



Configuring Ethernet Switch Ports

This chapter contains the following sections:

- [Configuring VLANs, on page 1](#)
- [VLAN Trunking Protocol \(VTP\), on page 2](#)
- [Configuring 802.1x Authentication, on page 2](#)
- [Configuring Spanning Tree Protocol, on page 3](#)
- [Configuring MAC Address Table Manipulation, on page 5](#)
- [Configuring Switch Port Analyzer, on page 6](#)
- [Configuring IGMP Snooping, on page 7](#)
- [Configuring EVPN VXLAN VLAN-Aware Service, on page 7](#)
- [Multi-Homing Configuration in BGP EVPN VXLAN Fabric, on page 27](#)

Configuring VLANs

A VLAN is a switched network that is logically segmented by function, project team, or application, without regard to the physical locations of the users. VLANs have the same attributes as physical LANs, but you can group end stations even if they are not physically located on the same LAN segment. Any switch port can belong to a VLAN, and unicast, broadcast, and multicast packets are forwarded and flooded only to end stations in the VLAN. Each VLAN is considered a logical network, and packets destined for stations that do not belong to the VLAN must be forwarded through a router.



- Note**
- IR1800 routers have reserved a set of VLANs (2350 to 2449) for additional usage. It is not allowed to add the reserved VLANs. You must ensure that these VLANs are not used in the network.
 - Jumbo frames on L2 interfaces are not supported.

The following is an example of a vlan configuration:

```
IR1800#show vlan
VLAN Name                               Status      Ports
-----
1    default                             active      Ge0/1/0, Ge0/1/1, Ge0/1/2, Ge0/1/3
1002 fddi-default                       act/unsup
1003 token-ring-default                 act/unsup
1004 fddinet-default                    act/unsup
1005 trnet-default                       act/unsup
```

VLAN	Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode	Trans1	Trans2
1	enet	100001	1500	-	-	-	-	-	0	0
1002	fddi	101002	1500	-	-	-	-	-	0	0
1003	tr	101003	1500	-	-	-	-	-	0	0
1004	fdnet	101004	1500	-	-	-	ieee	-	0	0
1005	trnet	101005	1500	-	-	-	ibm	-	0	0

Primary	Secondary	Type	Ports
---------	-----------	------	-------

IR1800#

You can assign a given port to a vlan by following these steps:

```
interface GigabitEthernet0/1/0
switchport access vlan 4
```

```
interface vlan 4
ip v4 address ...
ipv6 address autoconf
```

VLAN Trunking Protocol (VTP)

VTP is a Layer 2 messaging protocol that maintains VLAN configuration consistency by managing the addition, deletion, and renaming of VLANs on a network-wide basis. VTP minimizes misconfigurations and configuration inconsistencies that can cause several problems, such as duplicate VLAN names, incorrect VLAN-type specifications, and security violations.

Before you create VLANs, you must decide whether to use VTP in your network. Using VTP, you can make configuration changes centrally on one or more switches and have those changes automatically communicated to all the other switches in the network. Without VTP, you cannot send information about VLANs to other switches. VTP is designed to work in an environment where updates are made on a single switch and are sent through VTP to other switches in the domain. It does not work well in a situation where multiple updates to the VLAN database occur simultaneously on switches in the same domain, which would result in an inconsistency in the VLAN database.

Further information about configuring VTP can be found here: http://www.cisco.com/c/en/us/td/docs/routers/access/interfaces/software/feature/guide/geshwc_cfg.html#wp1046901

Configuring 802.1x Authentication

IEEE 802.1x port-based authentication defines a client-server-based access control and authentication protocol to prevent unauthorized clients from connecting to a LAN through publicly accessible ports. The authentication server authenticates each client connected to a switch port before allowing access to any switch or LAN services. Until the client is authenticated, IEEE 802.1x access control allows only Extensible Authentication Protocol over LAN (EAPOL), Cisco Discovery Protocol (CDP), and Spanning Tree Protocol (STP) traffic through the port to which the client is connected. After authentication, normal traffic passes through the port.

With IEEE 802.1x authentication, the devices in the network have specific roles:

- **Supplicant**—Device (workstation) that requests access to the LAN and switch services and responds to requests from the router. The workstation must be running IEEE 802.1x-compliant client software such

as that offered in the Microsoft Windows XP operating system. (The supplicant is sometimes called the client.)

- **Authentication server**—Device that performs the actual authentication of the supplicant. The authentication server validates the identity of the supplicant and notifies the router whether or not the supplicant is authorized to access the LAN and switch services. The Network Access Device transparently passes the authentication messages between the supplicant and the authentication server, and the authentication process is carried out between the supplicant and the authentication server. The particular EAP method used will be decided between the supplicant and the authentication server (RADIUS server). The RADIUS security system with EAP extensions is available in Cisco Secure Access Control Server Version 3.0 or later. RADIUS operates in a client and server model in which secure authentication information is exchanged between the RADIUS server and one or more RADIUS clients.
- **Authenticator**—Router that controls the physical access to the network based on the authentication status of the supplicant. The router acts as an intermediary between the supplicant and the authentication server, requesting identity information from the supplicant, verifying that information with the authentication server, and relaying a response to the supplicant. The router includes the RADIUS client, which is responsible for encapsulating and decapsulating the EAP frames and interacting with the authentication server.

For detailed information on how to configure 802.1x port-based authentication, see the following link:

http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/sec_usr_8021x/configuration/15-mt/sec-user-8021x-15-mt-book/config-ieee-802x-pba.html

Example: Enabling IEEE 802.1x and AAA on a Switch Port

This example shows how to configure an IR1800 router as 802.1x authenticator:

```
Router> enable
Router# configure terminal
Router(config)# dot1x system-auth-control
Router(config)# aaa new-model
Router(config)# aaa authentication dot1x default group radius
Router(config)# interface GigabitEthernet 0/1/0
Router(config-if)# switchport mode access
Router(config-if)# access-session port-control auto
Router(config-if)# dot1x pae authenticator
Router(config-if)# access-session closed
Router(config-if)# access-session host-mode single-host
Router(config-if)# end
```

Configuring Spanning Tree Protocol

Spanning Tree Protocol (STP) is a Layer 2 link management protocol that provides path redundancy while preventing loops in the network. For a Layer 2 Ethernet network to function properly, only one active path can exist between any two stations. Multiple active paths among end stations cause loops in the network. If a loop exists in the network, end stations might receive duplicate messages. Switches might also learn end-station MAC addresses on multiple Layer 2 interfaces. These conditions result in an unstable network. Spanning-tree operation is transparent to end stations, which cannot detect whether they are connected to a single LAN segment or a switched LAN of multiple segments.

The STP uses a spanning-tree algorithm to select one switch of a redundantly connected network as the root of the spanning tree. The algorithm calculates the best loop-free path through a switched Layer 2 network by assigning a role to each port based on the role of the port in the active topology:

- Root—A forwarding port elected for the spanning-tree topology
- Designated—A forwarding port elected for every switched LAN segment
- Alternate—A blocked port providing an alternate path to the root bridge in the spanning tree
- Backup—A blocked port in a loopback configuration

The switch that has all of its ports as the designated role or as the backup role is the root switch. The switch that has at least one of its ports in the designated role is called the designated switch. Spanning tree forces redundant data paths into a standby (blocked) state. If a network segment in the spanning tree fails and a redundant path exists, the spanning-tree algorithm recalculates the spanning-tree topology and activates the standby path. Switches send and receive spanning-tree frames, called bridge protocol data units (BPDUs), at regular intervals. The switches do not forward these frames but use them to construct a loop-free path. BPDUs contain information about the sending switch and its ports, including switch and MAC addresses, switch priority, port priority, and path cost. Spanning tree uses this information to elect the root switch and root port for the switched network and the root port and designated port for each switched segment.

When two ports on a switch are part of a loop, the spanning-tree port priority and path cost settings control which port is put in the forwarding state and which is put in the blocking state. The spanning-tree port priority value represents the location of a port in the network topology and how well it is located to pass traffic. The path cost value represents the media speed.

For detailed configuration information on STP see the following link:

http://www.cisco.com/c/en/us/td/docs/routers/access/interfaces/NIM/software/configuration/guide/4_8PortGENIM.html#pgfld-1079138



Important If the router is factory-defaulted, write erased, or config-reset, the vlan database gets deleted. Even though the configuration takes effect, interfaces need to be removed and re-applied.

Example: Spanning Tree Protocol Configuration

The following example shows configuring spanning-tree port priority of a Gigabit Ethernet interface. If a loop occurs, spanning tree uses the port priority when selecting an interface to put in the forwarding state.

```
Router# configure terminal
Router(config)# interface GigabitEthernet 0/1/0
Router(config-if)# spanning-tree vlan 1 port-priority 64
Router(config-if)# end
```

The following example shows how to change the spanning-tree port cost of a Gigabit Ethernet interface. If a loop occurs, spanning tree uses cost when selecting an interface to put in the forwarding state.

```
Router#configure terminal
Router(config)# interface GigabitEthernet 0/1/0
Router(config-if)# spanning-tree cost 18
Router(config-if)# end
```

The following example shows configuring the bridge priority of VLAN 10 to 33792:

```
Router# configure terminal
Router(config)# spanning-tree vlan 10 priority 33792
Router(config)# end
```

The following example shows configuring the hello time for VLAN 10 being configured to 7 seconds. The hello time is the interval between the generation of configuration messages by the root switch.

```
Router# configure terminal
Router(config)# spanning-tree vlan 10 hello-time 7
Router(config)# end
```

The following example shows configuring forward delay time. The forward delay is the number of seconds an interface waits before changing from its spanning-tree learning and listening states to the forwarding state.

```
Router# configure terminal
Router(config)# spanning-tree vlan 10 forward-time 21
Router(config)# end
```

The following example shows configuring maximum age interval for the spanning tree. The maximum-aging time is the number of seconds a switch waits without receiving spanning-tree configuration messages before attempting a reconfiguration.

```
Router# configure terminal
Router(config)# spanning-tree vlan 20 max-age 36
Router(config)# end
```

The following example shows the switch being configured as the root bridge for VLAN 10, with a network diameter of 4.

```
Router# configure terminal
Router(config)# spanning-tree vlan 10 root primary diameter 4
Router(config)# exit
```

Configuring MAC Address Table Manipulation

The MAC address table contains address information that the switch uses to forward traffic between ports. All MAC addresses in the address table are associated with one or more ports. The address table includes these types of addresses:

- Dynamic address: a source MAC address that the switch learns and then drops when it is not in use. You can use the aging time setting to define how long the switch retains unseen addresses in the table.
- Static address: a manually entered unicast address that does not age and that is not lost when the switch resets.

The address table lists the destination MAC address, the associated VLAN ID, and port associated with the address and the type (static or dynamic).

Port security is supported, as is sticky MAC addresses.

See the “Example: MAC Address Table Manipulation” for sample configurations for enabling secure MAC address, creating a static entry, set the maximum number of secure MAC addresses and set the aging time.

For detailed configuration information on MAC address table manipulation see the following link:

http://www.cisco.com/c/en/us/td/docs/routers/access/interfaces/software/feature/guide/geshwic_cfg.html#wp1048223

Example: MAC Address Table Manipulation

The following example shows creating a static entry in the MAC address table.

```
Router# configure terminal
Router(config)# mac address-table static 0002.0003.0004 interface GigabitEthernet 0/1/0
vlan 3
Router(config)# end
```

The following example shows setting the aging timer.

```
Router# configure terminal
Router(config)# mac address-table aging-time 300
Router(config)# end
```

Configuring Switch Port Analyzer

The Cisco IR1800 supports local SPAN only, and up to one SPAN session. You can analyze network traffic passing through ports by using SPAN to send a copy of the traffic to another port on the switch or on another switch that has been connected to a network analyzer or other monitoring or security device. SPAN copies (or mirrors) traffic received or sent (or both) on source ports to a destination port for analysis. SPAN does not affect the switching of network traffic on the source ports. You must dedicate the destination port for SPAN use. Except for traffic that is required for the SPAN or RSPAN session, destination ports do not receive or forward traffic.

Only traffic that enters or leaves source ports or traffic that enters or leaves source can be monitored by using SPAN; traffic routed to a source cannot be monitored. For example, if incoming traffic is being monitored, traffic that gets routed from another source cannot be monitored; however, traffic that is received on the source and routed to another can be monitored.

For detailed information on how to configure a switched port analyzer (SPAN) session, see the following web link:

http://www.cisco.com/c/en/us/td/docs/switches/lan/catalyst3750/software/release/15-0_2_se/configuration/guide/scg3750/swspan.html

Example: SPAN Configuration

The following example shows how to configure a SPAN session to monitor bidirectional traffic from a Gigabit Ethernet source interface:

```
Router# configure terminal
Router(config)# monitor session 1 source GigabitEthernet 0/1/0
Router(config)# end
```

The following example shows how to configure a gigabit ethernet interface as the destination for a SPAN session:

```
Router# configure terminal
Router(config)# monitor session 1 destination GigabitEthernet 0/1/0
Router(config)# end
```

The following example shows how to remove gigabit ethernet as a SPAN source for SPAN session 1:

```
Router# configure terminal
Router(config)# no monitor session 1 source GigabitEthernet 0/1/0
Router(config)# end
```

Show Monitor Example

```
Router(config)#monitor session 1 source interface gi0/1/0
Router(config)#monitor session 1 destination interface gi0/1/1
Router#sh monitor session 1
Session 1
-----
Type : Local Session
Source Ports :
Both : Gi0/1/0
Destination Ports : Gi0/1/1
```

Example of ERSPAN

```
Router#show monitor session 1
Session 1
-----
Type                : ERSPAN Source Session
Status              : Admin Disabled
Source Ports        :
    RX Only         : Gi0/0/0
Destination IP Address : 172.5.5.200
MTU                  : 1464
Destination ERSPAN ID : 100
Origin IP Address    : 172.5.6.2
IPv6 DSCP            : 0
IPv6 TTL             : 0
```

Configuring IGMP Snooping

IGMP snooping constrains the flooding of multicast traffic by dynamically configuring Layer 2 interfaces so that multicast traffic is forwarded to only those interfaces associated with IP multicast devices. As the name implies, IGMP snooping requires the LAN switch to snoop on the IGMP transmissions between the host and the router and to keep track of multicast groups and member ports. When the switch receives an IGMP report from a host for a particular multicast group, the switch adds the host port number to the forwarding table entry; when it receives an IGMP Leave Group message from a host, it removes the host port from the table entry. It also periodically deletes entries if it does not receive IGMP membership reports from the multicast clients.

The multicast router sends out periodic general queries to all VLANs. All hosts interested in this multicast traffic send join requests and are added to the forwarding table entry.

Use the **ip igmp snooping enable** command to configure IGMP Snooping on the IR1800.

By default, IGMP snooping is globally enabled in the IR1800.

MLD snooping is also supported on the IR1800, and further information can be found in this documentation set: https://www.cisco.com/c/en/us/td/docs/switches/lan/catalyst3850/software/release/16-1/configuration_guide/b_161_consolidated_3850_cg/b_161_consolidated_3850_cg_chapter_01100.html

Configuring EVPN VXLAN VLAN-Aware Service

A VLAN-Aware EVPN instance (EVI) allows multiple subnets (L2VNI) to be mapped to a single EVI. When this feature is configured, the MAC-VRF is identified by the combination of the route-target and the ethernet-tag. The EVPN routes that require the identification of a specific bridge-table within a MAC-VRF will advertise

these routes with the Ethernet Tag field set to a value that allows such identification. This feature enhances the router's inter-operability.

There are two methods to configure VLAN-Aware:

1. Profile based configuration
2. Manual configuration

Guidelines and Limitations

- You may configure either the Profile based configuration, or Manual Configuration method on an EVI. Both methods cannot be used to configure VLAN-aware on the same EVI on the device.
- This feature is supported only on Layer 2. IRB and L3 are not supported.

Profile based Configuration of EVPN VXLAN VLAN-Aware Service

Configure EVPN VXLAN VLAN-Aware instance

Follow this procedure to configure a VLAN-aware EVPN instance (EVI):

Procedure

	Command or Action	Purpose
Step 1	configure terminal Example: Router#configure terminal	Enters Global Configuration Mode
Step 2	l2vpn evpn profile <profile-name> <service-type> Example: Router(config)#l2vpn evpn profile evpn_va vlan-aware	Configures an EVPN Vxlan Vlan-Aware profile.
Step 3	evi-id <id> Example: Router(config-evpn-prof)#evi-id 1	Configures the EVPN Instance (EVI) id.
Step 4	ethernet-tag [auto-vni auto-vlan] Example: Router(config)#ethernet-tag auto-vlan	Enables the autogeneration of the Ethernet-Tag based on the L2VNI or on the VLAN value. The default is <i>auto-vni</i> .
Step 5	(Optional) l2vni-base <l2vni-base> Example: Router(config-evpn-prof)#l2vni-base 50000	(Optional) Configures the L2 Virtual Network Identifier (VNI) base id.

	Command or Action	Purpose
Step 6	(Optional) replication-type {ingress static} {[ipv4_mcast_addr ipv4_mcast_prefix]} Example: Router(config-evpn-prof)#replication-type ingress	(Optional) Configures the replication-type.
Step 7	(Optional) encapsulation vxlan Example: Router(config-evpn-prof)#encapsulation vxlan	(Optional) Configures the encapsulation type.
Step 8	(Optional) default-gateway advertise {enable disable} Example: Router(config)#default-gateway advertise enable	(Optional) Enable or Disable default gateway advertising.
Step 9	(Optional) multicast advertise enable Example: Router(config)#multicast advertise enable	(Optional) Enable or Disable multicast advertising.
Step 10	(Optional) ip local-learning {enable disable} Example: Router(config)#ip local-learning enable	(Optional) Enable or Disable IP based local learning.
Step 11	(Optional) flooding-suppression address-resolution {enable disable} Example: Router(config)#flooding-suppression address-resolution enable	(Optional) Enable or Disable flooding suppression based address resolution.
Step 12	(Optional) re-originate route-type5 Example: Router(config)#re-originate route-type5	(Optional) Enable re-origination of type 5 routes.

Apply the configuration on a Bridge-Domain

Follow the procedure to apply the configuration on a bridge-domain on your device:

Procedure

	Command or Action	Purpose
Step 1	bridge-domain <id> Example:	Applies the configuration to the specified bridge domain.

	Command or Action	Purpose
	<code>Router(config)#bridge-domain 12</code>	
Step 2	member Vlan12 service-instance 12 Example: <code>Router(config-bdomain)#member Vlan12 service-instance 12</code>	Specifies the service instance for the VLAN member.
Step 3	member evpn-instance profile <va-profile-name> Example: <code>Router(config-bdomain)#member evpn-instance profile evpn_va</code>	Add an EVI member to the bridge-domain.

Manual configuration of EVPN VXLAN VLAN-Aware Service

To manually configure EVPN VXLAN VLAN-Aware service on your device, complete these tasks:

- [Static Configuration of VXLAN VLAN-Aware EVPN Instance, on page 10](#)
- [Applying Configuration on the Bridge Domain, on page 11](#)
- [Configure Ingress Replication for EVPN VXLAN VLAN-Aware, on page 11](#)
- [Configure Static Replication for VLAN-Aware, on page 13](#)

Static Configuration of VXLAN VLAN-Aware EVPN Instance

Follow the procedure for static configuration of the EVPN instance:

Procedure

	Command or Action	Purpose
Step 1	configure terminal Example: <code>Router#configure terminal</code>	Enters Global Configuration Mode
Step 2	l2vpn evpn instance 1 vlan-aware Example: <code>Router(config)#l2vpn evpn instance 1 vlan-aware</code>	Configure a VLAN-Aware EVPN instance.
Step 3	encapsulation vxlan Example: <code>Router(config-evpn-evi)#encapsulation vxlan</code>	Configures the encapsulation type to VXLAN.

Example

```
l2vpn evpn instance 1 vlan-aware
encapsulation vxlan
!
```

Applying Configuration on the Bridge Domain

Follow the procedure to apply the configuration on the bridge domain:

Procedure

	Command or Action	Purpose
Step 1	configure terminal Example: Router#configure terminal	Enters Global Configuration Mode
Step 2	bridge-domain 12 Example: Router(config)bridge-domain 12	Specifies the bridge domain for the configuration to be applied to.
Step 3	member Vlan12 service-instance 12 Example: Router(config-bdomain)#member Vlan12 service-instance 12	Specifies the service instance for the VLAN member.
Step 4	member evpn-instance 1 vni <vni> ethernet-tag <etag> Example: Router(config-bdomain)#member evpn-instance 1 vni 30012 ethernet-tag 20012	Configure a VLAN-aware EVI member under the bridge-domain

Example

```
bridge-domain 12
member Vlan12 service-instance 12
member evpn-instance 1 vni 30012 ethernet-tag 20012
```

Configure Ingress Replication for EVPN VXLAN VLAN-Aware

Follow this procedure to configure Ingress Replication for EVPN VXLAN VLAN-Aware:

Procedure

	Command or Action	Purpose
Step 1	configure terminal Example: Router#configure terminal	Enters Global Configuration Mode
Step 2	l2vpn evpn instance 1 vlan-aware Example: Router(config)#l2vpn evpn instance 1 vlan-aware	Configure a VLAN-Aware EVPN instance
Step 3	replication-type ingress Example: Router(config-evpn-evi)#replication-type ingress	Configures the replication type to ingress replication.
Step 4	interface nve1 Example: Router(config)#interface nve1	Configures the NVE interface and enters the interface configuration mode.
Step 5	no ip address Example: Router(config-if)#no ip address	Disables IP processing on the interface.
Step 6	source-interface Loopback0 Example: Router(config-if)#source-interface Loopback0	Specifies the source loopback for the interface.
Step 7	host-reachability protocol bgp Example: Router(config-if)#host-reachability protocol bgp	Specifies the BGP protocol for host reachability.
Step 8	member vni 30000 ingress replication Example: Router(config-if)#member vni 30000 ingress replication	Configures the L2VNI member with ingress replication.

Example

```
l2vpn evpn instance 1 vlan-aware
 encapsulation vxlan
 replication-type ingress
!
interface nve1
```

```

no ip address
source-interface Loopback0
host-reachability protocol bgp
member vni 30000 ingress-replication
member vni 30012 ingress-replication
!

```

Configure Static Replication for VLAN-Aware

Follow this procedure to configure Static Replication for VLAN-Aware:

Procedure

	Command or Action	Purpose
Step 1	configure terminal Example: Router#configure terminal	Enters Global Configuration Mode
Step 2	l2vpn evpn instance 1 vlan-aware Example: Router(config)#l2vpn evpn instance 1 vlan-aware	Enables VLAN-Aware on the specified EVPN instance.
Step 3	replication-type static Example: Router(config)#replication-type static	Configures the replication type to static replication.
Step 4	interface nve1 Example: Router(config)#interface nve1	Configures the interface and enters the interface configuration mode.
Step 5	no ip address Example: Router(config-if)#no ip address	Disables IP processing on the interface.
Step 6	source-interface Loopback0 Example: Router(config-if)#source-interface Loopback0	Specifies the source loopback for the interface.
Step 7	host-reachability protocol bgp Example: Router(config-if)#host-reachability protocol bgp	Specifies the BGP protocol for host reachability.
Step 8	member vni 30000 mcast-group 209.165.1.1 Example:	Configures the VNI member and Multicast group

	Command or Action	Purpose
	Router(config-if)#member vni 30000 mcast-group 209.165.1.1	
Step 9	member vni 30012 mcast-group 209.165.1.1 Example: Router(config-if)#member vni 30012 mcast-group 209.165.1.1	Configures the VNI member and Multicast group

Example


Example:

```
l2vpn evpn instance 1 vlan-aware
encapsulation vxlan
replication-type static
!
interface nve1
no ip address
source-interface Loopback0
host-reachability protocol bgp
member vni 30000 mcast-group 209.165.1.1
member vni 30012 mcast-group 209.165.1.1
!
```

Configuration Example

Here is an example of configuring the VLAN aware feature over VXLAN EVPN in a network topology with three routers (R1, R2, and R3) as the VTEPs (Virtual Tunnel Endpoint), connected to three switchports (SW1, SW2, and SW3) which are connected to the host, while one router (R4) acts as the *spine* as shown in the figure.

Figure 1: Configuration example of 4 router topology

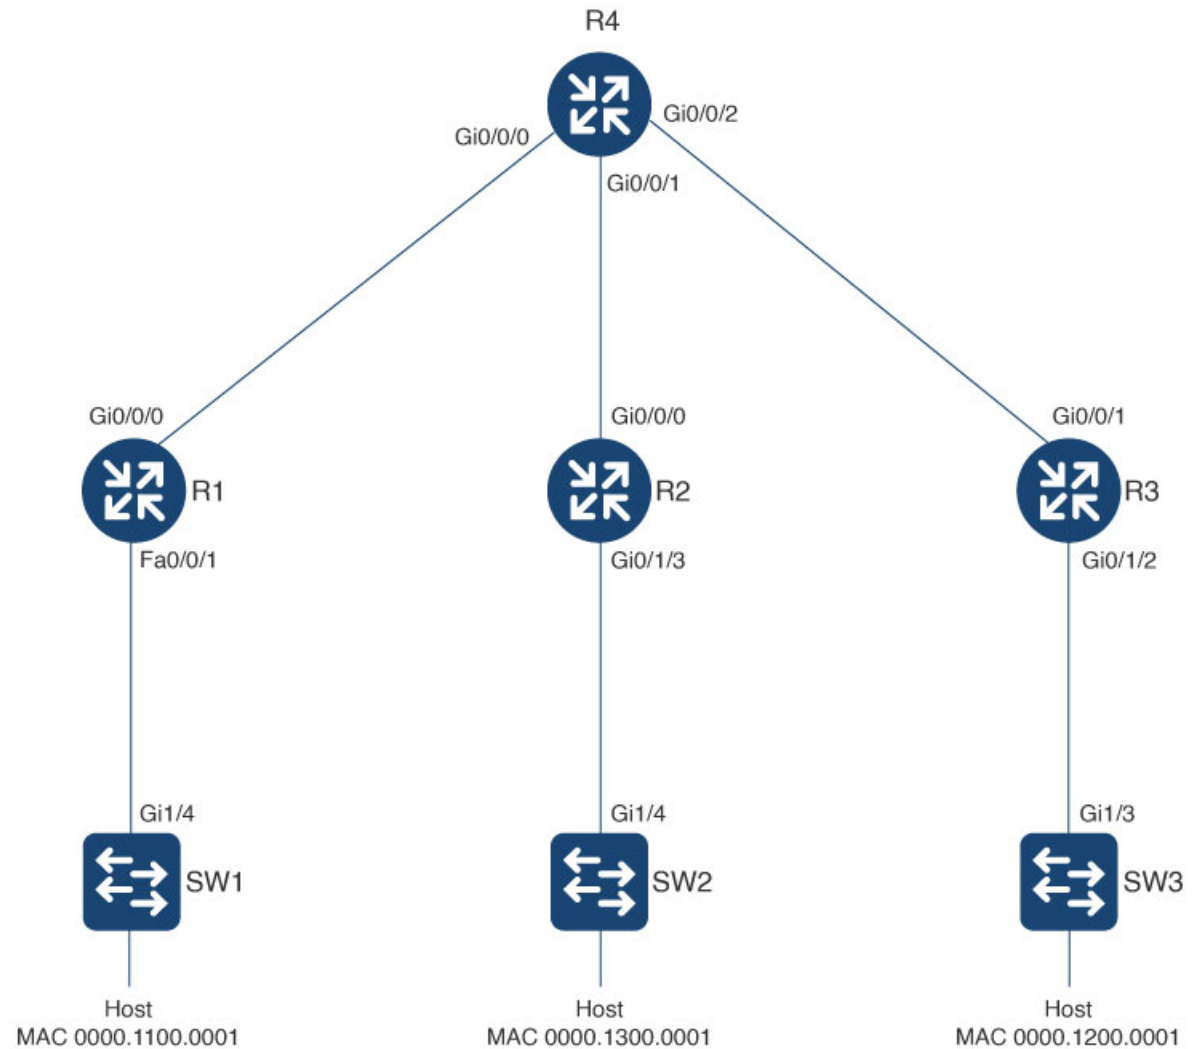

Here is the running configuration for Router 1 (R1)

```

l2vpn evpn
  replication-type ingress
!
l2vpn evpn profile evpn_va vlan-aware
  evi-id 3
  l2vni-base 50000
  ethernet-tag auto-vni
!
bridge-domain 12
  member Vlan12 service-instance 12
  member evpn-instance profile evpn_va
!
bridge-domain 22
  member Vlan22 service-instance 22
  member evpn-instance profile evpn_va

interface Loopback0
  ip address 192.0.2.1 255.255.255.255

```

```

!
interface GigabitEthernet0/0/0
 ip address 10.10.10.2 255.255.255.0
!
!
interface FastEthernet0/0/1
 switchport trunk allowed vlan 12,22
 switchport mode trunk
!
interface Vlan12
 no ip address
 service instance 12 ethernet
 encapsulation dot1q 12
!
!
interface Vlan22
 no ip address
 service instance 22 ethernet
 encapsulation dot1q 22
!
interface nve1
 no ip address
 source-interface Loopback0
 host-reachability protocol bgp
 member vni 30000 ingress-replication
!
router ospf 1
 router-id 192.0.2.1
 network 10.10.10.0 0.0.0.255 area 0
 network 192.0.2.1 0.0.0.0 area 0
!
router bgp 1
 bgp router-id 192.0.2.1
 bgp log-neighbor-changes
 neighbor 192.0.2.4 remote-as 1
 neighbor 192.0.2.4 update-source Loopback0
!
 address-family ipv4
  neighbor 192.0.2.4 activate
  neighbor 192.0.2.4 send-community both
 exit-address-family
!
 address-family l2vpn evpn
  neighbor 192.0.2.4 activate
  neighbor 192.0.2.4 send-community both
 exit-address-family
!

```

Here is the running configuration for Router 2 (R2)

```

l2vpn evpn
 replication-type ingress
!
l2vpn evpn profile evpn_va vlan-aware
 evi-id 3
 l2vni-base 50000
 ethernet-tag auto-vni
!
bridge-domain 12
 member Vlan12 service-instance 12
 member evpn-instance profile evpn_va
!
bridge-domain 22
 member Vlan22 service-instance 22
 member evpn-instance profile evpn_va

```

```

!
interface Loopback0
 ip address 192.0.2.2 255.255.255.255
!
interface GigabitEthernet0/0/0
 ip address 10.10.20.2 255.255.255.0
!
interface GigabitEthernet0/1/3
 switchport trunk allowed vlan 12,22
 switchport mode trunk
!
interface Vlan12
 no ip address
 service instance 12 ethernet
 encapsulation dot1q 12
!
!
interface Vlan22
 no ip address
 service instance 22 ethernet
 encapsulation dot1q 22
!
interface nve1
 no ip address
 source-interface Loopback0
 host-reachability protocol bgp
 member vni 30000 ingress-replication
!
router ospf 1
 router-id 192.0.2.2
 network 10.10.20.0 0.0.0.255 area 0
 network 192.0.2.2 0.0.0.0 area 0
!
router bgp 1
 bgp router-id 192.0.2.2
 bgp log-neighbor-changes
 neighbor 192.0.2.4 remote-as 1
 neighbor 192.0.2.4 update-source Loopback0
!
 address-family ipv4
  neighbor 192.0.2.4 activate
  neighbor 192.0.2.4 send-community both
 exit-address-family
!
 address-family l2vpn evpn
  neighbor 192.0.2.4 activate
  neighbor 192.0.2.4 send-community both
 exit-address-family
!

```

Here is the running configuration for Router 3 (R3)

```

l2vpn evpn
 replication-type ingress
!
l2vpn evpn profile evpn_va vlan-aware
 evi-id 3
 l2vni-base 50000
 ethernet-tag auto-vni
!
bridge-domain 12
 member Vlan12 service-instance 12
 member evpn-instance profile evpn_va
!
bridge-domain 22

```

```

member Vlan22 service-instance 22
member evpn-instance profile evpn_va

interface Loopback0
 ip address 192.0.2.3 255.255.255.255
!
interface GigabitEthernet0/0/1
 ip address 10.10.30.2 255.255.255.0
interface GigabitEthernet0/1/2
 switchport trunk allowed vlan 12,22
 switchport mode trunk
!
interface Vlan12
 no ip address
 service instance 12 ethernet
 encapsulation dot1q 12
!
!
interface Vlan22
 no ip address
 service instance 22 ethernet
 encapsulation dot1q 22
!
interface nve1
 no ip address
 source-interface Loopback0
 host-reachability protocol bgp
 member vni 30000 ingress-replication
!
router ospf 1
 router-id 192.0.2.3
 network 10.10.30.0 0.0.0.255 area 0
 network 192.0.2.3 0.0.0.0 area 0
!
router bgp 1
 bgp router-id 192.0.2.3
 bgp log-neighbor-changes
 neighbor 192.0.2.4 remote-as 1
 neighbor 192.0.2.4 update-source Loopback0
!
 address-family ipv4
  neighbor 192.0.2.4 activate
  neighbor 192.0.2.4 send-community both
 exit-address-family
!
 address-family l2vpn evpn
  neighbor 192.0.2.4 activate
  neighbor 192.0.2.4 send-community both
 exit-address-family
!

```

Here is the running configuration for the Router 4 (R4) which is acting as the *spine*.

```

interface Loopback0
 ip address 192.0.2.4 255.255.255.255
!
interface GigabitEthernet0/0/0
 ip address 10.10.10.1 255.255.255.0
 negotiation auto
!
interface GigabitEthernet0/0/1
 ip address 10.10.20.1 255.255.255.0
 negotiation auto
!

```

```

interface GigabitEthernet0/0/2
 ip address 10.10.30.1 255.255.255.0
 negotiation auto
!
router ospf 1
 router-id 192.0.2.4
 network 10.10.10.0 0.0.0.255 area 0
 network 10.10.20.0 0.0.0.255 area 0
 network 10.10.30.0 0.0.0.255 area 0
 network 192.0.2.4 0.0.0.0 area 0
!
router bgp 1
 bgp router-id 192.0.2.4
 bgp log-neighbor-changes
 neighbor 192.0.2.1 remote-as 1
 neighbor 192.0.2.1 update-source Loopback0
 neighbor 192.0.2.2 remote-as 1
 neighbor 192.0.2.2 update-source Loopback0
 neighbor 192.0.2.3 remote-as 1
 neighbor 192.0.2.3 update-source Loopback0
!
address-family l2vpn evpn
 neighbor 192.0.2.1 activate
 neighbor 192.0.2.1 send-community both
 neighbor 192.0.2.1 route-reflector-client
 neighbor 192.0.2.2 activate
 neighbor 192.0.2.2 send-community both
 neighbor 192.0.2.2 route-reflector-client
 neighbor 192.0.2.3 activate
 neighbor 192.0.2.3 send-community both
 exit-address-family
!

```

Here is the running configuration for the switchport SW1, connected to Router R1.

```

interface GigabitEthernet1/4
 switchport trunk allowed vlan 12,22
 switchport mode trunk
!
interface GigabitEthernet1/7
 switchport trunk allowed vlan 12,22
 switchport mode trunk
!

```

Here is the running configuration for the switchport SW2, connected to Router R2.

```

interface GigabitEthernet1/4
 switchport trunk allowed vlan 12,22
 switchport mode trunk
!
interface GigabitEthernet1/7
 switchport trunk allowed vlan 12,22
 switchport mode trunk
!

```

Here is the running configuration for the switchport SW3, connected to Router R3.

```

switchport trunk allowed vlan 12,22
 switchport mode trunk
!
interface GigabitEthernet1/7
 switchport trunk allowed vlan 12,22
 switchport mode trunk
!

```

Verify Configuration of EVPN VXLAN VLAN-Aware Service

Verify the configuration on the router R1

Use the **show l2vpn evpn evi 3 detail** command to verify the configuration of the EVI and bridge-domain, and to ensure the ethernet-tag value is configured.

```
Router1#show l2vpn evpn evi 3 detail
EVPN instance:      3 (VLAN Aware)
  Profile:           evpn_va
  RD:                10.10.10.2:32770 (auto)
  Import-RTs:       1:3
  Export-RTs:       1:3
  Per-EVI Label:    none
  State:            Established
  Replication Type:  Ingress (profile)
  Encapsulation:    vxlan (profile)
  IP Local Learn:    Enabled (global)
  Adv. Def. Gateway: Disabled (global)
  Re-originate RT5: Disabled (profile)
  AR Flood Suppress: Enabled (global)
  Bridge Domain:    12
    Ethernet-Tag:    50012
    State:           Established
    Flood Suppress:  Attached
    Core If:
    Access If:
    NVE If:          nve1
    RMAC:            0000.0000.0000
    Core BD:         0
    L2 VNI:          50012
    L3 VNI:          0
    VTEP IP:         192.0.2.1
  Pseudoports:
    Vlan12 service instance 12
      Routes: 0 MAC, 0 MAC/IP
  Peers:
    192.0.2.2
      Routes: 0 MAC, 0 MAC/IP, 1 IMET, 0 EAD
    192.0.2.3
      Routes: 1 MAC, 0 MAC/IP, 1 IMET, 0 EAD
  Bridge Domain:    22
    Ethernet-Tag:    50022
    State:           Established
    Flood Suppress:  Attached
    Core If:
    Access If:
    NVE If:          nve1
    RMAC:            0000.0000.0000
    Core BD:         0
    L2 VNI:          50022
    L3 VNI:          0
    VTEP IP:         192.0.2.1
  Pseudoports:
    Vlan22 service instance 22
      Routes: 0 MAC, 0 MAC/IP
  Peers:
    192.0.2.2
      Routes: 0 MAC, 0 MAC/IP, 1 IMET, 0 EAD
    192.0.2.3
      Routes: 0 MAC, 0 MAC/IP, 1 IMET, 0 EAD
```

Use the **show l2route evpn imet** command to verify the IMET routes.

```
Router1#show l2route evpn imet
EVI      ETAG    Prod      Router IP Addr  Type    Label
      Tunnel ID Multicast Proxy
-----
3        50012    BGP              10.10.20.2      6      50012
              192.0.2.2      No
3        50012    BGP              10.10.30.2      6      50012
              192.0.2.3      No
3        50012    L2VPN            10.10.10.2      6      50012
              192.0.2.1      No
3        50022    BGP              10.10.20.2      6      50022
              192.0.2.2      No
3        50022    BGP              10.10.30.2      6      50022
              192.0.2.3      No
3        50022    L2VPN            10.10.10.2      6      50022
              192.0.2.1      No
```

Use the **show ip bgp l2vpn evpn all** command to verify the configuration.

```
Router1#show ip bgp l2vpn evpn all
BGP table version is 31, local router ID is 192.0.2.1
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,
               t secondary path, L long-lived-stale,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found
```

```

      Network      Next Hop      Metric LocPrf Weight Path
Route Distinguisher: 192.0.2.1:32770
*> [2] [192.0.2.1:32770] [50012] [48] [000011000001] [0] [*]/20
      0.0.0.0      32768 ?
*>i [2] [192.0.2.1:32770] [50012] [48] [000012000001] [0] [*]/20
      192.0.2.3      0 100 0 ?
*>i [2] [192.0.2.1:32770] [50012] [48] [000013000001] [0] [*]/20
      192.0.2.2      0 100 0 ?
*>i [2] [192.0.2.1:32770] [50012] [48] [04BD9708512B] [0] [*]/20
      192.0.2.3      0 100 0 ?
*> [2] [192.0.2.1:32770] [50022] [48] [000011000002] [0] [*]/20
      0.0.0.0      32768 ?
*>i [2] [192.0.2.1:32770] [50022] [48] [000012000002] [0] [*]/20
      192.0.2.3      0 100 0 ?
*>i [2] [192.0.2.1:32770] [50022] [48] [000013000002] [0] [*]/20
      192.0.2.2      0 100 0 ?
Route Distinguisher: 192.0.2.2:32770
*>i [2] [192.0.2.2:32770] [50012] [48] [000013000001] [0] [*]/20
      192.0.2.2      0 100 0 ?
*>i [2] [192.0.2.2:32770] [50022] [48] [000013000002] [0] [*]/20
      192.0.2.2      0 100 0 ?
Route Distinguisher: 192.0.2.3:32770
*>i [2] [192.0.2.3:32770] [50012] [48] [000012000001] [0] [*]/20
      192.0.2.3      0 100 0 ?
*>i [2] [192.0.2.3:32770] [50012] [48] [04BD9708512B] [0] [*]/20
      192.0.2.3      0 100 0 ?
*>i [2] [192.0.2.3:32770] [50022] [48] [000012000002] [0] [*]/20
      192.0.2.3      0 100 0 ?
Route Distinguisher: 192.0.2.1:32770
*> [3] [192.0.2.1:32770] [50012] [32] [192.0.2.1]/17
      0.0.0.0      32768 ?
*>i [3] [192.0.2.1:32770] [50012] [32] [192.0.2.2]/17
      192.0.2.2      0 100 0 ?
*>i [3] [192.0.2.1:32770] [50012] [32] [192.0.2.3]/17
      192.0.2.3      0 100 0 ?
*> [3] [192.0.2.1:32770] [50022] [32] [192.0.2.1]/17
```

```

0.0.0.0 32768 ?
*>i [3][192.0.2.1:32770][50022][32][192.0.2.2]/17
192.0.2.2 0 100 0 ?
*>i [3][192.0.2.1:32770][50022][32][192.0.2.3]/17
192.0.2.3 0 100 0 ?
Route Distinguisher: 192.0.2.2:32770
*>i [3][192.0.2.2:32770][50012][32][192.0.2.2]/17
192.0.2.2 0 100 0 ?
*>i [3][192.0.2.2:32770][50022][32][192.0.2.2]/17
192.0.2.2 0 100 0 ?
Route Distinguisher: 192.0.2.3:32770
*>i [3][192.0.2.3:32770][50012][32][192.0.2.3]/17
192.0.2.3 0 100 0 ?
*>i [3][192.0.2.3:32770][50022][32][192.0.2.3]/17
192.0.2.3 0 100 0 ?

```

Use the **show nve peers** command to verify the configuration.

```
Router1#show nve peers
```

```
'M' - MAC entry download flag 'A' - Adjacency download flag
'4' - IPv4 flag '6' - IPv6 flag
```

Interface	VNI	Type	Peer-IP	RMAC/Num_RTs	eVNI	state	flags	UP time
nve1	50012	L2CP	192.0.2.2	1	50012	UP	N/A	00:38:47
nve1	50012	L2CP	192.0.2.3	1	50012	UP	N/A	00:38:47
nve1	50022	L2CP	192.0.2.2	1	50022	UP	N/A	00:38:47
nve1	50022	L2CP	192.0.2.3	1	50022	UP	N/A	00:38:47

Use the **show l2vpn evpn mac** command to verify the configuration.

```
Router1#show l2vpn evpn mac
```

MAC Address	EVI	BD	ESI	Ether Tag	Next Hop(s)
0000.1100.0001	3	12	0000.0000.0000.0000.0000	50012	Vl12:12
0000.1200.0001	3	12	0000.0000.0000.0000.0000	50012	192.0.2.3
0000.1300.0001	3	12	0000.0000.0000.0000.0000	50012	192.0.2.2
04bd.9708.512b	3	12	0000.0000.0000.0000.0000	50012	192.0.2.3
0000.1100.0002	3	22	0000.0000.0000.0000.0000	50022	Vl22:22
0000.1200.0002	3	22	0000.0000.0000.0000.0000	50022	192.0.2.3
0000.1300.0002	3	22	0000.0000.0000.0000.0000	50022	192.0.2.2

Verify the configuration on the router R2

Use the **show l2vpn evpn evi 3 detail** command to verify the configuration of the EVI and bridge-domain, and to ensure the ethernet-tag value is configured.

```
Router2#show l2vpn evpn evi 3 detail
```

```

EVPN instance:      3 (VLAN Aware)
Profile:            evpn_va
RD:                10.10.20.2:32770 (auto)
Import-RTs:        1:3
Export-RTs:        1:3
Per-EVI Label:     none
State:             Established
Replication Type:   Ingress (profile)
Encapsulation:     vxlan (profile)
IP Local Learn:     Enabled (global)
Adv. Def. Gateway: Disabled (global)
Re-originate RT5:  Disabled (profile)
AR Flood Suppress: Enabled (global)
Bridge Domain:     12
Ethernet-Tag:      50012
State:             Established
Flood Suppress:    Attached

```

```

Core If:
Access If:
NVE If:          nve1
RMAC:            0000.0000.0000
Core BD:         0
L2 VNI:          50012
L3 VNI:          0
VTEP IP:         192.0.2.2
Pseudoports:
  Vlan12 service instance 12
    Routes: 0 MAC, 0 MAC/IP
Peers:
  192.0.2.1
    Routes: 0 MAC, 0 MAC/IP, 1 IMET, 0 EAD
  192.0.2.3
    Routes: 1 MAC, 0 MAC/IP, 1 IMET, 0 EAD
Bridge Domain:   22
Ethernet-Tag:    50022
State:           Established
Flood Suppress: Attached
Core If:
Access If:
NVE If:          nve1
RMAC:            0000.0000.0000
Core BD:         0
L2 VNI:          50022
L3 VNI:          0
VTEP IP:         192.0.2.2
Pseudoports:
  Vlan22 service instance 22
    Routes: 0 MAC, 0 MAC/IP
Peers:
  192.0.2.1
    Routes: 0 MAC, 0 MAC/IP, 1 IMET, 0 EAD
  192.0.2.3
    Routes: 0 MAC, 0 MAC/IP, 1 IMET, 0 EAD

```

Use the **show l2route evpn imet** command to verify the IMET routes.

```

Router2#show l2route evpn imet

```

EVI	ETAG	Prod	Tunnel ID	Multicast	Proxy	Router IP Addr	Type	Label
3	50012	BGP	192.0.2.1		No	10.10.10.2	6	50012
3	50012	BGP	192.0.2.3		No	10.10.30.2	6	50012
3	50012	L2VPN	192.0.2.2		No	10.10.20.2	6	50012
3	50022	BGP	192.0.2.1		No	10.10.10.2	6	50022
3	50022	BGP	192.0.2.3		No	10.10.30.2	6	50022
3	50022	L2VPN	192.0.2.2		No	10.10.20.2	6	50022

Use the **show ip bgp l2vpn evpn all** command to verify the configuration.

```

Router2#sh ip bgp l2vpn evpn all
BGP table version is 27, local router ID is 192.0.2.2
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,

```

t secondary path, L long-lived-stale,
 Origin codes: i - IGP, e - EGP, ? - incomplete
 RPKI validation codes: V valid, I invalid, N Not found

```

      Network      Next Hop      Metric LocPrf Weight Path
Route Distinguisher: 192.0.2.1:32770
*>i [2][192.0.2.1:32770][50012][48][000011000001][0][*]/20
      192.0.2.1      0      100      0 ?
*>i [2][192.0.2.1:32770][50022][48][000011000002][0][*]/20
      192.0.2.1      0      100      0 ?
Route Distinguisher: 192.0.2.2:32770
*>i [2][192.0.2.2:32770][50012][48][000011000001][0][*]/20
      192.0.2.1      0      100      0 ?
*>i [2][192.0.2.2:32770][50012][48][000012000001][0][*]/20
      192.0.2.3      0      100      0 ?
*> [2][192.0.2.2:32770][50012][48][000013000001][0][*]/20
      0.0.0.0      32768 ?
*>i [2][192.0.2.2:32770][50012][48][04BD9708512B][0][*]/20
      192.0.2.3      0      100      0 ?
*>i [2][192.0.2.2:32770][50022][48][000011000002][0][*]/20
      192.0.2.1      0      100      0 ?
*>i [2][192.0.2.2:32770][50022][48][000012000002][0][*]/20
      192.0.2.3      0      100      0 ?
*> [2][192.0.2.2:32770][50022][48][000013000002][0][*]/20
      0.0.0.0      32768 ?
Route Distinguisher: 192.0.2.3:32770
*>i [2][192.0.2.3:32770][50012][48][000012000001][0][*]/20
      192.0.2.3      0      100      0 ?
*>i [2][192.0.2.3:32770][50012][48][04BD9708512B][0][*]/20
      192.0.2.3      0      100      0 ?
*>i [2][192.0.2.3:32770][50022][48][000012000002][0][*]/20
      192.0.2.3      0      100      0 ?
Route Distinguisher: 192.0.2.1:32770
*>i [3][192.0.2.1:32770][50012][32][192.0.2.1]/17
      192.0.2.1      0      100      0 ?
*>i [3][192.0.2.1:32770][50022][32][192.0.2.1]/17
      192.0.2.1      0      100      0 ?
Route Distinguisher: 192.0.2.2:32770
*>i [3][192.0.2.2:32770][50012][32][192.0.2.1]/17
      192.0.2.1      0      100      0 ?
*> [3][192.0.2.2:32770][50012][32][192.0.2.2]/17
      0.0.0.0      32768 ?
*>i [3][192.0.2.2:32770][50012][32][192.0.2.3]/17
      192.0.2.3      0      100      0 ?
*>i [3][192.0.2.2:32770][50022][32][192.0.2.1]/17
      192.0.2.1      0      100      0 ?
*> [3][192.0.2.2:32770][50022][32][192.0.2.2]/17
      0.0.0.0      32768 ?
*>i [3][192.0.2.2:32770][50022][32][192.0.2.3]/17
      192.0.2.3      0      100      0 ?
Route Distinguisher: 192.0.2.3:32770
*>i [3][192.0.2.3:32770][50012][32][192.0.2.3]/17
      192.0.2.3      0      100      0 ?
*>i [3][192.0.2.3:32770][50022][32][192.0.2.3]/17
      192.0.2.3      0      100      0 ?

```

Use the **show nve peers** command to verify the configuration.

Router2#**show nve peers**

'M' - MAC entry download flag 'A' - Adjacency download flag
 '4' - IPv4 flag '6' - IPv6 flag

Interface	VNI	Type	Peer-IP	RMAC/Num_RTs	eVNI	state	flags	UP time
nve1	50012	L2CP	192.0.2.1	2	50012	UP	N/A	00:05:28
nve1	50012	L2CP	192.0.2.3	3	50012	UP	N/A	00:05:28

```

nve1          50022    L2CP 192.0.2.1    2          50022    UP    N/A    00:05:28
nve1          50022    L2CP 192.0.2.3    2          50022    UP    N/A    00:05:28

```

Use the **show l2vpn evpn mac** command to verify the configuration

```

Router2#show l2vpn evpn mac
MAC Address      EVI    BD    ESI                      Ether Tag  Next Hop(s)
-----
0000.1100.0001  3      12    0000.0000.0000.0000.0000  50012      192.0.2.1
0000.1200.0001  3      12    0000.0000.0000.0000.0000  50012      192.0.2.3
0000.1300.0001  3      12    0000.0000.0000.0000.0000  50012      V112:12
04bd.9708.512b  3      12    0000.0000.0000.0000.0000  50012      192.0.2.3
0000.1100.0002  3      22    0000.0000.0000.0000.0000  50022      192.0.2.1
0000.1200.0002  3      22    0000.0000.0000.0000.0000  50022      192.0.2.3
0000.1300.0002  3      22    0000.0000.0000.0000.0000  50022      V122:22

```

Verify the configuration on the router R3

Use the **show l2vpn evpn evi 3 detail** command to verify the configuration of the EVI and bridge-domain, and to ensure the ethernet-tag value is configured.

```

Router3#show l2vpn evpn evi 3 detail
EVPN instance:      3 (VLAN Aware)
  Profile:           evpn_va
  RD:                10.10.30.2:32770 (auto)
  Import-RTs:        1:3
  Export-RTs:         1:3
  Per-EVI Label:      none
  State:              Established
  Replication Type:    Ingress (profile)
  Encapsulation:       vxlan (profile)
  IP Local Learn:      Enabled (global)
  Adv. Def. Gateway:   Disabled (global)
  Re-originate RT5:    Disabled (profile)
  AR Flood Suppress:   Enabled (global)
  Bridge Domain:       12
    Ethernet-Tag:      50012
    State:              Established
    Flood Suppress:     Attached
    Core If:
    Access If:
    NVE If:             nve1
    RMAC:               0000.0000.0000
    Core BD:            0
    L2 VNI:             50012
    L3 VNI:            0
    VTEP IP:            192.0.2.3
  Pseudoports:
    Vlan12 service instance 12
      Routes: 1 MAC, 0 MAC/IP
  Peers:
    192.0.2.1
      Routes: 0 MAC, 0 MAC/IP, 1 IMET, 0 EAD
    192.0.2.2
      Routes: 0 MAC, 0 MAC/IP, 1 IMET, 0 EAD
  Bridge Domain:       22
    Ethernet-Tag:      50022
    State:              Established
    Flood Suppress:     Attached
    Core If:
    Access If:
    NVE If:             nve1
    RMAC:               0000.0000.0000
    Core BD:            0

```

```

L2 VNI:          50022
L3 VNI:          0
VTEP IP:         192.0.2.3
Pseudoports:
  Vlan22 service instance 22
    Routes: 0 MAC, 0 MAC/IP
Peers:
  192.0.2.1
    Routes: 0 MAC, 0 MAC/IP, 1 IMET, 0 EAD
  192.0.2.2
    Routes: 0 MAC, 0 MAC/IP, 1 IMET, 0 EAD

```

Use the **show l2route evpn imet** command to verify the IMET routes.

```

Router3#show l2route evpn imet

```

EVI	ETAG	Prod	Tunnel ID	Multicast	Proxy	Router IP Addr	Type	Label
3	50012	BGP	192.0.2.1		No	10.10.10.2	6	50012
3	50012	BGP	192.0.2.2		No	10.10.20.2	6	50012
3	50012	L2VPN	192.0.2.3		No	10.10.30.2	6	50012
3	50022	BGP	192.0.2.1		No	10.10.10.2	6	50022
3	50022	BGP	192.0.2.2		No	10.10.20.2	6	50022
3	50022	L2VPN	192.0.2.3		No	10.10.30.2	6	50022

Use the **show ip bgp l2vpn evpn all** command to verify the configuration.

```

Router3# sh ip bgp l2vpn evpn all
BGP table version is 30, local router ID is 192.0.2.3
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,
               t secondary path, L long-lived-stale,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found

```

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 192.0.2.1:32770					
>i [2] [192.0.2.1:32770] [50012] [48] [000011000001] [0] []/20	192.0.2.1	0	100	0 ?	
>i [2] [192.0.2.1:32770] [50022] [48] [000011000002] [0] []/20	192.0.2.1	0	100	0 ?	
Route Distinguisher: 192.0.2.2:32770					
>i [2] [192.0.2.2:32770] [50012] [48] [000013000001] [0] []/20	192.0.2.2	0	100	0 ?	
>i [2] [192.0.2.2:32770] [50022] [48] [000013000002] [0] []/20	192.0.2.2	0	100	0 ?	
Route Distinguisher: 192.0.2.3:32770					
>i [2] [192.0.2.3:32770] [50012] [48] [000011000001] [0] []/20	192.0.2.1	0	100	0 ?	
> [2] [192.0.2.3:32770] [50012] [48] [000012000001] [0] []/20	0.0.0.0			32768 ?	
>i [2] [192.0.2.3:32770] [50012] [48] [000013000001] [0] []/20	192.0.2.2	0	100	0 ?	
> [2] [192.0.2.3:32770] [50012] [48] [04BD9708512B] [0] []/20	0.0.0.0			32768 ?	
>i [2] [192.0.2.3:32770] [50022] [48] [000011000002] [0] []/20	192.0.2.1	0	100	0 ?	

```

*> [2] [192.0.2.3:32770] [50022] [48] [000012000002] [0] [*]/20
      0.0.0.0 32768 ?
*>i [2] [192.0.2.3:32770] [50022] [48] [000013000002] [0] [*]/20
      192.0.2.2 0 100 0 ?
Route Distinguisher: 192.0.2.1:32770
*>i [3] [192.0.2.1:32770] [50012] [32] [192.0.2.1]/17
      192.0.2.1 0 100 0 ?
*>i [3] [192.0.2.1:32770] [50022] [32] [192.0.2.1]/17
      192.0.2.1 0 100 0 ?
Route Distinguisher: 192.0.2.2:32770
*>i [3] [192.0.2.2:32770] [50012] [32] [192.0.2.2]/17
      192.0.2.2 0 100 0 ?
*>i [3] [192.0.2.2:32770] [50022] [32] [192.0.2.2]/17
      192.0.2.2 0 100 0 ?
Route Distinguisher: 192.0.2.3:32770
*>i [3] [192.0.2.3:32770] [50012] [32] [192.0.2.1]/17
      192.0.2.1 0 100 0 ?
*>i [3] [192.0.2.3:32770] [50012] [32] [192.0.2.2]/17
      192.0.2.2 0 100 0 ?
*> [3] [192.0.2.3:32770] [50012] [32] [192.0.2.3]/17
      0.0.0.0 32768 ?
*>i [3] [192.0.2.3:32770] [50022] [32] [192.0.2.1]/17
      192.0.2.1 0 100 0 ?
*>i [3] [192.0.2.3:32770] [50022] [32] [192.0.2.2]/17
      192.0.2.2 0 100 0 ?
*> [3] [192.0.2.3:32770] [50022] [32] [192.0.2.3]/17
      0.0.0.0 32768 ?

```

Use the **show nve peers** command to verify the configuration.

```
Router3#show nve peers
```

```
'M' - MAC entry download flag 'A' - Adjacency download flag
'4' - IPv4 flag '6' - IPv6 flag
```

Interface	VNI	Type	Peer-IP	RMAC/Num_RTs	eVNI	state	flags	UP time
nve1	50012	L2CP	192.0.2.1	2	50012	UP	N/A	00:07:48
nve1	50012	L2CP	192.0.2.2	2	50012	UP	N/A	00:05:23
nve1	50022	L2CP	192.0.2.1	2	50022	UP	N/A	00:07:48
nve1	50022	L2CP	192.0.2.2	2	50022	UP	N/A	00:05:23

Use the **show l2vpn evpn mac** command to verify the configuration

```
Router3# show l2vpn evpn mac
```

MAC Address	EVI	BD	ESI	Ether Tag	Next Hop(s)
0000.1100.0001	3	12	0000.0000.0000.0000.0000	50012	192.0.2.1
0000.1200.0001	3	12	0000.0000.0000.0000.0000	50012	V112:12
0000.1300.0001	3	12	0000.0000.0000.0000.0000	50012	192.0.2.2
0000.1100.0002	3	22	0000.0000.0000.0000.0000	50022	192.0.2.1
0000.1200.0002	3	22	0000.0000.0000.0000.0000	50022	V122:22
0000.1300.0002	3	22	0000.0000.0000.0000.0000	50022	192.0.2.2

Multi-Homing Configuration in BGP EVPN VXLAN Fabric

Ethernet Virtual Private Network (EVPN) has gained prominence in contemporary networking due to its capacity to deliver scalable, flexible, and efficient Layer 2 and Layer 3 VPN services over an IP/MPLS backbone. EVPN is commonly integrated with Virtual Extensible LAN (VXLAN), a widely-used network virtualization overlay protocol that significantly enhances the Layer 2 network address space.

EVPN-VXLAN operates as an open standards technology addressing the constraints of traditional VLAN-based networks. It establishes network fabric that extends Layer 2 connectivity as an overlay on existing physical networks.

Why Multi-Homing?

Multi-homing is critical for effectively implementing the combined two-stage VLAN and Bridge Domain (BD) model in routing platforms. A traditional single-model procedure for EVPN is designed exclusively for either BD-only or VLAN-only configurations. Additionally, there are limited numbers of routing ports available, which means that switchports must be utilized to enable effective Multi-homing deployments.

By configuring EVPN Ethernet Segments on switchports and associating them with VLANs which are mapped to Switched Virtual Interfaces (SVIs) under the EVPN BD, multi-homing facilitates increased resilience and optimized network resource utilization. The Multi-Homing (MH) All-Active Ethernet Segment feature offers redundancy for connections between hosts or Layer 2 switches and the EVPN VXLAN network

Significance of DF Election and Split-Horizon in Multi-Homing Deployments

Designated Forwarder (DF) election and split-horizon techniques are essential in multi-homing deployments to prevent traffic loops and duplication. In scenarios where multiple switchports are configured as members of a multi-homing VLAN, ambiguity arises regarding the intended traffic destination. To maintain network stability, only one switchport can be actively supported to handle traffic within the multi-homing VLAN, while local switching is disabled.

The switchport functions as the access interface for the EVPN Ethernet Segment, while the associated SVI Ethernet Forwarding Port (EFP) represents the member pseudoport of the EVPN Ethernet Virtual Instance (EVI) or BD linked to the EVPN Ethernet Segment.

The implementation of DF election and split-horizon at the SVI EFP level ensures that traffic is efficiently managed, significantly reducing the risk of loops and optimizing network performance in multi-homing configurations.

Configuring Multi-Homing in a BGP EVPN VXLAN Fabric

To configure multi-homing with all-active redundancy in a BGP EVPN VXLAN fabric, perform the following set of procedures:

1. [Configure Ethernet Segment and Redundancy in the Ethernet Segment](#)
2. [Configure Multi-homing VLAN and Associate EVPN Ethernet-Segment](#)
 - Access Mode
 - Trunk Mode
3. [Configure SVI Service Instance](#)
4. [Configure EVPN-Instance](#)
 - Profile based Configuration
 - Manual Configuration
5. [Apply the configuration on a Bridge-Domain](#)

Removing a Multi-homing VLAN

Unconfiguring the EVPN Ethernet-segment on the switchport will remove the corresponding multihoming VLANs.

Configure Ethernet Segment and Redundancy in the Ethernet Segment

Follow these steps to configure redundancy on an ethernet segment on your router.

Procedure

Step 1 Enter the privileged EXEC mode and enter the password, if prompted.

Example:

```
Router#enable
```

Step 2 Enter the Global Configuration Mode.

Example:

```
Router#configure terminal
```

Step 3 Enter the Layer 2 VPN EVPN ethernet segment configuration mode.

Example:

```
Router(config)#l2vpn evpn ethernet-segment 1
```

Step 4 Configure the ethernet segment identifier type (ESI) and value for the ethernet segment.

Example:

```
Router(config-evpn-es)#l2vpn evpn ethernet-segment 1
```

The following ESI types are supported:

- Type 0: This type indicates an arbitrary 9-octet ESI value. The format is 00 + 9-octets of ESI value
- Type 3: This type indicates a MAC-based ESI Value. The format is 03 + system-mac (6 bytes) + value of MAC address (3 bytes).

Step 5 Configure the redundancy type for the ethernet segment.

Example:

```
Router(config-evpn-es)#redundancy all-active
```

Step 6 Exit the Layer 2 VPN EVPN ethernet segment configuration mode and enter privileged EXEC mode.

Example:

```
Router(config-evpn-es)#end
```

Configure Multi-Homing VLAN and Associate EVPN Ethernet-Segment

You can add a multi-homing VLAN through two modes:

- Access Mode: The switchport must be the only port in the Access VLAN.

If the switchport is not the only port in the access VLAN, the command line interface (CLI) request to configure EVPN Ethernet-segment will be rejected.

- **Trunk Mode:** The switchport must be the only port for all the VLANs which are allowed on the trunk switchport.

If the switchport is not the only port associated with the VLANs which are allowed on the trunk, the CLI request to configure EVPN Ethernet-segment will be rejected.

Follow these steps to add a VLAN to switchport.

Procedure

Step 1 Enter privileged EXEC mode and enter password, if prompted.

Example:

```
Router#enable
```

Step 2 Enter Global Configuration Mode.

Example:

```
Router#configure terminal
```

Step 3 Specify the interface, and enter interface configuration mode.

Example:

```
Router(config)#interface FastEthernet0/0/1
```

Step 4 Select the switchport mode and add the multi-homing VLAN.

Example:

For Access mode:

```
Router(config-if)#switchport mode access
Router(config-if)#switchport access vlan 200
```

For Trunk mode:

```
Router(config-if)#switchport mode trunk
Router(config-if)#switchport trunk allowed vlan 200
```

Step 5 Associate the specified Ethernet segment with the interface. Each Ethernet segment is represented by a unique Ethernet segment ID.

Example:

```
Router(config-if)#evpn ethernet-segment 1
```

Note

Ensure that you configure a unique Ethernet segment ID on any interface. Ensure that you configure the same segment ID on the link that connects the second VTEP (Virtual Tunnel Endpoint) and the dual-homed device (the second link through the Ethernet segment).

Step 6 Exit the interface configuration mode and enter the privileged EXEC mode.

Example:

```
Router(config-if) #end
```

Configure SVI Service Instance

This task configures the SVI service instance.

Procedure

Step 1 Enter the Global Configuration Mode.

Example:

```
Router#configure terminal
```

Step 2 Configure the VLAN interface and enter the interface configuration mode.

Example:

```
Router(config) #interface Vlan200
```

Step 3 Disable the IP processing on the interface.

Example:

```
Router(config-if) #no ip address
```

Step 4 Specify the SVI service instance for the ethernet.

Example:

```
Router(config-if) #service instance 200 ethernet
```

Step 5 Configure the encapsulation type.

Example:

```
Router(config-if-svi-efp) #encapsulation dot1q 200
```

Configure EVPN-Instance

There are two methods to configure evpn-instance:

- Profile based configuration
- Manual configuration

Procedure

Step 1 Enter privileged EXEC mode and enter password, if prompted.

Example:

```
Router#enable
```

Step 2 Enter the Global Configuration Mode.

Example:

```
Router#configure terminal
```

Step 3 For profile method: Configure an EVPN profile instance.

```
Router(config)#l2vpn evpn profile <profile-name> <service-type>
```

Example:

```
Router(config)#l2vpn evpn profile evpn_va vlan-aware
```

Step 4 For manual method: Configure an EVPN instance.

Example:

```
Router(config)#l2vpn evpn instance 1 vlan-aware
```

Step 5 Configures the encapsulation type to VXLAN.

Example:

```
Router(config-evpn-evi)#encapsulation vxlan
```

Apply the Configuration on the Bridge-Domain

Follow these steps to apply the configuration on a bridge-domain.

Procedure

Step 1 Apply the configuration to the specified bridge domain.

Example:

```
Router(config)#bridge-domain 200
```

Step 2 Specify the service instance EFP to the bridge domain.

Example:

```
Router(config-bdomain)#member Vlan200 service-instance 200
```

Step 3 For profile based configuration: Add an EVPN instance to the bridge-domain.

Example:

```
Router(config-bdomain)#member evpn-instance profile evpn_va
```

Step 4 For manual configuration: Add an EVPN instance to the bridge-domain.

Example:

```
Router(config-bdomain)#member evpn-instance 1 vni 20011 ethernet-tag 20011
```


Note

For more information on different replication types, on the **nve**, see [Configure Ingress Replication](#) and [Configure Static Replication](#)

Configuration Example

Here is an example of configuring the Multi-Homing feature over BGP EVPN VXLAN in a network topology with four routers (R1, R2, R3, and R4) as the VTEPs (Virtual Tunnel Endpoint). The R1 and R2 are the VTEPs with Multi-Homing VLANs as shown in the figure.

Figure 2: Configuration example of 4 router and 1 switch topology

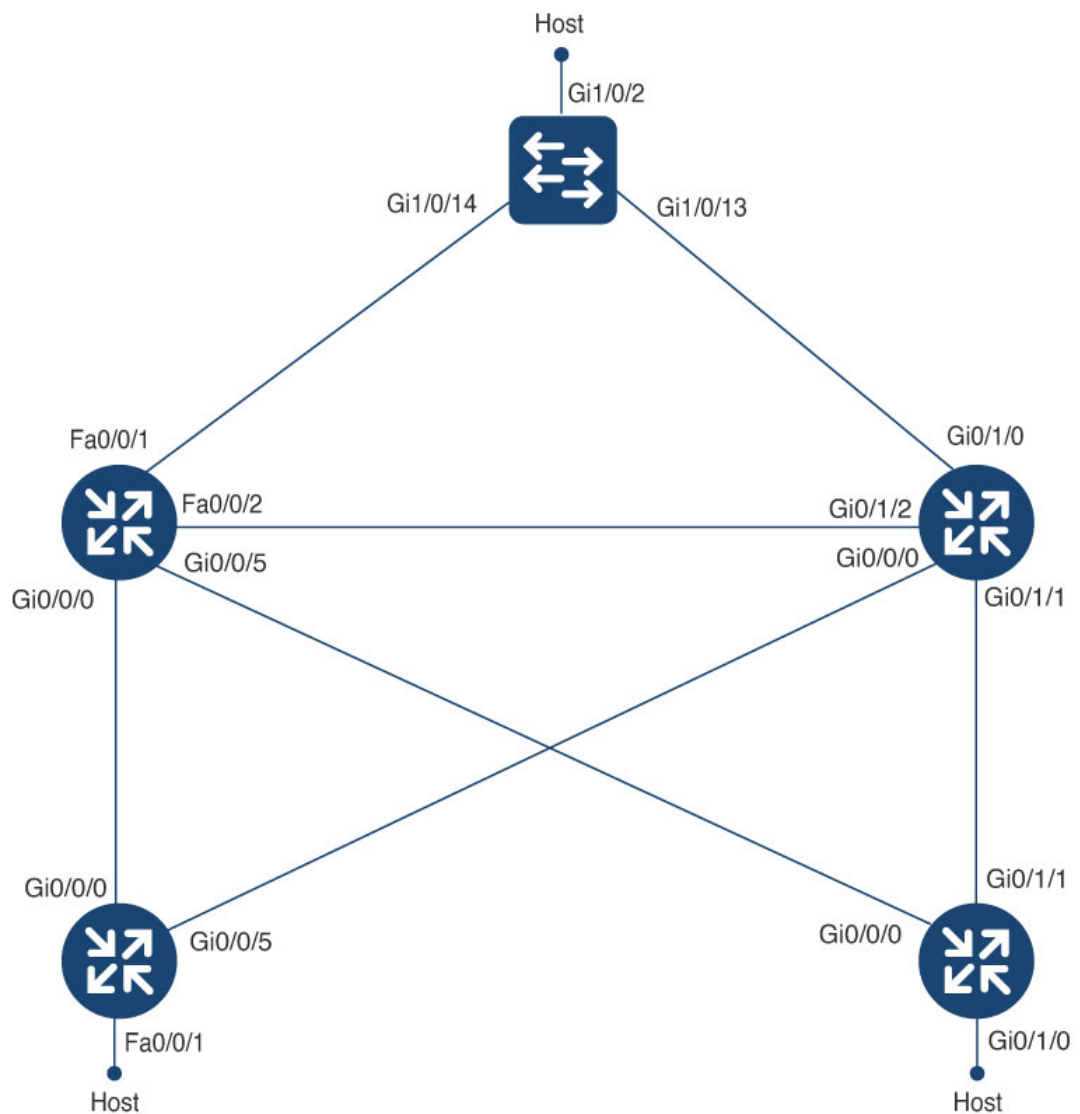

Running Configuration for Router 1 (R1)

```

l2vpn evpn ethernet-segment 1
  identifier type 3 system-mac 0012.0012.0012
  redundancy all-active
  df-election wait-time 1
!
l2vpn evpn
  replication-type ingress
!
l2vpn evpn profile evpn_va vlan-aware
  evi-id 3
  l2vni-base 50000
  ethernet-tag auto-vni
!
bridge-domain 200
  member Vlan200 service-instance 200
  member evpn-instance profile evpn_va
!
interface Loopback0
  ip address 1.1.1.1 255.255.255.255
  ip ospf network point-to-point
  ip ospf 1 area 0
!
interface Loopback1
  ip address 1.1.1.2 255.255.255.255
  ip ospf network point-to-point
  ip ospf 1 area 0
!
interface GigabitEthernet0/0/0
  ip address 10.1.3.1 255.255.255.0
  ip ospf network point-to-point
  ip ospf bfd
  ip ospf 1 area 0
  media-type rj45
  bfd interval 50 min_rx 50 multiplier 3
!
interface FastEthernet0/0/1
  switchport trunk allowed vlan 200
  switchport mode trunk
  evpn ethernet-segment 1
!
interface FastEthernet0/0/2
  switchport access vlan 12
  switchport mode access
!
interface GigabitEthernet0/0/5
  no switchport
  ip address 10.1.4.1 255.255.255.0
  ip ospf network point-to-point
  ip ospf bfd
  ip ospf 1 area 0
  bfd interval 50 min_rx 50 multiplier 3
!
interface Vlan12
  ip address 10.1.2.1 255.255.255.0
  ip ospf network point-to-point
  ip ospf bfd
  ip ospf 1 area 0
  bfd interval 999 min_rx 999 multiplier 3
!
interface Vlan200
  no ip address
  service instance 200 ethernet

```

```

        encapsulation dot1q 200
    !
!
interface nve1
    no ip address
    source-interface Loopback1
    host-reachability protocol bgp
    member vni 30000 ingress-replication
!
router ospf 1
    router-id 1.1.1.1
!
router bgp 65001
    bgp log-neighbor-changes
    neighbor 2.2.2.1 remote-as 65001
    neighbor 2.2.2.1 update-source Loopback0
    neighbor 2.2.2.1 fall-over bfd
    neighbor 3.3.3.1 remote-as 65001
    neighbor 3.3.3.1 update-source Loopback0
    neighbor 3.3.3.1 fall-over bfd
    neighbor 3.3.3.1 route-reflector-client
    neighbor 4.4.4.1 remote-as 65001
    neighbor 4.4.4.1 update-source Loopback0
    neighbor 4.4.4.1 fall-over bfd
    neighbor 4.4.4.1 route-reflector-client
!
address-family l2vpn evpn
    neighbor 2.2.2.1 activate
    neighbor 2.2.2.1 send-community both
    neighbor 3.3.3.1 activate
    neighbor 3.3.3.1 send-community both
    neighbor 3.3.3.1 route-reflector-client
    neighbor 4.4.4.1 activate
    neighbor 4.4.4.1 send-community both
    neighbor 4.4.4.1 route-reflector-client
exit-address-family
!

```

Running Configuration for Router 2 (R2)

```

l2vpn evpn ethernet-segment 1
    identifier type 3 system-mac 0012.0012.0012
    redundancy all-active
    df-election wait-time 1
!
l2vpn evpn
    replication-type ingress
!
l2vpn evpn profile evpn_va vlan-aware
    evi-id 3
    l2vni-base 50000
    ethernet-tag auto-vni
!
bridge-domain 200
    member Vlan200 service-instance 200
    member evpn-instance profile evpn_va
!
interface Loopback0
    ip address 2.2.2.1 255.255.255.255
    ip ospf network point-to-point
    ip ospf 1 area 0
!
interface Loopback1
    ip address 2.2.2.2 255.255.255.255

```

```

ip ospf network point-to-point
ip ospf 1 area 0
!
interface GigabitEthernet0/0/0
ip address 10.2.3.2 255.255.255.0
ip ospf network point-to-point
ip ospf bfd
ip ospf 1 area 0
media-type rj45
negotiation auto
bfd interval 50
!
interface GigabitEthernet0/1/0
switchport trunk allowed vlan 200
switchport mode trunk
evpn ethernet-segment 1
!
interface GigabitEthernet0/1/1
switchport access vlan 24
switchport mode access
!
interface GigabitEthernet0/1/2
switchport access vlan 12
switchport mode access
!
interface Vlan12
ip address 10.1.2.2 255.255.255.0
ip ospf network point-to-point
ip ospf bfd
ip ospf 1 area 0
bfd interval 999 min_rx 999 multiplier 3
!
interface Vlan24
ip address 10.2.4.2 255.255.255.0
ip ospf network point-to-point
ip ospf bfd
ip ospf 1 area 0
bfd interval 999 min_rx 999 multiplier 3
!
interface Vlan200
no ip address
service instance 200 ethernet
encapsulation dot1q 200
!
interface nve1
no ip address
source-interface Loopback1
host-reachability protocol bgp
member vni 30000 ingress-replication
!
router ospf 1
router-id 2.2.2.1
!
router bgp 65001
bgp log-neighbor-changes
neighbor 1.1.1.1 remote-as 65001
neighbor 1.1.1.1 update-source Loopback0
neighbor 1.1.1.1 fall-over bfd
neighbor 3.3.3.1 remote-as 65001
neighbor 3.3.3.1 update-source Loopback0
neighbor 3.3.3.1 fall-over bfd
neighbor 3.3.3.1 route-reflector-client
neighbor 4.4.4.1 remote-as 65001
neighbor 4.4.4.1 update-source Loopback0

```

```

neighbor 4.4.4.1 fall-over bfd
neighbor 4.4.4.1 route-reflector-client
!
address-family l2vpn evpn
neighbor 1.1.1.1 activate
neighbor 1.1.1.1 send-community both
neighbor 3.3.3.1 activate
neighbor 3.3.3.1 send-community both
neighbor 3.3.3.1 route-reflector-client
neighbor 4.4.4.1 activate
neighbor 4.4.4.1 send-community both
neighbor 4.4.4.1 route-reflector-client
exit-address-family
!
```

Running Configuration for Router 3 (R3)

```

l2vpn evpn
replication-type ingress
!
l2vpn evpn profile evpn_va vlan-aware
evi-id 3
l2vni-base 50000
ethernet-tag auto-vni
!
bridge-domain 200
member Vlan200 service-instance 200
member evpn-instance profile evpn_va
!
interface Loopback0
ip address 3.3.3.1 255.255.255.255
ip ospf network point-to-point
ip ospf 1 area 0
!
interface Loopback1
ip address 3.3.3.2 255.255.255.255
ip ospf network point-to-point
ip ospf 1 area 0
!
interface GigabitEthernet0/0/0
ip address 10.1.3.3 255.255.255.0
ip ospf network point-to-point
ip ospf bfd
ip ospf 1 area 0
media-type rj45
bfd interval 50 min_rx 50 multiplier 3
!
interface FastEthernet0/0/1
switchport trunk allowed vlan 200
switchport mode trunk
!
interface GigabitEthernet0/0/5
no switchport
ip address 10.2.3.3 255.255.255.0
ip ospf network point-to-point
ip ospf bfd
ip ospf 1 area 0
bfd interval 50 min_rx 50 multiplier 3
!
interface Vlan200
no ip address
service instance 200 ethernet
encapsulation dot1q 200
!
```

```

!
interface nve1
 no ip address
 source-interface Loopback1
 host-reachability protocol bgp
 member vni 30000 ingress-replication
!
router ospf 1
 router-id 3.3.3.1
!
router bgp 65001
 bgp log-neighbor-changes
 neighbor 1.1.1.1 remote-as 65001
 neighbor 1.1.1.1 update-source Loopback0
 neighbor 1.1.1.1 fall-over bfd
 neighbor 2.2.2.1 remote-as 65001
 neighbor 2.2.2.1 update-source Loopback0
 neighbor 2.2.2.1 fall-over bfd
!
 address-family l2vpn evpn
  neighbor 1.1.1.1 activate
  neighbor 1.1.1.1 send-community both
  neighbor 2.2.2.1 activate
  neighbor 2.2.2.1 send-community both
 exit-address-family
!

```

Running Configuration for Router 4 (R4)

```

l2vpn evpn
 replication-type ingress
!
l2vpn evpn profile evpn_va vlan-aware
 evi-id 3
 l2vni-base 50000
 ethernet-tag auto-vni
!
bridge-domain 200
 member Vlan200 service-instance 200
 member evpn-instance profile evpn_va
!
interface Loopback0
 ip address 4.4.4.1 255.255.255.255
 ip ospf network point-to-point
 ip ospf 1 area 0
!
interface Loopback1
 ip address 4.4.4.2 255.255.255.255
 ip ospf network point-to-point
 ip ospf 1 area 0
!
interface GigabitEthernet0/0/0
 ip address 10.1.4.4 255.255.255.0
 ip ospf network point-to-point
 ip ospf bfd
 ip ospf 1 area 0
 media-type rj45
 negotiation auto
 bfd interval 50 min_rx 50 multiplier 3
!
interface GigabitEthernet0/1/0
 switchport trunk allowed vlan 200
 switchport mode trunk
!

```

```

interface GigabitEthernet0/1/1
  switchport access vlan 24
  switchport mode access
!
interface Vlan24
ip address 10.2.4.4 255.255.255.0
  ip ospf network point-to-point
  ip ospf bfd
  ip ospf 1 area 0
  bfd interval 999 min_rx 999 multiplier 3
!
interface Vlan200
  no ip address
  service instance 200 ethernet
  encapsulation dot1q 200
!
!
interface nve1
  no ip address
  source-interface Loopback1
  host-reachability protocol bgp
  member vni 30000 ingress-replication
!
router ospf 1
  router-id 4.4.4.1
!
router bgp 65001
  bgp log-neighbor-changes
  neighbor 1.1.1.1 remote-as 65001
  neighbor 1.1.1.1 update-source Loopback0
  neighbor 1.1.1.1 fall-over bfd
  neighbor 2.2.2.1 remote-as 65001
  neighbor 2.2.2.1 update-source Loopback0
  neighbor 2.2.2.1 fall-over bfd
!
address-family l2vpn evpn
  neighbor 1.1.1.1 activate
  neighbor 1.1.1.1 send-community both
  neighbor 2.2.2.1 activate
  neighbor 2.2.2.1 send-community both
exit-address-family
!

```

Running Configuration for Switch

```

interface GigabitEthernet1/0/13
  switchport trunk allowed vlan 200
  switchport mode trunk
  carrier-delay 0
  speed 100
  channel-group 1 mode on
end
!
interface GigabitEthernet1/0/14
  switchport access vlan 500
  switchport trunk allowed vlan 200
  switchport mode trunk
  carrier-delay 0
  channel-group 1 mode on
end
!
interface Port-channel1
  switchport trunk allowed vlan 200
  switchport mode trunk

```

```
end
!
```

Verify the Multi-Homing Configuration

Verify the Configuration on Router 1 (R1)

Use the **show l2vpn evpn evi detail** command to verify the configuration of the EVI and bridge-domain, and to ensure the ethernet-tag value is configured

```
Router1#show l2vpn evpn evi detail
EVPN instance:      3 (VLAN Aware)
  Profile:          evpn_va
  RD:               1.1.1.1:32770 (auto)
  Import-RTs:       65001:3
  Export-RTs:       65001:3
  Per-EVI Label:    none
  State:            Established
  Replication Type: Ingress (profile)
  Encapsulation:    vxlan (profile)
  IP Local Learn:    Enabled (global)
  Adv. Def. Gateway: Disabled (global)
  Re-originate RT5: Disabled (profile)
  AR Flood Suppress: Enabled (global)
  Bridge Domain:    200
    Ethernet-Tag:    50200
    State:           Established
    Flood Suppress:  Attached
  Core If:
  Access If:
  NVE If:           nve1
  RMAC:             0000.0000.0000
  Core BD:          0
  L2 VNI:           50200
  L3 VNI:           0
  VTEP IP:          1.1.1.2
  Originating Router: 1.1.1.1
  Pseudoports:
    Vlan200 service instance 200 (DF state: forwarding)
      Routes: 1 MAC, 0 MAC/IP
      ESI: 0300.1200.1200.1200.0001
  Peers:
    2.2.2.2
      Routes: 1 MAC, 0 MAC/IP, 1 IMET, 1 EAD
    3.3.3.2
      Routes: 1 MAC, 0 MAC/IP, 1 IMET, 0 EAD
    4.4.4.2
      Routes: 1 MAC, 0 MAC/IP, 1 IMET, 0 EAD
```

Use the **show ip bgp l2vpn evpn all** command to verify the configuration.

```
Router1#show ip bgp l2vpn evpn all
BGP table version is 53, local router ID is 1.1.1.1
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,
               t secondary path, L long-lived-stale,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found

      Network          Next Hop          Metric LocPrf Weight Path
Route Distinguisher: 1.1.1.1:32770
```

```

*> [1] [1.1.1.1:32770] [03001200120012000001] [50200]/23
      0.0.0.0 32768 ?
*mi 2.2.2.2 0 100 0 ?
Route Distinguisher: 10.1.2.2:2
*>i [1] [10.1.2.2:2] [03001200120012000001] [4294967295]/23
      2.2.2.2 0 100 0 ?
Route Distinguisher: 10.1.2.2:32770
*>i [1] [10.1.2.2:32770] [03001200120012000001] [50200]/23
      2.2.2.2 0 100 0 ?
Route Distinguisher: 100.109.165.27:8
*> [1] [100.109.165.27:8] [03001200120012000001] [4294967295]/23
      0.0.0.0 32768 ?
Route Distinguisher: 1.1.1.1:32770
*> [2] [1.1.1.1:32770] [50200] [48] [001101000001] [0] [*]/20
      0.0.0.0 32768 ?
*>i [2] [1.1.1.1:32770] [50200] [48] [001101000002] [0] [*]/20
      2.2.2.2 0 100 0 ?
*>i [2] [1.1.1.1:32770] [50200] [48] [001201000001] [0] [*]/20
      3.3.3.2 0 100 0 ?
*>i [2] [1.1.1.1:32770] [50200] [48] [001301000001] [0] [*]/20
      4.4.4.2 0 100 0 ?
Route Distinguisher: 3.3.3.1:32770
* i [2] [3.3.3.1:32770] [50200] [48] [001201000001] [0] [*]/20
      3.3.3.2 0 100 0 ?
*>i 3.3.3.2 0 100 0 ?
Route Distinguisher: 10.1.2.2:32770
*>i [2] [10.1.2.2:32770] [50200] [48] [001101000002] [0] [*]/20
      2.2.2.2 0 100 0 ?
Route Distinguisher: 10.1.4.4:32770
* i [2] [10.1.4.4:32770] [50200] [48] [001301000001] [0] [*]/20
      4.4.4.2 0 100 0 ?
*>i 4.4.4.2 0 100 0 ?
Route Distinguisher: 1.1.1.1:32770
*> [3] [1.1.1.1:32770] [50200] [32] [1.1.1.1]/17
      0.0.0.0 32768 ?
*>i [3] [1.1.1.1:32770] [50200] [32] [3.3.3.1]/17
      3.3.3.2 0 100 0 ?
*>i [3] [1.1.1.1:32770] [50200] [32] [10.1.2.2]/17
      2.2.2.2 0 100 0 ?
*>i [3] [1.1.1.1:32770] [50200] [32] [10.1.4.4]/17
      4.4.4.2 0 100 0 ?
Route Distinguisher: 3.3.3.1:32770
* i [3] [3.3.3.1:32770] [50200] [32] [3.3.3.1]/17
      3.3.3.2 0 100 0 ?
*>i 3.3.3.2 0 100 0 ?
Route Distinguisher: 10.1.2.2:32770
*>i [3] [10.1.2.2:32770] [50200] [32] [10.1.2.2]/17
      2.2.2.2 0 100 0 ?
Route Distinguisher: 10.1.4.4:32770
* i [3] [10.1.4.4:32770] [50200] [32] [10.1.4.4]/17
      4.4.4.2 0 100 0 ?
*>i 4.4.4.2 0 100 0 ?
Route Distinguisher: 1.1.1.1:1
*> [4] [1.1.1.1:1] [03001200120012000001] [32] [1.1.1.1]/23
      0.0.0.0 32768 ?
Route Distinguisher: 2.2.2.1:1
*>i [4] [2.2.2.1:1] [03001200120012000001] [32] [10.1.2.2]/23
      2.2.2.2 0 100 0 ?

```

Use the **show nve peers** command to verify the configuration.

```
Router1#show nve peers
```

```
'M' - MAC entry download flag 'A' - Adjacency download flag
'4' - IPv4 flag '6' - IPv6 flag
```

Verify the Multi-Homing Configuration

Interface	VNI	Type	Peer-IP	RMAC/Num_RTs	eVNI	state	flags	UP time
nve1	50200	L2CP	2.2.2.2	3	50200	UP	N/A	00:19:17
nve1	50200	L2CP	3.3.3.2	2	50200	UP	N/A	00:06:09
nve1	50200	L2CP	4.4.4.2	2	50200	UP	N/A	00:06:08

Use the **show l2vpn evpn mac** command to verify the configuration.

```
Router1#show l2vpn evpn mac
```

MAC Address	EVI	BD	ESI	Ether Tag	Next Hop(s)
0011.0100.0001	3	200	0300.1200.1200.1200.0001	50200	Vl200:200
0011.0100.0002	3	200	0300.1200.1200.1200.0001	50200	2.2.2.2
0012.0100.0001	3	200	0000.0000.0000.0000.0000	50200	3.3.3.2
0013.0100.0001	3	200	0000.0000.0000.0000.0000	50200	4.4.4.2

Verify the Configuration on Router 2 (R2)

Use the **show l2vpn evpn evi detail** command to verify the configuration of the EVI and bridge-domain, and to ensure the ethernet-tag value is configured

```
Router2#show l2vpn evpn evi detail
EVPN instance:          3 (VLAN Aware)
  Profile:               evpn_va
  RD:                   10.1.2.2:32770 (auto)
  Import-RTs:           65001:3
  Export-RTs:           65001:3
  Per-EVI Label:        none
  State:                Established
  Replication Type:     Ingress (profile)
  Encapsulation:        vxlan (profile)
  IP Local Learn:       Enabled (global)
  Adv. Def. Gateway:    Disabled (global)
  Re-originate RT5:     Disabled (profile)
  AR Flood Suppress:    Enabled (global)
  Bridge Domain:        200
    Ethernet-Tag:        50200
    State:              Established
    Flood Suppress:     Attached
  Core If:
  Access If:
  NVE If:               nve1
  RMAC:                 0000.0000.0000
  Core BD:              0
  L2 VNI:               50200
  L3 VNI:               0
  VTEP IP:              2.2.2.2
  Originating Router: 10.1.2.2
  Pseudoports:
    Vlan200 service instance 200 (DF state: PE-to-CE BUM blocked)
      Routes: 1 MAC, 0 MAC/IP
      ESI: 0300.1200.1200.1200.0001
  Peers:
    1.1.1.2
      Routes: 1 MAC, 0 MAC/IP, 1 IMET, 1 EAD
    3.3.3.2
      Routes: 1 MAC, 0 MAC/IP, 1 IMET, 0 EAD
    4.4.4.2
      Routes: 1 MAC, 0 MAC/IP, 1 IMET, 0 EAD
```

Use the **show ip bgp l2vpn evpn all** command to verify the configuration.

```
Router2#show ip bgp l2vpn evpn all
BGP table version is 67, local router ID is 2.2.2.2
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
```

x best-external, a additional-path, c RIB-compressed,
 t secondary path, L long-lived-stale,
 Origin codes: i - IGP, e - EGP, ? - incomplete
 RPKI validation codes: V valid, I invalid, N Not found

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 1.1.1.1:11					
*>i [1] [1.1.1.1:11] [03001200120012000001] [4294967295]/23	1.1.1.1	0	100	0	?
Route Distinguisher: 1.1.1.1:32770					
*>i [1] [1.1.1.1:32770] [03001200120012000001] [50200]/23	1.1.1.1	0	100	0	?
Route Distinguisher: 2.2.2.1:4					
*> [1] [2.2.2.1:4] [03001200120012000001] [4294967295]/23	0.0.0.0			32768	?
Route Distinguisher: 2.2.2.1:32770					
*> [1] [2.2.2.1:32770] [03001200120012000001] [50200]/23	0.0.0.0			32768	?
*mi [1.1.1.1]		0	100	0	?
Route Distinguisher: 1.1.1.1:32770					
>i [2] [1.1.1.1:32770] [50200] [48] [001101000001] [0] []/20	1.1.1.1	0	100	0	?
>i [2] [1.1.1.1:32770] [50200] [48] [001101000002] [0] []/20	1.1.1.1	0	100	0	?
Route Distinguisher: 2.2.2.1:32770					
>i [2] [2.2.2.1:32770] [50200] [48] [001101000001] [0] []/20	1.1.1.1	0	100	0	?
>i [2] [2.2.2.1:32770] [50200] [48] [001101000002] [0] []/20	1.1.1.1	0	100	0	?
>i [2] [2.2.2.1:32770] [50200] [48] [001201000001] [0] []/20	3.3.3.1	0	100	0	?
>i [2] [2.2.2.1:32770] [50200] [48] [001301000001] [0] []/20	4.4.4.1	0	100	0	?
Route Distinguisher: 3.3.3.1:32770					
>i [2] [3.3.3.1:32770] [50200] [48] [001201000001] [0] []/20	3.3.3.1	0	100	0	?
Route Distinguisher: 4.4.4.1:32770					
>i [2] [4.4.4.1:32770] [50200] [48] [001301000001] [0] []/20	4.4.4.1	0	100	0	?
Route Distinguisher: 1.1.1.1:32770					
*>i [3] [1.1.1.1:32770] [50200] [32] [1.1.1.1]/17	1.1.1.1	0	100	0	?
Route Distinguisher: 2.2.2.1:32770					
*>i [3] [2.2.2.1:32770] [50200] [32] [1.1.1.1]/17	1.1.1.1	0	100	0	?
*> [3] [2.2.2.1:32770] [50200] [32] [2.2.2.1]/17	0.0.0.0			32768	?
*>i [3] [2.2.2.1:32770] [50200] [32] [3.3.3.1]/17	3.3.3.1	0	100	0	?
*>i [3] [2.2.2.1:32770] [50200] [32] [4.4.4.1]/17	4.4.4.1	0	100	0	?
Route Distinguisher: 3.3.3.1:32770					
*>i [3] [3.3.3.1:32770] [50200] [32] [3.3.3.1]/17	3.3.3.1	0	100	0	?
Route Distinguisher: 4.4.4.1:32770					
*>i [3] [4.4.4.1:32770] [50200] [32] [4.4.4.1]/17	4.4.4.1	0	100	0	?
Route Distinguisher: 1.1.1.1:1					
*>i [4] [1.1.1.1:1] [03001200120012000001] [32] [1.1.1.1]/23	1.1.1.1	0	100	0	?
Route Distinguisher: 2.2.2.2:1					
*> [4] [2.2.2.2:1] [03001200120012000001] [32] [2.2.2.1]/23	0.0.0.0			32768	?

Use the **show nve peers** command to verify the configuration.

Router2#**show nve peers**

'M' - MAC entry download flag 'A' - Adjacency download flag
'4' - IPv4 flag '6' - IPv6 flag

Interface	VNI	Type	Peer-IP	RMAC/Num_RTs	eVNI	state	flags	UP time
nve1	50200	L2CP	1.1.1.1	4	50200	UP	N/A	00:02:42
nve1	50200	L2CP	3.3.3.1	2	50200	UP	N/A	00:02:28
nve1	50200	L2CP	4.4.4.1	2	50200	UP	N/A	00:02:37

Use the **show l2vpn evpn mac** command to verify the configuration.

Router2#**show l2vpn evpn mac**

MAC Address	EVI	BD	ESI	Ether Tag	Next Hop(s)
0011.0100.0001	3	200	0300.1200.1200.1200.0001	50200	1.1.1.1
0011.0100.0002	3	200	0300.1200.1200.1200.0001	50200	1.1.1.1
0012.0100.0001	3	200	0000.0000.0000.0000.0000	50200	3.3.3.1
0013.0100.0001	3	200	0000.0000.0000.0000.0000	50200	4.4.4.1

Verify the Configuration on Router 3 (R3)

Use the **show l2vpn evpn evi detail** command to verify the configuration of the EVI and bridge-domain, and to ensure the ethernet-tag value is configured

Router3#**show l2vpn evpn evi detail**

```

EVPN instance:          3 (VLAN Aware)
  Profile:               evpn_va
  RD:                   3.3.3.1:32770 (auto)
  Import-RTs:           1:3
  Export-RTs:           1:3
  Per-EVI Label:        none
  State:                Established
  Replication Type:     Ingress (profile)
  Encapsulation:        vxlan (profile)
  IP Local Learn:       Enabled (global)
  Adv. Def. Gateway:    Disabled (global)
  Re-originate RT5:     Disabled (profile)
  AR Flood Suppress:    Enabled (global)
  Bridge Domain:        200
    Ethernet-Tag:        50200
    State:              Established
    Flood Suppress:     Attached
  Core If:
  Access If:
  NVE If:               nve1
  RMAC:                0000.0000.0000
  Core BD:              0
  L2 VNI:               50200
  L3 VNI:               0
  VTEP IP:              3.3.3.1
  Originating Router: 3.3.3.1
  Pseudoports:
    Vlan200 service instance 200
      Routes: 1 MAC, 0 MAC/IP
  Peers:
    1.1.1.1
      Routes: 2 MAC, 0 MAC/IP, 1 IMET, 1 EAD
    2.2.2.1
      Routes: 0 MAC, 0 MAC/IP, 1 IMET, 1 EAD

```

Use the **show ip bgp l2vpn evpn all** command to verify the configuration.

```
Router3#show ip bgp l2vpn evpn all
BGP table version is 62, local router ID is 3.3.3.3
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,
               t secondary path, L long-lived-stale,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found
```

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 1.1.1.1:11					
* i [1] [1.1.1.1:11] [03001200120012000001] [4294967295]/23	1.1.1.1	0	100	0 ?	
*>i	1.1.1.1	0	100	0 ?	
Route Distinguisher: 1.1.1.1:32770					
* i [1] [1.1.1.1:32770] [03001200120012000001] [50200]/23	1.1.1.1	0	100	0 ?	
*>i	1.1.1.1	0	100	0 ?	
Route Distinguisher: 2.2.2.1:4					
* i [1] [2.2.2.1:4] [03001200120012000001] [4294967295]/23	2.2.2.1	0	100	0 ?	
*>i	2.2.2.1	0	100	0 ?	
Route Distinguisher: 2.2.2.1:32770					
* i [1] [2.2.2.1:32770] [03001200120012000001] [50200]/23	2.2.2.1	0	100	0 ?	
*>i	2.2.2.1	0	100	0 ?	
Route Distinguisher: 3.3.3.1:32770					
*mi [1] [3.3.3.1:32770] [03001200120012000001] [50200]/23	2.2.2.1	0	100	0 ?	
*>i	1.1.1.1	0	100	0 ?	
Route Distinguisher: 1.1.1.1:32770					
* i [2] [1.1.1.1:32770] [50200] [48] [001101000001] [0] [*]/20	1.1.1.1	0	100	0 ?	
*>i	1.1.1.1	0	100	0 ?	
* i [2] [1.1.1.1:32770] [50200] [48] [001101000002] [0] [*]/20	1.1.1.1	0	100	0 ?	
*>i	1.1.1.1	0	100	0 ?	
Route Distinguisher: 3.3.3.1:32770					
>i [2] [3.3.3.1:32770] [50200] [48] [001101000001] [0] []/20	1.1.1.1	0	100	0 ?	
>i [2] [3.3.3.1:32770] [50200] [48] [001101000002] [0] []/20	1.1.1.1	0	100	0 ?	
> [2] [3.3.3.1:32770] [50200] [48] [001201000001] [0] []/20	0.0.0.0			32768 ?	
Route Distinguisher: 1.1.1.1:32770					
* i [3] [1.1.1.1:32770] [50200] [32] [1.1.1.1]/17	1.1.1.1	0	100	0 ?	
*>i	1.1.1.1	0	100	0 ?	
Route Distinguisher: 2.2.2.1:32770					
* i [3] [2.2.2.1:32770] [50200] [32] [2.2.2.1]/17	2.2.2.1	0	100	0 ?	
*>i	2.2.2.1	0	100	0 ?	
Route Distinguisher: 3.3.3.1:32770					
*>i [3] [3.3.3.1:32770] [50200] [32] [1.1.1.1]/17	1.1.1.1	0	100	0 ?	
*>i [3] [3.3.3.1:32770] [50200] [32] [2.2.2.1]/17	2.2.2.1	0	100	0 ?	
*> [3] [3.3.3.1:32770] [50200] [32] [3.3.3.1]/17	0.0.0.0			32768 ?	

Use the **show nve peers** command to verify the configuration.

```
Router3#show nve peers
'M' - MAC entry download flag 'A' - Adjacency download flag
'4' - IPv4 flag '6' - IPv6 flag
```

Verify the Multi-Homing Configuration

Interface	VNI	Type	Peer-IP	RMAC/Num_RTs	eVNI	state	flags	UP time
nve1	50200	L2CP	1.1.1.1	4	50200	UP	N/A	00:03:10
nve1	50200	L2CP	2.2.2.1	2	50200	UP	N/A	00:02:24

Use the **show l2vpn evpn mac** command to verify the configuration.

```
Router3#show l2vpn evpn mac
```

MAC Address	EVI	BD	ESI	Ether Tag	Next Hop(s)
0011.0100.0001	3	200	0300.1200.1200.1200.0001	50200	1.1.1.1
0011.0100.0002	3	200	0300.1200.1200.1200.0001	50200	1.1.1.1
0012.0100.0001	3	200	0000.0000.0000.0000.0000	50200	Vl200:200

Verify the Configuration on Router 4 (R4)

Use the **show l2vpn evpn evi detail** command to verify the configuration of the EVI and bridge-domain, and to ensure the ethernet-tag value is configured

```
Router4#show l2vpn evpn evi detail
EVPN instance: 3 (VLAN Aware)
Profile: evpn_va
RD: 4.4.4.1:32770 (auto)
Import-RTs: 1:3
Export-RTs: 1:3
Per-EVI Label: none
State: Established
Replication Type: Ingress (profile)
Encapsulation: vxlan (profile)
IP Local Learn: Enabled (global)
Adv. Def. Gateway: Disabled (global)
Re-originate RT5: Disabled (profile)
AR Flood Suppress: Enabled (global)
Bridge Domain: 200
Ethernet-Tag: 50200
State: Established
Flood Suppress: Attached
Core If:
Access If:
NVE If: nve1
RMAC: 0000.0000.0000
Core BD: 0
L2 VNI: 50200
L3 VNI: 0
VTEP IP: 4.4.4.1
Originating Router: 4.4.4.1
Pseudoports:
  Vlan200 service instance 200
    Routes: 1 MAC, 0 MAC/IP
Peers:
  1.1.1.1
    Routes: 2 MAC, 0 MAC/IP, 1 IMET, 1 EAD
  2.2.2.1
    Routes: 0 MAC, 0 MAC/IP, 1 IMET, 1 EAD
```

Use the **show ip bgp l2vpn evpn all** command to verify the configuration.

```
Router4#show ip bgp l2vpn evpn all
BGP table version is 25, local router ID is 4.4.4.4
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,
               t secondary path, L long-lived-stale,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found
```

```

      Network      Next Hop      Metric LocPrf Weight Path
Route Distinguisher: 1.1.1.1:11
* i [1] [1.1.1.1:11] [03001200120012000001] [4294967295]/23
      1.1.1.1      0      100      0 ?
*>i      1.1.1.1      0      100      0 ?
Route Distinguisher: 1.1.1.1:32770
* i [1] [1.1.1.1:32770] [03001200120012000001] [50200]/23
      1.1.1.1      0      100      0 ?
*>i      1.1.1.1      0      100      0 ?
Route Distinguisher: 2.2.2.1:4
* i [1] [2.2.2.1:4] [03001200120012000001] [4294967295]/23
      2.2.2.1      0      100      0 ?
*>i      2.2.2.1      0      100      0 ?
Route Distinguisher: 2.2.2.1:32770
* i [1] [2.2.2.1:32770] [03001200120012000001] [50200]/23
      2.2.2.1      0      100      0 ?
*>i      2.2.2.1      0      100      0 ?
Route Distinguisher: 4.4.4.1:32770
*mi [1] [4.4.4.1:32770] [03001200120012000001] [50200]/23
      2.2.2.1      0      100      0 ?
*>i      1.1.1.1      0      100      0 ?
Route Distinguisher: 1.1.1.1:32770
* i [2] [1.1.1.1:32770] [50200] [48] [001101000001] [0] [*]/20
      1.1.1.1      0      100      0 ?
*>i      1.1.1.1      0      100      0 ?
* i [2] [1.1.1.1:32770] [50200] [48] [001101000002] [0] [*]/20
      1.1.1.1      0      100      0 ?
*>i      1.1.1.1      0      100      0 ?
Route Distinguisher: 4.4.4.1:32770
*>i [2] [4.4.4.1:32770] [50200] [48] [001101000001] [0] [*]/20
      1.1.1.1      0      100      0 ?
*>i [2] [4.4.4.1:32770] [50200] [48] [001101000002] [0] [*]/20
      1.1.1.1      0      100      0 ?
*> [2] [4.4.4.1:32770] [50200] [48] [001301000001] [0] [*]/20
      0.0.0.0      32768 ?
Route Distinguisher: 1.1.1.1:32770
* i [3] [1.1.1.1:32770] [50200] [32] [1.1.1.1]/17
      1.1.1.1      0      100      0 ?
*>i      1.1.1.1      0      100      0 ?
Route Distinguisher: 2.2.2.1:32770
* i [3] [2.2.2.1:32770] [50200] [32] [2.2.2.1]/17
      2.2.2.1      0      100      0 ?
*>i      2.2.2.1      0      100      0 ?
Route Distinguisher: 4.4.4.1:32770
*>i [3] [4.4.4.1:32770] [50200] [32] [1.1.1.1]/17
      1.1.1.1      0      100      0 ?
*>i [3] [4.4.4.1:32770] [50200] [32] [2.2.2.1]/17
      2.2.2.1      0      100      0 ?
*> [3] [4.4.4.1:32770] [50200] [32] [4.4.4.1]/17
      0.0.0.0      32768 ?

```

Use the **show nve peers** command to verify the configuration.

Router4#**show nve peers**

'M' - MAC entry download flag 'A' - Adjacency download flag
'4' - IPv4 flag '6' - IPv6 flag

Interface	VNI	Type	Peer-IP	RMAC/Num_RTs	eVNI	state	flags	UP time
nve1	50200	L2CP	1.1.1.1	4	50200	UP	N/A	00:04:52
nve1	50200	L2CP	2.2.2.1	2	50200	UP	N/A	00:03:33

Use the **show l2vpn evpn mac** command to verify the configuration.

```
Router4#show l2vpn evpn mac
MAC Address      EVI    BD      ESI                      Ether Tag  Next Hop(s)
-----
0011.0100.0001  3      200    0300.1200.1200.1200.0001 50200      1.1.1.1
0011.0100.0002  3      200    0300.1200.1200.1200.0001 50200      1.1.1.1
0013.0100.0001  3      200    0000.0000.0000.0000.0000 50200      V1200:200
```

Misconfiguration of Multihoming VLANs

If a second switchport is added to a multihoming VLAN, traffic flow can be disrupted, especially for Broadcast, Unknown Unicast, and Multicast (BUM) traffic. This can lead to unpredictable internal states within the EVPN Ethernet Segment, ultimately requiring correction for proper functionality.

Misconfigurations can occur by:

- adding a single-homed switchport to a multihoming VLAN.
- adding a multi-homed switchport to a multihoming VLAN.

In such cases, an error message is logged, indicating the violation of the multihoming VLAN prerequisites.




Note Ensure that only one switch port is configured per multihoming VLAN to prevent traffic loss.

Adding Another Switchport to Multihoming VLAN

Configuring a MH VLAN 10, then set up EVPN ES-1 on Ethernet0/0, and then add a new switch port, Ethernet0/1, to VLAN 10.

The following image illustrates the first scenario for misconfiguration.

Figure 3: Add Single-Homed Switchport to MH VLAN

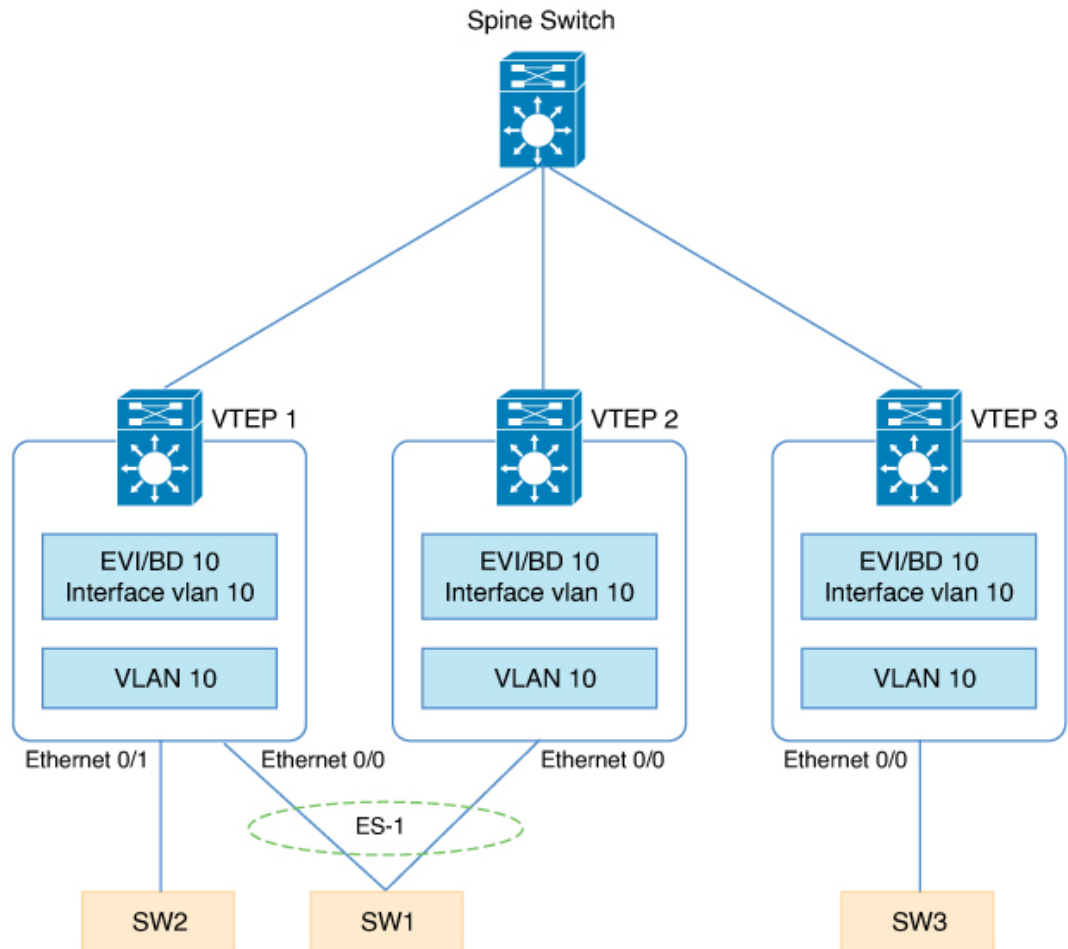

The traffic disruption is illustrated below:

Unicast traffic

- SW1 to SW2:
 SW1 to VTEP1 to SW2: Local switching on VTEP1 VLAN 10
 SW1 to VTEP2 to VTEP1 to SW2: Forwarded by EVPN EVI/BD 10
- SW2 to SW1:
 SW1 to VTEP1 to SW2: Local switching on VTEP1 VLAN 10
- SW1 to SW3:
 Forwarded through EVPN BD 10
- SW3 to SW1:
 Forwarded through EVPN BD 10
- SW3 to SW2:

Forwarded through EVPN BD 10

BUM traffic

- SW1 BUM: Traffic Loss

Split horizon is performed on SVI EFP member, SW2 may not receive the BUM traffic, if SW1's traffic is hashed to VTEP2.

- SW2 BUM: No Impact

Split horizon is performed on SVI EFP member, but SW1 will receive the local switched traffic

- SW3 BUM: **Traffic Loss**

DF election is performed on SVI EFP member, SW2 may not receive the BUM traffic, if VTEP1 is act as non-DF.


If a Port-channel is used for All-Active multihoming and if it is connected to a multihoming VLAN on a non-designated forwarder (DF) VTEP, the BUM traffic to a single-homed client switch may be lost.

Adding Another ES Switchport to Multihoming VLAN

Configure a MH VLAN 10, then set up EVPN ES-1 on Ethernet0/0 and EVPN ES-2 on Ethernet0/1. Additionally, add the new allowed VLAN on Ethernet0/1.

The following image illustrates the second secenario for misconfiguration.

Figure 4: Add Another ES Switchport to MH VLAN

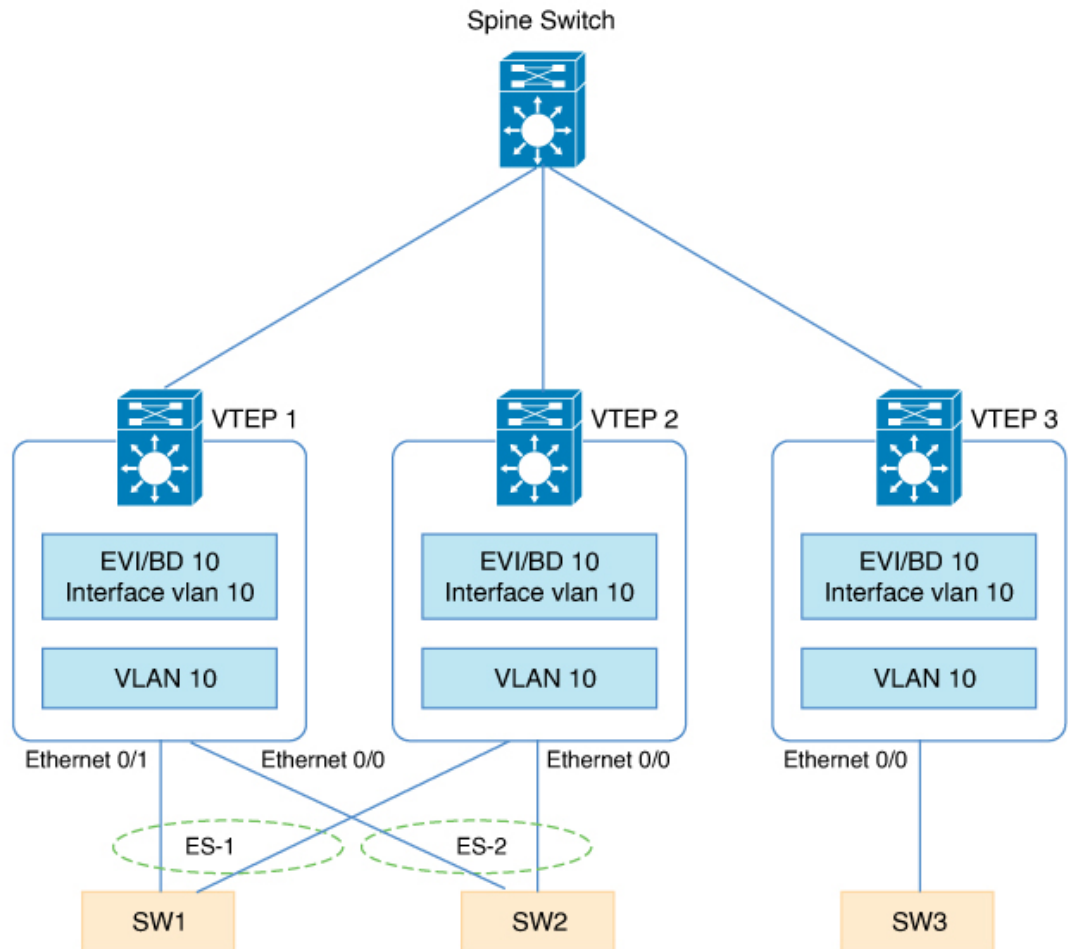

The traffic disruption is illustrated below:

Unicast traffic

- SW1 to SW2:
Local switching on VTEP1/VTEP2 VLAN 10
- SW2 to SW1:
Local switching on VTEP1/VTEP2 VLAN 10
- SW1 to SW3:
Forwarded through EVPN BD 10
- SW3 to SW1:
Forwarded through EVPN BD 10

BUM traffic

- SW1 BUM:
 - SW2 receives local switched traffic from VTEP1/VTEP2.
 - SW3 receives the BUM traffic forward from EVPN BD 10
- SW3 BUM:
 - SW1 receives BUM traffic forward from EVPN BD 10 on DF VTEP1 only.
 - SW2 receives the BUM traffic forward from EVPN BD 10 on DF VTEP1 only.

Although most traffic may continue to operate if the multihoming VLAN is misconfigured, its performance will not meet expectations. The internal state of the EVPN Ethernet segment becomes unpredictable, rendering it unsupported. This issue must be resolved to ensure proper functionality.