



# Configuring External VRF Connectivity and Route Leaking

---

This chapter contains the following sections:

- [Configuring External VRF Connectivity, on page 1](#)
- [Configuring Route Leaking, on page 2](#)

## Configuring External VRF Connectivity

### About External Layer-3 Connectivity for VXLAN BGP EVPN Fabrics

A VXLAN BGP EVPN fabric can be extended by using per-VRF IP routing to achieve external connectivity. The approach that is used for the Layer-3 extensions is commonly referred to as VRF Lite, while the functionality itself is more accurately defined as Inter-AS Option A or back-to-back VRF connectivity.

### Guidelines and Limitations for External VRF Connectivity and Route Leaking

The following are the guidelines and limitations for External Layer-3 Connectivity for VXLAN BGP EVPN Fabrics:

- Support added for Cisco Nexus 3600 platform switches.
- A physical Layer-3 Interface (Parent-Interface) can be used for external Layer-3 connectivity (ie VRF default).
- The Parent-Interface to multiple Sub-Interfaces can not be used for external Layer-3 connectivity (ie Ethernet1/1 for VRF default). A Sub-Interface can be used instead.
- VTEPs do not support VXLAN encapsulated traffic over Parent-Interfaces if Sub-Interfaces are configured. This is regardless of VRF participation.
- VTEPs do not support VXLAN encapsulated traffic over Sub-Interfaces. This is regardless of VRF participation or IEEE 802.1q encapsulation.
- Mixing Sub-Interfaces for VXLAN and non-VXLAN enabled VLANs is not supported.

# Configuring Route Leaking

## About Centralized VRF Route-Leaking for VXLAN BGP EVPN Fabrics

VXLAN BGP EVPN uses MP-BGP and its route-policy concept to import and export prefixes. The ability of this very extensive route-policy model allows to leak routes from one VRF to another VRF and vice-versa; any combination of custom VRF or VRF default can be used. VRF route-leaking is a switch-local function at specific to a location in the network, the location where the cross-VRF route-target import/export configuration takes place (leaking point). The forwarding between the different VRFs follows the control-plane, the location of where the configuration for the route-leaking is performed - hence Centralized VRF route-leaking. With the addition of VXLAN BGP EVPN, the leaking point requires to advertise the cross-VRF imported/exported route and advertise them towards the remote VTEPs or External Routers.

The advantage of Centralized VRF route-leaking is that only the VTEP acting as leaking point requires the special capabilities needed, while all other VTEPs in the network are neutral to this function.

## Guidelines and Limitations for External VRF Connectivity and Route Leaking

The following are the guidelines and limitations for External Layer-3 Connectivity for VXLAN BGP EVPN Fabrics:

- Support added for Cisco Nexus 3600 platform switches.
- A physical Layer-3 Interface (Parent-Interface) can be used for external Layer-3 connectivity (ie VRF default).
- The Parent-Interface to multiple Sub-Interfaces can not be used for external Layer-3 connectivity (ie Ethernet1/1 for VRF default). A Sub-Interface can be used instead.
- VTEPs do not support VXLAN encapsulated traffic over Parent-Interfaces if Sub-Interfaces are configured. This is regardless of VRF participation.
- VTEPs do not support VXLAN encapsulated traffic over Sub-Interfaces. This is regardless of VRF participation or IEEE 802.1q encapsulation.
- Mixing Sub-Interfaces for VXLAN and non-VXLAN enabled VLANs is not supported.


## Centralized VRF Route-Leaking Brief - Shared Internet with Custom VRF

Some pointers follow:

- The Shared Internet with VRF route-leaking for VXLAN BGP EVPN fabrics is depicted in the following figure.
- The default-route is made exported from the Shared Internet VRF and re-advertisement within VRF Blue and VRF Red on the Border Node.
- Ensure the default-route in VRF Blue and VRF Red is not leaked to the Shared Internet VRF.
- The less specific prefixes for VRF Blue and VRF Red are exported for the Shared Internet VRF and re-advertised as necessary.

- Configured less specific prefixes (aggregates) that are advertised from the Border Node to the remaining VTEPs to the destination VRF (Blue or Red).
- BGP EVPN does not export prefixes that were previously imported to prevent the occurrence of routing loops.

Figure 1: Centralized VRF Route-Leaking - Shared Internet with Custom VRF

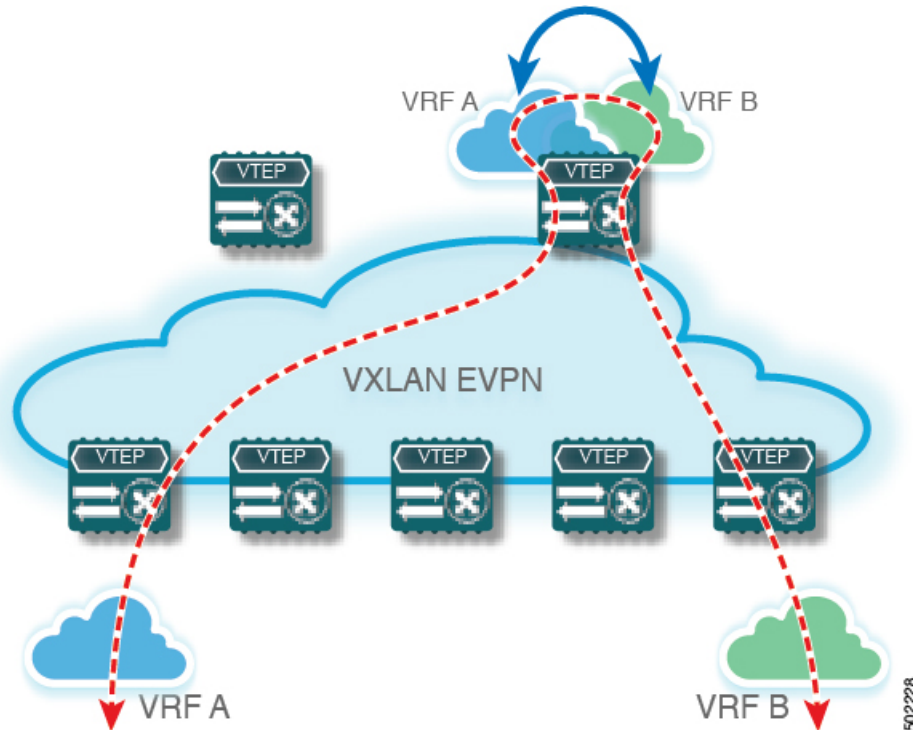

## Configuring Centralized VRF Route-leaking - Specific Prefixes between Custom VRF

### Configuring VRF Context on the Routing-Block VTEP

This procedure applies equally to IPv6.

#### SUMMARY STEPS

1. `configure terminal`
2. `vrf context vrf-name`
3. `vni number`
4. `rd auto`
5. `address-family ipv4 unicast`
6. `route-target both {auto | as:vni}`
7. `route-target both {auto | as:vni } evpn`
8. `route-target import rt-from-different-vrf`

## 9. route-target import *rt-from-different-vrf evpn*

### DETAILED STEPS

	Command or Action	Purpose
Step 1	<code>configure terminal</code>	Enter global configuration mode.
Step 2	<code>vrf context <i>vrf-name</i></code>	Configure the VRF.
Step 3	<code>vni <i>number</i></code>	Specify the VNI.  The VNI associated with the VRF is often referred to as Layer-3 VNI, L3VNI or L3VPN. The L3VNI is configured as common identifier across the participating VTEPs.
Step 4	<code>rd auto</code>	Specify the VRFs Route Distinguisher (RD).  The RD uniquely identifies a VTEP within a L3VNI.
Step 5	<code>address-family ipv4 unicast</code>	Configure the IPv4 Unicast address-family.  Required for IPv4 over VXLAN with IPv4 underlay.
Step 6	<code>route-target both {auto   <i>as:vni</i>}</code>	Configure the Route Target (RT) for import/export of IPv4 prefixes within the IPv4 unicast address-family The Route Target (RT) is used for a per-VRF prefix import/export policy. If <i>as:vni</i> is entered, the value is in the format of ASN:NN, ASN4:NN, or IPv4:NN.
Step 7	<code>route-target both {auto   <i>as:vni</i> } evpn</code>	Configure the Route Target (RT) for import/export of IPv4 prefixes within the IPv4 unicast address-family The Route Target (RT) is used for a per-VRF prefix import/export policy. If <i>as:vni</i> is entered, the value is in the format of ASN:NN, ASN4:NN, or IPv4:NN.
Step 8	<code>route-target import <i>rt-from-different-vrf</i></code>	Configure the Route Target (RT) for importing IPv4 prefixes from the leaked-from VRF (ie AS:VNI).
Step 9	<code>route-target import <i>rt-from-different-vrf evpn</i></code>	Configure the Route Target (RT) for importing IPv4 prefixes from the leaked-from VRF (ie AS:VNI).

## Configuring the BGP VRF instance on the Routing-Block

This procedure applies equally to IPv6.

### SUMMARY STEPS

1. `configure terminal`
2. `router bgp autonomous-system number`
3. `vrf vrf-name`
4. `address-family ipv4 unicast`
5. `advertise l2vpn evpn`
6. `aggregate-address prefix/mask`

7. `maximum-paths ibgp number`
8. `maximum-paths number`

#### DETAILED STEPS

	Command or Action	Purpose
Step 1	<code>configure terminal</code>	Enters global configuration mode.
Step 2	<code>router bgp autonomous-system number</code>	Configure BGP.
Step 3	<code>vrf vrf-name</code>	Specify the VRF.
Step 4	<code>address-family ipv4 unicast</code>	Configure address family for IPv4
Step 5	<code>advertise l2vpn evpn</code>	Enable the advertisement of EVPN routes within IPv4 address-family.
Step 6	<code>aggregate-address prefix/mask</code>	Create less specific prefix aggregate into the destination VRF.
Step 7	<code>maximum-paths ibgp number</code>	Enabling equal cost multipathing (ECMP) for iBGP prefixes.
Step 8	<code>maximum-paths number</code>	Enabling equal cost multipathing (ECMP) for eBGP prefixes

### Example - Configuration Centralized VRF Route-Leaking - Specific Prefixes Between Custom VRF

#### Configuring VXLAN BGP EVPN Routing-Block

The VXLAN BGP EVPN Routing-Block acts as centralized route-leaking point. The leaking configuration is localized such that control-plane leaking and data-path forwarding follow the same path. Most significantly is the VRF configuration of the Routing-Block and the advertisement of the less specific prefixes (aggregates) into the respective destination VRFs.

```
vrf context Blue
  vni 51010
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn
    route-target import 65002:51020
    route-target import 65002:51020 evpn
!
vlan 2110
  vn-segment 51010
!
interface Vlan2110
  no shutdown
  mtu 9216
  vrf member Blue
  no ip redirects
  ip forward
!
vrf context Red
  vni 51020
  rd auto
```

```

address-family ipv4 unicast
  route-target both auto
  route-target both auto evpn
  route-target import 65002:51010
  route-target import 65002:51010 evpn
!
vlan 2120
  vn-segment 51020
!
interface Vlan2120
  no shutdown
  mtu 9216
  vrf member Blue
  no ip redirects
  ip forward
!
interface nve1
  no shutdown
  host-reachability protocol bgp
  source-interface loopback1
  member vni 51010 associate-vrf
  member vni 51020 associate-vrf
!
router bgp 65002
  vrf Blue
    address-family ipv4 unicast
      advertise l2vpn evpn
      aggregate-address 10.20.0.0/16
      maximum-paths ibgp 2
      Maximum-paths 2
  vrf Red
    address-family ipv4 unicast
      advertise l2vpn evpn
      aggregate-address 10.10.0.0/16
      maximum-paths ibgp 2
      Maximum-paths 2


```

## Centralized VRF Route-Leaking Brief - Shared Internet with Custom VRF

Some pointers follow:

- The Shared Internet with VRF route-leaking for VXLAN BGP EVPN fabrics is depicted in the following figure.
- The default-route is made exported from the Shared Internet VRF and re-advertisement within VRF Blue and VRF Red on the Border Node.
- Ensure the default-route in VRF Blue and VRF Red is not leaked to the Shared Internet VRF.
- The less specific prefixes for VRF Blue and VRF Red are exported for the Shared Internet VRF and re-advertised as necessary.
- Configured less specific prefixes (aggregates) that are advertised from the Border Node to the remaining VTEPs to the destination VRF (Blue or Red).
- BGP EVPN does not export prefixes that were previously imported to prevent the occurrence of routing loops.

Figure 2: Centralized VRF Route-Leaking - Shared Internet with Custom VRF

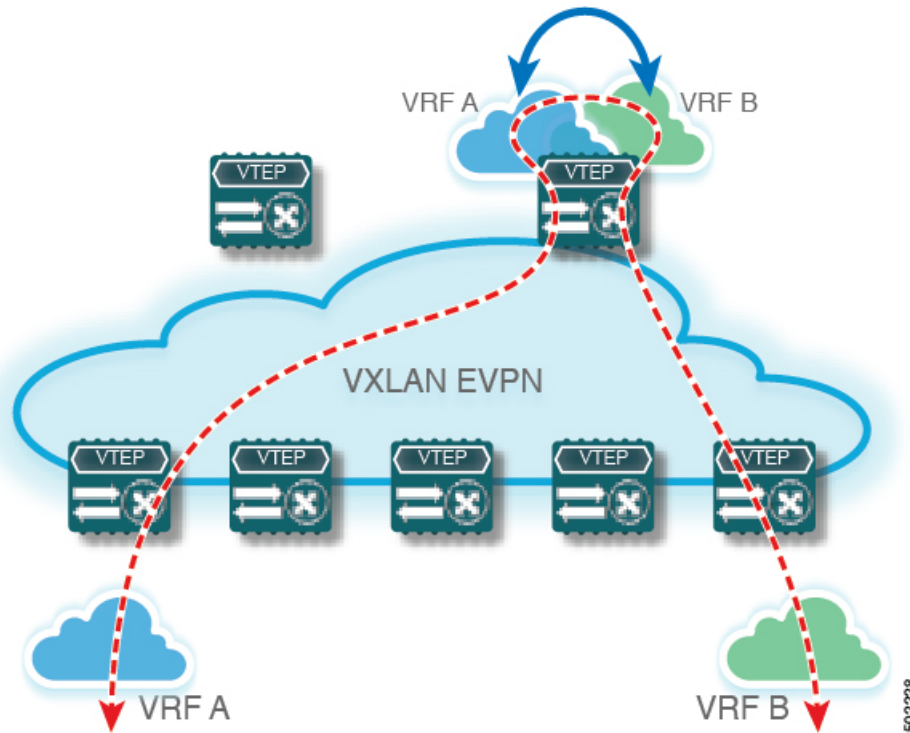

## Configuring Centralized VRF Route-Leaking - Shared Internet with Custom VRF

### Configuring Internet VRF on Border Node

This procedure applies equally to IPv6.

#### SUMMARY STEPS

1. **configure terminal**
2. **vrf context** *vrf-name*
3. **vni** *number*
4. **ip route** *0.0.0.0/0 next-hop*
5. **rd auto**
6. **address-family ipv4 unicast**
7. **route-target both** {*auto* | *as:vni*}
8. **route-target both** *shared-vrf-rt evpn*

#### DETAILED STEPS

	Command or Action	Purpose
Step 1	<b>configure terminal</b>	Enter global configuration mode.
Step 2	<b>vrf context</b> <i>vrf-name</i>	Configure the VRF.

	Command or Action	Purpose
Step 3	<code>vni number</code>	Specify the VNI.  The VNI associated with the VRF is often referred to as Layer-3 VNI, L3VNI or L3VPN. The L3VNI is configured as common identifier across the participating VTEPs.
Step 4	<code>ip route 0.0.0.0/0 next-hop</code>	Configure default-route in shared internet VRF to external router (example).
Step 5	<code>rd auto</code>	Specify the VRFs Route Distinguisher (RD).  The RD uniquely identifies a VTEP within a L3VNI.
Step 6	<code>address-family ipv4 unicast</code>	Configure the IPv4 Unicast address-family.  Required for IPv4 over VXLAN with IPv4 underlay.
Step 7	<code>route-target both {auto   as:vni}</code>	Configure the Route Target (RT) for import/export of EVPN and IPv4 prefixes within the IPv4 unicast address-family.
Step 8	<code>route-target both shared-vrf-rt evpn</code>	Configure a special Route Target (RT) for the import/export of the shared IPv4 prefixes.  Additional import/export map for further qualification is supported

## Configuring Shared Internet BGP Instance on the Border Node

This procedure applies equally to IPv6.

### SUMMARY STEPS

1. **configure terminal**
2. **router bgp** *autonomous-system number*
3. **vrf** *vrf-name*
4. **address-family ipv4 unicast**
5. **advertise l2vpn evpn**
6. **aggregate-address** *prefix/mask*
7. **maximum-paths ibgp** *number*
8. **maximum-paths** *number*

### DETAILED STEPS

	Command or Action	Purpose
Step 1	<code>configure terminal</code>	Enters global configuration mode.
Step 2	<code>router bgp</code> <i>autonomous-system number</i>	Configure BGP.
Step 3	<code>vrf</code> <i>vrf-name</i>	Specify the VRF.
Step 4	<code>address-family ipv4 unicast</code>	Configure address family for IPv4



	Command or Action	Purpose
Step 5	<code>advertise l2vpn evpn</code>	Enable the advertisement of EVPN routes within IPv4 address-family.
Step 6	<code>aggregate-address prefix/mask</code>	Create less specific prefix aggregate into the destination VRF.
Step 7	<code>maximum-paths ibgp number</code>	Enabling equal cost multipathing (ECMP) for iBGP prefixes.
Step 8	<code>maximum-paths number</code>	Enabling equal cost multipathing (ECMP) for eBGP prefixes.

## Configuring Custom VRF Context on the Border Node - 1

This procedure applies equally to IPv6.

### SUMMARY STEPS

1. `configure terminal`
2. `vrf context vrf-name`
3. `vni number`
4. `rd auto`
5. `ip route 0.0.0.0/0 Null0`
6. `address-family ipv4 unicast`
7. `route-target both {auto | as:vni}`
8. `route-target both {auto | as:vni} evpn`
9. `import map name`

### DETAILED STEPS

	Command or Action	Purpose
Step 1	<code>configure terminal</code>	Enters global configuration mode.
Step 2	<code>vrf context vrf-name</code>	Configure the VRF.
Step 3	<code>vni number</code>	Specify the VNI.  The VNI associated with the VRF is often referred to as Layer-3 VNI, L3VNI or L3VPN. The L3VNI is configured as the common identifier across the participating VTEPs.
Step 4	<code>rd auto</code>	Specify the VRFs Route Distinguisher (RD).  The Route Distinguisher (RD) uniquely identifies a VTEP within a L3VNI.
Step 5	<code>ip route 0.0.0.0/0 Null0</code>	Configure default-route in common VRF to attract traffic towards Border Node with Shared Internet VRF.
Step 6	<code>address-family ipv4 unicast</code>	Configure the IPv4 Unicast address-family.

	Command or Action	Purpose
		Required for IPv4 over VXLAN with IPv4 underlay.
<b>Step 7</b>	<code>route-target both {auto   as:vni}</code>	Configure the Route Target (RT) for import/export of IPv4 prefixes within the IPv4 unicast address-family. The Route Target (RT) is used for a per-VRF prefix import/export policy. If <i>as:vni</i> is entered, the value is in the format of ASN:NN, ASN4:NN, or IPv4:NN.
<b>Step 8</b>	<code>route-target both {auto   as:vni} evpn</code>	Configure the Route Target (RT) for import/export of IPv4 prefixes within the IPv4 unicast address-family. The Route Target (RT) is used for a per-VRF prefix import/export policy. If <i>as:vni</i> is entered, the value is in the format of ASN:NN, ASN4:NN, or IPv4:NN.
<b>Step 9</b>	<code>import map name</code>	Apply a route-map on routes being imported into this routing table.

## Configuring Custom VRF Instance in BGP on the Border Node

This procedure applies equally to IPv6.

### SUMMARY STEPS

1. **configure terminal**
2. **router bgp** *autonomous-system-number*
3. **vrf** *vrf-name*
4. **address-family ipv4 unicast**
5. **advertise l2vpn evpn**
6. **network 0.0.0.0/0**
7. **maximum-paths ibgp** *number*
8. **maximum-paths** *number*

### DETAILED STEPS

	Command or Action	Purpose
<b>Step 1</b>	<code>configure terminal</code>	Enters global configuration mode.
<b>Step 2</b>	<code>router bgp</code> <i>autonomous-system-number</i>	Configure BGP.
<b>Step 3</b>	<code>vrf</code> <i>vrf-name</i>	Specify the VRF.
<b>Step 4</b>	<code>address-family ipv4 unicast</code>	Configure address family for IPv4.
<b>Step 5</b>	<code>advertise l2vpn evpn</code>	Enable the advertisement of EVPN routes within IPv4 address-family.
<b>Step 6</b>	<code>network 0.0.0.0/0</code>	Creating IPv4 default-route network statement.
<b>Step 7</b>	<code>maximum-paths ibgp</code> <i>number</i>	Enabling equal cost multipathing (ECMP) for iBGP prefixes.

	Command or Action	Purpose
Step 8	<code>maximum-paths number</code>	Enabling equal cost multipathing (ECMP) for eBGP prefixes.

## Example - Configuration Centralized VRF Route-Leaking - Shared Internet with Custom VRF

An example of Centralized VRF route-leaking with Shared Internet VRF

### Configuring VXLAN BGP EVPN Border Node for Shared Internet VRF

The VXLAN BGP EVPN Border Node provides a centralized Shared Internet VRF. The leaking configuration is localized such that control-plane leaking and data-path forwarding following the same path. Most significantly is the VRF configuration of the Border Node and the advertisement of the default-route and less specific prefixes (aggregates) into the respective destination VRFs.

```
vrf context Shared
  vni 51099
  ip route 0.0.0.0/0 10.9.9.1
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn
    route-target both 99:99
    route-target both 99:99 evpn
!
vlan 2199
  vn-segment 51099
!
interface Vlan2199
  no shutdown
  mtu 9216
  vrf member Shared
  no ip redirects
  ip forward
!
ip prefix-list PL_DENY_EXPORT seq 5 permit 0.0.0.0/0
!
route-map RM_DENY_IMPORT deny 10
  match ip address prefix-list PL_DENY_EXPORT
route-map RM_DENY_IMPORT permit 20
!
vrf context Blue
  vni 51010
  ip route 0.0.0.0/0 Null0
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn
    route-target both 99:99
    route-target both 99:99 evpn
    import map RM_DENY_IMPORT
!
vlan 2110
  vn-segment 51010
!
interface Vlan2110
  no shutdown
  mtu 9216
  vrf member Blue
  no ip redirects
```

```

    ip forward
  !
vrf context Red
  vni 51020
  ip route 0.0.0.0/0 Null0
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn
    route-target both 99:99
    route-target both 99:99 evpn
    import map RM_DENY_IMPORT
  !
vlan 2120
  vn-segment 51020
  !
interface Vlan2120
  no shutdown
  mtu 9216
  vrf member Blue
  no ip redirects
  ip forward
  !
interface nve1
  no shutdown
  host-reachability protocol bgp
  source-interface loopback1
  member vni 51099 associate-vrf
  member vni 51010 associate-vrf
  member vni 51020 associate-vrf
  !
router bgp 65002
  vrf Shared
    address-family ipv4 unicast
      advertise l2vpn evpn
      aggregate-address 10.10.0.0/16
      aggregate-address 10.20.0.0/16
      maximum-paths ibgp 2
      maximum-paths 2
  vrf Blue
    address-family ipv4 unicast
      advertise l2vpn evpn
      network 0.0.0.0/0
      maximum-paths ibgp 2
      maximum-paths 2
  vrf Red
    address-family ipv4 unicast
      advertise l2vpn evpn
      network 0.0.0.0/0
      maximum-paths ibgp 2
      maximum-paths 2

```


## Centralized VRF Route-Leaking Brief - Shared Internet with VRF Default

Some pointers are given below:

- The Shared Internet with VRF route-leaking for VXLAN BGP EVPN fabrics is depicted within Figure 4.
- The default-route is made exported from VRF default and re-advertisement within VRF Blue and VRF Red on the Border Node.
- Ensure the default-route in VRF Blue and VRF Red is not leaked to the Shared Internet VRF

- The less specific prefixes for VRF Blue and VRF Red are exported to VRF default and re-advertised as necessary.
- Configured less specific prefixes (aggregates) that are advertised from the Border Node to the remaining VTEPs to the destination VRF (Blue or Red).
- BGP EVPN does not export prefixes that were previously imported to prevent the occurrence of routing loops.

Figure 3: Centralized VRF Route-Leaking - Shared Internet with VRF Default

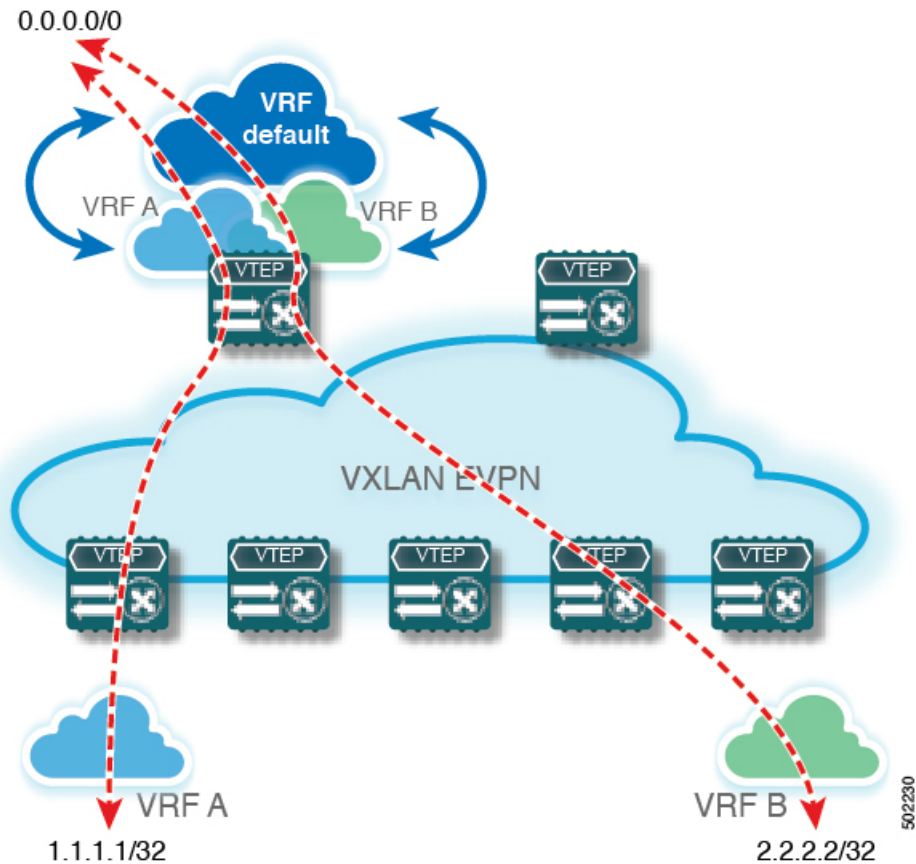

## Configuring Centralized VRF Route-Leaking - Shared Internet with VRF Default

### Configuring VRF Default on Border Node

This procedure applies equally to IPv6.

#### SUMMARY STEPS

1. **configure terminal**
2. **ip route 0.0.0.0/0 next-hop**

**DETAILED STEPS**

	<b>Command or Action</b>	<b>Purpose</b>
<b>Step 1</b>	<code>configure terminal</code>	Enters global configuration mode.
<b>Step 2</b>	<code>ip route 0.0.0.0/0 next-hop</code>	Configure default-route in VRF default to external router (example)

**Configuring BGP Instance for VRF Default on the Border Node**

This procedure applies equally to IPv6.

**SUMMARY STEPS**

1. `configure terminal`
2. `router bgp autonomous-system number`
3. `address-family ipv4 unicast`
4. `aggregate-address prefix/mask`
5. `maximum-paths number`

**DETAILED STEPS**

	<b>Command or Action</b>	<b>Purpose</b>
<b>Step 1</b>	<code>configure terminal</code>	Enters global configuration mode.
<b>Step 2</b>	<code>router bgp autonomous-system number</code>	Configure BGP.
<b>Step 3</b>	<code>address-family ipv4 unicast</code>	Configure address family for IPv4.
<b>Step 4</b>	<code>aggregate-address prefix/mask</code>	Create less specific prefix aggregate in VRF default.
<b>Step 5</b>	<code>maximum-paths number</code>	Enabling equal cost multipathing (ECMP) for eBGP prefixes.

**Configuring Custom VRF on Border Node**

This procedure applies equally to IPv6

**SUMMARY STEPS**

1. `configure terminal`
2. `ip prefix-list name seq 5 permit 0.0.0.0/0`
3. `route-map name deny 10`
4. `match ip address prefix-list name`
5. `route-map name permit 20`

**DETAILED STEPS**

	<b>Command or Action</b>	<b>Purpose</b>
<b>Step 1</b>	<code>configure terminal</code>	Enters global configuration mode.
<b>Step 2</b>	<code>ip prefix-list <i>name</i> seq 5 permit 0.0.0.0/0</code>	Configure IPv4 prefix-list for default-route filtering.
<b>Step 3</b>	<code>route-map <i>name</i> deny 10</code>	Create route-map with leading deny statement to prevent the default-route of being leaked.
<b>Step 4</b>	<code>match ip address prefix-list <i>name</i></code>	Match against the IPv4 prefix-list that contains the default-route.
<b>Step 5</b>	<code>route-map <i>name</i> permit 20</code>	Create route-map with trailing allow statement to advertise non-matching routes via route-leaking.

**Configuring Filter for Permitted Prefixes from VRF Default on the Border Node**

This procedure applies equally to IPv6.

**SUMMARY STEPS**

1. `configure terminal`
2. `route-map name permit 10`

**DETAILED STEPS**

	<b>Command or Action</b>	<b>Purpose</b>
<b>Step 1</b>	<code>configure terminal</code>	Enters global configuration mode.
<b>Step 2</b>	<code>route-map <i>name</i> permit 10</code>	Create route-map with allow statement to advertise routes via route-leaking to the customer VRF and subsequently remote VTEPs.

**Configuring Custom VRF Context on the Border Node - 2**

This procedure applies equally to IPv6.

**SUMMARY STEPS**

1. `configure terminal`
2. `vrf context vrf-name`
3. `vni number`
4. `rd auto`
5. `ip route 0.0.0.0/0 Null0`
6. `address-family ipv4 unicast`
7. `route-target both auto | AS:VNI`
8. `route-target both auto | AS:VNI evpn`
9. `route-target both shared-vrf-rt`
10. `route-target both shared-vrf-rt evpn`

**11. import vrf default map *name*****DETAILED STEPS**

	<b>Command or Action</b>	<b>Purpose</b>
<b>Step 1</b>	<b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	<b>vrf context <i>vrf-name</i></b>	Configure the VRF.
<b>Step 3</b>	<b>vni <i>number</i></b>	Specify the VNI.  The VNI associated with the VRF is often referred to as Layer-3 VNI, L3VNI or L3VPN. The L3VNI is configured as common identifier across the participating VTEPs.
<b>Step 4</b>	<b>rd auto</b>	Specify the VRFs Route Distinguisher (RD).  The Route Distinguisher (RD) uniquely identifies a VTEP within a L3VNI.
<b>Step 5</b>	<b>ip route 0.0.0.0/0 Null0</b>	Configure default-route in common VRF to attract traffic towards Border Node with Shared Internet VRF.
<b>Step 6</b>	<b>address-family ipv4 unicast</b>	Configure the IPv4 Unicast address-family.  Required for IPv4 over VXLAN with IPv4 underlay.
<b>Step 7</b>	<b>route-target both auto   <i>AS:VNI</i></b>	Configure the Route Target (RT) for import/export of EVPN and IPv4 prefixes within the IPv4 unicast address-family.
<b>Step 8</b>	<b>route-target both auto   <i>AS:VNI evpn</i></b>	Configure the Route Target (RT) for import/export of EVPN and IPv4 prefixes within the IPv4 unicast address-family.
<b>Step 9</b>	<b>route-target both <i>shared-vrf-rt</i></b>	Configure a special Route Target (RT) for the import/export of the Shared IPv4 prefixes.  Additional import/export map for further qualification is supported
<b>Step 10</b>	<b>route-target both <i>shared-vrf-rt evpn</i></b>	Configure a special Route Target (RT) for the import/export of the Shared IPv4 prefixes.  Additional import/export map for further qualification is supported
<b>Step 11</b>	<b>import vrf default map <i>name</i></b>	Permits all routes, from VRF default, from being imported into the custom VRF according to the specific route-map.

**Configuring Custom VRF Instance in BGP on the Border Node**

This procedure applies equally to IPv6.



**SUMMARY STEPS**

1. **configure terminal**
2. **router bgp** *autonomous-system-number*
3. **vrf** *vrf-name*
4. **address-family ipv4 unicast**
5. **advertise l2vpn evpn**
6. **network 0.0.0.0/0**
7. **maximum-paths ibgp** *number*
8. **maximum-paths** *number*

**DETAILED STEPS**

	<b>Command or Action</b>	<b>Purpose</b>
<b>Step 1</b>	<b>configure terminal</b>	Enters global configuration mode.
<b>Step 2</b>	<b>router bgp</b> <i>autonomous-system-number</i>	Configure BGP.
<b>Step 3</b>	<b>vrf</b> <i>vrf-name</i>	Specify the VRF.
<b>Step 4</b>	<b>address-family ipv4 unicast</b>	Configure address family for IPv4.
<b>Step 5</b>	<b>advertise l2vpn evpn</b>	Enable the advertisement of EVPN routes within IPv4 address-family.
<b>Step 6</b>	<b>network 0.0.0.0/0</b>	Creating IPv4 default-route network statement.
<b>Step 7</b>	<b>maximum-paths ibgp</b> <i>number</i>	Enabling equal cost multipathing (ECMP) for iBGP prefixes.
<b>Step 8</b>	<b>maximum-paths</b> <i>number</i>	Enabling equal cost multipathing (ECMP) for eBGP prefixes.

**Example - Configuration Centralized VRF Route-Leaking - VRF Default with Custom VRF**

An example of Centralized VRF route-leaking with VRF default

**Configuring VXLAN BGP EVPN Border Node for VRF Default**

The VXLAN BGP EVPN Border Node provides centralized access to VRF default. The leaking configuration is localized such that control-plane leaking and data-path forwarding following the same path. Most significantly is the VRF configuration of the Border Node and the advertisement of the default-route and less specific prefixes (aggregates) into the respective destination VRFs.

```
ip route 0.0.0.0/0 10.9.9.1
!
ip prefix-list PL_DENY_EXPORT seq 5 permit 0.0.0.0/0
!
route-map permit 10
match ip address prefix-list PL_DENY_EXPORT
route-map RM_DENY_EXPORT permit 20
route-map RM_PERMIT_IMPORT permit 10
!
vrf context Blue
```

## Example - Configuration Centralized VRF Route-Leaking - VRF Default with Custom VRF

```

vni 51010
ip route 0.0.0.0/0 Null0
rd auto
address-family ipv4 unicast
  route-target both auto
  route-target both auto evpn
  import vrf default map RM_PERMIT_IMPORT
  export vrf default 100 map RM_DENY_EXPORT allow-vpn
!
vlan 2110
  vn-segment 51010
!
interface Vlan2110
  no shutdown
  mtu 9216
  vrf member Blue
  no ip redirects
  ip forward
!
vrf context Red
  vni 51020
  ip route 0.0.0.0/0 Null0
  rd auto
  address-family ipv4 unicast
    route-target both auto
    route-target both auto evpn
    import vrf default map RM_PERMIT_IMPORT
    export vrf default 100 map RM_DENY_EXPORT allow-vpn
!
vlan 2120
  vn-segment 51020
!
interface Vlan2120
  no shutdown
  mtu 9216
  vrf member Blue
  no ip redirects
  ip forward
!
interface nve1
  no shutdown
  host-reachability protocol bgp
  source-interface loopback1
  member vni 51010 associate-vrf
  member vni 51020 associate-vrf
!
router bgp 65002
  address-family ipv4 unicast
    aggregate-address 10.10.0.0/16
    aggregate-address 10.20.0.0/16
    maximum-paths 2
    maximum-paths ibgp 2
  vrf Blue
    address-family ipv4 unicast
      advertise l2vpn evpn
      network 0.0.0.0/0
      maximum-paths ibgp 2
      maximum-paths 2
  vrf Red
    address-family ipv4 unicast
      advertise l2vpn evpn
      network 0.0.0.0/0
      maximum-paths ibgp 2
      maximum-paths 2

```