



NetFlow Supported Features

- [In-line Modification of Netflow Configuration, on page 1](#)
- [Options Template Overview, on page 3](#)
- [Flow Filter, on page 5](#)
- [IPFIX, on page 8](#)
- [NetFlow Configuration Submodes, on page 24](#)
- [MPLS Flow Monitor with IPv4 and IPv6 Support, on page 27](#)
- [Monitor GTP-U Traffic in 5G Network, on page 30](#)
- [Netflow Full Packet Capture, on page 46](#)

In-line Modification of Netflow Configuration

The In-line modification of Netflow configuration enables to add or remove flow attributes of a flow entity that is already applied to an interface.

A flow entity can be a monitor map, exporter map or a sampler map.

Netflow does not support in-line modification of all its configuration items. This table lists flow entries and flow attributes that are in-line modifiable.



Note In-line modification of flow items clears the cache counters. As a result there could be flow accounting mismatch.



Note The In-line modification of Netflow configuration is supported on Cisco IOS XR 64 bit software.

Table 1: In-line Modifiable Flow Entities and Flow Attributes

Flow Entity	Flow Attribute
Monitor map Note Any modification to the cache attributes results in resetting of the cache counters. The cache flows are dropped not exported.	cache timeout active <i>seconds</i>
	cache timeout inactive <i>seconds</i>
	cache timeout update <i>seconds</i>
	cache timeout rate-limit <i>seconds</i>
	exporter
	cache entries
	cache permanent
	option outphysint bgstrings Note This flow attribute is not supported on Cisco NCS 5500 Router.
Exporter Map Note Any modification to an exporter map results in resetting of the exporter counter.	source <source interface>
	destination <destinaiton address>
	dscp <dscp_value>
	version v9 ipfix
Sampler Map	sampling interval

Restriction

- In-line modification of the **record ipv4** flow attribute is not supported.

Use Case

Consider a netflow configuration as shown below applied on Bundle interface.

```
RP/0/RP1/CPU0:router#show running-config interface bundle-ether 8888
Thu Oct 26 14:17:17.459 UTC
interface Bundle-Ether8888
ipv4 address 192.168.108.1 255.255.255.252
ipv6 address 192:168:108::1/126
flow ipv6 monitor MONITOR-8k sampler SAMPLER-8k ingress
!
RP/0/RP1/CPU0:router#show running-config flow monitor-map MONITOR-8k
Thu Oct 26 14:17:32.581 UTC
flow monitor-map MONITOR-8k
record ipv6
exporter NF-2
cache timeout update 30
!
```

The Netflow configuration includes:

- flow monitor map—MONITOR-8k: The flow monitor map do not have cache entries configured. Cache entries are the number of entries in the flow cache.
- exporter map—NF-2
- sampler map—SAMPLE-8k

The **cache entries** attribute is in-line modifiable. Let us configure the cache entries, while the flow monitor map is in use:

```
RP/0/RP1/CPU0:router#config
RP/0/RP1/CPU0:router(config)#flow monitor-map MONITOR-8k
RP/0/RP1/CPU0:router(config-fmm)#cache entries 8000
RP/0/RP1/CPU0:router(config-fmm)#commit
Thu Oct 26 14:18:24.625 UTC
RP/0/RP1/CPU0:Oct 26 14:18:24.879 : config[67366]: %MGBL-CONFIG-6-DB_COMMIT : Configuration
committed by user '<username>'.
Use 'show configuration commit changes 1000000556' to view the changes. /*configuration
commit is successfull. */
```

The above configuration changes are committed successfully.

Verification

To verify if the monitor map has chache entries of 8000 configured, use the **show flow monitor-map** command for MONITOR-8k map:

```
RP/0/RSP0/CPU0:router# show flow monitor-map MONITOR-8k

Flow Monitor Map : MONITOR-8k
-----
Id:                1
RecordMapName:     ipv6
ExportMapName:     NF-2
CacheAgingMode:    Permanent
CacheMaxEntries: 8000
CacheActiveTout:   N/A
CacheInactiveTout: N/A
CacheUpdateTout:   30 seconds
```

Options Template Overview

NetFlow version 9 is a template-based version. The templates provide an extensible design to the record format. This feature allows enhancements to NetFlow services without requiring concurrent changes to the basic flow-record format. An options template is a special type of template record that is used to communicate the format of data related to the NetFlow process. Rather than supplying information about IP flows, the options are used to supply metadata about the NetFlow process itself. The sampler options template and the interface options template are different forms of options templates. These two tables are exported by the NetFlow process. The NetFlow process will also export the VRF table.

Sampler Table

The sampler options template consists of sampler tables. Similarly, the interface option templates consist of interface tables. By enabling the options for sampler table and interface table, it becomes easier for the collector to determine the information on data flow.

The sampler table consists of information on the active samplers. It is used by the collector to estimate the sampling rate for each data flow. The sampler table consists of the following information for each sampler:

Field Name	Value
FlowSamplerID	This ID is assigned to the sampler. It is used by the collector to retrieve information about the sampler for a data flow record.
FlowSamplerMode	This field indicates the mode in which the sampling has been performed.
FlowSamplerRandomInterval	This field indicates the rate at which the sampling is performed.
SamplerName	This field indicates the name of the sampler.

Interface Table

The interface table consists of information on interfaces that are being monitored for data flow. By using this information, the collector determines the names of interfaces associated with the data flow. The interface table consists of the following information:

Field Name	Value
ingressInterface	This field indicates the SNMP index assigned to the interface. By matching this value to the Ingress interface in the data flow record, the collector is able to retrieve the name of the interface.
interfaceDescription	This field indicates the name of the interface.

VRF Table

The VRF table consists of mapping of VRF IDs to the VRF names. By using this information, the collector determines the name of the required VRF. The VRF table consists of the following information:

Field Name	Value
ingressVRFID	The identifier of the VRF with the name in the VRF-Name field.
VRF-Name	The VRF name which has the VRFID value ingressVRFID. The value "default" indicates that the interface is not assigned explicitly to a VRF.

The data records contain ingressVRFID as an extra field in each record. The values of these fields are used to lookup the VRF Table to find the VRF names. A value 0 in these fields indicates that the VRF is unknown.

The VRF table is exported at intervals specified by the optional **timeout** keyword that can be configured manually. The default value is 1800 seconds.

Flow Filter

Table 2: Feature History Table

Feature Name	Release Information	Feature Description
Flow Filter on Cisco NC57 Line Cards	Release 7.2.2	With this feature, you can collect user-defined and ACL-filtered NetFlow data that is available in the NetFlow cache and export it to an external interface for processing. Flow filter can be configured on interfaces in ingress direction. This feature introduces the option filtered command.

NetFlow provides highly granular per-flow traffic statistics in a Cisco router. The router accumulates NetFlow statistics of all the flows in a NetFlow cache and exports them to an external device for further processing. But in some cases, you might want to gather NetFlow data on only a subset of these flows. The flow filter feature provides the capability to gather NetFlow data on only a specific user-defined subset of flow.

The flow filter feature is configured on interfaces in ingress or egress direction. The flow filter feature uses ACL and QoS bits to filter the NetFlow data; the match criteria is based on five tuple and DSCP bits. The filtered Netflow data is sampled (not all interface flows are sampled) and exported to a collector.

When both security ACL and Netflow filtering ACL are configured on an interface, the security ACL takes precedence over Netflow filtering ACL.

The Flow Filter supports:

- NetFlow v9 and IPFIX export formats.
- Yang data model for dynamic provisioning.

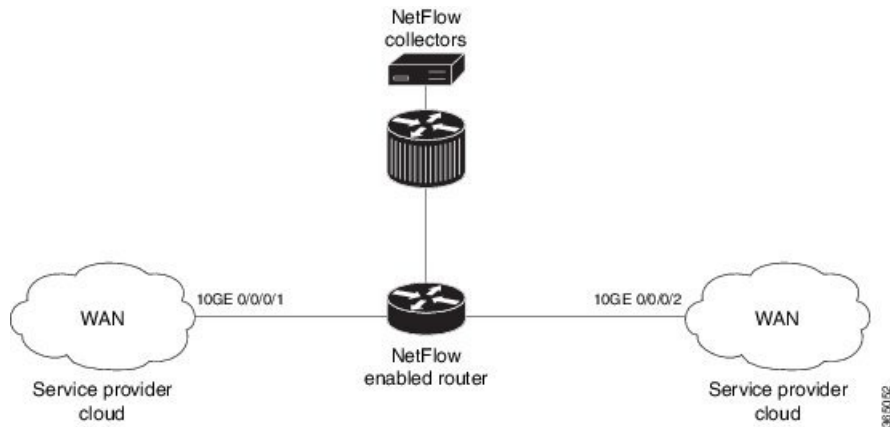
Restrictions

These are the restrictions for the flow filter feature:

- Supported on physical interface, physical subinterface, bundle interface, and bundle subinterface
- Not supported on satellite access interface, ICL interface and clusters.
- MPLS netflow filtering is not supported.

Configuring Flow Filter

Consider SP-PE use case where SP (Service Provide) cloud is connected to the PE (Provider Edge) router through gigabit ethernet.

Figure 1: SP-PE Topology

Configuring NetFlow on PE router involves:

1. Configuring ACL based filter criteria for NetFlow
2. Configuring Monitor map with filter netflow object
3. Configuring Sampler map
4. Configuring Exporter map
5. Applying the NetFlow flow filter ACL configuration and Monitor map to an interface

Configuring ACL based filter criteria for NetFlow

```
ipv4 access-list nf_ex
 10 permit ipv4 192.168.1.1/24 any capture
```

Configuring Monitor map with filter netflow object

```
flow monitor-map fmm1
 record ipv4
   option filtered
 exporter fem1
 cache entries 10000
 cache timeout active 1800
 cache timeout inactive 15
 exit
```

Configuring Sampler map

```
sampler-map fsm1
 random 1 out-of 65535
 exit
```

Configuring Exporter map

```
flow exporter-map feml
 destination 10.1.1.1
 source Loopback 0
 transport udp 1024
 dscp 10
exit
version v9
 template data timeout 600
 options interface-table
exit
```

Applying the NetFlow Flow filter ACL configuration and Monitor map to an interface

```
interface 10GE0/0/0/1
 ipv4 access-group nf_ex_ing
 flow ipv4 monitor fmm1 sampler fsm1 ingress
exit
```

Verification

Use the **show flow monitor** command to verify the flow filter configuration successfully applied on the PE router:

```
RP/0/RP0/CPU0:router# show flow monitor-map netflow_monitor_map_fl_4
```

```
Flow Monitor Map : netflow_monitor_map_fl_4
-----
Id: 28
RecordMapName: ipv4-raw
ExportMapName: netflow_exporter_map_fl_4
CacheAgingMode: Normal
CacheMaxEntries: 65535
CacheActiveTout: 1800 seconds
CacheInactiveTout: 700 seconds
CacheUpdateTout: N/A
CacheRateLimit: 2000
Options: filtered
HwCacheExists: False
HwCacheInactTout: 50

Flow Monitor :          fmm1
-----
Flow definition:      ipv4-raw
Cache configuration:
  Type:                Normal
  Cache size:          65535 entries
  Inactive timeout:    15 seconds
  Active timeout:      1800 seconds
  Update timeout:      N/A
  Rate limit:          2000 entries per second
  Options:             filtered
```

IPFIX

Internet Protocol Flow Information Export (IPFIX) has been standardized by the Internet Engineering Task Force (IETF) as an export protocol for transmitting NetFlow packets. Building upon NetFlow version 9, IPFIX introduces efficient flow data formatting through templates, ensuring scalability and adaptability to diverse network environments. Utilizing UDP as the transport protocol, IPFIX facilitates the seamless transfer of NetFlow information from exporters to collectors. With native support for IPv6 flow records, the inclusion of optional data fields, and the ability to send data to multiple collectors, IPFIX proves to be a versatile and powerful solution for network administrators, enabling comprehensive traffic analysis, monitoring, and enhanced visibility into network behavior.

Restrictions

These IPFIX features are not supported:

- Variable-length information element in the IPFIX template
- Stream Control Transmission Protocol (SCTP) as the transport protocol

Limitations

- You cannot modify an exporter version of an exporter map that is already applied to an interface. To modify the exporter version, first remove the exporter configuration applied on the interface, later modify the version and apply the configuration to the interface.
- An interface can have three different monitor-maps but all the monitor maps should have the same version for the exporters. There can be different exporters for the three monitor maps but they all need to have the same exporter version either v9 or IPFIX.
- You can only have monitor-maps one of each record type attached to an interface, that is one monitor-map for IPv4 record, one monitor-map for IPv6 record and one for MPLS record. There can be different exporter maps for these three monitor-maps but all the exporter maps should have same exporter version configured, either v9 or IPFIX.
- Multiple sampler-maps can be configured but only two sampler maps can be applied to an interface across the system.

Collect Additional BGP Information Elements for MPLS IPv4 and IPv6 Using IPFIX

Table 3: Feature History Table

Feature Name	Release Information	Feature Description
Collect Additional BGP Information Elements for MPLS IPv4 and IPv6 Using IPFIX	Release 24.1.1	You can now collect insights into how MPLS traffic is flowing through the network, assess the performance of your traffic engineering policies and make informed adjustments, pinpoint where in your MPLS network packets are being misrouted or dropped for swift troubleshooting, and also enable accurate billing for your users' customers because of insights into accurate resource usage. This is made possible because we have enabled the collection of BGP information elements for MPLS IPv4 and IPv6 traffic using IPFIX. This feature modifies the output of the show flow monitor command.

You can now monitor and optimize your network more effectively with IPFIX, which enhances the collection of BGP Information Elements (IEs) in IPFIX records. Specifically designed to improve congestion mitigation in core-edge link scenarios, this update introduces support for gathering eight additional BGP fields in IPFIX MPLS IPv4/IPv6 records.

Additionally, two new Information Elements, namely Minimum Time-to-Live (TTL) and Maximum TTL, are recorded. These elements provide information about the minimum Time to Live for a flow and the maximum Time to Live for a flow.

Table 4: Information Elements

IE Field	IE Number
BgpSourceAsNumber	16
BgpDestinationAsNumber	17
BgpNextHopIPv4Address	18
BgpNextHopIPv6Address	63
DestinationIPv4PrefixLength	13
DestinationIPv6PrefixLength	30

IE Field	IE Number
IpNextHopIPv4Address	15
IpNextHopIPv6Address	62
Minimum TTL	52
Maximum TTL	53

IE number, or Information Element Number, is a unique identifier assigned to specific elements within network communication protocols, facilitating standardized interpretation and management. For more information refer [IP Flow Information Export \(IPFIX\) Entities](#).

Configuration

The following example shows how to collect MPLS traffic with both IPv6 and IPv4 fields.

Configuring Monitor map:

```
Router(config)#flow monitor-map mpls-1
Router(config-fmm)#record mpls ipv4-ipv6-fields
Router(config-fmm)#commit
Router(config-fmm)#exit
```

Configuring Sampler map:

```
Router(config)#sampler-map fsm1
Router(config-sm)#random 1 out-of 4000
Router(config-sm)#commit
Router(config-sm)#exit
```

Apply a Monitor Map and a Sampler Map to a physical interface

```
Router(config)#interface HundredGigE 0/0/0/24
Router(config-if)#flow mpls monitor mpls-1 sampler fsm1 ingress
Router(config-if)#exit
```

Verification

Verify the flow monitor stats statistics using the **show flow monitor cache location** command.

```
Router#show flow monitor mpls-1 cache summary location 0/0/CPU0===== Record number: 1
=====
===== Record number: 1 =====
LabelType       : Unknown
Prefix/Length   : 20.1.1.0/24
Label1-EXP-S    : 16001-0-1
Label2-EXP-S    : -
Label3-EXP-S    : -
Label4-EXP-S    : -
Label5-EXP-S    : -
Label6-EXP-S    : -
InputInterface  : FH0/0/0/1
OutputInterface : FH0/0/0/0
ForwardStatus   : Fwd
FirstSwitched   : 00 08:28:52:189
LastSwitched    : 00 08:28:57:649
ByteCount       : 2352
PacketCount     : 56
Dir             : Ing
SamplerID       : 1
```

```

IPv4SrcAddr      : 30.1.1.1
IPv4DstAddr      : 20.1.1.1
IPv4TOS          : 0
IPv4Prot         : udp
L4SrcPort        : 2025
L4DestPort       : 2500
L4TCPFlags       : 0
IPv4SrcPrfxLen   : 24
IPv4DstPrfxLen   : 24
BGPNextHopV4     : 192.168.10.10
BGPNextHopV6     : ::
BGPSrcOrigAS     : 2000
BGPDstOrigAS     : 1000
IPv4NextHop      : 192.168.10.10
IPv6NextHop      : ::
MinimumTTL       : 90
MaximumTTL       : 110
InputVRFID       : default
OutputVRFID      : default

```

===== Record number: 1 =====

```

LabelType        : Unknown
Prefix/Length    : ::/0
Label1-EXP-S     : 16001-0-1
Label2-EXP-S     : -
Label3-EXP-S     : -
Label4-EXP-S     : -
Label5-EXP-S     : -
Label6-EXP-S     : -
InputInterface   : FH0/0/0/1
OutputInterface  : FH0/0/0/0
ForwardStatus    : Fwd
FirstSwitched    : 00 08:27:38:692
LastSwitched     : 00 08:27:47:572
ByteCount        : 5580
PacketCount      : 90
Dir              : Ing
SamplerID        : 1
IPv6SrcAddr      : 50::1
IPv6DstAddr      : 40::1
IPv6TC           : 0
IPv6FlowLabel    : 0
IPv6OptHdrs      : 0x0
IPv6Prot         : udp
L4SrcPort        : 2025
L4DestPort       : 2500
L4TCPFlags       : 0
IPv6SrcPrfxLen   : 64
IPv6DstPrfxLen   : 64
BGPNextHopV4     : 0.0.0.0
BGPNextHopV6     : ::ffff:192.168.10.10
BGPSrcOrigAS     : 2000
BGPDstOrigAS     : 1000
IPv4NextHop      : 192.168.10.10
IPv6NextHop      : ::
MinimumTTL       : 195
MaximumTTL       : 205
InputVRFID       : default
OutputVRFID      : default

```



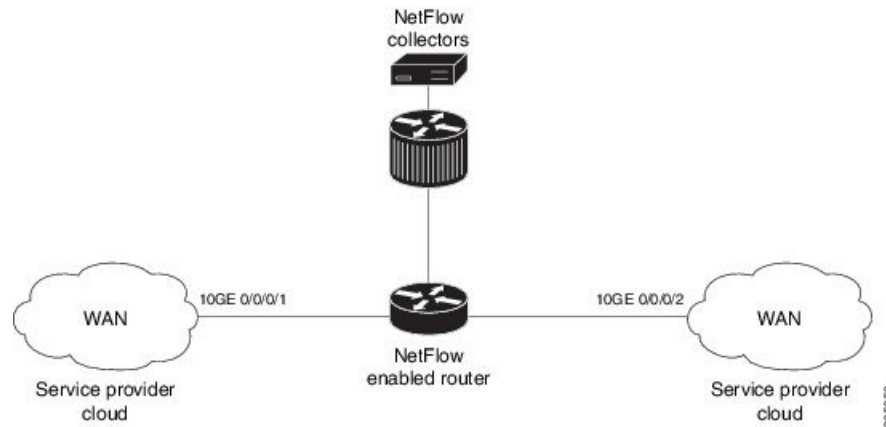
Note When processing the ICMP Layer 4 header, the destination port is determined based on the ICMPv6 message type, instead of being set to zero. This behavior is specific to ICMPv6 and does not apply to ICMP for IPv4.

For example, in the following output, the L4DestPort value corresponds to ICMPv6 Msg Type 3 (Time Exceeded). See <https://www.iana.org/assignments/icmpv6-parameters/icmpv6-parameters.xhtml#icmpv6-parameters-codes-4>

```
IPv6SrcAddr      : 1700::2
IPv6DstAddr      : 1800::2
BGPDstOrigAS     : 0
BGPSrcOrigAS     : 0
BGPNextHopV6     : fcbb:bb00:3::
IPv6TC           : 8
IPv6FlowLabel    : 4
IPv6OptHdrs      : 0x0
IPv6Prot         : icmpv6
MinimumTTL       : 120
MaximumTTL       : 120
L4SrcPort        : 0
L4DestPort       : 3
L4TCPFlags       : 0
IPv6DstPrfxLen   : 64
IPv6SrcPrfxLen   : 128
InputInterface   : Hu0/0/0/1
OutputInterface  : Hu0/0/0/0
ForwardStatus    : Fwd
BGPNextHopV4     : 0.0.0.0
IPv4NextHop      : 0.0.0.0
IPv6NextHop      : ::
FirstSwitched    : 04 02:36:55:363
LastSwitched     : 04 02:37:19:963
ByteCount        : 25190
PacketCount      : 229
Dir              : Ing
SamplerID        : 4
SrcMacAddr       : 00:ca:ff:ee:00:01
DstMacAddr       : 04:00:00:07:1d:04
EthType          : 34525
Dot1qPriority     : 0
Dot1qVlanId      : 0
CustVlanId       : 0
InputVRFID       : vrf_1
OutputVRFID      : default
```

Configuring IPFIX

Consider SP-PE use case where SP (Service Provider) cloud is connected to the PE (Provider Edge) router through TenGigabit ethernet.

Figure 2: SP-PE Topology

Configuring NetFlow on PE router involves:

1. Configuring Exporter map with IPFIX as an exporter
2. Configuring Monitor map
3. Configuring Sampler map
4. Applying the Monitor map and Sampler map to an interface

Configuring Exporter map with IPFIX as the exporter version

```
flow exporter-map fem_ipfix
 destination 10.1.1.1
 source Loopback 0
 transport udp 1025
 exit
version ipfix
 template data timeout 600
 options sampler-table
 exit
```

Configuring Monitor map

```
flow monitor-map fmm1
 record ipv4
 option filtered
 exporter fem_ipfix
 cache entries 10000
 cache timeout active 1800
 cache timeout inactive 15
 exit
```

Configuring Sampler map

```
sampler-map fsm1
 random 1 out-of 4000 /*Sampling rate supported is 1:4000*/
 exit
```

Applying the Monitor map to an interface

Now apply the monitor-map **fmm1** that is configured with an exporter version IPFIX and sampler-map **fsm1** to the 10GE 0/0/0/1 interface in the ingress direction:

```
configure
interface 10GE0/0/0/1
 flow ipv4 monitor fmm1 sampler fsm1 ingress
exit
```

Verification

Use the **show flow flow-exporter map** command to verify the exporter version configured is IPFIX:

```
RP/0/RP0/CPU0:router# show flow exporter-map fem_ipfix
Flow Exporter Map : fem_ipfix
-----
Id                : 3
Packet-Length     : 1468
DestinationIpAddr : 10.1.1.1
VRFName           : default
SourceIfName      : Loopback1
SourceIpAddr      : 4.4.0.1
DSCP              : 40
TransportProtocol  : UDP
TransportDestPort  : 9001
```

Export Version: IPFIX

```
Common Template Timeout : 1800 seconds
Options Template Timeout : 1800 seconds
Data Template Timeout : 1800 seconds
Interface-Table Export Timeout : 0 seconds
Sampler-Table Export Timeout : 0 seconds
VRF-Table Export Timeout : 0 seconds
```

Exported packets in an IPFIX packet structure are in the form of template set or data set. The first data template is sent when the configuration is activated on the interface.

With constant stream, the flowset data does not change, so data is decoded. Data template is updated in the case of timeout on the template. To change the timeout options in the flow exporter, use the **template options timeout** command:

```
RP/0/RP0/CPU0:router(config)#flow exporter-map ipfix_exp1
RP/0/RP0/CPU0:router(config-fem)#version ipfix
RP/0/RP0/CPU0:router(config-fem-ver)#template options
RP/0/RP0/CPU0:TU-PE3(config-fem-ver)#template options timeout
RP/0/RP0/CPU0:TU-PE3(config-fem-ver)#template options timeout 30

RP/0/RP0/CPU0:router# show flow exporter-map ipfix_exp1
version ipfix

  template data timeout 30
!
dscp 40
transport udp 9001
source Loopback0
destination 10.127.59.86
```

IPFIX Enablement for SRv6 and Services over SRv6 Core

Table 5: Feature History Table

Feature Name	Release Information	Description
IPFIX Enablement for SRv6 and Services over SRv6 Core	Release 7.8.1	This feature provides improved information elements about SRv6 IP traffic flows recorded by IPFIX from the network devices. The following sub-menus are introduced for this command: The record ipv6 command is modified to support a new optional keyword, srv6. For more information, see: • record ipv6 • show flow monitor-map

Feature Name	Release Information	Description
Simultaneous L2 and L3 Flow Monitoring using IPFIX	Release 7.10.1	Introduced in this release on: NCS 5500 fixed port routers NCS 5500 modular routers (NCS 5500 line cards) This feature introduces support for simultaneous L2 and L3 flow monitoring. Now, you can configure IP Flow Information Export (IPFIX) to actively monitor and record end-to-end L2 and L3 flow information elements from network devices. Previously, only L2 or L3 flow could be monitored at a time. This feature introduces these changes: CLI: The following sub-menus are introduced for these commands: • The record ipv4 command is modified to support a new optional keyword, I2-I3 • The record ipv6 command is modified to support a new optional keyword, I2-I3 YANG Data Model: • New XPaths for <code>Cisco-IOS-XR-UM-flow-cfg.yang</code> (see GitHub, YANG Data Models Navigator)

When migrating from traditional IP and MPLS networks to SRv6-based networks, there is a need for information elements specific to SRv6 traffic flow. To address this, we have introduced the **srv6** keyword to the **ipv6** command. By utilizing this keyword, you can now access SRv6 flow information that is recorded by IPFIX from the network devices.

Restriction and Limitation

1. IPFIX with multiple SRH is not supported in IOS XR software version 7.10.1
2. SRv6 NetFlow is not supported on subinterfaces of decap nodes, including both L2VPN and L3VPN scenarios. To address this limitation, you can apply NetFlow on the main interface instead, which can capture traffic over the underlying subinterface and populate the record. However, please be aware that in the NetFlow record, the input ifhandle will be associated with the main interface only.

Configuration

From Cisco IOS-XR Release 7.8.1, a new optional keyword, `srv6` is introduced for the `record ipv6` option. See the following example:

```
RP/0/RP0/CPU0:router# configure
RP/0/RP0/CPU0:router(config-fem)# flow monitor-map MON-MAP-v6
RP/0/RP0/CPU0:router(config-fmm)# record ipv6 srv6
RP/0/RP0/CPU0:router(config-fmm)# exporter EXP
RP/0/RP0/CPU0:router(config-fmm)# cache timeout inactive 5
RP/0/RP0/CPU0:router(config-fmm)# !
RP/0/RP0/CPU0:router(config-fmm)# sampler-map SAMP
RP/0/RP0/CPU0:router(config-fmm)# random 1 out-of 1000
RP/0/RP0/CPU0:router(config-fmm)# !
RP/0/RP0/CPU0:router(config-fmm)# interface GigabitEthernet0/1/0/0
RP/0/RP0/CPU0:router(config-fmm)# ipv6 address 2002:1::1/64
RP/0/RP0/CPU0:router(config-fmm)# flow ipv6 monitor M1 sampler SAMP ingres
```

This example shows how to display SRv6 monitor-map data for a specific flow:

```
RP/0/RP0/CPU0:router# show flow monitor-map MON
```

```
Flow Monitor Map : MON
```

```
-----
Id: 1
RecordMapName: srv6
ExportMapName: EXP
CacheAgingMode: Normal
CacheMaxEntries: 65535
CacheActiveTout: 101 seconds
CacheInactiveTout: 15 seconds
CacheUpdateTout: N/A
CacheRateLimit: 2000
HwCacheExists: False
HwCacheInactTout: 50
```

From Cisco IOS-XR Release 7.10.1, a new optional keyword, `l2-l3` is introduced for the `record ipv4` and `record ipv6` option. By utilizing this keyword, you can now access end-to-end L2 and L3 flow information that is recorded by IPFIX from the network devices. See the following example:

```
RP/0/RP0/CPU0:router# configure
RP/0/RP0/CPU0:router(config-fem)# flow monitor-map M-IPv4
RP/0/RP0/CPU0:router(config-fmm)# record ipv4 l2-l3
RP/0/RP0/CPU0:router(config-fmm)# exporter EXP-ipfix
RP/0/RP0/CPU0:router(config-fmm)# !
RP/0/RP0/CPU0:router(config-fmm)# flow monitor-map M-IPv6
RP/0/RP0/CPU0:router(config-fmm)# record ipv6 l2-l3
RP/0/RP0/CPU0:router(config-fmm)# exporter EXP-ipfix
RP/0/RP0/CPU0:router(config-fmm)# !
RP/0/RP0/CPU0:router(config-fmm)# sampler-map SAMP
RP/0/RP0/CPU0:router(config-fmm)# random 1 out-of 1000
RP/0/RP0/CPU0:router(config-fmm)# !
RP/0/RP0/CPU0:router(config-fmm)# interface GigabitEthernet0/1/0/0
RP/0/RP0/CPU0:router(config-fmm)# description CE-PE Interface
RP/0/RP0/CPU0:router(config-fmm)# ipv4 address 1.1.1.1 255.255.255.0
RP/0/RP0/CPU0:router(config-fmm)# ipv6 address 2001:DB8:c18:1::/64
RP/0/RP0/CPU0:router(config-fmm)# flow ipv4 monitor M-IPv4 sampler SAMP ingres
```

```
RP/0/RP0/CPU0:router(config-fmm)# flow ipv6 monitor M-IPv6 sampler SAMP ingress
RP/0/RP0/CPU0:router(config-fmm)# !
RP/0/RP0/CPU0:router
```

This example shows how to display IPv4 monitor-map data for a specific flow:

```
RP/0/RP0/CPU0:router# show run flow monitor-map

flow monitor-map M-IPv4
  record ipv4 l2-l3
  exporter EXP
!
flow monitor-map M-IPv6
  record ipv6 l2-l3
  exporter EXP
!
```

This example shows how to display l2-l3 monitor-map data for IPv4 specific flow:

```
RP/0/RP0/CPU0:router# show flow monitor-map M-IPv4

Flow Monitor Map : M-IPv4
-----
Id:                3
RecordMapName:     ipv4-l2-l3
ExportMapName:     EXP
CacheAgingMode:    Normal
CacheMaxEntries:   65535
CacheActiveTout:   1800 seconds
CacheInactiveTout: 15 seconds
CacheUpdateTout:   N/A
CacheRateLimit:    2000
HwCacheExists:     False
HwCacheInactTout:  50
```

This example shows how to display l2-l3 monitor-map data for IPv6 specific flow:

```
RP/0/RP0/CPU0:router# show flow monitor-map M-IPv6

Flow Monitor Map : M-IPv6
-----
Id:                4
RecordMapName:     ipv6-l2-l3
ExportMapName:     EXP
CacheAgingMode:    Normal
CacheMaxEntries:   65535
CacheActiveTout:   1800 seconds
CacheInactiveTout: 15 seconds
CacheUpdateTout:   N/A
CacheRateLimit:    2000
HwCacheExists:     False
HwCacheInactTout:  50
```

This example shows the complete recorded data for SRv6 L2 services :

```
RP/0/RP0/CPU0:router# show flow monitor M-IPv6 location 0/0/CPU0

Cache summary for Flow Monitor M1:
Cache size:                65535
Current entries:           3
```

```

Flows added:                                4
Flows not added:                            0
Ager Polls:                                68143
- Active timeout                            0
- Inactive timeout                          1
- Immediate                                0
- TCP FIN flag                              0
- Emergency aged                            0
- Counter wrap aged                        0
- Total                                    1
Periodic export:
- Counter wrap                              0
- TCP FIN flag                              0
Flows exported                              1

===== Record number: 1 =====
IPv6SrcAddr      : 2::2
IPv6DstAddr      : bbbb:bc00:88:e000::
BGPDstOrigAS     : 0
BGPSrcOrigAS     : 0
BGPNextHopV6     : fe80::232:17ff:fe7e:1ce1
IPv6TC           : 0
IPv6FlowLabel    : 50686
IPv6OptHdrs      : 0x0
IPv6Prot         : 143
L4SrcPort        : 0
L4DestPort       : 0
L4TCPFlags       : 0
IPv6DstPrfxLen   : 48
IPv6SrcPrfxLen   : 128
InputInterface   : Hu0/0/0/10
OutputInterface  : BE111.1
ForwardStatus    : Fwd
FirstSwitched    : 01 18:51:25:797
LastSwitched     : 01 18:51:25:797
ByteCount        : 61004304
PacketCount      : 113814
Dir              : Ing
SamplerID        : 1
InputVRFID       : default
OutputVRFID      : default
InnerIPv4SrcAddr : 0.0.0.0
InnerIPv4DstAddr : 0.0.0.0
InnerIPv6SrcAddr : ::
InnerIPv6DstAddr : ::
InnerL4SrcPort   : 0
InnerL4DestPort  : 0
SrcMacAddr       : 00:0c:29:0e:d8:32
DstMacAddr       : 00:0c:29:0e:d8:3c
EthType          : 2048
Dot1qPriority     : 0
Dot1qVlanId      : 2001
RecordType       : SRv6 L2 Service Record
SRHFlags         : 0x0
SRHTags          : 0x0
SRHSegmentsLeft  : 0
SRHNumSegments   : 0

```

This example shows the complete recorded data for IPv6 L2-L3 services :

```
RP/0/RP0/CPU0:router# show flow monitor M-IPv6 location 0/0/CPU0
```

```

RP/0/RP0/CPU0:router# show flow monitor MON-MAP-v6 location 0/0/CPU0
Thu Apr 28 11:36:47.622 IST
...
===== Record number: 1 =====
IPv6SrcAddr      : 151:1::1
IPv6DstAddr      : ff02::1:ff00:2
BGPDstOrigAS     : 0
BGPSrcOrigAS     : 0
BGPNextHopV6     : ::
IPv6TC           : 224
IPv6FlowLabel    : 0
IPv6OptHdrs      : 0x0
IPv6Prot         : icmpv6
MinimumTTL       : 255
MaximumTTL       : 255
L4SrcPort        : 0
L4DestPort       : 135
L4TCPFlags       : 0
IPV6DstPrfxLen   : 0
IPV6SrcPrfxLen   : 0
InputInterface   : BE999.1
OutputInterface  : 0
ForwardStatus    : FwdNoFrag
FirstSwitched    : 01 18:51:25:797
LastSwitched     : 01 18:51:25:797
ByteCount        : 104
PacketCount      : 1
Dir              : Ing
SamplerID        : 1
InputVRFID       : default
OutputVRFID      : default
SrcMacAddr       : 00:0c:29:0e:d8:32
DstMacAddr       : 00:0c:29:0e:d8:3c
EthType          : 2048
Dot1qPriority     : 0
Dot1qVlanId      : 100
CustVlanId       : 200

```

IP Flow Information Export (IPFIX) 315

Internet Protocol Flow Information Export (IPFIX) is an IETF standard export protocol (RFC 7011) for sending IP flow information. Cisco NCS 5500 Router supports IPFIX 315 format to export flow information. IPFIX 315 format facilitates sending 'n' octets frame information starting from ethernet header till transport header of the traffic flow over the network. IPFIX 315 supports sending variable size packet record with variable payload information such as IPv4, IPv6, MPLS, and Nested packets like OuterIP-GRE-InnerIP and so on. The process includes sampling and exporting the traffic flow information. Along with the ethernet frame information, IPFIX 315 format exports information of incoming and outgoing interface of the sampled packet.

Use **hw-module profile netflow ipfix315 location** < linecard location > command to enable IPFIX 315.

The information of the packets flowing through a device is used for variety of purpose including network monitoring, capacity planning, traffic management, and so on,



Note Cisco NCS 5500 Router does not support Netflow version 9 format to export flow information.

Sampling and Exporting Information

You must configure a sampling map to sample the traffic flow information. The sampler map specifies the rate at which packets (one out of n packets) are sampled. The minimum sampling rate is 1 out of 32,000 packets. Not all packets flowing through a device are exported; packets selected as per sampling rate are considered for exporting.

You must configure a sampling map to sample the traffic flow information. The sampler map specifies the rate at which packets (one out of n packets) are sampled.

The size of exported packet is until and including L4 header.

The below figure *IPFIX 315 Export Packet Format* shows exported packet information.

Figure 3: IPFIX 315 Export Packet Format



A special cache type called Immediate Aging is used while exporting the packets. Immediate Aging ensures that the flows are exported as soon as they are added to the cache. Use the command **cache immediate** in flow monitor map configuration to enable Immediate Aging cache type.

IPFIX 315 Implementation Considerations

Here are few key points to consider before implementing IPFIX 315:

- Supported only in ingress direction.
- Supported on main interface only. The traffic on all sub-interfaces under the main interface is exported. This applies to releases up to and including IOS-XR software release 7.10.x.
- Sampling rate for bundles is per member-link and not per bundle interface.
- The outgoing interface information may not be correct in case of packets that are multicasted or broadcasted on multiple ports.
- The incoming and outgoing interface will have information of main interface and not the sub-interface even if the packet is routed via sub-interface. In case of bundles it will point to bundle main interface.
- IPFIX 315 is not supported on BVI interface.
- Sampling and exporting of the control packets is not supported.
- When you configure **ipfix315-enable**, then you must configure all the ports on that LC with `datalinkframesection flow`.

- When the HQoS profile is enabled, Netflow does not give correct Output Interface. DSP is unique for each sub-interface.
- Netflow on the L2 interface assumes IPv4/IPv6/MPLS traffic, and if the traffic is purely L2 based, then the system ignores that traffic.
- You must remove all v9 configurations before reloading an LC. Else, with the existing v9 configurations on LC reload, you might encounter a few configuration apply error. Or, flow might be seen on an interface even when apply on interface has failed.

Configuring IPFIX 315

Configuring IPFIX 315 involves:

1. Configuring Exporter map
2. Configuring Monitor map
3. Configuring Sampler map
4. Enabling IPFIX 315 on a line card
5. Applying the Monitor map and Sampler map to an interface

Configuring Exporter map

```
flow exporter-map ipfix_exp
version ipfix
!
dscp 40
transport udp 9001
source Loopback1
destination 100.10.1.159
!
```



Note For **options** command and its configurations in Exporter Map, see [options](#).

Configuring Monitor map

```
flow monitor-map ipfix_mon
record datalinksectiondump
exporter ipfix_exp
cache immediate
cache entries 1000000
cache timeout rate-limit 1000000
!
```

Configuring Sampler map

```
sampler-map ipfix_sm
random 1 out-of 32000
!
```



Note The default cache size is 65535, hence you can configure sampling rate as 1 out of 65535 packets. However the recommended sampling rate is 1 out of 32000 packets.

Enabling IPFIX 315 on a line card

```
(config)# hw-module profile netflow ipfix315-enable location 0/0/CPU0
```

You should reload the LC for the changes to take effect.

Applying the Monitor map to an interface

```
interface HundredGigE 0/0/0/18
    flow datalinkframesection monitor ipfix_mon sampler ipfix_sm ingress
```

Verification

Use the **show flow platform producer statistics location** command to display the IPFIX 315 ingress packets flow statistics:

```
RP/0/RP0/CPU0#show flow platform producer statistics location 0/0/CPU0
Netflow Platform Producer Counters:
IPv4 Ingress Packets:                0
IPv4 Egress Packets:                 0
IPv6 Ingress Packets:                0
IPv6 Egress Packets:                 0
MPLS Ingress Packets:                0
MPLS Egress Packets:                 0
IPFIX315 Ingress Packets:           630478
IPFIX315 Egress Packets:              0
Drops (no space):                    0
Drops (other):                       0
Unknown Ingress Packets:              0
Unknown Egress Packets:              0
Worker waiting:                      2443
```

Use the **show flow monitor <monitor-map> cache location** command to check the flow monitor stats. In this example flow statistics for *ipfix_mon* monitor map are displayed:

```
RP/0/RP0/CPU0#show flow monitor ipfix_mon cache location 0/0/CPU0

Cache summary for Flow Monitor ipfix_mon:
Cache size:                65535
Current entries:              0
Flows added:               50399
Flows not added:              0
Ager Polls:                   2784
- Active timeout              0
- Inactive timeout            0
- Immediate                  50399 /*cache type immediate*/
- TCP FIN flag                0
- Emergency aged              0
- Counter wrap aged           0
- Total                       50399
Periodic export:
- Counter wrap                0
- TCP FIN flag                0
Flows exported              50399
```

Matching entries: 0

Above example shows that there were 50399 flows added to the cache and exported.

NetFlow Configuration Submodes

In Cisco IOS XR Software, NetFlow map configuration takes place in map-specific submodes. Cisco IOS XR Software supports these NetFlow map configuration submodes:



Note The Cisco IOS XR Software allows you to issue most commands available under submodes as one single command string from mode. For example, you can issue the **record ipv4** command from the flow monitor map configuration submode as follows:

```
RP/0/RP0/CPU0:router(config)# flow monitor-map fmm
RP/0/RP0/CPU0:router(config-fmm)# record ipv4
```

Alternatively, you can issue the same command from global configuration mode, as shown in the following example:

```
RP/0/RP0/CPU0:router(config)# flow monitor-map fmm record ipv4
```

Flow Monitor Map Configuration Submode

When you issue the **flow monitor-map map_name** command in mode, the CLI prompt changes to “config-fmm,” indicating that you have entered the flow monitor map configuration submode.

In this sample output, the question mark (?) online help function displays all the commands available under the flow monitor map configuration submode:

```
RP/0/RP0/CPU0:router(config)# flow monitor-map fmm
RP/0/RP0/CPU0:router(config-fmm)# ?

cache      Specify flow cache attributes
commit     Commit the configuration changes to running
describe   Describe a command without taking real actions
do         Run an exec command
exit       Exit from this submode
exporter   Specify flow exporter map name
no         Negate a command or set its defaults
record     Specify a flow record map name
show       Show contents of configuration
```

Flow Exporter Map Configuration Submode

Table 6: Feature History Table

Feature Name	Release Information	Description
sFlow Agent Address Assignment	Release 7.10.1	Introduced in this release on: NCS 5500 fixed port routers; NCS 5700 fixed port routers; NCS 5500 modular routers (NCS 5500 line cards; NCS 5700 line cards [Mode: Compatibility; Native]) You can now monitor traffic from a specific source by configuring the sFlow agent ID with the specific IPv4 or IPv6 address. Upon configuration, you can determine the source of the sFlow data. Earlier, by default, the sFlow agent ID had the source address of the sFlow export packet. The feature introduces these changes: CLI New Command: • router-id Modified Command: • The show flow exporter-map command is modified to display flow exporter map with router-id information. YANG Data Model • New XPaths for <code>openconfig-sampling-sflow.yang</code> (see GitHub, YANG Data Models Navigator)

When you issue the **flow exporter-map fem-name** command in mode, the command-line interface (CLI) prompt changes to “config-fem,” indicating that you have entered the flow exporter map configuration submode.

In this sample output, the question mark (?) online help function displays all the commands available under the flow exporter map configuration submode:

```
RP/0/RP0/CPU0:router(config)# flow exporter-map fem

RP/0/RP0/CPU0:router(config-fem)# ?

clear          Clear the uncommitted configuration
clear          Clear the configuration
commit         Commit the configuration changes to running
describe       Describe a command without taking real actions
destination    Export destination configuration
do             Run an exec command
dscp           Specify DSCP value for export packets
exit           Exit from this submode
no             Negate a command or set its defaults
pwd            Commands used to reach current submode
root           Exit to the global configuration mode
router-id     router-id or agent-id configuration
show           Show contents of configuration
source         Source interface
transport      Specify the transport protocol for export packets
version        Specify export version parameters
```



Note If you enter the **version** command, you enter the flow exporter map version configuration submode.



Note A single flow monitor map can support up to eight exporters.

Flow Exporter Map Version Configuration Submode

When you issue the **version v9** command in the flow exporter map configuration submode, the CLI prompt changes to “config-fem-ver,” indicating that you have entered the flow exporter map version configuration submode.

In this sample output, the question mark (?) online help function displays all the commands available under the flow exporter map version configuration submode:

```
RP/0/RP0/CPU0:router(config-fem)# version v9

RP/0/RP0/CPU0:router(config-fem-ver)# ?

commit         Commit the configuration changes to running
describe       Describe a command without taking real actions
do             Run an exec command
exit           Exit from this submode
no             Negate a command or set its defaults
options        Specify export of options template
show           Show contents of configuration
template       Specify template export parameters
```

Sampler Map Configuration Submode

When you issue the **sampler-map** *map_name* command in mode, the CLI prompt changes to “config-sm,” indicating that you have entered the sampler map configuration submode.

In this sample output, the question mark (?) online help function displays all the commands available under the sampler map configuration submode:

```
RP/0/RP0/CPU0:router(config)# sampler-map fmm

RP/0/RP0/CPU0:router(config-sm)# ?
clear      Clear the uncommitted configuration
clear      Clear the configuration
commit     Commit the configuration changes to running
describe   Describe a command without taking real actions
do         Run an exec command
exit       Exit from this submode
no         Negate a command or set its defaults
pwd        Commands used to reach current submode
random     Use random mode for sampling packets
root       Exit to the global configuration mode
show       Show contents of configuration
```

Enabling the NetFlow BGP Data Export Function

Use the **bgp attribute-download** command to enable NetFlow BGP routing attribute collection. The routing attributes are then exported. When no routing attributes are collected, zeroes (0) are exported.

When BGP attribute download is enabled, BGP downloads the attribute information for prefixes (community, extended community, and as-path) to the Routing Information Base (RIB) and Forwarding Information Base (FIB). This enables FIB to associate the prefixes with attributes and send the NetFlow statistics along with the associated attributes.

MPLS Flow Monitor with IPv4 and IPv6 Support

Cisco IOS XR Software supports the NetFlow collection of MPLS packets. It also supports the NetFlow collection of MPLS packets carrying IPv4, IPv6, or both IPv4 and IPv6 payloads.

MPLS Cache Reorganization to Support Both IPv4 and IPv6

In Cisco IOS XR Software, at a time, you can have only one MPLS flow monitor running on an interface. If you apply an additional MPLS flow monitor to the interface, the new flow monitor overwrites the existing one.

You can configure the MPLS flow monitor to collect IPv4 fields, IPv6 fields, or IPv4-IPv6 fields. IPv4-IPv6 configuration collects both IPv4 and IPv6 addresses using one MPLS flow monitor. IPv4 configuration collects only IPv4 addresses. IPv6 configuration collects only IPv6 addresses.

The MPLS flow monitor supports up to 1,000,000 cache entries. NetFlow entries include these types of fields:

- IPv4 fields
- IPv6 fields

- MPLS with IPv4 fields
- MPLS with IPv6 fields

The maximum number of bytes per NetFlow cache entry is as follows:

- IPv4—88 bytes per entry
- IPv6—108 bytes per entry
- MPLS with IPv4 fields—108 bytes per entry
- MPLS with IPv6 fields—128 bytes per entry



Note The different types of NetFlow entries are stored in separate caches. Consequently, the number of NetFlow entries on a line card can significantly impact the amount of available memory on the line card. Also, even though the sampling rate for IPv6 is the same as the sampling rate for IPv4, the CPU utilization for IPv6 is higher due to the longer keys used by the IPv6 fields.

MPLS Packets with IPv6 Flows

Table 7: Feature History Table

Feature Name	Release Information	Feature Description
MPLS top label type 4 for BGP Labeled Unicast traffic	Release 7.4.1	This feature is an enhancement to how Netflow MPLS records are verified. This feature allows the user to analyze the traffic types by providing more visibility on the granularity of the information. This feature helps you to monitor the traffic data. This feature introduces the new MPLS label type BGP. This label type is a field in the MPLS label that identifies the control protocol which allocates the top-of-stack label. MPLS label types enable verification of Netflow MPLS records.

The collection of IPv6 flows in MPLS packets is an option. The CPU uses 128 bytes for each IPv6 field. IPv6 flows may contain these types of information:

- Source IP address
- Destination IP address
- Traffic class value
- Layer 4 protocol number
- Layer 4 source port number
- Layer 4 destination port number
- Flow ID

- Header option mask

To collect the IPv6 fields in MPLS packets, you must activate the MPLS record type, `ipv6-fields` by running the **record mpls ipv6-fields** command. You can also specify the number of labels to be used for aggregation with this command.

Top label type 4 for BGP Labeled Unicast traffic

MPLS packets sampled by the netflow monitor export the label type based on the topmost label type in the netflow cache record. When the topmost record is an explicit NULL, the succeeding label type is accounted.

The Top label type 4 for BGP Labeled Unicast traffic feature is an enhancement to how netflow MPLS records are verified. MPLS label type value 4, which indicates any label associated with BGP or BGP routing, is supported starting from Release 7.4.1. Earlier to this release, the label type was exported as 0, indicating unknown.

This feature provides the user with additional support for analysis of traffic types by providing more visibility on the granularity of information. This feature provides clearer perspective on data monitoring.

Table 8: Netflow cache record of MPLS label types and values

Value	Description	Supported available
0	Unknown: The MPLS label type is not known	Yes
1	TE-MIDPT: Any TE tunnel mid-point or tail label	No
2	Pseudowire: Any PWE3 or Cisco AToM-based label	No
3	VPN: Any label associated with VPN	No
4	BGP: Any label associated with BGP or BGP routing	Yes
5	LDP: Any label associated with dynamically assigned labels using LDP	Yes
6-255	Unassigned	No

Only label types 0, 4, and 5 are supported. Labels that are not advertised from LDP and BGP are exported as 0, indicating the value as "unknown".

Monitor GTP-U Traffic in 5G Network

Table 9: Feature History Table

Feature Name	Release Information	Feature Description
Monitor GTP-U Traffic in 5G Network	Release 24.2.1	NCS 5500 fixed port routers; NCS 5700 fixed port routers; NCS 5500 modular routers (NCS 5500 line cards; NCS 5700 line cards [Mode: Compatibility; Native]) You now get a comprehensive view of your 5G network's performance and gain detailed insights into slice utilization, deployed QoS policies, and their impact on traffic. This includes verifying deployed QoS policies, assessing 5G slice mechanisms, and tracking GTP-U endpoints for specific applications. This feature specifically applies to 5G network slicing when the GTP User Plane carries data within the core network and to the radio access network. This is achieved by exporting GTP-U related Information Elements using Netflow and IPFIX records to collectors for analysis. This feature introduces these changes: CLI: The gtp keyword is introduced in the record ipv4 and record ipv6 commands.

Cisco 8000 routers introduces the capability to monitor the performance of GTP-U traffic in 5G networks. This feature utilizes Netflow and IPFIX to collect and analyze traffic data, offering valuable insights into network performance and facilitating effective management of 5G network traffic.

Starting from IOS-XR software release 24.2.1, three new GTP-U related information elements can be gathered in Netflow and IPFIX records for both IPv4 and IPv6 traffic. This advancement allows administrators to optimize the performance and security of their 5G networks.

The newly introduced information elements are as follows:

IE Field	IE Number
GTP_TEID	507
GTP_QFI	509
GTP_SESS_DIR	510

IE number, or Information Element Number, is a unique identifier assigned to specific elements within network communication protocols, facilitating standardized interpretation and management. For more information, refer IP Flow Information Export (IPFIX) Entities.

Benefits of GTP-U Traffic Monitoring

The following are some of the key benefits of enabling GTP-U traffic monitoring on your router.

- **Monitor Network Slicing:** 5G network slicing enables the creation of dedicated virtual networks with specific functionalities. By exporting GTP traffic records, you can conduct detailed analysis of the traffic within each slice, ensuring optimal performance and resource allocation.
- **Flexible Deployment:** GTP-U monitoring can be implemented on any network node where the outermost traffic encapsulation utilizes the GTP protocol. This capability can be activated to monitor traffic at various strategic points across the network infrastructure.
- **IPv6 Support for 5G Deployments:** With the expansion of 5G networks, there's an increasing use of IPv6, especially in scenarios where 5G base stations (gNodeBs) connect to User Plane Functions (UPFs) using IPv6. This feature ensures that flow records for such IPv6 GTP-U traffic can be captured and exported effectively.

GTP-U Traffic Record Templates

This section provides you with all the record template options available for monitoring GTP-U traffic.

IPv4-GTP-IPv4 Record

This record captures GTP-U traffic details between IPv4 interfaces, essential for monitoring and optimizing IPv4 5G network performance.

S.No	IPFIX			NetFlow V9		
	IE #	Field	Size (Bytes)	IE #	Field	Size (Bytes)
46	256	V9_ETH_TYPE	2	256	V9_ETH_TYPE	2
47	243	V9_DOT1Q_VLAN_ID	2	243	V9_DOT1Q_VLAN_ID	2
48	245	V9_DOT1Q_CUST_VLAN_ID	2	245	V9_DOT1Q_CUST_VLAN_ID	2
49	244	V9_DOT1Q_PRIORITY	1	244	V9_DOT1Q_PRIORITY	1
50	198	IN_BYTES_DELTA	8	444	V9_AS_PATH	128
1	2	V9_IN_PKTS	8	2	V9_IN_PKTS	4
2	1	V9_IN_BYTES	8	1	V9_IN_BYTES	4

S.No	IPFIX			NetFlow V9		
	IE #	Field	Size (Bytes)	IE #	Field	Size (Bytes)
3	10	V9_INPUT_SNMP	4	10	V9_INPUT_SNMP	4
4	14	V9_OUTPUT_SNMP	4	14	V9_OUTPUT_SNMP	4
5	22	V9_FIRST_SWITCHED	4	22	V9_FIRST_SWITCHED	4
6	21	V9_LAST_SWITCHED	4	21	V9_LAST_SWITCHED	4
7	89	V9_FORWARDING_STATUS	4	89	V9_FORWARDING_STATUS	1
8	61	V9_DIRECTION	1	61	V9_DIRECTION	1
9	302	SELECTOR_ID	4	48	V9_FLOW_SAMPLER_ID	2
10	234	V9_VRF_ID_INPUT	4	234	V9_VRF_ID_INPUT	4
11	235	V9_VRF_ID_OUTPUT	4	235	V9_VRF_ID_OUTPUT	4
12	55	V9_POST_QOS_TOS	1	55	V9_POST_QOS_TOS	1
13	8	V9_IPV4SRCADDR	4	8	V9_IPV4SRCADDR	4
14	12	V9_IPV4DSTADDR	4	12	V9_IPV4DSTADDR	4
15	7	V9_SRC_PORT	2	7	V9_SRC_PORT	2
16	11	V9_DST_PORT	2	11	V9_DST_PORT	2
17	9	V9_SRC_MASK	1	9	V9_SRC_MASK	1
18	13	V9_DST_MASK	1	13	V9_DST_MASK	1
19	4	V9_PROT	1	4	V9_PROT	1
20	6	V9_TCP_FLAGS	2	6	V9_TCP_FLAGS	1
21	5	V9_TOS	1	5	V9_TOS	1
22	52	V9_MIN_TTL	1	52	V9_MIN_TTL	1
23	53	V9_MAX_TTL	1	53	V9_MAX_TTL	1
24	54	V9_IP_IDENT	4	54	V9_IP_IDENT	4
25	197	IPFIX_FRAG_FLAGS	1	197	IPFIX_FRAG_FLAGS	1
26	88	V9_FRAGMENT_OFFSET	2	88	V9_FRAGMENT_OFFSET	2
27	184	IPFIX_TCP_SEQ_NUM	4	184	IPFIX_TCP_SEQ_NUM	4
28	25	V9_MIN_PKT_LEN	8	25	V9_MIN_PKT_LEN	8
29	26	V9_MAX_PKT_LEN	8	26	V9_MAX_PKT_LEN	8
30	503	IPFIX_L4_CHECKSUM	2	503	IPFIX_L4_CHECKSUM	2
31	504	IPFIX_ICMP_8_BYTES	8	504	IPFIX_ICMP_8_BYTES	8
32	507	GTP_TEID	4	507	GTP_TEID	4

S.No	IPFIX			NetFlow V9		
	IE #	Field	Size (Bytes)	IE #	Field	Size (Bytes)
33	509	GTP_QFI	1	509	GTP_QFI	1
34	510	GTP_SESS_DIR	1	510	GTP_SESS_DIR	1
35	8	V9_IPV4SRCADDR	4	8	V9_IPV4SRCADDR	4
36	12	V9_IPV4DSTADDR	4	12	V9_IPV4DSTADDR	4
37	5	V9_TOS	1	5	V9_TOS	1
38	16	V9_SRC_AS	4	16	V9_SRC_AS	4
39	17	V9_DST_AS	4	17	V9_DST_AS	4
40	18	V9_BGP_IPV4_NEXT_HOP	4	18	V9_BGP_IPV4_NEXT_HOP	4
41	63	V9_BGP_IPV6_NEXT_HOP	16	63	V9_BGP_IPV6_NEXT_HOP	16
42	15	V9_IPV4_NEXT_HOP	4	15	V9_IPV4_NEXT_HOP	4
43	62	V9_IPV6_NEXT_HOP	16	62	V9_IPV6_NEXT_HOP	16
44	56	V9_IN_SRC_MAC	6	56	V9_IN_SRC_MAC	6
45	80	V9_IN_DST_MAC	6	80	V9_IN_DST_MAC	6
46	256	V9_ETH_TYPE	2	256	V9_ETH_TYPE	2
47	243	V9_DOT1Q_VLAN_ID	2	243	V9_DOT1Q_VLAN_ID	2
48	245	V9_DOT1Q_CUST_VLAN_ID	2	245	V9_DOT1Q_CUST_VLAN_ID	2
49	244	V9_DOT1Q_PRIORITY	1	244	V9_DOT1Q_PRIORITY	1
50	198	IN_BYTES_DELTA	8	444	V9_AS_PATH	128
51				445	V9_STD_COMM	128

IPv4-GTP-IPv6 Record

This record monitors GTP-U traffic that starts in an IPv4 network and transitions into an IPv6 network, aiding in cross-network compatibility analysis.

S.No	IPFIX			NetFlow V9		
	IE #	Field	Size (Bytes)	IE #	Field	Size (Bytes)
1	2	V9_IN_PKTS	8	2	V9_IN_PKTS	4
2	1	V9_IN_BYTES	8	1	V9_IN_BYTES	4
3	10	V9_INPUT_SNMP	4	10	V9_INPUT_SNMP	4
4	14	V9_OUTPUT_SNMP	4	14	V9_OUTPUT_SNMP	4
5	22	V9_FIRST_SWITCHED	4	22	V9_FIRST_SWITCHED	4

S.No	IPFIX			NetFlow V9		
	IE #	Field	Size (Bytes)	IE #	Field	Size (Bytes)
6	21	V9_LAST_SWITCHED	4	21	V9_LAST_SWITCHED	4
7	89	V9_FORWARDING_STATUS	4	89	V9_FORWARDING_STATUS	1
8	61	V9_DIRECTION	1	61	V9_DIRECTION	1
9	302	SELECTOR_ID	4	48	V9_FLOW_SAMPLER_ID	2
10	234	V9_VRF_ID_INPUT	4	234	V9_VRF_ID_INPUT	4
11	235	V9_VRF_ID_OUTPUT	4	235	V9_VRF_ID_OUTPUT	4
12	55	V9_POST_QOS_TOS	1	55	V9_POST_QOS_TOS	1
13	27	V9_IPV6_SRC_ADDR	16	27	V9_IPV6_SRC_ADDR	16
14	28	V9_IPV6_DST_ADDR	16	28	V9_IPV6_DST_ADDR	16
15	31	V9_FLOW_LABEL	4	31	V9_FLOW_LABEL	3
16	64	V9_IPV6_OPTION_HEADERS	4	64	V9_IPV6_OPTION_HEADERS	4
17	7	V9_SRC_PORT	2	7	V9_SRC_PORT	2
18	11	V9_DST_PORT	2	11	V9_DST_PORT	2
19	30	V9_IPV6_DST_MASK	1	30	V9_IPV6_DST_MASK	1
20	29	V9_IPV6_SRC_MASK	1	29	V9_IPV6_SRC_MASK	1
21	4	V9_PROT	1	4	V9_PROT	1
22	6	V9_TCP_FLAGS	2	6	V9_TCP_FLAGS	1
23	5	V9_TOS	1	5	V9_TOS	1
24	52	V9_MIN_TTL	1	52	V9_MIN_TTL	1
25	53	V9_MAX_TTL	1	53	V9_MAX_TTL	1
26	54	V9_IP_IDENT	4	54	V9_IP_IDENT	4
27	197	IPFIX_FRAG_FLAGS	1	197	IPFIX_FRAG_FLAGS	1
28	88	V9_FRAGMENT_OFFSET	2	88	V9_FRAGMENT_OFFSET	2
29	184	IPFIX_TCP_SEQ_NUM	4	184	IPFIX_TCP_SEQ_NUM	4
30	25	V9_MIN_PKT_LEN	8	25	V9_MIN_PKT_LEN	8
31	26	V9_MAX_PKT_LEN	8	26	V9_MAX_PKT_LEN	8
32	503	IPFIX_L4_CHECKSUM	2	503	IPFIX_L4_CHECKSUM	2
33	504	IPFIX_ICMP_8_BYTES	8	504	IPFIX_ICMP_8_BYTES	8
34	507	GTP_TEID	4	507	GTP_TEID	4
35	509	GTP_QFI	1	509	GTP_QFI	1

S.No	IPFIX			NetFlow V9		
	IE #	Field	Size (Bytes)	IE #	Field	Size (Bytes)
36	510	GTP_SESS_DIR	1	510	GTP_SESS_DIR	1
37	8	V9_IPV4SRCADDR	4	8	V9_IPV4SRCADDR	4
38	12	V9_IPV4DSTADDR	4	12	V9_IPV4DSTADDR	4
39	5	V9_TOS	1	5	V9_TOS	1
40	16	V9_SRC_AS	4	16	V9_SRC_AS	4
41	17	V9_DST_AS	4	17	V9_DST_AS	4
42	18	V9_BGP_IPV4_NEXT_HOP	4	18	V9_BGP_IPV4_NEXT_HOP	4
43	63	V9_BGP_IPV6_NEXT_HOP	16	63	V9_BGP_IPV6_NEXT_HOP	16
44	15	V9_IPV4_NEXT_HOP	4	15	V9_IPV4_NEXT_HOP	4
45	62	V9_IPV6_NEXT_HOP	16	62	V9_IPV6_NEXT_HOP	16
46	56	V9_IN_SRC_MAC	6	56	V9_IN_SRC_MAC	6
47	80	V9_IN_DST_MAC	6	80	V9_IN_DST_MAC	6
48	256	V9_ETH_TYPE	2	256	V9_ETH_TYPE	2
49	243	V9_DOT1Q_VLAN_ID	2	243	V9_DOT1Q_VLAN_ID	2
50	245	V9_DOT1Q_CUST_VLAN_ID	2	245	V9_DOT1Q_CUST_VLAN_ID	2
51	244	V9_DOT1Q_PRIORITY	1	244	V9_DOT1Q_PRIORITY	1
52	198	IN_BYTES_DELTA	8	444	V9_AS_PATH	128
53				445	V9_STD_COMM	128

IPv6-GTP-IPv4 Record

This record monitors GTP-U traffic moving from an IPv6 network to an IPv4 network, ensuring seamless data flow across different network types.

S.No	IPFIX			NetFlow V9		
	IE #	Field	Size (Bytes)	IE #	Field	Size (Bytes)
1	2	V9_IN_PKTS	8	2	V9_IN_PKTS	4
2	1	V9_IN_BYTES	8	1	V9_IN_BYTES	4
3	10	V9_INPUT_SNMP	4	10	V9_INPUT_SNMP	4
4	14	V9_OUTPUT_SNMP	4	14	V9_OUTPUT_SNMP	4
5	21	V9_LAST_SWITCHED	4	21	V9_LAST_SWITCHED	4
6	22	V9_FIRST_SWITCHED	4	22	V9_FIRST_SWITCHED	4

S.No	IPFIX			NetFlow V9		
	IE #	Field	Size (Bytes)	IE #	Field	Size (Bytes)
7	89	V9_FORWARDING_STATUS	4	89	V9_FORWARDING_STATUS	1
8	61	V9_DIRECTION	1	61	V9_DIRECTION	1
9	302	SELECTOR_ID	4	48	V9_FLOW_SAMPLER_ID	2
10	234	V9_VRF_ID_INPUT	4	234	V9_VRF_ID_INPUT	4
11	235	V9_VRF_ID_OUTPUT	4	235	V9_VRF_ID_OUTPUT	4
12	55	V9_POST_QOS_TOS	1	55	V9_POST_QOS_TOS	1
13	8	V9_IPV4SRCADDR	4	8	V9_IPV4SRC4ADDR	4
14	12	V9_IPV4DSTADDR	4	12	V9_IPV4DSTADDR	4
15	7	V9_SRC_PORT	2	7	V9_SRC_PORT	2
16	11	V9_DST_PORT	2	11	V9_DST_PORT	2
17	9	V9_SRC_MASK	1	9	V9_SRRC_MASK	1
18	13	V9_DST_MASK	1	13	V9_DST_MASK	1
19	4	V9_PROT	1	4	V9_PROT	1
20	6	V9_TCP_FLAGS	2	6	V9_TCP_FLAGS	1
21	5	V9_TOS	1	5	V9_TOS	1
22	52	V9_MIN_TTL	1	52	V9_MIN_TTL	1
23	53	V9_MAX_TTL	1	53	V9_MAX_TTL	1
24	54	V9_IP_IDENT	4	54	V9_IP_IDENT	4
25	197	IPFIX_FRAG_FLAGS	1	197	IPFIX_FRAG_FLAGS	1
26	88	V9_FRAGMENT_OFFSET	2	88	V9_FRAGMENT_OFFSET	2
27	184	IPFIX_TCP_SEQ_NUM	4	184	IPFIX_TCP_SEQ_NUM	4
28	25	V9_MIN_PKT_LEN	8	25	V9_MIN_PKT_LEN	8
29	26	V9_MAX_PKT_LEN	8	26	V9_MAX_PKT_LEN	8
30	503	IPFIX_L4_CHECKSUM	2	503	IPFIX_L4_CHECKSUM	2
31	504	IPFIX_ICMP_8_BYTES	8	504	IPFIX_ICMP_8_BYTES	8
32	507	GTP_TEID	4	507	GTP_TEID	4
33	509	GTP_QFI	1	509	GTP_QFI	1
34	510	GTP_SESS_DIR	1	510	GTP_SESS_DIR	1
35	27	V9_IPV6_SRC_ADDR	16	27	V9_IPV6_SRC_ADDR	16
36	28	V9_IPV6_DST_ADDR	16	28	V9_IPV6_DST_ADDR	16

S.No	IPFIX			NetFlow V9		
	IE #	Field	Size (Bytes)	IE #	Field	Size (Bytes)
37	5	V9_TOS	1	5	V9_TOS	1
38	31	V9_FLOW_LABEL	4	31	V9_FLOW_LABEL	3
39	16	V9_SRC_AS	4	16	V9_SRC_AS	4
40	17	V9_DST_AS	4	17	V9_DST_AS	4
41	18	V9_BGP_IPV4_NEXT_HOP	4	18	V9_BGP_IPV4_NEXT_HOP	4
42	63	V9_BGP_IPV6_NEXT_HOP	16	63	V9_BGP_IPV6_NEXT_HOP	16
43	15	V9_IPV4_NEXT_HOP	4	15	V9_IPV4_NEXT_HOP	4
44	62	V9_IPV6_NEXT_HOP	16	62	V9_IPV6_NEXT_HOP	16
45	56	V9_IN_SRC_MAC	6	56	V9_IN_SRC_MAC	6
46	80	V9_IN_DST_MAC	6	80	V9_IN_DST_MAC	6
47	256	V9_ETH_TYPE	2	256	V9_ETH_TYPE	2
48	243	V9_DOT1Q_VLAN_ID	2	243	V9_DOT1Q_VLAN_ID	2
49	245	V9_DOT1Q_CUST_VLAN_ID	2	245	V9_DOT1Q_CUST_VLAN_ID	2
50	244	V9_DOT1Q_PRIORITY	1	244	V9_DOT1Q_PRIORITY	1
51	198	IN_BYTES_DELTA	8	444	V9_AS_PATH	128
52				445	V9_STD_COMM	128

IPv6-GTP-IPv6 Record

This record provides insights into GTP-U traffic within IPv6 networks, crucial for maintaining the integrity and efficiency of modern 5G infrastructures.

S.No	IPFIX			NetFlow V9		
	IE #	Field	Size (Bytes)	IE #	Field	Size (Bytes)
1	2	V9_IN_PKTS	8	2	V9_IN_PKTS	4
2	1	V9_IN_BYTES	8	1	V9_IN_BYTES	4
3	10	V9_INPUT_SNMP	4	10	V9_INPUT_SNMP	4
4	14	V9_OUTPUT_SNMP	4	14	V9_OUTPUT_SNMP	4
5	21	V9_LAST_SWITCHED	4	21	V9_LAST_SWITCHED	4
6	22	V9_FIRST_SWITCHED	4	22	V9_FIRST_SWITCHED	4
7	89	V9_FORWARDING_STATUS	4	89	V9_FORWARDING_STATUS	1
8	61	V9_DIRECTION	1	61	V9_DIRECTION	1

S.No	IPFIX			NetFlow V9		
	IE #	Field	Size (Bytes)	IE #	Field	Size (Bytes)
9	302	SELECTOR_ID	4	48	V9_FLOW_SAMPLER_ID	2
10	234	V9_VRF_ID_INPUT	4	234	V9_VRF_ID_INPUT	4
11	235	V9_VRF_ID_OUTPUT	4	235	V9_VRF_ID_OUTPUT	4
12	55	V9_POST_QOS_TOS	1	55	V9_POS_QOS_TOS	1
13	27	V9_IPV6_SRC_ADDR	16	27	V9_IPV6_SRC_ADDR	16
14	28	V9_IPV6_DST_ADDR	16	28	V9_IPV6_DST_ADDR	16
15	31	V9_FLOW_LABEL	4	31	V9_FLOW_LABEL	3
16	64	V9_IPV6_OPTION_HEADERS	4	64	V9_IPV6_OPTION_HEADERS	4
17	7	V9_SRC_PORT	2	7	V9_SRC_PORT	2
18	11	V9_DST_PORT	2	11	V9_DST_PORT	2
19	30	V9_IPV6_DST_MASK	1	30	V9_IPV6_DST_MASK	1
20	29	V9_IPV6_SRC_MASK	1	29	V9_IPV6_SRC_MASK	1
21	4	V9_PROT	1	4	V9_PROT	1
22	6	V9_TCP_FLAGS	2	6	V9_TCP_FLAGS	1
23	5	V9_TOS	1	5	V9_TOS	1
24	52	V9_MIN_TTL	1	52	V9_MIN_TTL	1
25	53	V9_MAX_TTL	1	53	V9_MAX_TTL	1
26	54	V9_IP_IDENT	4	54	V9_IP_IDENT	4
27	197	IPFIX_FRAG_FLAGS	1	197	IPFIX_FRAG_FLAGS	1
28	88	V9_FRAGMENT_OFFSET	2	88	V9_FRAGMENT_OFFSET	2
29	184	IPFIX_TCP_SEQ_NUM	4	184	IPFIX_TCP_SEQ_NUM	4
30	25	V9_MIN_PKT_LEN	8	25	V9_MIN_PKT_LEN	8
31	26	V9_MAX_PKT_LEN	8	26	V9_MAX_PKT_LEN	8
32	503	IPFIX_L4_CHECKSUM	2	503	IPFIX_L4_CHECKSUM	2
33	504	IPFIX_ICMP_8_BYTES	8	504	IPFIX_ICMP_8_BYTES	8
34	507	GTP_TEID	4	507	GTP_TEID	4
35	509	GTP_QFI	1	509	GTP_QFI	1
36	510	GTP_SESS_DIR	1	510	GTP_SESS_DIR	1
37	27	V9_IPV6_SRC_ADDR	16	27	V9_IPV6_SRC_ADDR	16
38	28	V9_IPV6_DST_ADDR	16	28	V9_IPV6_DST_ADDR	16

S.No	IPFIX			NetFlow V9		
	IE #	Field	Size (Bytes)	IE #	Field	Size (Bytes)
39	5	V9_TOS	1	5	V9_TOS	1
40	31	V9_FLOW_LABEL	4	31	V9_FLOW_LABEL	3
41	16	V9_SRC_AS	4	16	V9_SRC_AS	4
42	17	V9_DST_AS	4	17	V9_DST_AS	4
43	18	V9_BGP_IPV4_NEXT_HOP	4	18	V9_BGP_IPV4_NEXT_HOP	4
44	63	V9_BGP_IPV6_NEXT_HOP	16	63	V9_BGP_IPV6_NEXT_HOP	16
45	15	V9_IPV4_NEXT_HOP	4	15	V9_IPV4_NEXT_HOP	4
46	62	V9_IPV6_NEXT_HOP	16	62	V9_IPV6_NEXT_HOP	16
47	56	V9_IN_SRC_MAC	6	56	V9_IN_SRC_MAC	6
48	80	V9_IN_DST_MAC	6	80	V9_IN_DST_MAC	6
49	256	V9_ETH_TYPE	2	256	V9_ETH_TYPE	2
50	243	V9_DOT1Q_VLAN_ID	2	243	V9_DOT1Q_VLAN_ID	2
51	245	V9_DOT1Q_CUST_VLAN_ID	2	245	V9_DOT1Q_CUST_VLAN_ID	2
52	244	V9_DOT1Q_PRIORITY	1	244	V9_DOT1Q_PRIORITY	1
53	198	IN_BYTES_DELTA	8	444	V9_AS_PATH	128
54				445	V9_STD_COMM	128

Extended Template Records

IPv4 Peering Extended Record

This record extends monitoring capabilities to include detailed peering information for IPv4 traffic, enhancing traffic management and security measures.

S.No	IPFIX			NetFlow V9		
	IE #	Field	Size (Bytes)	IE #	Field	Size (Bytes)
1	2	V9_IN_PKTS	8	2	V9_IN_PKTS	4
2	1	V9_IN_BYTES	8	1	V9_IN_BYTES	4
3	8	V9_IPV4SRCADDR	4	8	V9_IPV4SRCADDR	4
4	12	V9_IPV4DSTADDR	4	12	V9_IPV4DSTADDR	4
5	10	V9_INPUT_SNMP	4	10	V9_INPUT_SNMP	4
6	14	V9_OUTPUT_SNMP	4	14	V9_OUTPUT_SNMP	4
7	22	V9_FIRST_SWITCHED	4	22	V9_FIRST_SWITCHED	4

S.No	IPFIX			NetFlow V9		
	IE #	Field	Size (Bytes)	IE #	Field	Size (Bytes)
8	21	V9_LAST_SWITCHED	4	21	V9_LAST_SWITCHED	4
9	7	V9_SRC_PORT	2	7	V9_SRC_PORT	2
10	11	V9_DST_PORT	2	11	V9_DST_PORT	2
11	16	V9_SRC_AS	4	16	V9_SRC_AS	4
12	17	V9_DST_AS	4	17	V9_DST_AS	4
13	18	V9_BGP_IPV4_NEXT_HOP	4	18	V9_BGP_IPV6_NEXT_HOP	4
14	63	V9_BGP_IPV6_NEXT_HOP	16	63	V9_BGP_IPV6_NEXT_HOP	16
15	15	V9_IPV4_NEXT_HOP	4	15	V9_IPV4_NEXT_HOP	4
16	62	V9_IPV6_NEXT_HOP	16	62	V9_IPV6_NEXT_HOP	16
17	9	V9_SRC_MASK	1	9	V9_SRC_MASK	1
18	13	V9_DST_MASK	1	13	V9_DST_MASK	1
19	4	V9_PROT	1	4	V9_PROT	1
20	6	V9_TCP_FLAGS	2	6	V9_TCP_FLAGS	1
21	5	V9_TOS	1	5	V9_TOS	1
22	55	V9_POST_QOS_TOS	1	55	V9_POST_QOS_TOS	1
23	61	V9_DIRECTION	1	61	V9_DIRECTION	1
24	89	V9_FORWARDING_STATUS	4	89	V9_FORWARDING_STATUS	1
25	302	SELECTOR_ID	4	48	V9_FLOW_SAMPLER_ID	2
26	234	V9_VRF_ID_INPUT	4	234	V9_VRF_ID_INPUT	4
27	235	V9_VRF_ID_OUTPUT	4	235	V9_VRF_ID_OUTPUT	4
28	52	V9_MIN_TTL	1	52	V9_MIN_TTL	1
29	53	V9_MAX_TTL	1	53	V9_MAX_TTL	1
30	54	V9_IP_IDENT	4	54	V9_IP_IDENT	4
31	197	IPFIX_FRAG_FLAGS	1	197	IPFIX_FRAG_FLAGS	1
32	88	V9_FRAGMENT_OFFSET	2	88	V9_FRAGMENT_OFFSET	2
33	184	IPFIX_TCP_SEQ_NUM	4	184	IPFIX_TCP_SEQ_NUM	4
34	25	V9_MIN_PKT_LEN	8	25	V9_MIN_PKT_LEN	8
35	26	V9_MAX_PKT_LEN	8	26	V9_MAX_PKT_LEN	8
36	503	IPFIX_L4_CHECKSUM	2	503	IPFIX_L4_CHECKSUM	2
37	504	IPFIX_ICMP_8_BYTES	8	504	IPFIX_ICMP_8_BYTES	8

S.No	IPFIX			NetFlow V9		
	IE #	Field	Size (Bytes)	IE #	Field	Size (Bytes)
38	56	V9_IN_SRC_MAC	6	56	V9_IN_SRC_MAC	6
39	80	V9_IN_DST_MAC	6	80	V9_IN_DST_MAC	6
40	256	V9_ETH_TYPE	2	256	V9_ETH_TYPE	2
41	243	V9_DOT1Q_VLAN_ID	2	243	V9_DOT1Q_VLAN_ID	2
42	245	V9_DOT1Q_CUST_VLAN_ID	2	245	V9_DOT1Q_CUST_VLAN_ID	2
43	244	V9_DOT1Q_PRIORITY	1	244	V9_DOT1Q_PRIORITY	1
44	198	IN_BYTES_DELTA	8	444	V9_AS_PATH	128
45				445	V9_STD_COMM	128

IPv6 Peering Extended Record

This record offers comprehensive peering data for IPv6 traffic, supporting advanced traffic analysis and network optimization strategies.

S.No	IPFIX			NetFlow V9		
	IE #	Field	Size (Bytes)	IE #	Field	Size (Bytes)
1	2	V9_IN_PKTS	8	2	V9_IN_PKTS	4
2	1	V9_IN_BYTES	8	1	V9_IN_BYTES	4
3	27	V9_IPV6_SRC_ADDR	16	27	V9_IPV6_SRC_ADDR	16
4	28	V9_IPV6_DST_ADDR	16	28	V9_IPV6_DST_ADDR	16
5	10	V9_INPUT_SNMP	4	10	V9_INPUT_SNMP	4
6	14	V9_OUTPUT_SNMP	4	14	V9_OUTPUT_SNMP	4
7	22	V9_FIRST_SWITCHED	4	22	V9_FIRST_SWITCHED	4
8	21	V9_LAST_SWITCHED	4	21	V9_LAST_SWITCHED	4
9	31	V9_FLOW_LABEL	4	31	V9_FLOW_LABEL	3
10	64	V9_IPV6_OPTION_HEADERS	4	64	V9_IPV6_OPTION_HEADERS	4
11	7	V9_SRC_PORT	2	7	V9_SRC_PORT	2
12	11	V9_DST_PORT	2	11	V9_DST_PORT	2
13	16	V9_SRC_AS	4	16	V9_SRC_AS	4
14	17	V9_DST_AS	4	17	V9_DST_AS	4
15	18	V9_BGP_IPV4_NEXT_HOP	4	18	V9_BGP_IPV6_NEXT_HOP	4
16	63	V9_BGP_IPV6_NEXT_HOP	16	63	V9_BGP_IPV6_NEXT_HOP	16

S.No	IPFIX			NetFlow V9		
	IE #	Field	Size (Bytes)	IE #	Field	Size (Bytes)
17	15	V9_IPV4_NEXT_HOP	4	15	V9_IPV4_NEXT_HOP	4
18	62	V9_IPV6_NEXT_HOP	16	62	V9_IPV6_NEXT_HOP	16
19	30	V9_IPV6_DST_MASK	1	30	V9_IPV6_DST_MASK	1
20	29	V9_IPV6_SRC_MASK	1	29	V9_IPV6_SRC_MASK	1
21	4	V9_PROT	1	4	V9_PROT	1
22	6	V9_TCP_FLAGS	2	6	V9_TCP_FLAGS	1
23	5	V9_TOS	1	5	V9_TOS	1
24	55	V9_POST_QOS_TOS	1	55	V9_POST_QOS_TOS	1
25	61	V9_DIRECTION	1	61	V9_DIRECTION	1
26	89	V9_FORWARDING_STATUS	4	89	V9_FORWARDING_STATUS	1
27	302	SELECTOR_ID	4	48	V9_FLOW_SAMPLER_ID	2
28	234	V9_VRF_ID_INPUT	4	234	V9_VRF_ID_INPUT	4
29	235	V9_VRF_ID_OUTPUT	4	235	V9_VRF_ID_OUTPUT	4
30	52	V9_MIN_TTL	1	52	V9_MIN_TTL	1
31	53	V9_MAX_TTL	1	53	V9_MAX_TTL	1
32	54	V9_IP_IDENT	4	54	V9_IP_IDENT	4
33	197	IPFIX_FRAG_FLAGS	1	197	IPFIX_FRAG_FLAGS	1
34	88	V9_FRAGMENT_OFFSET	2	88	V9_FRAGMENT_OFFSET	2
35	184	IPFIX_TCP_SEQ_NUM	4	184	IPFIX_TCP_SEQ_NUM	4
36	25	V9_MIN_PKT_LEN	8	25	V9_MIN_PKT_LEN	8
37	26	V9_MAX_PKT_LEN	8	26	V9_MAX_PKT_LEN	8
38	503	IPFIX_L4_CHECKSUM	2	503	IPFIX_L4_CHECKSUM	2
39	504	IPFIX_ICMP_8_BYTES	8	504	IPFIX_ICMP_8_BYTES	8
40	56	V9_IN_SRC_MAC	6	56	V9_IN_SRC_MAC	6
41	80	V9_IN_DST_MAC	6	80	V9_IN_DST_MAC	6
42	256	V9_ETH_TYPE	2	256	V9_ETH_TYPE	2
43	243	V9_DOT1Q_VLAN_ID	2	243	V9_DOT1Q_VLAN_ID	2
44	245	V9_DOT1Q_CUST_VLAN_ID	2	245	V9_DOT1Q_CUST_VLAN_ID	2
45	244	V9_DOT1Q_PRIORITY	1	244	V9_DOT1Q_PRIORITY	1
46	198	IN_BYTES_DELTA	8	444	V9_AS_PATH	128

S.No	IPFIX			NetFlow V9		
	IE #	Field	Size (Bytes)	IE #	Field	Size (Bytes)
47				445	V9_STD_COMM	128

Configure Netflow for GTP-U Traffic Monitoring

Configure a Flow Exporter

```
Router# configure
Router(config)# flow exporter-map Expol
Router(config-fem)# source-address 2001:db8::0003
Router(config-fem)# destination 2001:db8::0002
Router(config-fem)# transport udp 1024
Router(config-fem)# version v9
Router(config-fem-ver)# options interface-table
Router(config-fem-ver)# commit
Router(config-fem-ver)# root
Router(config)#exit
```

Create a Flow Monitor for GTP-U monitoring

```
Router(config)#flow monitor-map ipv6
Router(config-fmm)#record ipv6 gtp
Router(config-fmm)#exporter Expol
Router(config-fmm)#option bgpattr
Router(config-fmm)#cache timeout active 30
Router(config-fmm)#cache timeout inactive 5
Router(config-fmm)#exit
```

Configure a Flow Sampler

```
Router(config)# configure
Router(config)# sampler-map fsm1
Router(config-sm)# random 1 out-of 262144
Router(config)# exit
Router(config)#commit
Router(config)#exit
Router#
```

Apply a Flow Monitor Map and a Flow Sampler to a physical interface

```
Router#configure
Router(config)#interface HundredGigE 0/0/0/24
Router(config-if)#flow ipv6 monitor fmm-ipv6 sampler fsm1 ingress
Router(config-if)#commit
Router(config-if)#root
Router(config)#exit
```

Running Configuration

View the running configuration

```
Router# show run

flow exporter-map Expol
version v9
```

```

    options interface-table
    !
    transport udp 1024
    source-address 2001:db8::3
    destination 2001:db8::2
    !
    flow monitor-map fmm-ipv6
    record ipv6
    exporter Expol
    cache entries 500000
    cache timeout active 60
    cache timeout inactive 20
    !
    sampler-map fsm1
    random 1 out-of 262144
    !

    interface HundredGigE0/0/0/24
    shutdown
    flow ipv6 monitor fmm-ipv6 sampler fsm1 ingress
    !
end

```

Verification

Monitoring Cache Record for GTP-U services

In the following example, you can verify the GTP tunnel ID, QoS flow identifier, and GTP session number from the GTPeId, GTPQFI and GTPSESSDIR field.

```

Router#show flow monitor fmm-ipv6 cache format record location 0/0/CPU0
===== Record number: 1 =====
RecordType      : GTP Tunneled Record
IPv4SrcAddr     : 0.0.0.0
IPv4DstAddr     : 0.0.0.0
IPv6SrcAddr     : 2001:db8:1::1
IPv6DstAddr     : 2001:db8:2::2
L4SrcPort       : 0
L4DestPort      : 0
IPv4Prot        : icmpv6
IPv4TOS         : 0
InputInterface  : Gi0/2/0/0
OutputInterface : 0
L4TCPFlags      : 0
ForwardStatus   : Fwd
FirstSwitched   : 00 00:08:59:286
LastSwitched    : 00 00:08:59:286
ByteCount       : 1296
PacketCount     : 1
Dir             : Ing
GTPeId        : 11
GTPQFI        : 0
GTPSESSDIR    : 0
IPv6TC         : 0
IPv6FlowLabel   : 690680
MinimumTTL      : 64
MaximumTTL      : 64
IPFragFlags     : 0
IPFragOffset    : 181
IPIdentification : 0
IPv6Ident       : 1546089621
L4SequenceNum   : 0
L4Checksum      : 0
MinPktLen       : 100

```

```

MaxPktLen      : 100
ICMPBytes      : 0x8000cf945edf0002
OuterIPv4SrcAddr : 100.100.100.1
OuterIPv4DstAddr : 200.200.200.2
OuterIPv6SrcAddr : ::
OuterIPv6DstAddr : ::
BGPNextHopV4   : 0.0.0.0
BGPNextHopV6   : ::
BGPSrcOrigAS   : 0
BGPDstOrigAS   : 0
IPv4NextHop     : 0.0.0.0
IPv6NextHop     : ::
SrcMacAddr      : 00:00:3f:11:50:20
DstMacAddr      : 45:00:00:62:00:00
EthType         : 2048
Dot1qPriority   : 0
Dot1qVlanId     : 0
CustVlanId      : 0
InputVRFID      : default
OutputVRFID     : default
===== Record number: 2 =====
RecordType      : GTP Tunnelled Record
IPv4SrcAddr     : 192.168.12.2
IPv4DstAddr     : 192.168.12.1
IPv6SrcAddr     : ::
IPv6DstAddr     : ::
L4SrcPort       : 0
L4DestPort      : 0
IPv4Prot        : icmp
IPv4TOS         : 0
InputInterface  : Gi0/2/0/0
OutputInterface : 0
L4TCPFlags      : 0
ForwardStatus   : Fwd
FirstSwitched   : 00 00:08:54:244
LastSwitched    : 00 00:08:54:244
ByteCount       : 64
PacketCount     : 1
Dir             : Ing
GTPTeid       : 11
GTPQFI        : 0
GTPSESSDIR    : 0
IPv6TC          : 0
IPv6FlowLabel   : 0
MinimumTTL      : 255
MaximumTTL      : 255
IPFragFlags     : 0
IPFragOffset    : 97
IPIdentification : 4
IPv6Ident       : 0
L4SequenceNum   : 0
L4Checksum      : 0
MinPktLen       : 100
MaxPktLen       : 100
ICMPBytes       : 0xabcdabcdabcdabcd
OuterIPv4SrcAddr : 100.100.100.1
OuterIPv4DstAddr : 200.200.200.2
OuterIPv6SrcAddr : ::
OuterIPv6DstAddr : ::
BGPNextHopV4   : 0.0.0.0
BGPNextHopV6   : ::
BGPSrcOrigAS   : 0
BGPDstOrigAS   : 0
IPv4NextHop     : 0.0.0.0

```

```

IPV6NextHop      : ::
SrcMacAddr       : 00:00:3f:11:50:20
DstMacAddr       : 45:00:00:62:00:00
EthType          : 2048
Dot1qPriority     : 0
Dot1qVlanId      : 0
CustVlanId       : 0
InputVRFID       : default
OutputVRFID      : default

```

Netflow Full Packet Capture

This feature captures the exact packet size of the ingress Netflow packet.

Earlier, when a L2VPN packet with a destination MAC address starting with the number 6 is received, the packet gets wrongly decoded as IPv6 packet; the packet size consequently gets reported inaccurately to the collector.

Configuring Netflow Full Packet Capture

This section describes how to configure Netflow full packet capture feature on the line card location 0/1/cpu0:



Note You should reload the line card for the changes to take effect.

```

RP/0/RP0/CPU0:router(config)# hw-module profile netflow fpc-enable location 0/1/cpu0
RP/0/RP0/CPU0:router(config)# exit
RP/0/RP0/CPU0:router # system admin
RP/0/RP0/CPU0:router(sysadmin)# hw-module reload location 0/1/cpu0
RP/0/RP0/CPU0:router(sysadmin)# commit
RP/0/RP0/CPU0:router(sysadmin)# end

```

Running Config

```

config
  hw-module profile netflow fpc-enable location 0/1/cpu0
!
sysadmin
  hw-module reload location 0/1/cpu0
!

```