



Cisco Catalyst SD-WAN EtherChannel



Note To achieve simplification and consistency, the Cisco SD-WAN solution has been rebranded as Cisco Catalyst SD-WAN. In addition, from Cisco IOS XE SD-WAN Release 17.12.1a and Cisco Catalyst SD-WAN Release 20.12.1, the following component changes are applicable: **Cisco vManage** to **Cisco Catalyst SD-WAN Manager**, **Cisco vAnalytics** to **Cisco Catalyst SD-WAN Analytics**, **Cisco vBond** to **Cisco Catalyst SD-WAN Validator**, **Cisco vSmart** to **Cisco Catalyst SD-WAN Controller**, and **Cisco Controllers** to **Cisco Catalyst SD-WAN Control Components**. See the latest Release Notes for a comprehensive list of all the component brand name changes. While we transition to the new names, some inconsistencies might be present in the documentation set because of a phased approach to the user interface updates of the software product.

Table 1: Feature History

Feature Name	Release Information	Description
Cisco Catalyst SD-WAN EtherChannel	Cisco IOS XE Catalyst SD-WAN Release 17.6.1a Cisco vManage Release 20.6.1	This feature allows you to configure EtherChannels on Cisco IOS XE Catalyst SD-WAN devices on the service side. An EtherChannel provides fault-tolerant high speed link, redundancy, and increased bandwidth between Cisco IOS XE Catalyst SD-WAN devices and other devices such as routers, switches, or servers connected in a network. You can configure EtherChannels only using the CLI device templates and CLI add-on feature templates.

Feature Name	Release Information	Description
Support for EtherChannels on the Transport Side	<p>Cisco IOS XE Catalyst SD-WAN Release 17.13.1a</p> <p>Cisco Catalyst SD-WAN Manager Release 20.13.1</p>	<p>Adds support for configuring EtherChannels on the transport side of a Cisco IOS XE Catalyst SD-WAN device.</p> <p>This feature also introduces support for aggregate EtherChannel Quality of Service (QoS) on the transport side.</p> <p>By combining EtherChannel and QoS, you can optimize network utilization, enhance performance, and maintain quality for specific traffic types.</p> <p>Note This feature has limited availability.</p>


- [Information About Cisco Catalyst SD-WAN EtherChannel, on page 2](#)
- [Supported Devices for Cisco Catalyst SD-WAN EtherChannel, on page 6](#)
- [Prerequisites for Cisco Catalyst SD-WAN EtherChannel, on page 7](#)
- [Restrictions for Cisco Catalyst SD-WAN EtherChannel, on page 8](#)
- [Configure EtherChannel Using a CLI Template, on page 8](#)
- [Monitor Configured EtherChannel Using CLI, on page 13](#)
- [Aggregate EtherChannel Quality of Service, on page 14](#)

Information About Cisco Catalyst SD-WAN EtherChannel

An EtherChannel provides fault-tolerant high-speed links between switches, routers, and servers. You can use the EtherChannel to increase bandwidth between the wiring closets and the data center, and also deploy it at any place in a network where bottlenecks are likely to occur. An EtherChannel provides automatic recovery for the loss of a link by redistributing the load across the remaining links. If a link fails, an EtherChannel redirects traffic from the failed link to the remaining links in the channel.

An EtherChannel comprises a channel group and a port-channel interface. The channel group binds physical ports to the port-channel interface. Configuration changes applied to the port-channel interface apply to all the physical ports bound together in the channel group.

Figure 1: EtherChannel

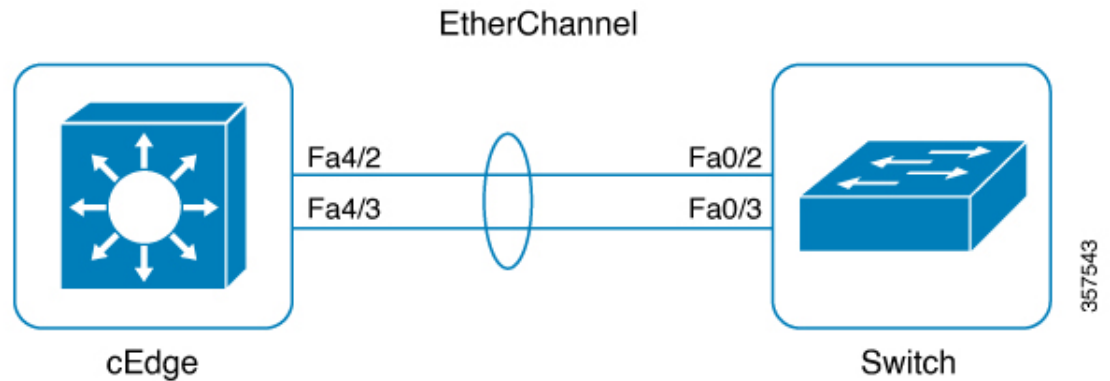

- Using EtherChannels in a network provides increased bandwidth and resilience.
 - Bandwidth: An EtherChannel allows multiple links to be combined into one logical link. Because an EtherChannel offers redundancy of links, you can configure EtherChannels to increase the speed in a network.
 - Resilience: An EtherChannel also provides network resilience. Even if a link within an EtherChannel fails, traffic that is previously carried over the failed link switches to the remaining links within the EtherChannel. Thus, EtherChannel provides automatic recovery for the loss of a link by redistributing the load across the remaining links.
- The number of supported port channels differs based on the specific device model.
- The number of supported member interfaces for a port channel differs based on the specific device model.
- EtherChannel supports the following combinations:
 - Two active links
 - Active and passive links
 - Single member link
 - Loopback interface in bind or unbind mode to the port channel

Starting from Cisco IOS XE Catalyst SD-WAN Release 17.13.1a and Cisco Catalyst SD-WAN Manager Release 20.13.1, EtherChannels configured on the transport side support the following:

- Control and management connections (DTLS, OMP) to Cisco Catalyst SD-WAN Manager, Cisco Catalyst SD-WAN Validator, and Cisco Catalyst SD-WAN Controller
- IPSEC tunnels for data traffic
- IPv4 forwarding
- L2 TLOC extension
- Explicit ACL (Access Control Lists)
- Implicit ACL on a port channel TLOC

- IPv4 static routing
- Loopback TLOC (ability to bind loopback to port channel)
- Port channel sub-interfaces
- Control policies on Cisco Catalyst SD-WAN Controller

EtherChannel in Cisco Catalyst SD-WAN

To create an EtherChannel, begin by configuring a port channel. A port channel is a logical interface on a Cisco IOS XE Catalyst SD-WAN device. After you create an EtherChannel, the configuration changes that are applied to the port-channel interface are also applied to all the physical ports assigned to the port-channel interface.

The maximum number of interfaces that can be combined into a single EtherChannel using LACP is eight, although the actual limit may depend on the specific model of the device.

You can configure an EtherChannel using one these methods:

- Link Aggregation Control Protocol (LACP) mode
- Static mode

Use the LACP mode to configure an EtherChannel if it is supported on both ends of a device. If either of the device does not support LACP mode, use a static mode to configure an EtherChannel.

LACP Mode

LACP facilitates the automatic creation of EtherChannels by exchanging LACP packets between the Ethernet ports.

This table shows the user-configurable EtherChannel LACP modes.

Table 2: EtherChannel LACP Modes

Mode	Description
active	Places a port in an active negotiating state in which the port starts negotiations with other ports by sending LACP packets.
passive	Places a port in a passive negotiating state in which the port responds to the packets that it receives, but does not start LACP packet negotiation. This setting minimizes the transmission of LACP packets.

Both the **active** and **passive** modes enable ports to negotiate with partner ports based on port speed.

Ports can form an EtherChannel when they are in different LACP modes as long as the modes are compatible. For example:

- A port in the **active** mode can form an EtherChannel with another port that is in the **active** or **passive** mode.
- A port in the **passive** mode cannot form an EtherChannel with another port that is also in the **passive** mode because neither port starts LACP negotiation.

In addition to the standard LACP configuration, the following LACP-related commands are supported. Please refer to the list below:

- **lacp min-bundle**
- **lacp max-bundle**
- **lacp system-priority**
- **lacp port-priority**
- **lacp fast-switchover**
- **lacp rate fast**

Static Mode

You can manually create an EtherChannel by using the **interface port-channel** command in the global configuration mode. You then use the **channel-group interface** command in the global configuration mode to assign an interface to the EtherChannel. After you configure an EtherChannel, the configuration changes applied to the port-channel interface are applied to all the physical ports assigned to the port-channel interface. Unlike an LACP mode, in a static mode, no packets are sent for negotiations with the other ports. Instead, you must manually configure the ports as part of an EtherChannel.

Information related to LACP on port-channel interfaces can be obtained using the **show lacp** command. See [show lacp](#).

EtherChannel Load Balancing

An EtherChannel balances traffic load across the links in a channel. You can specify one of several different load-balancing modes. EtherChannels can use either dynamic flow-based load balancing or virtual LAN (VLAN) manual load balancing.

You can configure the load-balancing method globally for all the port channels or directly on specific port channels. The global configuration applies only to those port channels for which you have not explicitly configured load balancing. The port-channel configuration overrides the global configuration.

The following load-balancing methods are supported on Cisco IOS XE Catalyst SD-WAN devices:

- Flow-Based
- VLAN-Based

Flow-Based Load Balancing

Flow-based load balancing is the default load-balancing method, and is enabled by default at the global level. Flow-based load balancing identifies different flows of traffic based on the key fields in the data packet. For example, IPv4 source and destination IP addresses can be used to identify a flow. The various data traffic flows are then mapped to the different member links of a port channel. After the mapping is done, the data traffic for a flow is transmitted through the assigned member link. The flow mapping is dynamic and changes when there is any change in the state of a member link to which a flow is assigned. The flow mapping is dynamic when member links are added or deleted.

VLAN-Based Load Balancing

VLAN-based load balancing allows you to configure static assignment of user traffic, as identified by a VLAN ID, to a given member link of an EtherChannel. You can manually assign VLAN subinterfaces to a primary and secondary link. This feature allows load balancing to downstream equipment regardless of vendor

equipment capabilities, and provides failover protection by redirecting traffic to the secondary member link if the primary link fails. Member links are supported with up to 16 bundles per chassis.

EtherChannels Loading Balancing on the Transport Side of Cisco IOS XE Catalyst SD-WAN Devices

Benefits of Cisco Catalyst SD-WAN EtherChannel

- Provides fault-tolerance. If any one of the links in an EtherChannel fail, the EtherChannel automatically redistributes traffic across the remaining links.
- Helps increase bandwidth between Cisco IOS XE Catalyst SD-WAN devices and other devices such as switches and servers that are connected in a network.

Supported Devices for Cisco Catalyst SD-WAN EtherChannel

Service Side

The following platforms support EtherChannel and also offer load balancing for EtherChannel on the service side:

- Cisco 4000 Series Integrated Services Routers
 - Cisco 4451-X Integrated Services Router
 - Cisco 4461 Integrated Services Router
 - Cisco 4431 Integrated Services Router
 - Cisco 4331 Integrated Services Router
 - Cisco 4351 Integrated Services Router
- Cisco ASR 1000 Series Aggregation Services Routers
 - Cisco ASR 1001-X Router
 - Cisco ASR 1006-X Router
 - Cisco ASR 1001-HX Router
 - Cisco ASR 1002-HX Router
 - Cisco ASR 1002-X Router
- Cisco Catalyst 8000V Edge Software
- Cisco Catalyst 8200 Router
- Cisco Catalyst 8300 Router
- Cisco Catalyst 8500 Series Edge Router

Transport Side

The following platforms support EtherChannel and also offer load balancing for EtherChannel on the transport side:

- Cisco 4000 Series Integrated Services Routers
 - Cisco 4461 Integrated Services Router
- Cisco ASR 1000 Series Aggregation Services Routers
 - Cisco ASR 1001-HX Router
 - Cisco ASR 1002-HX Router
- Cisco Catalyst 8300 Router
- Cisco Catalyst 8500 Series Edge Router

Supported NIMs

The following NIMs are supported on Integrated Services Routers, for service side:

- NIM-1GE-CU-SFP
- NIM-2GE-CU-SFP
- SM-X-4x1G-1x10G
- SM-X-6X1G
- C-NIM-2T
- C-NIM-1X
- C-NIM-1M



Note Network Interface Modules (NIMs) with L2 ports do not support EtherChannels on the service side.

Prerequisites for Cisco Catalyst SD-WAN EtherChannel

Service Side

- All the LAN ports in each EtherChannel must be of the same speed.
- All the LAN ports must be configured on Layer 3 service-side ports.

Transport Side

- All the member links in each EtherChannel must be of the same speed.
- All the member links must be configured on Layer 3 transport side ports.

Restrictions for Cisco Catalyst SD-WAN EtherChannel

Service Side

- The maximum number of port channel interfaces that a device can support varies, depending on the particular model of the device.
- You can configure EtherChannels on a device by using the CLI, or using only the CLI templates or CLI add-on feature templates in Cisco SD-WAN Manager.
- Network Interface Modules (NIMs) with L2 ports do not support EtherChannels on the service side.
- The EtherChannel Quality of Service (QoS) feature on port channels is not supported on the service side.
- The Aggregate EtherChannel QoS feature on port channels is not supported on the service side.
- An EtherChannel does not support Digital Signal Processor (DSP) farm services and voice services.
- Sub interfaces cannot be added as member of EtherChannel.

Transport Side

- The maximum number of port channel interfaces that a device can support varies, depending on the particular model of the device.
- You can configure EtherChannels on a device by using the CLI, or using only the CLI templates or CLI add-on feature templates in Cisco SD-WAN Manager.
- Network Interface Modules (NIMs) with L2 ports do not support EtherChannels on the transport side.
- The Multichassis Link Aggregation Group (LAG), which involves different member links connecting to different switches, is not supported.
- The use of port channel on virtual devices such as Cisco Catalyst 8000V is not supported.
- Cisco IOS XE Catalyst SD-WAN Release 17.13.1a does not include support for an endpoint tracker on port-channel TLOCs.

Configure EtherChannel Using a CLI Template

In Cisco Catalyst SD-WAN Manager, you can configure EtherChannels on the service side or the transport side using the CLI templates. For more information about using CLI templates, see [CLI Add-On Feature Templates](#) and [CLI Templates](#).



Note By default, CLI templates execute commands in global config mode.

Configure a Service-Side EtherChannel Using a CLI Template

In Cisco Catalyst SD-WAN Manager, you can configure EtherChannels on the service side using CLI templates. For more information about using CLI templates, see [CLI Add-On Feature Templates](#) and [CLI Templates](#).



Note By default, CLI templates execute commands in global config mode.

1. Configure a Layer 3 port channel.

```
config-transaction
interface Port-channel channel-number
ip address ip-address mask <For IPv4 addresses>
ipv6 address ipv6-address/prefix length <For IPv6 addresses>
vrf forwarding vrf-value
```

2. Assign Interfaces to Layer 3 port channel with LACP active or passive options.

```
config-transaction
interface GigabitEthernet slot/subslot/port
no ip address
channel-group port-channel-group-number mode {active passive}
exit
```

Configure EtherChannel with LACP Parameters.

```
config-transaction
lacp system-priority priority
interface GigabitEthernet slot/subslot/port
lacp port-priority priority
```

3. Configure a Static EtherChannel.

```
config-transaction
interface GigabitEthernet slot/subslot/port
no ip address
channel-group channel-group-number
```

This example shows how to configure a Layer 3 EtherChannel, and how to assign two ports to channel 5 with the LACP mode as active and passive:

```
interface Port-channel5
vrf forwarding 150
ip address 11.0.0.1 255.255.255.0

interface GigabitEthernet 0/1/0
no ip address
channel-group 5 mode active

interface GigabitEthernet 0/1/2
no ip address
channel-group 5 mode passive
```

The following is a complete configuration example for creating an EtherChannel in static mode:

```

interface Port-channel2
 vrf forwarding 150
 ip address 10.0.0.1 255.255.255.0
 no negotiation auto
!

interface GigabitEthernet2/1/0
 no ip address
 negotiation auto
 cdp enable
 channel-group 2
!
interface GigabitEthernet2/1/1
 no ip address
 negotiation auto
 cdp enable
 channel-group 2
!

```

Configure a Transport Side EtherChannel Using a CLI Template

In Cisco Catalyst SD-WAN Manager, you can configure EtherChannels on the transport side using CLI templates. For more information about using CLI templates, see [CLI Add-On Feature Templates](#) and [CLI Templates](#).



Note By default, CLI templates execute commands in global config mode.

1. Configure a Layer 3 port channel.

```

interface Port-channel channel-number
ip address ip-address mask
ipv6 address ipv6-address/prefix-length

```

2. Assign Interfaces to Layer 3 port channel with LACP active or passive options.

```

interface GigabitEthernet slot/subslot/port
no ip address
channel-group channel-group-number mode {active passive}
exit

```

Configure EtherChannel with LACP Parameters.

```

lacp system-priority priority
interface GigabitEthernet slot/subslot/port
lacp port-priority priority

```

Configure Static EtherChannel.

```

interface GigabitEthernet slot/subslot/port
no ip address
channel-group channel-group-number

```

3. Configure tunnels.

```

interface Tunnel tunnel-number
ip unnumbered Port-channel channel-group-number
no ip redirects
tunnel source Port-channel channel-group-number
tunnel mode sdwan

sdwan
interface Port-channel channel-group-number
tunnel-interface
encapsulation {ipsec gre}
color color-type

```

This example shows how to configure a Layer 3 EtherChannel, and how to assign two ports to channel 1 with the LACP mode as active and passive:

```

interface Port-channell
ip address 10.48.48.15 255.255.255.0
ip ospf priority 0
ip ospf 65535 area 51
load-interval 30
no negotiation auto

interface GigabitEthernet0/0/0
no ip address
negotiation auto
lacp rate fast
channel-group 1 mode active
end

interface GigabitEthernet0/0/4
no ip address
negotiation auto
lacp rate fast
channel-group 1 mode passive
end

```

The following is a configuration example for creating an EtherChannel on the transport side.

```

interface Tunnel2
ip unnumbered Port-channell
tunnel source Port-channell
tunnel mode sdwan

interface Port-channell
tunnel-interface
encapsulation ipsec
color lte

```

Configure Load Balancing for EtherChannels on the Service Side

Enable Flow Based Load Balancing Per Port Channel

```

interface Port-channel channel-number
load-balancing flow

```

Hash Algorithms for Flow-based Load Balancing

```
port-channel load-balance-hash-algo {dst-ip dst-mac src-dst-ip src-dst-mac
src-dst-mixed-ip-port src-ip src-mac}
```



Note The default hash algorithm for flow-based load balancing is **src-dst-ip**.



Note The **Hash Algorithms For Flow-based Load Balancing** feature is supported only on Cisco Aggregation Services Routers platforms, where the hardware load-balancing for Etherchannel is supported. This command is not supported on Cisco Integrated Services Routers and Cisco Catalyst Router platforms.

This example shows a configuration where flow-based load balancing is configured on port channel 2 while the VLAN manual method is configured globally:

```
!
port-channel load-balancing vlan-manual

.
.
.
interface Port-channel2
 ip address 10.0.0.1 255.255.255.0
 no negotiation auto
 load-balancing flow
!

interface GigabitEthernet2/1/0
 no ip address
 negotiation auto
 cdp enable
 channel-group 2
!
interface GigabitEthernet2/1/1
 no ip address
 negotiation auto
 cdp enable
 channel-group 2
!
```

Manual Traffic Distribution Based on VLAN ID

```
port-channel load-balancing vlan-manual
```



Note This command is available for configuration in the global configuration mode, and applies to all the port-channel configured on the device.

This example shows how the load-balancing configuration can be globally applied to define policies for handling traffic by using the **port-channel load-balancing** command.

```
port-channel load-balancing vlan-manual

!
```

```

interface Port-channel1
!
interface Port-channel1.100
encapsulation dot1Q 100 primary GigabitEthernet 1/1/1
secondary GigabitEthernet 1/2/1
ip address 10.16.2.100 255.255.255.0
!
interface Port-channel1.200
encapsulation dot1Q 200 primary GigabitEthernet 1/2/1
ip address 10.16.3.200 255.255.255.0
!
interface Port-channel1.300
encapsulation dot1Q 300
ip address 10.16.4.300 255.255.255.0
!
interface GigabitEthernet 1/1/1
no ip address
channel-group 1!
interface GigabitEthernet 1/2/1
no ip address
channel-group 1

```

Enable VLAN Load Balancing Per Port Channel on the Service Side

```

interface Port-channel channel-number
load-balancing vlan

```

Example of Configuring VLAN Load Balancing on the Service Side.

```

interface Port-channel channel-number
interface GigabitEthernet slot/subslot/port
channel-group channel-group-number
interface GigabitEthernet slot/subslot/port
channel-group channel-group-number
interface Port-channel channel-number
load-balancing vlan
interface Port-channel channel-number
encapsulation dot1Q vlan_id primary interface1 secondaryinterface2

```



Note Interface 1 and interface 2 must be member ports of a port channel when **encapsulation dot1q** is configured.

Monitor Configured EtherChannel Using CLI

Example 1

The following is a sample output from the **show etherchannel summary** command. This example shows summary for each channel group.

```

Device# show etherchannel summary

Flags: D - down          P/bndl - bundled in port-channel
       I - stand-alone   s/susp - suspended
       H - Hot-standby (LACP only)
       R - Layer3       S - Layer2

```

```

      U - in use      f - failed to allocate aggregator

      M - not in use, minimum links not met
      u - unsuitable for bundling
      w - waiting to be aggregated
      d - default port

Number of channel-groups in use: 1
Number of aggregators:          1

Group  Port-channel  Protocol    Ports
-----+-----+-----+-----
 1      Po1 (RU)        LACP        Te0/3/0 (bndl) Te0/3/1 (hot-sby)

RU - L3 port-channel UP State
SU - L2 port-channel UP state
P/bndl - Bundled
S/susp - Suspended

```

Example 2

The following is a sample output from the **show etherchannel load-balancing** command. This example displays the load-balancing method that is applied to each port channel.

Aggregate EtherChannel Quality of Service

The Aggregate EtherChannel Quality of Service (QoS) feature improves the quality of service by effectively managing various network parameters, such as delay, jitter (or delay variation), bandwidth, and packet loss. Its primary function is to offer improved services for specific types of network traffic. The feature allows the application of an aggregate egress-queuing policy-map on the main or sub-interface of a port channel. Furthermore, it facilitates QoS support on the aggregate port channel's main interface on Cisco IOS XE Catalyst SD-WAN devices.

Prerequisites for Aggregate EtherChannel Quality of Service

- Identify aggregate port channel interfaces before creating them using the **platform qos port-channel-aggregate** command.
- In a port channel, all member links must be of the same speed.

Restrictions for Aggregate EtherChannel Quality of Service

- The aggregate port channel can support four member links and eight aggregate port channel interfaces.
- You can apply a policy map to the aggregate a port channel's main interface or sub-interface only. Member link QoS is not supported.
- You cannot spontaneously convert port channels to and from the aggregate status. You must delete the interface port-channel from the configurations before adding or removing the matching **platform qos port-channel-aggregate** command.

- QoS applications which are used to manage, prioritize and control the behavior of data transmission over a network are not supported on port channel member links.

QoS policies applied to aggregate port channel main interfaces and port channel sub-interfaces are not supported.

- When you enable aggregate QoS, it is not possible to directly modify a channel group on a member link. To make changes, the old channel group needs to be removed and the new one must be added. First push one template to remove the old member link and port channel configuration, then another template to add the new configuration.

Configure Aggregate EtherChannel Quality of Service Using a CLI Template

In Cisco Catalyst SD-WAN Manager, you can configure aggregate EtherChannel QoS using the CLI templates. For more information about using CLI templates, see [CLI Add-On Feature Templates](#) and [CLI Templates](#).



Note By default, CLI templates execute commands in global config mode.

1. Create the aggregated port channel.

```
platform qos port-channel-aggregate port-channel-number
interface Port-channel channel-number
no shutdown
ip address ip-address mask
```

2. Assign member links to port channel.

```
interface GigabitEthernet slot/subslot/port
no negotiation auto
channel-group channel-group-number mode {active passive}
exit
```

3. Configure tunnels.

```
interface Tunnel tunnel-number
no shutdown
ip unnumbered port-channel-interface
tunnel source port-channel-interface
tunnel mode sdwan
```

```
sdwan
interface channel-group-number
tunnel-interface
encapsulation ipsec
color public-internet
```

4. Configure QoS.

```
interface channel-group-number
```

service-policy output *pre-defined qos policy-map*

Here's the complete configuration example for configuring aggregate EtherChannel QoS.

```

!
class-map match-any Best-Effort
  match qos-group 2
!
class-map match-any Bulk
  match qos-group 3
!
class-map match-any Business
  match qos-group 1
!
class-map match-any Critical
  match qos-group 0
!
policy-map qos_template
  class Critical
    police rate percent 15
    !
    priority level 1
  !
  class Business
    bandwidth remaining percent 55
  !
  class Best-Effort
    bandwidth remaining percent 10
  !
  class Bulk
    bandwidth remaining percent 20
  !
!
policy-map shape_Port-channel1
  class class-default
    service-policy qos_template
    shape average 100000000
  !
!
interface TenGigabitEthernet0/1/6
  no shutdown
  no negotiation auto
  channel-group 1 mode active
  lacp rate fast
exit
interface TenGigabitEthernet0/1/7
  no shutdown
  no negotiation auto
  channel-group 1 mode active
  lacp rate fast
exit
interface Port-channel1
  no shutdown
  ip address 10.1.15.15 255.255.255.0
  ipv6 nd ra suppress all
  service-policy output shape_Port-channel1
exit
interface Tunnel1
  no shutdown
  ip unnumbered Port-channel1
  tunnel source Port-channel1
  tunnel mode sdwan
exit

```



```

!
sdwan
interface Port-channel1
 tunnel-interface
  encapsulation ipsec
  color lte
  no allow-service bgp
  allow-service dhcp
  allow-service dns
  allow-service icmp
  no allow-service sshd
  no allow-service netconf
  no allow-service ntp
  no allow-service ospf
  no allow-service stun
  allow-service https
  no allow-service snmp
  no allow-service bfd
 exit
exit

```

Verify Aggregate EtherChannel Quality of Service

To view QoS issues on a port channel interface, use the **show policy-map interface Port-channel** command.

```

Device# show policy-map interface Port-channel 1
Port-channel1

Service-policy output: shape_Port-channel1

Class-map: class-default (match-any)
 121 packets, 20797 bytes
 5 minute offered rate 2000 bps, drop rate 0000 bps
Match: any
Queueing
queue limit 416 packets
(queue depth/total drops/no-buffer drops) 0/0/0
(pkts output/bytes output) 121/20797
shape (average) cir 100000000, bc 400000, be 400000
target shape rate 100000000

Service-policy : qos_template

queue stats for all priority classes:
Queueing
priority level 1
queue limit 512 packets
(queue depth/total drops/no-buffer drops) 0/0/0
(pkts output/bytes output) 121/20797

Class-map: Critical (match-any)
 121 packets, 20797 bytes
 5 minute offered rate 2000 bps, drop rate 0000 bps
Match: qos-group 0
police:
  rate 15 %
  rate 15000000 bps, burst 468750 bytes
  conformed 121 packets, 20797 bytes; actions:
  transmit
  exceeded 0 packets, 0 bytes; actions:
  drop
  conformed 2000 bps, exceeded 0000 bps
Priority: Strict, b/w exceed drops: 0

```

```
Priority Level: 1

Class-map: Business (match-any)
  0 packets, 0 bytes
  5 minute offered rate 0000 bps, drop rate 0000 bps
  Match: qos-group 1
  Queuing
  queue limit 416 packets
  (queue depth/total drops/no-buffer drops) 0/0/0
  (pkts output/bytes output) 0/0
  bandwidth remaining 55%

Class-map: Best-Effort (match-any)
  0 packets, 0 bytes
  5 minute offered rate 0000 bps, drop rate 0000 bps
  Match: qos-group 2
  Queuing
  queue limit 416 packets
  (queue depth/total drops/no-buffer drops) 0/0/0
  (pkts output/bytes output) 0/0
  bandwidth remaining 10%

Class-map: Bulk (match-any)
  0 packets, 0 bytes
  5 minute offered rate 0000 bps, drop rate 0000 bps
  Match: qos-group 3
  Queuing
  queue limit 416 packets
  (queue depth/total drops/no-buffer drops) 0/0/0
  (pkts output/bytes output) 0/0
  bandwidth remaining 20%

Class-map: class-default (match-any)
  0 packets, 0 bytes
  5 minute offered rate 0000 bps, drop rate 0000 bps
  Match: any

  queue limit 416 packets
  (queue depth/total drops/no-buffer drops) 0/0/0
  (pkts output/bytes output) 0/0
```