



Firepower 1010 Threat Defense Getting Started: Management Center on a Local Management Network

First Published: 2024-10-16

Last Modified: 2025-03-05

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
<http://www.cisco.com>
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883



CHAPTER 1

Before You Begin

Manage the firewall using the Secure Firewall Management Center on a dedicated management network.

- [Power On the Firewall, on page 1](#)
- [Which Application is Installed: Threat Defense or ASA?, on page 2](#)
- [Access the Threat Defense CLI, on page 3](#)
- [Check the Version and Reimage, on page 4](#)
- [Obtain Licenses, on page 5](#)
- [\(If Needed\) Power Off the Firewall, on page 6](#)

Power On the Firewall

System power is controlled by the power cord; there is no power button.



Note The first time you boot up the firewall, threat defense initialization can take approximately 15 to 30 minutes.


Before you begin

It's important that you provide reliable power for your firewall (for example, using an uninterruptable power supply (UPS)). Loss of power without first shutting down can cause serious file system damage. There are many processes running in the background all the time, and losing power does not allow the graceful shutdown of your system.

Procedure

- Step 1** Attach the power cord to the firewall, and connect it to an electrical outlet.
The power turns on automatically when you plug in the power cord.
- Step 2** Check the Power LED on the back of the firewall; if it is solid green, the firewall is powered on.

Figure 1: System and Power LEDs



Step 3 Check the System LED on the back of the firewall; after it is solid green, the system has passed power-on diagnostics.


Which Application is Installed: Threat Defense or ASA?

Both applications, threat defense or ASA, are supported on the hardware. Connect to the console port and determine which application was installed at the factory.

Procedure

Step 1 Connect to the console port using either port type.

Figure 2: Console Port



Step 2 See the CLI prompts to determine if your firewall is running threat defense or ASA.

Threat Defense

You see the firepower login (FXOS) prompt. You can disconnect without logging in and setting a new password. If you need to log in all the way, see [Access the Threat Defense CLI, on page 3](#).

```
firepower login:
```

ASA

You see the ASA prompt.

```
ciscoasa>
```

- Step 3** If you are running the wrong application, see [Cisco Secure Firewall ASA and Secure Firewall Threat Defense Reimage Guide](#).


Access the Threat Defense CLI

You might need to access the CLI for configuration or troubleshooting.

Procedure

- Step 1** Connect to the console port using either port type.

Figure 3: Console Port



RJ-45 console

- Step 2** You connect to FXOS. Log in to the CLI using the **admin** username and the password (the default is **Admin123**). The first time you log in, you are prompted to change the password.

```
firepower login: admin
Password: Admin123
Successful login attempts for user 'admin' : 1

[...]

Hello admin. You must change your password.
Enter new password: *****
Confirm new password: *****
Your password was updated successfully.

[...]

firepower#
```

- Step 3** Change to the threat defense CLI.

Note

If you want to use the device manager for initial setup, do not access the threat defense CLI, which starts the CLI setup.

connect ftd

The first time you connect to the threat defense CLI, you are prompted to complete initial setup.

Example:

```
firepower# connect ftd
>
```

To exit the threat defense CLI, enter the **exit** or **logout** command. This command returns you to the FXOS prompt.

Example:

```
> exit
firepower#
```

Check the Version and Reimage

We recommend that you install your target version before you configure the firewall. Alternatively, you can perform an upgrade after you are up and running, but upgrading, which preserves your configuration, may take longer than using this procedure.


What Version Should I Run?

Cisco recommends running a Gold Star release indicated by a gold star next to the release number on the software download page. You can also refer to the release strategy described in <https://www.cisco.com/c/en/us/products/collateral/security/firewalls/bulletin-c25-743178.html>.

Procedure

Step 1 Connect to the console port using either port type.

Figure 4: Console Port



Step 2 At the FXOS CLI, show the running version.

```
scope ssa
```

```
show app-instance
```

Example:

```
Firepower# scope ssa
Firepower /ssa # show app-instance
```

Application Name	Slot ID	Admin State	Operational State	Running Version	Startup Version	Cluster Oper State
ftd	1	Enabled	Online	7.6.0.65	7.6.0.65	Not Applicable

Step 3

If you want to install a new version, perform these steps.

- By default, the Management interface uses DHCP. If you need to set a static IP address for the Management interface, enter the following commands.

```
scope fabric-interconnect a
```

```
set out-of-band static ip ip netmask netmask gw gateway
```

```
commit-buffer
```

- Perform the [reimage procedure](#) in the [FXOS troubleshooting guide](#).

You will need to download the new image from a server accessible from the Management interface.

After the firewall reboots, you connect to the FXOS CLI again.

- At the FXOS CLI, you are prompted to set the admin password again.

Obtain Licenses

When you bought your device from Cisco or a reseller, your licenses should have been linked to your Smart Software License account. If you don't have an account on the [Smart Software Manager](#), click the link to [set up a new account](#).


If you have not already done so, register the management center with the Smart Software Manager. Registering requires you to generate a registration token in the Smart Software Manager. See the [Cisco Secure Firewall Management Center Administration Guide](#) for detailed instructions.

The threat defense has the following licenses:

- Essentials—Required
- IPS
- Malware Defense
- URL Filtering
- Cisco Secure Client

- If you need to add licenses yourself, go to [Cisco Commerce Workspace](#) and use the **Search All** field.

Figure 5: License Search

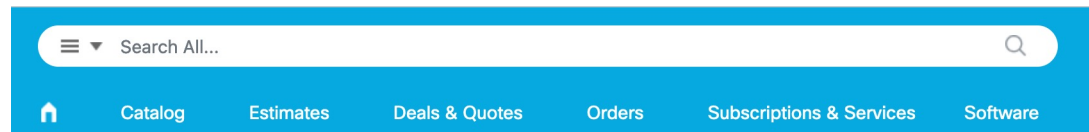

2. Search for the following license PIDs.



Note If a PID is not found, you can add the PID manually to your order.


- IPS, Malware Defense, and URL combination:
 - L-FPR1010T-TMC=

When you add one of the above PIDs to your order, you can then choose a term-based subscription corresponding with one of the following PIDs:

- L-FPR1010T-TMC-1Y
- L-FPR1010T-TMC-3Y
- L-FPR1010T-TMC-5Y
- Cisco Secure Client—See the [Cisco Secure Client Ordering Guide](#).

3. Choose **Products & Services** from the results.

Figure 6: Results

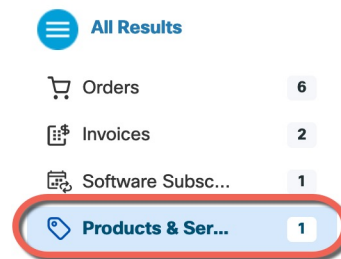

(If Needed) Power Off the Firewall

It's important that you shut down your system properly. Simply unplugging the power can cause serious file system damage. There are many processes running in the background all the time, and unplugging or shutting off the power does not allow the graceful shutdown of your firewall system.

The Firepower 1010 chassis does not have an external power switch..


Power Off the Firewall at the CLI

You can use the FXOS CLI to safely shut down the system and power off the firewall.

Procedure

Step 1 Connect to the console port using either port type.

Figure 7: Console Port



RJ-45 console

Step 2 In the FXOS CLI, connect to local-mgmt mode.

```
firepower # connect local-mgmt
```

Step 3 Shut down the system.

```
firepower(local-mgmt) # shutdown
```

Example:

```
firepower(local-mgmt)# shutdown
This command will shutdown the system. Continue?
Please enter 'YES' or 'NO': yes
INIT: Stopping Cisco Threat Defense.....ok
```

Step 4 Monitor the system prompts as the firewall shuts down. When the shutdown is complete, you will see the following prompt.

```
System is stopped.
It is safe to power off now.
Do you want to reboot instead? [y/N]
```

Step 5 You can now unplug the power to physically remove power from the chassis if necessary.

Power Off the Firewall Using the Management Center

Shut down your system properly using the management center.

Procedure

-
- Step 1** Shut down the firewall.
- Choose **Devices > Device Management**.
 - Next to the device that you want to restart, click **Edit** (✎).
 - Click the **Device** tab.
 - Click **Shut Down Device** (🔌) in the **System** section.
 - When prompted, confirm that you want to shut down the device.
- Step 2** If you have a console connection to the firewall, monitor the system prompts as the firewall shuts down. When shutdown is complete, you will see the following prompt.
- ```
System is stopped.
It is safe to power off now.

Do you want to reboot instead? [y/N]
```
- If you do not have a console connection, wait approximately 3 minutes to ensure the system has shut down.
- Step 3** You can now unplug the power to physically remove power from the chassis if necessary.
-



## CHAPTER 2

# Cable and Register the Firewall

---


Cable the firewall and then register the firewall to the management center.

- [Cable the Firewall, on page 9](#)
- [Perform Initial Configuration, on page 10](#)
- [Register the Firewall with the Management Center, on page 17](#)

## Cable the Firewall

Connect the management center to the dedicated Management 1/1 interface. The management network needs access to the internet for updates. For example, you can connect the management network to the internet through the firewall itself (for example, by connecting to the inside network).

See the [hardware installation guide](#) for more information.

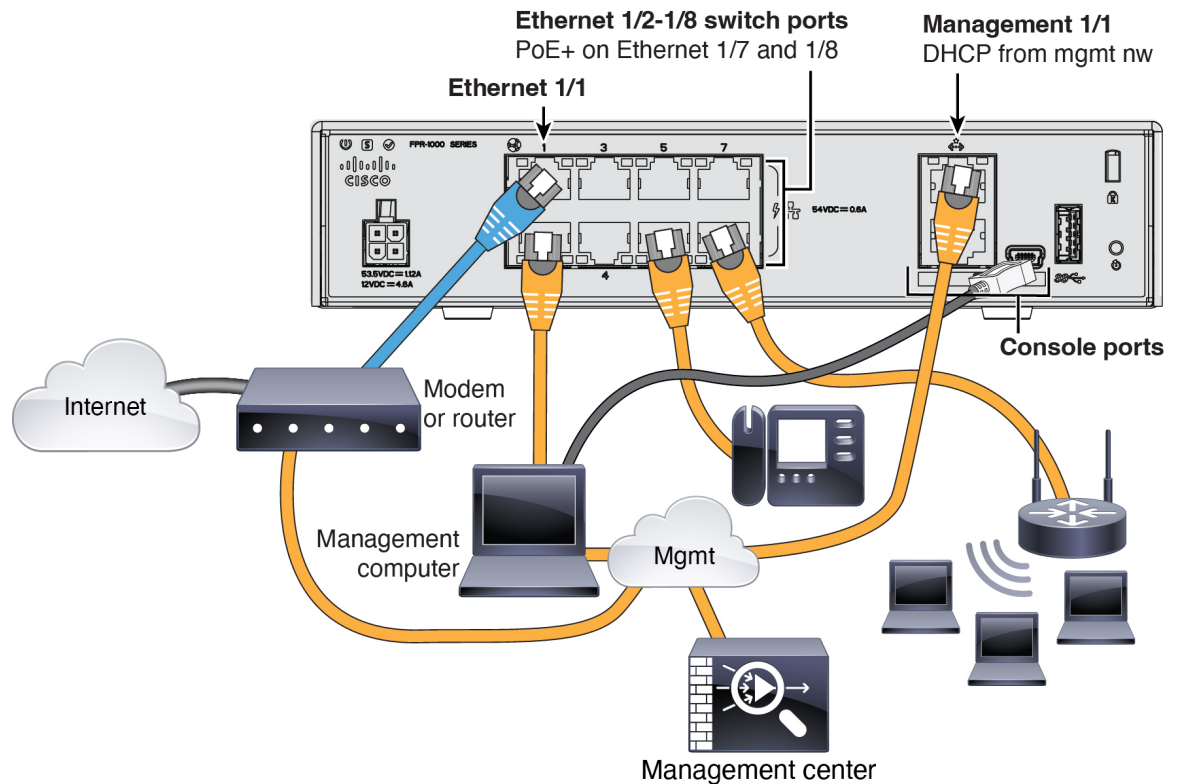

## Perform Initial Configuration

Perform initial configuration of the firewall using the Secure Firewall device manager or using the CLI.

### Initial Configuration: Device Manager

Using this method, after you register the firewall, the following interfaces will be preconfigured in addition to the Management interface:

- Ethernet 1/1—**outside**, IP address from DHCP, IPv6 autoconfiguration
- VLAN1— **inside**, 192.168.95.1/24
- Default route—Obtained through DHCP on the outside interface
- Additional interfaces—Any interface configuration from the device manager is preserved.

Other settings, such as the DHCP server on inside, access control policy, or security zones, are not preserved.


#### Procedure

- Step 1** Connect your computer to the inside interface (Ethernet 1/2 through 1/8).
- Step 2** Log into the device manager.

- Go to <https://192.168.95.1>.
- Log in with the username **admin** and the default password **Admin123**.
- You are prompted to read and accept the General Terms and change the admin password.

**Step 3**

Use the setup wizard.

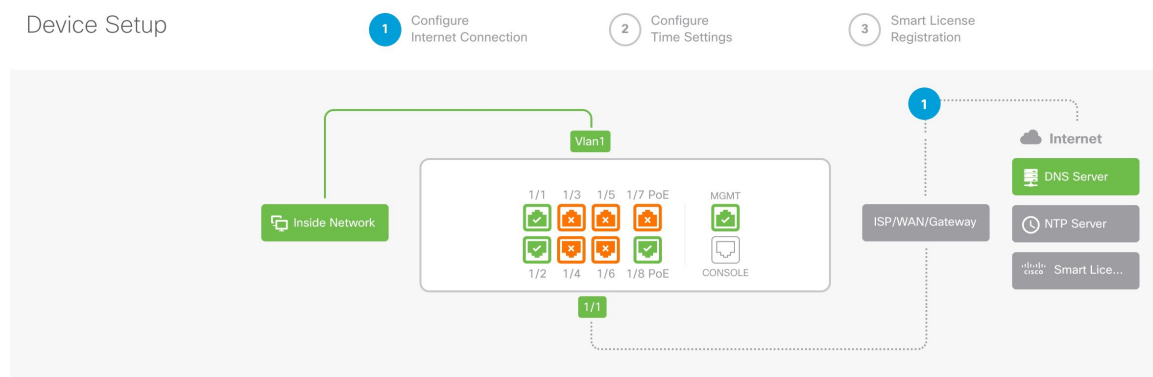**Figure 8: Device Setup****Note**

The exact port configuration depends on your model.

- Configure the outside and management interfaces.

**Figure 9: Connect firewall to internet**

### Connect firewall to Internet

The initial access control policy will enforce the following actions.  
You can edit the policy after setup.

|                                                                                                                                                                    |                                                                                                              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <p>Rule 1<br/><b>Trust Outbound Traffic</b></p> <p>This rule allows traffic to go from inside to outside, which is needed for the Smart License configuration.</p> | <p>Default Action<br/><b>Block all other traffic</b></p> <p>The default action blocks all other traffic.</p> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|

---

### Outside Interface Address

Connect Ethernet1/1 (Outside) to your ISP/WAN device, for example, your cable modem or router. Then, configure the addresses for the outside interface.

**Configure IPv4**

Using DHCP ▼

**Configure IPv6**

Using DHCP ▼

**NEXT**

Don't have internet connection?  
[Skip device setup](#) ⓘ

1. **Outside Interface Address**—Use a static IP address if you plan for high availability. You cannot configure PPPoE using the setup wizard; you can configure PPPoE after you complete the wizard.
2. **Management Interface**—Setting the Management interface IP address is not part of the setup wizard, but you can set the following options. If you need to use a static IP address, see [Step 4, on page 13](#).

**DNS Servers**—The DNS server for the system's management address. The default is the OpenDNS public DNS servers.

### Firewall Hostname

- b) Configure the **Time Setting (NTP)** and click **Next**.

**Figure 10: Time Setting (NTP)**

### Time Setting (NTP)

System Time: 11:56:20AM October 03 2024 -06:00

Time Zone for Scheduling Tasks

(UTC+00:00) UTC

NTP Time Server

Default NTP Servers

Server Name

0.sourcefire.pool.ntp.org

1.sourcefire.pool.ntp.org

2.sourcefire.pool.ntp.org

**NEXT**

- c) Select **Start 90 day evaluation period without registration**.

### Register with Cisco Smart Software Manager

Register with Cisco Smart Software Manager to use the full functionality of this device and to apply subscription licenses.

[What is smart license? ↗](#)


☐ **Continue with evaluation period: Start 90-day evaluation period without registration**  
**Recommended if device will be cloud managed.** [Learn More ↗](#)

Please make sure you register with Cisco before the evaluation period ends.  
 Otherwise you will not be able to make any changes to the device configuration.

*Do not register the threat defense with the Smart Software Manager; all licensing is performed on the management centerCDO.*

d) Click **Finish**.

**Figure 11: What's Next**

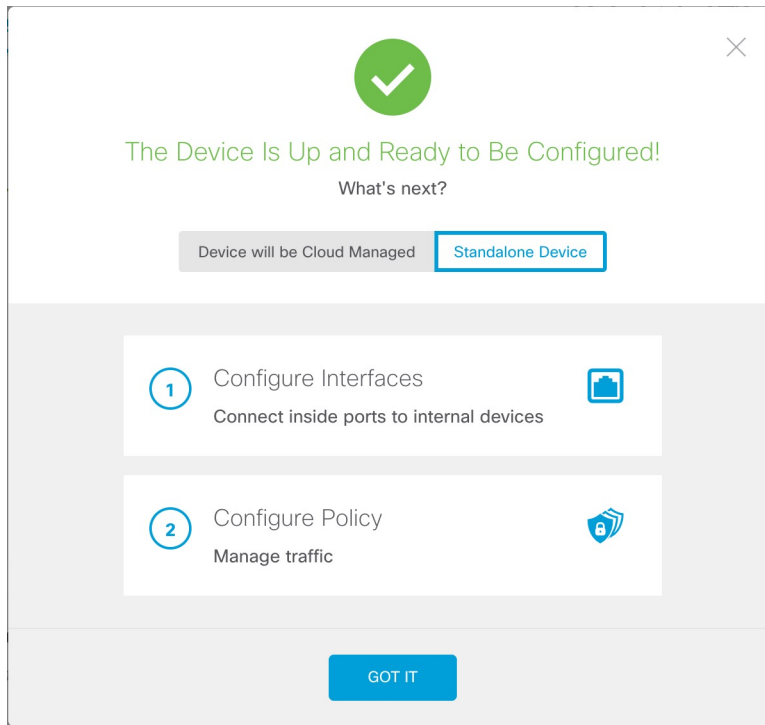

e) Choose **Standalone Device**, and then **Got It**.

**Step 4** (Optional) Configure the Management interface with a static IP address. See the Management interface on **Device > Interfaces**.

**Step 5** If you want to configure additional interfaces, choose **Device**, and then click the link in the **Interfaces** summary.

**Step 6** Register with the management centerCDO by choosing **Device > System Settings > Central Management** and clicking **Proceed**

Configure the **Management Center/SCC/Details**.


**Note**

Older versions may show "CDO" instead of "SCC."

**Figure 12: Management Center/SCC Details**

## Management Center/SCC Details

Do you know the Management Center/SCC hostname or IP address?

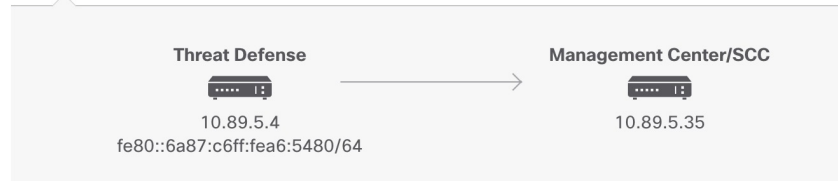☒ Yes ☐ No

Management Center/SCC Hostname or IP Address

10.89.5.35

Management Center/SCC Registration Key

....

NAT ID

Required when the management center/SCC hostname or IP address is not provided. We recommend always setting the NAT ID even when you specify the management center/SCC hostname or IP address.

11204

## Connectivity Configuration

Threat Defense Hostname

1120-4

DNS Server Group

CustomDNSServerGroup

Management Center/SCC Access Interface

management (Management1/1)

Type: Static | IP Address: 10.89.5.4 / 255.255.255.192

[Edit](#)

CANCEL

CONNECT

- For **Do you know the Management Center/SCC Hostname or IP address**, click **Yes** if you can reach the management center using an IP address or hostname or **No** if the management center is behind NAT or does not have a public IP address or hostname.
- If you chose **Yes**, enter the **Management Center/SCC Hostname/IP Address**.
- Specify the **Management Center/SCC Registration Key**.

This key is a one-time registration key of your choice that you will also specify on the management center when you register the firewall. The registration key must not exceed 37 characters. Valid characters include alphanumerical



characters (A–Z, a–z, 0–9) and the hyphen (-). This ID can be used for multiple firewalls registering to the management center.

d) Specify a **NAT ID**.

This ID is a unique, one-time string of your choice that you will also specify on the management center. We recommend that you specify the NAT ID even if you know the IP addresses of both devices. The NAT ID must not exceed 37 characters. Valid characters include alphanumerical characters (A–Z, a–z, 0–9) and the hyphen (-). This ID *cannot* be used for any other firewalls registering to the management center. The NAT ID is used in combination with the IP address to verify that the connection is coming from the correct device; only after authentication of the IP address/NAT ID will the registration key be checked.

**Step 7** Configure the **Connectivity Configuration**.

- a) Specify the **Threat Defense Hostname**.
- b) Specify the **DNS Server Group**.


Although you already set this: Choose an existing group, or create a new one. The default DNS group is called **CiscoUmbrellaDNSServerGroup**, which includes the OpenDNS servers.

- c) For the **Management Center/SCC Access Interface**, click **Management Interface**.

**Step 8** Click **Connect**.

The **Registration Status** dialog box shows the current status of the management centerCDO registration.

*Figure 13: Successful Connection*

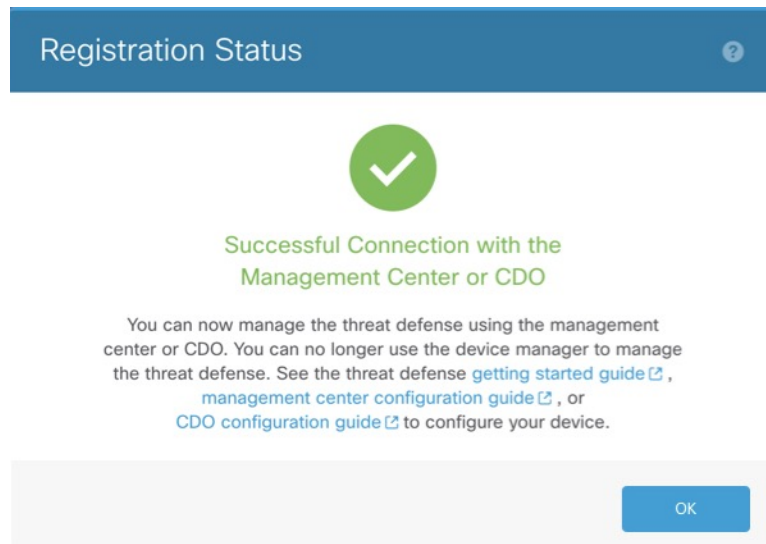

- Step 9** After the **Saving Management Center/SCC Registration Settings** step on the status screen, go to the management centerCDO and add the firewall. See [Register the Firewall with the Management Center, on page 17](#).

## Initial Configuration: CLI

Set the dedicated Management IP address, gateway, and other basic networking settings using the CLI setup script.

## Procedure

**Step 1** Connect to the console port and access the threat defense CLI. See [Access the Threat Defense CLI, on page 3](#).

**Step 2** Complete the CLI setup script for the Management interface settings.

### Note

You cannot repeat the CLI setup script unless you clear the configuration, for example, by reimaging. However, all of these settings can be changed later at the CLI using **configure network** commands. See [Cisco Secure Firewall Threat Defense Command Reference](#).

```
You must accept the EULA to continue.
Press <ENTER> to display the EULA:
Cisco General Terms
[...]
```

```
Please enter 'YES' or press <ENTER> to AGREE to the EULA:
```

```
System initialization in progress. Please stand by.
You must configure the network to continue.
Configure at least one of IPv4 or IPv6 unless managing via data interfaces.
Do you want to configure IPv4? (y/n) [y]:
Do you want to configure IPv6? (y/n) [y]: n
```

**Guidance:** Enter **y** for at least one of these types of addresses.

```
Configure IPv4 via DHCP or manually? (dhcp/manual) [manual]:
```

```
Enter an IPv4 address for the management interface [192.168.45.61]: 10.89.5.17
```

```
Enter an IPv4 netmask for the management interface [255.255.255.0]: 255.255.255.192
```

```
Enter the IPv4 default gateway for the management interface [data-interfaces]: 10.10.10.1
```

```
Enter a fully qualified hostname for this system [firepower]: 1010-3
```

```
Enter a comma-separated list of DNS servers or 'none' [208.67.222.222,208.67.220.220,2620:119:35::35]:
```

```
Enter a comma-separated list of search domains or 'none' []: cisco.com
```

```
If your networking information has changed, you will need to reconnect.
```

```
Disabling IPv6 configuration: management0
```

```
Setting DNS servers: 208.67.222.222,208.67.220.220,2620:119:35::35
```

```
Setting DNS domains:cisco.com
```

```
Setting hostname as 1010-3
```

```
Setting static IPv4: 10.89.5.17 netmask: 255.255.255.192 gateway: data on management0
```

```
Updating routing tables, please wait...
```

```
All configurations applied to the system. Took 3 Seconds.
```

```
Saving a copy of running network configuration to local disk.
```

```
For HTTP Proxy configuration, run 'configure network http-proxy'
```

```
Manage the device locally? (yes/no) [yes]: no
```

**Guidance:** Enter **no** to use the management center.

```
Setting hostname as 1010-3
```

```
Setting static IPv4: 10.89.5.17 netmask: 255.255.255.192 gateway: data on management0
```

```
Updating routing tables, please wait...
```

```
All configurations applied to the system. Took 3 Seconds.
```

```
Saving a copy of running network configuration to local disk.
```

```
For HTTP Proxy configuration, run 'configure network http-proxy'
```

```
Configuring firewall mode ...
```

```
Device is in OffBox mode - disabling/removing port 443 from iptables.
Update policy deployment information
- add device configuration
- add network discovery
- add system policy
```

You can register the sensor to a Firepower Management Center and use the Firepower Management Center to manage it. Note that registering the sensor to a Firepower Management Center disables on-sensor Firepower Services management capabilities.

When registering the sensor to a Firepower Management Center, a unique alphanumeric registration key is always required. In most cases, to register a sensor to a Firepower Management Center, you must provide the hostname or the IP address along with the registration key.

```
'configure manager add [hostname | ip address] [registration key]'
```

However, if the sensor and the Firepower Management Center are separated by a NAT device, you must enter a unique NAT ID, along with the unique registration key.

```
'configure manager add DONTRESOLVE [registration key] [NAT ID]'
```

Later, using the web interface on the Firepower Management Center, you must use the same registration key and, if necessary, the same NAT ID when you add this sensor to the Firepower Management Center.

### Step 3 Identify the management center.

```
configure manager add {hostname | IPv4_address | IPv6_address | DONTRESOLVE} reg_key nat_id
```

- {hostname | IPv4\_address | IPv6\_address | **DONTRESOLVE**}—Specifies either the FQDN or IP address of the management center. If the management center is not directly addressable, use **DONTRESOLVE**, in which case the firewall must have a reachable IP address or hostname.
- reg\_key—Specifies a one-time registration key of your choice that you will also specify on the management center when you register the threat defense. The registration key must not exceed 37 characters. Valid characters include alphanumeric characters (A–Z, a–z, 0–9) and the hyphen (-).
- nat\_id—Specifies a unique, one-time string of your choice that you will also specify on the management center. The NAT ID must not exceed 37 characters. Valid characters include alphanumeric characters (A–Z, a–z, 0–9) and the hyphen (-). This ID cannot be used for any other devices registering to the management center.

#### Example:

```
> configure manager add fmc-1.example.com regk3y78 natid56
Manager successfully configured.
```

## Register the Firewall with the Management Center

Register the firewall to the management center.

## Procedure

- Step 1** Log into the management center.
- Enter the following URL.  
**`https://fmc_ip_address`**
  - Enter your username and password.
  - Click **Log In**.
- Step 2** Choose **Devices > Device Management**.
- Step 3** From the **Add** drop-down menu, choose **Device (Wizard)**.
- Step 4** Click **Registration Key**, and then click **Next**.

*Figure 14: Device Registration Method*

The screenshot displays the 'Add Device (Wizard)' interface. On the left, a vertical progress bar shows four steps: 1. Device registration method (highlighted with a blue circle), 2. Management Center Role, 3. Initial device configuration, and 4. Device details. The main content area is divided into two panels. The left panel, titled 'Registration Key', contains the text 'Register device using registration key'. The right panel, titled 'Serial Number', contains the text 'Cisco Security Cloud integration is not enabled. To enable Cisco Security Cloud integration, go to Integration > Cisco Security Cloud.' Below the panels is a blue 'Next' button. At the bottom right, there are 'Cancel' and 'Add Device' buttons.

- Step 5** In a multi-domain environment, choose the **Domain** from the drop-down list and click **Next**.

Figure 15: Domain

**Add Device(s)**

1 Device registration method

Device registration method **Registration Key**

2 Domain

Domain \*

Global/Pubs

3 Initial device configuration

4 Device details

Previous Next

Cancel Add Device

**Step 6** Click **Primary manager**.

Figure 16: Management Center Role

**Add Device (Wizard)**

1 Device registration method

Device registration method **Registration Key**

2 Management Center Role

☒ Primary manager ☐ Analytics-only manager (with Security Cloud Control)

You are using this management center for all policy configuration, logging, analytics, and upgrading.

3 Initial device configuration

4 Device details

Previous Next

Cancel Add Device

**Step 7** For the **Initial Device Configuration**, click **Basic**.

Figure 17: Initial Device Configuration

### Add Device (Wizard)

- Device registration method  
Device registration method **Registration Key**
- Management Center Role  
Management **Primary manager**
- Initial device configuration**

**Choose initial device configuration method**

☒ Basic ☐ Device template

Apply basic configuration, including the access control policy.

**Access Control Policy \***

wfx\_automatio...

**Smart licensing**

Performance tier (threat defense virtual only)

FTDv50 - 10 Gbps

☒ Carrier

☒ Malware Defense

☒ IPS

☒ URL Filtering

Ensure that your smart licensing account has the required licenses.

☒ Transfer packet data as well as event data to the management center for inspection.
- Device details

Previous **Next**

Cancel **Add Device**

- Choose an initial **Access Control Policy** to deploy to the device at registration, or create a new policy. Unless you already have a customized policy you know you need to use, choose **Create new policy**, and choose **Block all traffic**. You can change this later to allow traffic; see [Configure an Access Control Rule, on page 35](#).
- Choose **Smart Licensing** licenses to apply to the device.  
You can also apply licenses after you add the device, from the **System > Licenses > Smart Licenses** page, including the Secure Client remote access VPN license.
- Click **Next**.

**Step 8** Specify the **Device details**.

Figure 18: Device Details

**Add Device (Wizard)**

1 Device registration method  
Device registration method **Registration Key**

2 Management Center Role  
Management **Primary manager**

3 Initial device configuration  
Access control policy **wfx\_automationPolicy123**

4 Device details

**Host**  
10.89.5.41

**Display name \***  
3110-1

**Registration key \***  
\*\*\*\*

**Device group**  
Select...

**Unique NAT ID**  
31101

Note: Either Host or NAT ID is required.

Previous

Cancel Add Device

- For the **Host**, enter the IP address or the hostname of the device you want to add. Leave this field blank if you don't know the device IP address (for example, it's behind NAT).
- For the **Display name**, enter a name for the device as you want it to display in the management center. You cannot change this name later.
- For the **Registration Key**, enter the same registration key from your initial configuration.
- (Optional) Add the device to a **Device group**
- For the **Unique NAT ID**, enter the same ID from your initial configuration.
- Check **Transfer Packets** so that for each intrusion event, the device transfers the packet to the management center for inspection.

For each intrusion event, the device sends event information and the packet that triggered the event to the management center for inspection. If you disable it, only event information will be sent to the management center; the packet will not be sent.

### Step 9 Click **Add Device**.

It may take up to two minutes for the management center to verify the device's heartbeat and establish communication. If the registration succeeds, the device is added to the list. If it fails, you will see an error message. If the device fails to register, check the following items:

- Ping—Access the device CLI, and ping the management center IP address using the following command:  
**ping system ip\_address**

If the ping is not successful, check your network settings using the **show network** command. If you need to change the device IP address, use the **configure network {ipv4 | ipv6} manual** command.

- Registration key, NAT ID, and management center IP address—Make sure you are using the same registration key, and if used, NAT ID, on both devices. You can set the registration key and NAT ID on the device using the **configure manager add** command.

For more troubleshooting information, see <https://cisco.com/go/fmc-reg-error>.

---





## CHAPTER 3

# Configure a Basic Policy

Configure a basic security policy with the following settings:

- Inside and outside interfaces—Assign a static IP address to the inside interface, and use DHCP for the outside interface.
- DHCP server—Use a DHCP server on the inside interface for clients.
- Default route—Add a default route through the outside interface.
- NAT—Use interface PAT on the outside interface.
- Access control—Allow traffic from inside to outside.

You can also customize your security policy to include more advanced inspections.

- [Configure Interfaces, on page 23](#)
- [Configure the DHCP Server, on page 28](#)
- [Add the Default Route, on page 30](#)
- [Configure NAT, on page 32](#)
- [Configure an Access Control Rule, on page 35](#)
- [Deploy the Configuration, on page 37](#)

## Configure Interfaces

When you use the device manager for initial setup instead of using the CLI, the following interfaces are preconfigured:

- Ethernet 1/1—**outside**, IP address from DHCP, IPv6 autoconfiguration
- VLAN1—**inside**, 192.168.95.1/24
- Default route—Obtained through DHCP on the outside interface

If you performed additional interface-specific configuration within device manager before registering with the management center, then that configuration is preserved.

If you used the CLI for initial setup, there is no preconfiguration of your device.

In both cases, you need to perform additional interface configuration after you register the device. For CLI initial setup, you must add the VLAN1 interface for the inside switch ports. Additional configuration includes

converting switch ports to firewall interfaces as desired, assigning interfaces to security zones, and changing IP addresses.

The following example configures a routed-mode inside interface (VLAN1) with a static address and a routed-mode outside interface using DHCP (Ethernet1/1). It also adds a DMZ interface for an internal web server.

## Procedure

**Step 1** Choose **Devices > Device Management**, and click **Edit** (✎) for the device.

**Step 2** Click **Interfaces**.

**Figure 19: Interfaces**

| Interface     | Logical Name | Type     | Security Zones | MAC Address (Active/Standby) | IP Address                    | Path Monitor | Port Mode | VLAN Usage | SwitchPo | Virtual Router |
|---------------|--------------|----------|----------------|------------------------------|-------------------------------|--------------|-----------|------------|----------|----------------|
| Management1/1 | management   | Physical |                |                              |                               | Disabled     |           |            | Global   |                |
| Ethernet1/1   | outside      | Physical | outside        |                              | 10.89.5.29/255.255.255.192... | Disabled     |           |            | Global   |                |
| Ethernet1/2   |              | Physical |                |                              |                               | Disabled     | Access    | 1          |          |                |
| Ethernet1/3   |              | Physical |                |                              |                               | Disabled     | Access    | 1          |          |                |
| Ethernet1/4   |              | Physical |                |                              |                               | Disabled     | Access    | 1          |          |                |

**Step 3** If you used the CLI for initial setup, enable the switch ports.

a) Click **Edit** (✎) for the switch port.

**Figure 20: Enable Switch Port**

### Edit Physical Interface

**General** Hardware Configuration

Interface ID:  
Ethernet1/2

☒ Enabled

Description:

Port Mode:  
Access

VLAN ID:  
1

(1 - 4096)

Protected:  
☐

b) Enable the interface by checking the **Enabled** check box.

- c) (Optional) Change the VLAN ID; the default is 1. You will next add a VLAN interface to match this ID.
- d) Click **OK**.

**Step 4**

Add (or edit) the **inside** VLAN interface.

- a) Click **Add Interfaces > VLAN Interface**, or if this interface already exists, click **Edit** (✎) for the interface.

*Figure 21: Add VLAN Interface*

**Add VLAN Interface** ⓘ

**General** IPv4 IPv6 Advanced

Name:

☒ Enabled

Description:

Mode:

Security Zone:

MTU:   
(64 - 9198)

Priority:   
(0 - 65535)

VLAN ID \*:   
(1 - 4070)

Disable Forwarding on Interface Vlan:

| Associated Interface  | Port Mo... |
|-----------------------|------------|
| No records to display |            |

- b) From the **Security Zone** drop-down list, choose an existing inside security zone or add a new one by clicking **New**. For example, add a zone called **inside\_zone**. You apply your security policy based on zones or groups. If VLAN1 was preconfigured, the rest of these fields are optional.
- c) Enter a **Name** up to 48 characters in length. For example, name the interface **inside**.
- d) Check the **Enabled** check box.
- e) Leave the **Mode** set to **None**.

- f) Set the **VLAN ID** to **1**.

By default, all of the switchports are set to VLAN 1; if you choose a different VLAN ID here, you need to also edit each switchport to be on the new VLAN ID.

You cannot change the VLAN ID after you save the interface; the VLAN ID is both the VLAN tag used, and the interface ID in your configuration.

- g) Click the **IPv4** and/or **IPv6** tab.

- **IPv4**—Choose **Use Static IP** from the drop-down list, and enter an IP address and subnet mask in slash notation.

For example, enter **192.168.1.56/24**

**Figure 22: Set Inside IP Address**

**Add VLAN Interface**

General **IPv4** IPv6 Advanced

IP Type:

IP Address:

eg. 192.0.2.1/255.255.255.128 or 192.0.2.1/25

- **IPv6**—Check the **Autoconfiguration** check box for stateless autoconfiguration.

- h) Click **OK**.

**Step 5** Click **Edit** (✎) for Ethernet1/1 that you want to use for **outside**.

The **General** page appears.

Figure 23: General

### Edit Physical Interface

**General** IPv4 IPv6 Path Monitoring Harc

Name:

☒ Enabled

☐ Management Only

Description:

Mode:

Security Zone:

Interface ID:

MTU:   
(64 - 9198)

Priority:   
(0 - 65535)

Propagate Security Group Tag: ☐

NVE Only: ☐

- From the **Security Zone** drop-down list, choose an existing outside security zone or add a new one by clicking **New**. For example, add a zone called **outside\_zone**.  
If VLAN1 was pre-configured, the rest of these fields are optional.
- Enter a **Name** up to 48 characters in length.  
For example, name the interface **outside**.
- Check the **Enabled** check box.
- Leave the **Mode** set to **None**.
- Click the **IPv4** and/or **IPv6** tab.
  - IPv4**—Choose **Use DHCP**, and configure the following optional parameters:
    - Obtain default route using DHCP**—Obtains the default route from the DHCP server.
    - DHCP route metric**—Assigns an administrative distance to the learned route, between 1 and 255. The default administrative distance for the learned routes is 1.

Figure 24: Set Outside IP Address

### Edit Physical Interface

General
**IPv4**
IPv6
Path Monitoring

IP Type:

Obtain default route using DHCP: ☒

DHCP route metric:

(1 - 255)

- **IPv6**—Check the **Autoconfiguration** check box for stateless autoconfiguration.

f) Click **OK**.

**Step 6** Configure a DMZ interface to host a web server, for example.

- Disable switch-port mode for the switch port you want to use for the DMZ by clicking the slider in the **SwitchPort** column so it shows as disabled (☐).
- Click **Edit** (✎) for the interface.
- From the **Security Zone** drop-down list, choose an existing DMZ security zone or add a new one by clicking **New**.  
For example, add a zone called **dmz\_zone**.
- Enter a **Name** up to 48 characters in length.  
For example, name the interface **dmz**.
- Check the **Enabled** check box.
- Leave the **Mode** set to **None**.
- Click the **IPv4** and/or **IPv6** tab and configure the IP address as desired.
- Click **OK**.

**Step 7** Click **Save**.

## Configure the DHCP Server

Enable the DHCP server if you want clients to use DHCP to obtain IP addresses from the firewall.

### Procedure

**Step 1** Choose **Devices > Device Management**, and click **Edit** (✎) for the device.

**Step 2** Choose **DHCP > DHCP Server**.

Figure 25: DHCP Server

**Step 3** In the **Server** area, click **Add** and configure the following options.

Figure 26: Add Server

- **Interface**—Choose the interface name from the drop-down list.
- **Address Pool**—Set the range of IP addresses. The IP addresses must be on the same subnet as the selected interface and cannot include the IP address of the interface itself.
- **Enable DHCP Server**—Enable the DHCP server on the selected interface.

**Step 4** Click **OK**.

**Step 5** Click **Save**.

## Add the Default Route


The default route normally points to the upstream router reachable from the outside interface. If you obtained the outside address from DHCP, your device might have already received a default route. If you need to manually add the route, complete this procedure.

### Procedure

**Step 1** Choose **Devices > Device Management**, and click **Edit** (✎) for the device.

**Step 2** Choose **Routing > Static Route**.

**Figure 27: Static Route**

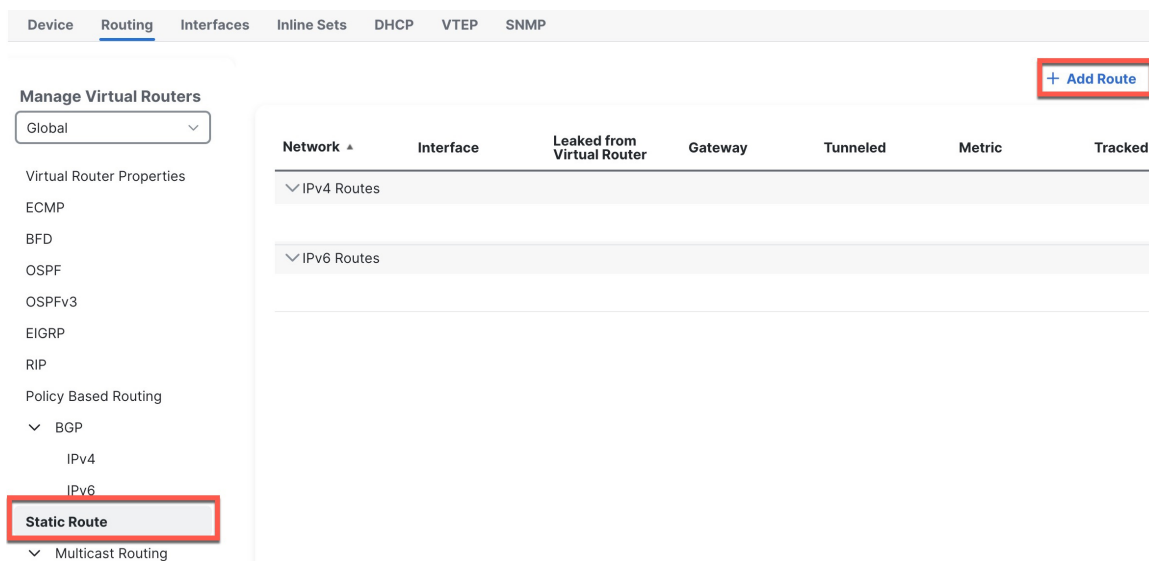

If you received a default route from the DHCP server, it will show in this table.

**Step 3** Click **Add Route**, and set the following options.



Figure 28: Add Static Route Configuration

**Add Static Route Configuration**

Type: ☒ IPv4 ☐ IPv6

Interface\*  
outside

(Interface starting with this icon signifies it is available for route leak)

Available Network +

Search

any-ipv4  
gateway  
IPv4-Benchmark-Tests  
IPv4-Link-Local  
IPv4-Multicast  
IPv4-Private-10.0.0.0-8

Add

Selected Network

any-ipv4

Gateway\*  
gateway

Metric:  
1  
(1 - 254)

Tunneled: ☐ (Used only for default Route)

Route Tracking:  
 +

Cancel OK

- **Type**—Click the **IPv4** or **IPv6** radio button depending on the type of static route that you are adding.
- **Interface**—Choose the egress interface; typically the outside interface.
- **Available Network**—Choose **any-ipv4** for an IPv4 default route, or **any-ipv6** for an IPv6 default route, and click **Add** to move it to the **Selected Network** list.
- **Gateway** or **IPv6 Gateway**—Enter or choose the gateway router that is the next hop for this route. You can provide an IP address or a Networks/Hosts object.

**Step 4** Click **OK**.

The route is added to the static route table.

**Step 5** Click **Save**.

# Configure NAT

This procedure creates a NAT rule for internal clients to convert the internal addresses to a port on the outside interface IP address. This type of NAT rule is called *interface Port Address Translation (PAT)*.

## Procedure

**Step 1** Choose **Devices > NAT**, and click **New Policy**.

**Step 2** Name the policy, select the devices that you want to use the policy, and click **Save**.

**Figure 29: New Policy**

**New Policy** ⓘ

**Name:**  
FTD\_policy

**Description:**

**Targeted Devices**  
Select devices to which you want to apply this policy.

**Available Devices and Templates**  
Search by name or value

|               |
|---------------|
| 192.168.0.124 |
| 192.168.0.155 |

**Selected Devices and Templates**

|               |   |
|---------------|---|
| 192.168.0.124 | ✕ |
| 192.168.0.155 | ✕ |

Add to Policy

Cancel Save

The policy is added the management center. You still have to add rules to the policy.

Figure 30: NAT Policy

The screenshot shows the 'FTD\_Policy' configuration page. At the top right are buttons for 'Show Warnings', 'Save', and 'Cancel'. Below the title bar, there's a 'Rules' tab and links for 'NAT Exemptions' and 'Policy Assignments (1)'. A 'Filter by Device' button and a 'Filter Rules' search bar are present. The 'Add Rule' button is highlighted with a red box. Below these elements is a table with columns for '#', 'Direction', 'Type', 'Source Interface Objects', 'Destination Interface Objects', 'Original Packet' (with sub-columns: Original Sources, Original Destinations, Original Services), 'Translated Packet' (with sub-columns: Translated Sources, Translated Destinations, Translated Services), and 'Options'. The table is divided into sections: 'NAT Rules Before', 'Auto NAT Rules', and 'NAT Rules After'.

**Step 3** Click **Add Rule**.

**Step 4** Configure the basic rule options:

Figure 31: Basic Rule Options

The 'Add NAT Rule' dialog box is shown. It has two tabs: 'Interface Objects' and 'Translation'. The 'Translation' tab is active. Under 'NAT Rule:', a dropdown menu shows 'Auto NAT Rule'. Under 'Type:', a dropdown menu shows 'Dynamic'. There is a checked checkbox for 'Enable'.

- **NAT Rule**—Choose **Auto NAT Rule**.
- **Type**—Choose **Dynamic**.

**Step 5** On the **Interface Objects** page, add the outside zone from the **Available Interface Objects** area to the **Destination Interface Objects** area.

Figure 32: Interface Objects

The 'Interface Objects' configuration page is shown. It has four tabs: 'Interface Objects', 'Translation', 'PAT Pool', and 'Advanced'. The 'Interface Objects' tab is active. It shows 'Available Interface Objects' on the left with a search bar and a list containing 'inside' and 'outside'. The 'outside' object is highlighted with a red circle labeled '1'. There are 'Add to Source' and 'Add to Destination' buttons. The 'Add to Destination' button is highlighted with a red circle labeled '2'. On the right, there are two boxes: 'Source Interface Objects' (0) and 'Destination Interface Objects' (1). The 'outside' object is being added to the 'Destination Interface Objects' box, indicated by a red circle labeled '3'.

**Step 6** On the **Translation** page, configure the following options:

Figure 33: Translation

| Interface Objects                                            | Translation | PAT Pool                                                                    | Advanced |
|--------------------------------------------------------------|-------------|-----------------------------------------------------------------------------|----------|
| Original Packet                                              |             | Translated Packet                                                           |          |
| Original Source:*<br><input type="text" value="all-ipv4"/> + |             | Translated Source:<br><input type="text" value="Destination Interface IP"/> |          |
| Original Port:<br><input type="text" value="TCP"/>           |             | <input type="text"/>                                                        |          |
| <input type="text"/>                                         |             | Translated Port:<br><input type="text"/>                                    |          |

The values selected for Destination Interface Objects in 'Interface Objects' tab will be used

- **Original Source**—Click **Add (+)** to add a network object for all IPv4 traffic (**0.0.0.0/0**).

Figure 34: New Network Object

### New Network Object

Name

Description

Network  
☐ Host   ☐ Range   ☒ Network   ☐ FQDN

☐ Allow Overrides

Cancel Save

**Note**

You cannot use the system-defined **any-ipv4** object, because Auto NAT rules add NAT as part of the object definition, and you cannot edit system-defined objects.

- **Translated Source**—Choose **Destination Interface IP**.

**Step 7** Click **Save** to add the rule.

The rule is saved to the **Rules** table.

**Step 8** Click **Save** on the **NAT** page to save your changes.

# Configure an Access Control Rule

If you created a basic **Block all traffic** access control policy when you registered the device, then you need to add rules to the policy to allow traffic through the device. The access control policy can include multiple rules that are evaluated in order.

This procedure creates an access control rule to allow all traffic from the inside zone to the outside zone.

## Procedure

**Step 1** Choose **Policies > Access Control heading > Access Control**, and click **Edit** (✎) for the access control policy assigned to the device.

**Step 2** Click **Add Rule**, and set the following parameters.

**Figure 35: Source Zone**

The screenshot shows the 'Add Rule' configuration page. The rule name is 'inside-to-outside'. The 'Action' is set to 'Allow'. The 'Intrusion Policy' is set to 'None'. The 'Zones' tab is selected, showing a list of zones: 'inside' (Routed Security Zone) and 'outside' (Routed Security Zone). The 'inside' zone is selected. The 'Add Source Zone' button is highlighted.

1. Name this rule, for example, **inside-to-outside**.

2. Select the inside zone from **Zones**

3. Click **Add Source Zone**.

**Figure 36: Destination Zone**

The screenshot shows the 'Add Rule' configuration page. The rule name is 'inside-to-outside'. The 'Action' is set to 'Allow'. The 'Intrusion Policy' is set to 'None'. The 'Zones' tab is selected, showing a list of zones: 'inside' (Routed Security Zone) and 'outside' (Routed Security Zone). The 'outside' zone is selected. The 'Add Destination Zone' button is highlighted.

4. Select the outside zone from **Zones**.

5. Click **Add Destination Zone**.

Leave the other settings as is.

**Step 3** (Optional) Customize associated policies by clicking on the policy type in the packet flow diagram.

Prefilter, Decryption, Security Intelligence, and Identity policies are applied before an access control rule. Customizing these policies is not required, but after you know your network's needs, they let you improve network performance by either fastpathing trusted traffic (bypassing processing) or blocking traffic so no further processing is required.

**Figure 37: Policies Applied Before Access Control**



- **Prefilter Rules**—The Default Prefilter Policy passes all traffic for the other rules to act on (analyzes). The only change to the default policy you can make is to **block** tunnel traffic. Otherwise, you can create a new prefilter policy to associate with the access control policy that can analyze (pass on), fastpath (bypass further checks) or block.

Prefiltering lets you improve performance by dealing with traffic before it gets any further, by either blocking or fastpathing. In a new policy, you can add *tunnel* rules and *prefilter* rules. A tunnel rule lets you fastpath, block, or rezone plaintext (non-encrypted), passthrough tunnels. A prefilter rule lets you fastpath or block non-tunneled traffic identified by IP address, port, and protocol.

For example, if you know you want to block all FTP traffic on your network, but fastpath SSH traffic from an administrator, you can add a new prefilter policy.

- **Decryption**—Decryption is not applied by default. Decryption is a way to expose network traffic to deep inspection. In most cases, you don't want to decrypt traffic, and can only do so if it is legally allowed. For maximum network protection, a decryption policy might be a good idea for traffic going to critical servers or coming from untrusted network segments.
- **Security Intelligence**—(Requires the IPS license) Security Intelligence is enabled by default. Security Intelligence is another early defense against malicious activity applied before passing connections to the access control policy for further processing. Security Intelligence uses reputation intelligence to quickly block connections to or from IP addresses, URLs, and domain names provided by Talos, the threat intelligence organization at Cisco. You can add or delete additional IP addresses, URLs, or domains if desired.

**Note**


If you do not have the IPS license, this policy will not be deployed even though it shows in your access control policy as enabled.

- **Identity**—Identity is not applied by default. You can require a user to authenticate before allowing traffic to be processed by the access control policy.

**Step 4** (Optional) Add an Intrusion policy that is applied after the access control rule.

The Intrusion policy is a defined set of intrusion detection and prevention configurations that inspects traffic for security violations. The management center includes many system-provided policies you can enable as-is or that you can customize. This step enables a system-provided policy.

- Click the **Intrusion Policy** drop-down list.

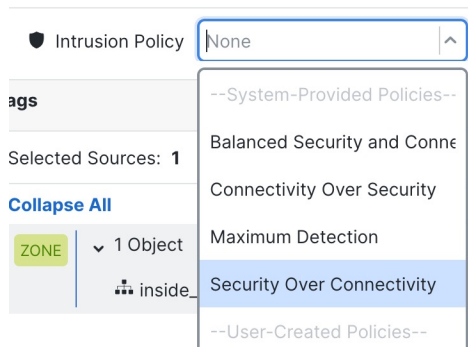
**Figure 38: System-Provided Intrusion Policies**

- b) Choose one of the system-provided policies from the list.

**Step 5**

(Optional) Add a File policy that is applied after the access control rule.

- a) Click the **File Policy** drop-down list and choose either an existing policy or add one by choosing the **Open File Policy List**.

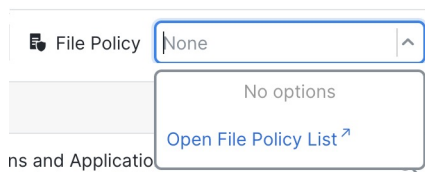**Figure 39: File Policy**

For a new policy, the **Policies > Malware & File** page opens in a separate tab.

- b) See the [Cisco Secure Firewall Device Manager Configuration Guide](#) for details on creating the policy.  
c) Return to the **Add Rule** page and select the newly created policy from the drop-down list.

**Step 6**

Click **Apply**.

The rule is added to the **Rules** table.

**Step 7**

Click **Save**.


## Deploy the Configuration

Deploy the configuration changes to the device; none of your changes are active on the device until you deploy them.

**Procedure****Step 1**


Click **Deploy** in the upper right.

Figure 40: Deploy




**Step 2** For a quick deployment, check specific devices and then click **Deploy**.

Figure 41: Deploy Selected

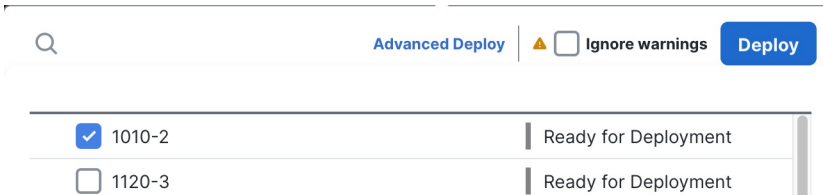

Or click **Deploy All** to deploy to all devices.


Figure 42: Deploy All

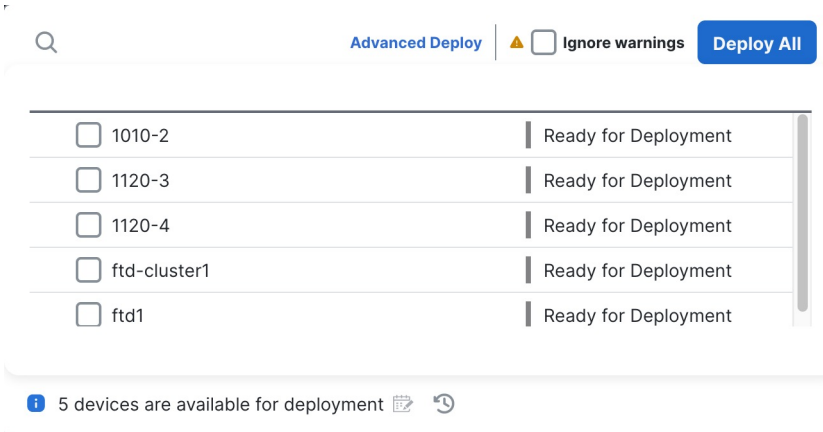

Otherwise, for additional deployment options, click **Advanced Deploy**.



Figure 43: Advanced Deployment

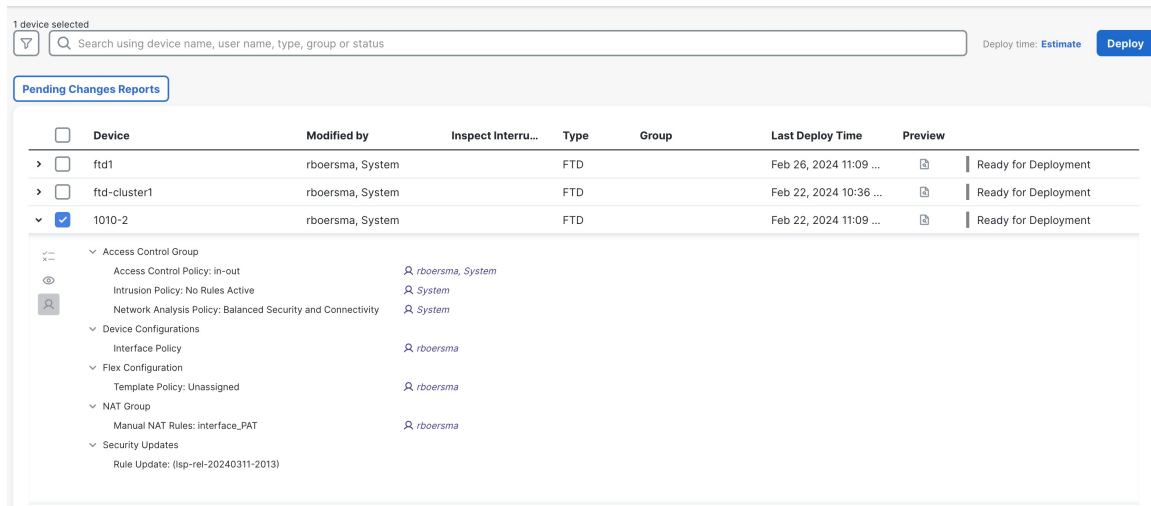**Step 3**

Ensure that the deployment succeeds. Click the icon to the right of the **Deploy** button in the menu bar to see status for deployments.

Figure 44: Deployment Status

