



## Campus Fabric

---

- [Information about Campus Fabric, page 1](#)
- [How to Configure Campus Fabric, page 4](#)
- [show Commands for Troubleshooting LISP Configuration, page 11](#)
- [Configuration Examples for LISP Configuration on Fabric Edge Node, page 12](#)
- [Data Plane Security in Campus Fabric, page 14](#)
- [Security Group Tags and Policy Enforcement in Campus Fabric, page 18](#)
- [Multicast Using Campus Fabric Overlay, page 18](#)
- [Feature History for Campus Fabric , page 23](#)

## Information about Campus Fabric

Campus Fabric, also referred to as Software Defined Access, provides the basic infrastructure for building virtual networks on policy-based segmentation constructs. It is based on the Locator ID Separator Protocol (LISP) overlay network built on top of an arbitrary underlay network.

Overlay networks can run across all the underlay network devices or a subnet of these devices. Multiple overlay networks can spread across the same underlay network to support multitenancy.

Cisco IOS XE Everest 16.6.1 supports Layer 2 and Layer 3 overlay networks.

Campus Fabric Overlay provisioning uses three components to enable flexible attachment of users and devices, and enhanced security through user-based and device-group based policies:

- Control Plane
- Data Plane
- Policy Plane

The Campus Fabric feature is supported on the Enterprise Services and IP Base software images.


## Benefits of Provisioning a Campus Fabric Network

- A hybrid Layer 2 and Layer 3 overlay offers the best of both these services.
- Provides end-to-end segmentation using LISP Virtualization technology wherein only the Fabric Edge and Border nodes have to be LISP aware. The rest of the components are just IP forwarders.
- Eliminates Spanning Tree Protocol (STP), improves link utilization, and brings in faster convergence and equal cost multipath (ECMP) load balancing.
- Fabric header supports Secure Group Tag (SGT) propagation, which helps in having a uniform policy model across the network. SGT-based policy constructs are subnet independent.
- Provides host mobility for both wired and wireless clients.
- Use of LISP helps decouple the host address and its location, simplifying the routing operations, and improving scalability and support.

## Understanding Fabric Domain Elements

Figure 1: Elements of a Fabric Domain displays the elements that make up the fabric domain.

**Figure 1: Elements of a Fabric Domain**

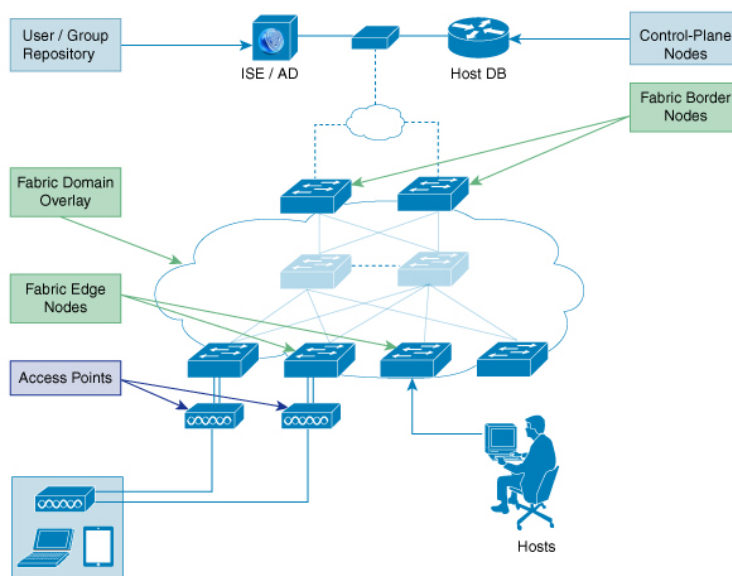

The following is a description of the fabric domain elements illustrated in the [Figure 1: Elements of a Fabric Domain](#).

- **Fabric Edge Devices**—Provide connectivity to users and devices that connect to the fabric domain. Fabric edge devices identify and authenticate end points, and register end-point ID information in the fabric host-tracking database. These devices encapsulate at ingress and decapsulate at egress, to forward traffic to and from the end points connected to the fabric domain.

- Fabric Control-Plane Devices—Provide overlay reachability information and end points-to-routing locator mapping, in the host-tracking database. A control-plane device receives registrations from fabric edge devices having local end points, and resolves requests from edge devices to locate remote end points. You can configure up to three control-plane devices-internally (a fabric border device) and externally (a designated control-plane device, such as Cisco CSR1000v), to allow redundancy in your network.
- Fabric Border Devices — Connect traditional Layer 3 networks or different fabric domains to the local domain, and translate reachability and policy information, such as virtual routing and forwarding (VRF) and SGT information, from one domain to another.
- Virtual Contexts—Provide virtualization at the device level, using VRF to create multiple instances of Layer 3 routing tables. Contexts or VRFs provide segmentation across IP addresses, allowing for overlapped address space and traffic separation. You can configure up to 32 contexts in the fabric domain.
- Host-Pools—Group end points that are present in the fabric domain into IP pools, and identify them with a VLAN ID and an IP subnet.

## Campus Fabric Configuration Guidelines and Limitations

- Configure no more than three control-plane devices in each fabric domain.
- Configure no more than two border devices in each fabric domain..
- Each fabric edge device supports up to 2000 end points.
- Each control-plane device supports up to 5000 fabric edge device registrations.
- Configure no more than 64 virtual contexts in each fabric domain.
- Layer 2 (IPv4 host) and Layer 3 (IPv6 Host) LISP overlay functionality is supported on Cisco IOS XE Everest 16.6.1 and later releases.
- On the edge device, Cisco TrustSec links are not supported on uplink interfaces connected to the underlay.
- Layer 3 source group tags cannot be applied to uplink interfaces connected to the underlay.
- Cisco IOS XE 16.6.1 does not support Dense Mode or Bidirectional Protocol Independent Multicast (PIM). Only PIM Sparse Mode (SM) and PIM Source Specific Multicast (SSM) modes are supported.
- Multicast does not support group-to-rendezvous point (RP) mapping distribution mechanisms, Auto-RP, and Bootstrap Router (BSR). Only Static RP configuration is supported.
- Multicast RP redundancy is not supported in the fabric domain.



### Important

---

Virtual Extensible LAN (VXLAN) and LISP must be configured as part of campus fabric network. They are not supported as standalone features.

---

## Campus Fabric: Scale and Performance

- The maximum number of Layer 2 EID VLANs that is possible is 2048.

- The maximum number of local and remote hosts on each fabric edge is 32000.
- The maximum number of access points that can be connected to the fabric is 100.
- The maximum number of wireless clients that a campus fabric can onboard is 2000.

## CLI Changes From Cisco IOS XE Everest 16.6.1

Starting Cisco IOS XE Everest 16.6.1, the CLI model for L2 LISP configuration is redesigned to better reflect the configuration flow and to configure LISP behavior that is specific to different functionalities such as support for Layer 2 MAC address as EID prefixes, and so on.

The following is a list of CLI changes:

- The new CLI provides two levels of inheritance in two paths:
  - **router lisp > service-** called the global service or top service mode
  - **router lisp > instance-id > service-** called the instance-service mode
- The end point identifier table, **eid-table**, is decoupled from the **instance-id**. You can now configure **eid-table** without specifying the **instance-id**. The hierarchy is **router lisp > instance-id > service > eid-table**.
- You can have the common configuration under global service mode and instance ID-specific configuration under instance-service mode.
- CLI that is configured at the global level of the hierarchy affects the operational state of all the instance services at lower levels of the hierarchy, unless explicitly overridden.
- All the { ipv4 | ipv6 } [proxy] { itr | etr } commands appear under their respective service mode without their address family prefix.
- All the LISP show commands commence with the **show lisp** prefix.
- A new command, **locator default-set**, which is configured at the global level marks one of the locator set as default.
- **service-ethernet** is a new sub mode that enables Layer 2 MAC ID as EID space.



### Note

After you enter the commands in the changed configuration style, the earlier CLIs are not supported. To switch to the earlier CLIs, reload the system.

## How to Configure Campus Fabric

Configuring Campus Fabric involves the following stages:

- Network Provisioning—Setting up the management plane and the underlay mechanism
- Overlay Provisioning—Setting up the fabric overlay, which includes fabric edge and fabric border devices.

- Policy Management—Setting up virtual contexts or VRFs, end point groups and policies.

## Configure Fabric Edge Device

Follow these steps to configure fabric edge devices:

### Before You Begin

- Configure a loopback0 IP address for each edge device to ensure that the device is reachable. Ensure that you run the **ip lisp source-locator loopback0** command on the uplink interface.
- Ensure that your underlay configuration is set up.
- Configure control-plane devices and border devices in your fabric domain.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<b>configure terminal</b>  <b>Example:</b> Switch# configure terminal	Enters the global configuration mode.
<b>Step 2</b>	<b>router lisp</b>  <b>Example:</b> Switch(config)# router lisp	Enters LISP configuration mode.
<b>Step 3</b>	<b>locator-table name {default   vrf vrf-name}</b>  <b>Example:</b> Switch(config-router-lisp)# locator-table loc-table default	Associates a virtual routing and forwarding (VRF) table through which the router can reach the locator address space.
<b>Step 4</b>	<b>locator-set name {ip-address {priority priority_value   weight weight}   auto-discover-rlocs}</b>  <b>Example:</b> Switch(config-router-lisp-locator-table)# locator-set rloc1 1.1.1.1 priority 1 weight 1	Specifies a named locator set.
<b>Step 5</b>	<b>IPv4-interface loopback Loopback-address { priority priority_value   weight weight}</b>  <b>Example:</b> Switch(config-router-lisp-locator-set)# IPv4-interface loopback0 priority 1 weight 1	Configure the loopback IP address to ensure that the device is reachable.
<b>Step 6</b>	<b>exit-locator-set</b>  <b>Example:</b> Switch(config-router-lisp-locator-set)# exit-locator-set	Exits the locator-set configuration mode.

	Command or Action	Purpose
<b>Step 7</b>	<b>instance-id</b> <i>instance</i>  <b>Example:</b> Switch(config-router-lisp)# instance-id 3	Creates a LISP EID instance to group multiple services. Configurations under this instance-id are applicable to all services underneath it.
<b>Step 8</b>	<b>dynamic-eid</b> <i>dynamic-EID</i>  <b>Example:</b> Switch(config-router-lisp-instance)# dynamic-eid DEFAULT.EID.eng	Creates the dynamic-eid policy and enters the dynamic-eid configuration mode.
<b>Step 9</b>	<b>database-mapping</b> <i>eid locator-set RLOC name</i>  <b>Example:</b> Switch(config-router-lisp-instance-dynamic-eid)# database-mapping 10.1.1.0/24 locator-set set1	Configures EID to RLOC mapping relationship.
<b>Step 10</b>	<b>exit-dynamic-eid</b>  <b>Example:</b> Switch(config-router-lisp-instance-dynamic-eid)# exit-dynamic-eid	Exits dynamic-eid configuration mode
<b>Step 11</b>	<b>service ipv4</b>  <b>Example:</b> Switch(config-router-lisp-instance)# service ipv4	Enables Layer 3 network services for the IPv4 address family and enters the service submode.
<b>Step 12</b>	<b>eid-table vrf</b> <i>vrf-table</i>  <b>Example:</b> Switch(config-router-lisp-instance-service)# eid-table vrf vrf2	Associates the LISP instance ID configured earlier with a VRF table through which the end-point identifier address space is reachable.
<b>Step 13</b>	<b>map-cache</b> <i>destination-eid map-request</i>  <b>Example:</b> Switch(config-router-lisp-instance-service)# map-cache 10.1.1.0/24 map-request	Generates a static map request for the destination EID.
<b>Step 14</b>	<b>itr map-resolver</b> <i>map-resolver-address</i>  <b>Example:</b> Switch(config-router-lisp-instance-service)# itr map-resolver 2.1.1.6	Configures the map-resolver IP from where it needs to query the RLOC corresponding to destination EID IP.
<b>Step 15</b>	<b>itr</b>  <b>Example:</b> Switch(config-router-lisp-instance-service)# itr	Specifies that this device acts as an Ingress Tunnel Router (ITR).
<b>Step 16</b>	<b>etr map-server</b> <i>map-server-addr key {0   6}</i> <i>authentication key</i>	Configures the locator address of the LISP map server to be used by the Egress Tunnel Router (ETR) when registering the IPv4 EIDs.

	Command or Action	Purpose
	<b>Example:</b> Switch(config-router-lisp-instance-service)# etr map-server 2.1.1.6 key foo	
<b>Step 17</b>	<b>etr</b>  <b>Example:</b> Switch(config-router-lisp-instance-service)# etr	Specifies that this device acts as an ETR.
<b>Step 18</b>	<b>use-petr locator-address { priority priority_value   weight weight_value</b>  <b>Example:</b> Switch(config-router-lisp-instance-service)# use-petr 14.1.1.1	Configures the device to use Proxy Egress Tunnel Router (PETR).
<b>Step 19</b>	<b>exit-service-ipv4</b>  <b>Example:</b> Switch(config-router-lisp-instance-service)# exit-service-ipv4	Exits service submode.
<b>Step 20</b>	<b>exit-instance-id</b>  <b>Example:</b> Switch(config-router-lisp-instance)# exit-instance-id	Exits instance submode.

## Configure a Fabric Edge Node as an Anycast Switch Virtual Interface (SVI)

Follow these steps to configure a fabric edge node as an anycast SVI:

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<b>configure terminal</b>  <b>Example:</b> switch# configure terminal	Enters the global configuration mode.
<b>Step 2</b>	<b>interface interface</b>  <b>Example:</b> switch(config)# interface vlan10	Enters SVI configuration mode.

	Command or Action	Purpose
<b>Step 3</b>	<b>ip vrf forwarding</b> <i>vrf-name</i>  <b>Example:</b> Switch(config-if)# ip vrf forwarding EMP	Configures VRF on the interface.
<b>Step 4</b>	<b>ip address</b> <i>ipv4-address</i>  <b>Example:</b> Switch(config-if)# ip address 192.168.10.1/24	Configures IP address on the interface.
<b>Step 5</b>	<b>ip helper-address</b> <i>ipaddress</i>  <b>Example:</b> Switch(config-if)# ip helper-address 172.168.1.1	DHCP broadcasts will be forwarded as a unicast to this specific helper address rather than be dropped by the router
<b>Step 6</b>	<b>lisp mobility</b>  <b>Example:</b> Switch(config-if)# lisp mobility	Configures the interface to participate in LISP virtual machine mobility, which is dynamic EID roaming.

## Configure a Fabric Edge Node as a DHCP Relay Agent

These steps describe how to configure fabric edge as a DHCP relay agent. For more information on configuring DHCP Client-Server in a Campus Fabric, see the *Cisco IOS XE 16.6.1 Configure DHCP for Campus Fabric* document.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<b>configure terminal</b>  <b>Example:</b> Switch# configure terminal	Enters the global configuration mode.
<b>Step 2</b>	<b>ip dhcp snooping</b>  <b>Example:</b> Switch(config)# ip dhcp snooping	Enables DHCP snooping globally.
<b>Step 3</b>	<b>ip dhcp snooping vlan</b>  <b>Example:</b> Switch(config-if)# ip dhcp snooping vlan	Enables DHCP snooping on a specified VLAN.



	Command or Action	Purpose
<b>Step 4</b>	<b>ip dhcp relay information option</b>  <b>Example:</b> Switch(config-if)# ip dhcp relay information option	Enables the system to insert the DHCP relay agent information option (Option-82 field) in the messages forwarded to a DHCP server.

## Configure a Fabric Border Device

Follow these steps to configure a fabric border device:

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<b>configure terminal</b>  <b>Example:</b> Switch# configure terminal	Enters global configuration mode.
<b>Step 2</b>	<b>router lisp</b>  <b>Example:</b> Switch(config)# router lisp	Enters LISP configuration mode.
<b>Step 3</b>	<b>service ipv4</b>  <b>Example:</b> Switch(config-router-lisp)# service ipv4	Enables Layer 3 network services for the IPv4 address family and enters the service submodule.
<b>Step 4</b>	<b>map-cache destination-eid map-request</b>  <b>Example:</b> Switch(config-router-lisp-service)# map-cache 10.1.0.0/16 map-request	Specifies the destination EID to which map-requests are sent.
<b>Step 5</b>	<b>encapsulation vxlan</b>  <b>Example:</b> Switch(config-router-lisp-service)# encapsulation vxlan	Specifies VXLAN-based encapsulation.
<b>Step 6</b>	<b>itr map-resolver ip-address</b>  <b>Example:</b> Switch(config-router-lisp-service)# itr map-resolver 2.1.1.6	Configures the locator address of the LISP map resolver to which this device will send Map-Request messages for IPv4 EID-to-RLOC mapping resolutions.

	Command or Action	Purpose
<b>Step 7</b>	<b>proxy-itr</b> <i>locator-address</i>  <b>Example:</b> Switch(config-router-lisp-service)# proxy-itr 7.7.7.7	Enables the LISP ITR functionality.
<b>Step 8</b>	<b>proxy-etr</b>  <b>Example:</b> Switch(config-router-lisp-service)# proxy-etr	Enables the PETR functionality on the device.
<b>Step 9</b>	<b>exit-service-ipv4</b>  <b>Example:</b> Switch(config-router-lisp-service)# exit-service-ipv4	Exits service sub-mode.
<b>Step 10</b>	<b>exit-router-lisp</b>  <b>Example:</b> Switch(config-router-lisp)# exit-router-lisp	Exits LISP configuration mode.

## Configure Fabric Control Plane

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<b>configure terminal</b>  <b>Example:</b> Switch# configure terminal	Enters global configuration mode.
<b>Step 2</b>	<b>router lisp</b>  <b>Example:</b> Switch(config)# router lisp	Enters LISP configuration mode.
<b>Step 3</b>	<b>site</b> <i>site-name</i>  <b>Example:</b> Switch(config-router-lisp)# site fabric	Configures a LISP site on a control plane device and enters LISP site configuration mode.

	Command or Action	Purpose
<b>Step 4</b>	<b>authentication-key</b> <i>key</i>  <b>Example:</b> Switch(config-router-lisp-site)# authentication-key lisp	Configures the password used to create the Hashed Message Authentication Code (HMAC) Secure Hash Algorithm (SHA-1) hash for authenticating the map-register messages sent by edge devices when registering with the control-plane device.
<b>Step 5</b>	<b>eid-record</b> [ <b>instance-id</b> <i>instance-id</i> ] <i>record</i> [ <b>route-tag</b> <i>tag</i> ] [ <b>accept-more-specifics</b> ]  <b>Example:</b> Switch(config-router-lisp-site)# eid-record instance-id 30 10.1.0.0/16	Configures a host pool or a list of endpoint identifier (EID) prefixes that are allowed in a map-register message sent by the edge device when registering with the control-plane device.
<b>Step 6</b>	<b>exit-site</b>  <b>Example:</b> Switch(config-router-lisp-site)# exit-site	Exits LISP site configuration mode and returns to LISP configuration mode.
<b>Step 7</b>	<b>exit-router-lisp</b>  <b>Example:</b> Switch(config-router-lisp)# exit-router-lisp	Exits LISP configuration mode.


## show Commands for Troubleshooting LISP Configuration

- **show lisp** [*router-lisp-id*] {**instance\_id** *id* | **eid-table** *table*} {**ipv4** | **ipv6** | **ethernet**} {**database** | **map-cache** | **server** [*address-resolution*]}
- **show lisp instance-id** *id* **ipv4** **database**
- **show lisp instance-id** *id* **ipv4** **map-cache**
- **show lisp service** **ipv4** **summary**
- **show lisp instance-id** *id* { **ipv4** | **ipv6** | **ethernet**}
- **show lisp instance-id** *id* **dynamic-eid**

# Configuration Examples for LISP Configuration on Fabric Edge Node

Consider the following campus fabric topology:

**Figure 2: Sample Campus Fabric topology**

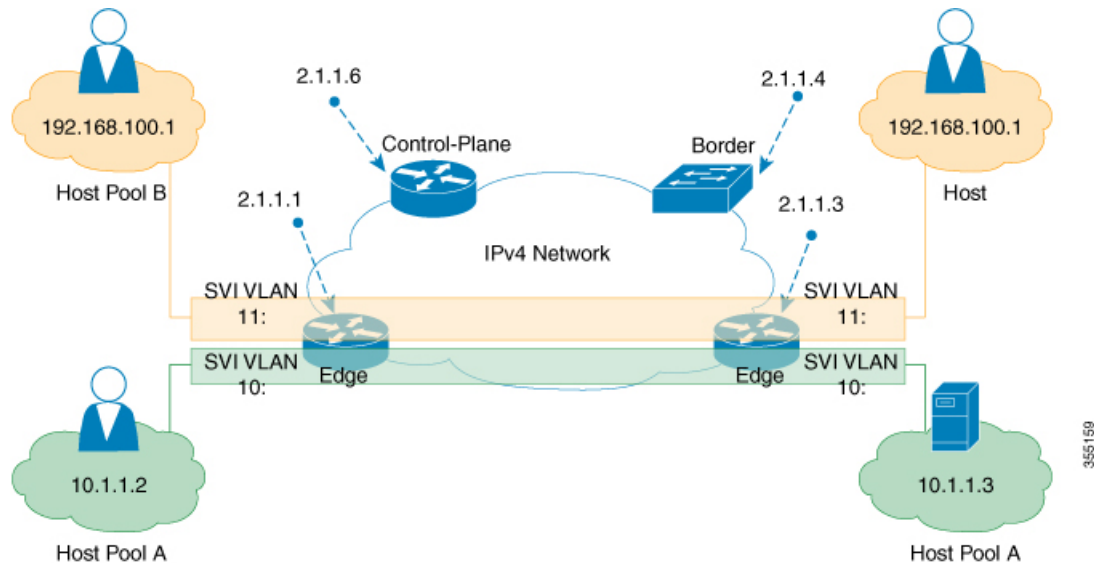

The following is the output of **show running-configuration** command on the fabric edge node in the [Figure 2: Sample Campus Fabric topology](#) , on page 12

```
interface Loopback0
ip address 2.1.1.1 255.255.255.255
!
interface Vlan10
mac-address ba25.cdf4.ad38
ip address 10.1.1.1 255.255.255.0
lisp mobility DEFAULT.EID.eng
end
!
interface Vlan11
mac-address ba25.cdf4.bd38
ip address 192.168.101.1 255.255.255.0
end
!
router lisp
locator-table default
locator-set set1
IPv4-interface Loopback0 priority 1 weight 1
exit-locator-set
!
locator default-set set1
service ipv4
proxy-itr 2.1.1.6
map-cache 0.0.0.0/0 map-request
itr map-resolver 2.1.1.6
etr map-server 2.1.1.6 key foo
etr map-server 2.1.1.6 proxy-reply
etr
```

```

use-petr 14.1.1.1
exit-service-ipv4
!
service ethernet
proxy-itr 2.1.1.6
map-cache 0.0.0.0/0 map-request
itr map-resolver 2.1.1.6
etr map-server 2.1.1.6 key foo
etr map-server 2.1.1.6 proxy-reply
etr
exit-service-ethernet
!
instance-id 30
dynamic-eid DEFAULT.EID.eng
database-mapping 10.1.1.0/24 locator-set set1
exit-dynamic-eid
!
service ipv4
eid-table default
exit-service-ipv4
!
exit-instance-id
!
instance-id 101
service ethernet
eid-table vlan 10
database-mapping mac locator-set set1
map-cache-limit 1000
database-mapping limit dynamic 2000
proxy-itr 2.1.1.6
map-cache 0.0.0.0/0 map-request
itr map-resolver 2.1.1.6
etr map-server 2.1.1.6 key foo
etr map-cache-ttl 10000
etr
exit-service-ethernet
!
exit-instance-id
!
instance-id 102
service ethernet
eid-table vlan 11
database-mapping mac locator-set set1
map-cache-limit 1000
database-mapping limit dynamic 2000

proxy-itr 2.1.1.6
map-cache 0.0.0.0/0 map-request
itr map-resolver 2.1.1.6
etr map-server 2.1.1.6 key foo
etr map-cache-ttl 10000
etr
exit-service-ethernet
!
exit-instance-id
exit-router-lisp
!

```

The following is the output of **show running-configuration** command on Control Plane in the [Figure 2: Sample Campus Fabric topology](#) , on page 12:

```

interface Loopback0
ip address 2.1.1.6 255.255.255.255
!
router lisp
locator-set WLC // enables wireless and access points to be registered.
3.3.3.20
exit-locator-set
!
service ipv4
map-server
map-resolver
exit-service-ipv4

```

```

!
service Ethernet // enables service ethernet on the map-server
map-server
map-resolver
exit-service-ethernet
!
map-server session passive-open WLC
site Shire
authentication-key cisco123
eid-record 10.1.1.0/24 accept-more-specifics
eid-record 20.1.1.0/24 accept-more-specifics
eid-record instance-id 1 any-mac
exit
!
exit-router-lisp

```

The following is the output of **show running-configuration** command on the fabric border node in the [Figure 2: Sample Campus Fabric topology](#) , on page 12

```

router lisp
locator-set default.RLOC
IPv4-Interface Loopback0 priority 10 weight 10
exit
!
service ipv4
sgt
itr map-resolver 2.1.1.6
proxy-etr
proxy-itr 2.1.1.4
exit-service-ipv4
!
instance-id 0
service ipv4
eid-table default
map-cache 10.1.1.0/24 map-request
map-cache 20.1.1.0/24 map-request
exit-service-ipv4
!
exit-instance-id
!
instance-id 100
service ipv4
eid-table vrf guest
map-cache 192.168.100.0/24 map-request
exit-service-ipv4
!
exit-instance-id
exit-router-lisp

```

## Data Plane Security in Campus Fabric

Campus Fabric Data Plane Security ensures that only traffic from within a fabric domain can be decapsulated, by an edge device at the destination. Edge and border devices in the fabric domain validate that the source Routing Locator (RLOC), or the uplink interface address, carried by the data packet is a member of the fabric domain.

Data Plane Security ensures that the edge device source addresses in the encapsulated data packets cannot be spoofed. Packets from outside the fabric domain carry invalid source RLOCs that are blocked during decapsulation by edge and border devices.

## Configure Data Plane Security on an Edge Device

### Before You Begin

- Configure a loopback0 IP address for each edge device to ensure that the device is reachable. Ensure that you apply the **ip lisp source-locator loopback0** command to the uplink interface.
- Ensure that your underlay configuration is set up.
- Ensure that you have configured edge, control plane, and border devices.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<b>router lisp</b>  <b>Example:</b> Switch(config)# router lisp	Enters LISP configuration mode.
<b>Step 2</b>	<b>instance-id instance-id</b>  <b>Example:</b> Switch(config-router-lisp)# instance-id 3	Creates a LISP EID instance to group multiple services. Configuration under this instance ID applies to all the services underneath it.
<b>Step 3</b>	<b>decapsulation filter rloc source member</b>  <b>Example:</b> Switch(config-router-lisp-instance)# decapsulation filter rloc source member	Enables the validation of the source RLOC (uplink interface) addresses of encapsulated packets in the fabric domain.
<b>Step 4</b>	<b>exit</b>  <b>Example:</b> Switch(config-router-lisp-instance)# exit	Exits LISP instance configuration mode and returns to LISP configuration mode.
<b>Step 5</b>	<b>exit</b>  <b>Example:</b> Switch(config-router-lisp)# exit	Exits LISP configuration mode and returns to global configuration mode.

## Configure Data Plane Security on a Control Plane Device

### Before You Begin

- Configure a loopback0 IP address for each control plane device to ensure that the device is reachable. Ensure

that you apply the **ip lisp source-locator loopback0** command to the uplink interface.

- Ensure that your underlay configuration is set up.
- Ensure that you have configured edge, control-plane, and border devices.

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<b>router lisp</b>  <b>Example:</b> Switch(config)# router lisp	Enters LISP configuration mode.
<b>Step 2</b>	<b>map-server rloc members distribute</b>  <b>Example:</b> Switch(config-router-lisp)# map-server rloc members distribute	Enables the distribution of the list of EID prefixes, to the edge devices in the fabric domain.
<b>Step 3</b>	<b>exit</b>  <b>Example:</b> Switch(config-router-lisp)# exit	Exits LISP configuration mode.
<b>Step 4</b>	<b>show lisp [session [established]   vrf [vrf-name [session [peer-address]]]]</b>  <b>Example:</b> Switch# show lisp session	Displays reliable transport session information. If there is more than one transport session, the corresponding information is displayed.
<b>Step 5</b>	<b>show lisp decapsulation filter [IPv4-rloc-address   IPv6-rloc-address] [eid-table eid-table-vrf   instance-id iid]</b>  <b>Example:</b> show lisp decapsulation filter	Displays the uplink interface address configuration details that are manually configured or discovered.

## Configure a Fabric Border Device

Follow these steps to configure a fabric border device:

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<b>configure terminal</b>  <b>Example:</b> Switch# configure terminal	Enters global configuration mode.



	Command or Action	Purpose
<b>Step 2</b>	<b>router lisp</b>  <b>Example:</b> Switch(config)# router lisp	Enters LISP configuration mode.
<b>Step 3</b>	<b>service ipv4</b>  <b>Example:</b> Switch(config-router-lisp)# service ipv4	Enables Layer 3 network services for the IPv4 address family and enters the service submode.
<b>Step 4</b>	<b>map-cache destination-eid map-request</b>  <b>Example:</b> Switch(config-router-lisp-service)# map-cache 10.1.0.0/16 map-request	Specifies the destination EID to which map-requests are sent.
<b>Step 5</b>	<b>encapsulation vxlan</b>  <b>Example:</b> Switch(config-router-lisp-service)# encapsulation vxlan	Specifies VXLAN-based encapsulation.
<b>Step 6</b>	<b>itr map-resolver ip-address</b>  <b>Example:</b> Switch(config-router-lisp-service)# itr map-resolver 2.1.1.6	Configures the locator address of the LISP map resolver to which this device will send Map-Request messages for IPv4 EID-to-RLOC mapping resolutions.
<b>Step 7</b>	<b>proxy-itr locator-address</b>  <b>Example:</b> Switch(config-router-lisp-service)# proxy-itr 7.7.7.7	Enables the LISP ITR functionality.
<b>Step 8</b>	<b>proxy-etr</b>  <b>Example:</b> Switch(config-router-lisp-service)# proxy-etr	Enables the PETR functionality on the device.
<b>Step 9</b>	<b>exit-service-ipv4</b>  <b>Example:</b> Switch(config-router-lisp-service)# exit-service-ipv4	Exits service sub-mode.
<b>Step 10</b>	<b>exit-router-lisp</b>  <b>Example:</b> Switch(config-router-lisp)# exit-router-lisp	Exits LISP configuration mode.

# Security Group Tags and Policy Enforcement in Campus Fabric

Campus Fabric overlay propagates source group tags (SGTs) across devices in the fabric domain. Packets are encapsulated using virtual extensible LAN (VXLAN) and carry the SGT information in the header. The SGT mapped to the IP address of the edge device is carried within the encapsulated packet and propagated to the destination device, where the packet is decapsulated and the Source Group Access Control List (SGACL) policy is enforced.

For more information on Cisco TrustSec and Source Group Tags, see the [Cisco TrustSec Switch Configuration Guide](#)

## Multicast Using Campus Fabric Overlay

You can use Campus Fabric overlay to carry multicast traffic over core networks that do not have native multicast capabilities. Campus Fabric overlay allows unicast transport of multicast traffic with head-end replication in the edge device.

**Note**

Only Protocol Independent Multicast (PIM) Sparse Mode and PIM Source Specific Multicast (SSM) are supported in Campus Fabric; dense mode is not supported.

## Information about LISP Multicast

LISP multicast includes the following features:

- Mapping of multicast source addresses as LISP EIDs. (Destination group addresses are not topology dependent.)
- Building the multicast distribution tree across LISP overlays.
- Unicast head-end replication of multicast data packets from sources within a root ingress tunnel router site to receiver egress tunnel route.
- Support for Any Source Multicast (ASM) and Source Specific Multicast (SSM) service models for unicast replication. Support for only SSM in core tree for multicast replication.
- Support for various combinations of LISP and non-LISP capable source and receiver sites.
- Support for IPv6 EIDs with head-end replication multicast mode.
- IPv6 multicast routing is supported only in default VRF.
- By default, IPv6 multicast is enabled on IPv6 interfaces. Hence, EID-facing interface does not require explicit IPv6 multicast configuration.

**Note**

If a LISP xTR is also a PIM First Hop Router (FH) or a Rendezvous Point (RP), and the device is only receiving traffic, ensure that at least one interface on the device is covered by local LISP database mapping. No additional configuration is required to ensure that the proper address is selected.

## Configure IPv4 Layer 3 LISP Multicast

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<b>configure terminal</b>  <b>Example:</b> Switch# configure terminal	Enters global configuration mode.
<b>Step 2</b>	<b>ip multicast-routing</b>  <b>Example:</b> Switch(config)# ip multicast-routing	Enables IP multicast routing.
<b>Step 3</b>	Enter one of the following: <ul style="list-style-type: none"> <li>• <b>ip pim rp-address</b> <i>rp-address</i></li> <li>• <b>ip pim ssm</b> {<b>default</b>   <b>range</b> <i>{access-list-name   access-list-number}</i>}</li> </ul> <b>Example:</b> Switch(config-if)# ip pim rp-address 66.66.66.66	Statically configures the address of a PIM RP for multicast groups.  Defines the Source Specific Multicast (SSM) range of IP multicast addresses.
<b>Step 4</b>	<b>interface</b> <i>LISP-interface number</i>  <b>Example:</b> Switch(config-if)# interface lisp0	Specifies the LISP interface and the subinterface on which to enable PIM sparse mode.
<b>Step 5</b>	Enter one of the following: <ul style="list-style-type: none"> <li>• <b>ip pim sparse-mode</b></li> <li>• <b>ip pim transport multicast</b></li> </ul> <b>Example:</b> Switch(config-if)# ip pim sparse-mode	Enables PIM on the interface for the sparse-mode operation.  Enables PIM on the interface for the sparse-mode operation. Use the <b>ip pim transport multicast</b> command when the core network has native multicast capabilities.
<b>Step 6</b>	<b>exit</b>  <b>Example:</b> Switch(config-if)# exit	Exits the interface configuration mode and enters global configuration mode.
<b>Step 7</b>	<b>interface</b> <i>interface-type interface-number</i>  <b>Example:</b> Switch(config)# interface GigabitEthernet0/1	Configures the interface facing the end point, and enters interface configuration mode.

	Command or Action	Purpose
<b>Step 8</b>	<b>ip pim sparse-mode</b>  <b>Example:</b> Switch(config-if)# ip pim sparse-mode	Enables PIM on the interface for sparse-mode operation.
<b>Step 9</b>	<b>end</b>  <b>Example:</b> Swtich(config-if)# end	Ends the current configuration session and returns to privileged EXEC mode.

## Configure Layer 2 Overlay Broadcast

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<b>configure terminal</b>  <b>Example:</b> Switch# configure terminal	Enters global configuration mode.
<b>Step 2</b>	<b>router lisp</b>  <b>Example:</b> Switch(config)# router lisp	Enters LISP configuration mode.
<b>Step 3</b>	<b>instance-id <i>instance</i></b>  <b>Example:</b> Switch(config-router-lisp)# instance-id 0	Creates a LISP EID instance to group multiple services. Configurations under this instance-id applies to all services underneath it.
<b>Step 4</b>	<b>service ethernet</b>  <b>Example:</b> Switch(config-router-lisp-instance)# service ethernet	Enables Layer 2 network services and enters service submode.
<b>Step 5</b>	<b>eid-table vlan <i>vlan-number</i></b>  <b>Example:</b> Switch(config-router-lisp-instance-service)# eid-table vlan 3	Associates the LISP instance-id configured earlier with a VLAN through which the endpoint identifier address space is reachable.
<b>Step 6</b>	<b>broadcast-underlay <i>multicast-group</i></b>  <b>Example:</b> Switch(config-router-lisp-instance-service)# broadcast-underlay 225.1.1.1	Specifies the multicast group used by the underlay to carry the overlay Layer 2 broadcast traffic.

	Command or Action	Purpose
<b>Step 7</b>	<code>exit-service-ethernet</code>  <b>Example:</b> <code>Switch(config-router-lisp-instance-service)# exit-service-ethernet</code>	Exits service sub mode.
<b>Step 8</b>	<code>exit-instance-id</code>  <b>Example:</b> <code>Switch(config-router-lisp-instance)# exit-instance-id</code>	Exits instance mode..


## show Commands for Troubleshooting LISP Multicast Configuration

- `show ip pim vrf vrf_name rp mapping`
- `show ip pim vrf vrf_name neighbor`
- `show ip pim vrf vrf_name tunnel`
- `show ip mroute vrf vrf_name`
- `show ip mfib vrf vrf_name`
- `show ip mfib vrf vrf_name count`
- `show ip multicast interface`

## Configuration Examples for LISP Multicast

Consider the following topology in campus fabric:

**Figure 3: Campus Fabric Topology to Configure Multicast**

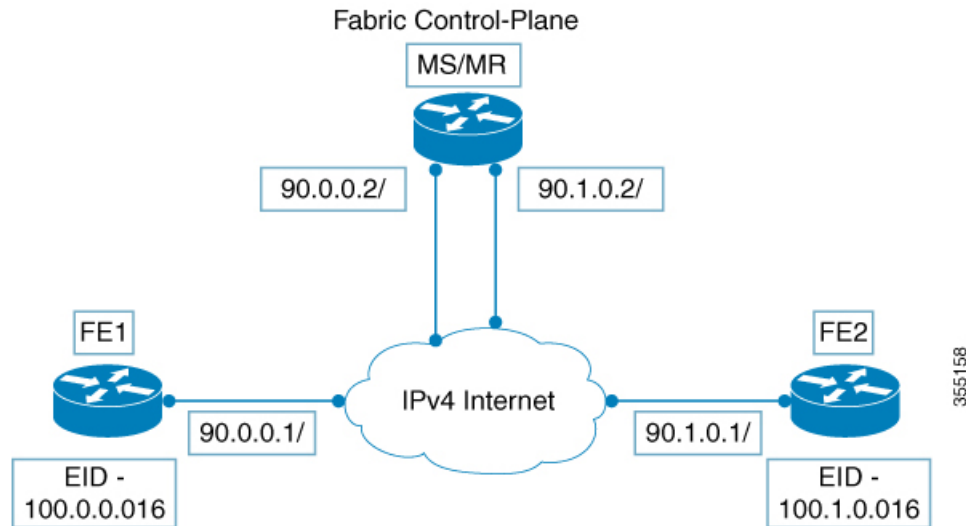

The following is a sample configuration of LISP multicast on fabric edge node FE1 in the figure [Figure 3: Campus Fabric Topology to Configure Multicast](#), on page 22

```
ip multicast-routing
ip pim ssm default
!
interface Loopback0
ip address 11.1.1.1 255.0.0.0
!
interface Loopback100
ip address 66.66.66.66 255.255.255.255
ip pim sparse-mode
!
interface GigabitEthernet0/1
ip address 90.0.0.1 255.255.255.0
ip pim sparse-mode
!
Interface Vlan100
ip address 100.0.0.1 255.255.0.0
no ip redirects
ip local-proxy-arp
ip pim sparse-mode
ip route-cache same-interface
no lisp mobility liveness test
lisp mobility vl_100
ip pim sparse-mode
!
interface GigabitEthernet1/0/1
switchport access vlan 100
switchport mode access
!
!
interface LISP0
ip pim sparse-mode
ip pim lisp transport multicast
!
!
```

```

router lisp
locator-table default
locator-set rloc_1
  IPv4-interface Loopback0 priority 1 weight 1
  exit-locator-set
!
instance-id 0
  dynamic-eid vl_100
  database-mapping 100.0.0.0/16 locator-set rloc_1
  exit-dynamic-eid
!
  service ipv4
  eid-table default
  database-mapping 66.66.66.66/32 locator-set rloc_1
  itr map-resolver 30.3.1.1
  itr
  etr map-server 30.3.1.1 key lisp
  etr
  use-petr 14.1.1.1
  exit-service-ipv4
!
  exit-instance-id
!
encapsulation vxlan
exit-router-lisp
!
ip pim rp-address 66.66.66.66

```

The following is a sample configuration of control plane (MS/MR) in [Figure 3: Campus Fabric Topology to Configure Multicast](#), on page 22

```

interface Loopback0
ip address 30.3.1.1 255.255.255.255
!
interface GigabitEthernet0/1
ip address 90.0.0.2 255.255.255.0
Ip pim sparse-mode
!
interface GigabitEthernet0/2
ip address 90.1.0.2 255.255.255.0
Ip pim sparse-mode
!
router lisp
site Fabric
authentication-key lisp
eid-record 100.0.0.0/16 accept-more-specifics
eid-record 66.66.66.66/32 accept-more-specifics
eid-record 77.77.77.77/32 accept-more-specifics
eid-record 88.88.88.88/32 accept-more-specifics
exit
!
ipv4 map-server
ipv4 map-resolver
exit

```

## Feature History for Campus Fabric

Release	Modification
Cisco IOS XE Denali 16.3.2	This feature was introduced with support for auto commands.
Cisco IOS XE Everest 16.6.1	Support for <b>auto</b> commands removed. New mode of CLI introduced.

