



Cisco DNA Service for Bonjour Configuration Guide, Cisco IOS XE Amsterdam 17.3.x (Catalyst 9500 Switches)

First Published: 2020-11-27

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
<http://www.cisco.com>
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: [www.cisco.com go trademarks](http://www.cisco.com/go/trademarks). Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© 2020 Cisco Systems, Inc. All rights reserved.



CONTENTS

CHAPTER 1

Cisco DNA Service for Bonjour Solution Overview 1

- Solution Components 2
- Supported Platforms 3
- Cisco Wide Area Bonjour Supported Network Design 4
 - Traditional Wired and Wireless Networks 4
 - Wired Networks 5
 - Wireless Networks 7
 - Cisco SD-Access Wired and Wireless Networks 8
 - Fabric-Enabled Wired and Wireless Networks 8
 - Fabric-Enabled Policy Extended Node 10
 - BGP EVPN Networks 11

CHAPTER 2

Configuring Local Area Bonjour in Multicast DNS Mode for LAN and Wireless Networks 13

- Configuring Local Area Bonjour Domain for Wired Networks 13
 - Enabling mDNS Gateway on the Device 13
 - Creating Custom Service Definition 14
 - Creating Service List 15
 - Creating Service Policy 16
 - Associating Service Policy to an Interface 17
- Configuring Local Area Bonjour Domain for Wireless Networks 19
 - Enabling mDNS Gateway on the Device 20
 - Creating Custom Service Definition 22
 - Creating Service List 23
 - Creating Service Policy 24
- Verifying Local and Wide Area Bonjour Domains 25
 - Verifying Service Discovery Gateway 25

Verifying Controller	26
Verifying Local Area Bonjour for Wired and Wireless Networks	27

CHAPTER 3

Configuring Local Area Bonjour in Unicast Mode for LAN Networks	29
Prerequisites for Local Area Bonjour in Unicast Mode for LAN Networks	29
Restrictions for Local Area Bonjour in Unicast Mode for LAN Networks	30
Information About Local Area Bonjour in Unicast Mode for LAN Networks	30
End Points for Unicast Mode	30
Layer 2 Network for Unicast Mode	31
How to Configure Local Area Bonjour Unicast Mode for LAN Networks	32
Configuring mDNS Gateway Mode	32
Configuring mDNS Service Policy	34
Configuring mDNS Location-Filter	36
Configuring custom Service Definition	38
Configuring service-routing on Service Peer	39
Configuring service-routing on Service Discovery Gateway	40
Verifying Local Area Bonjour in Unicast Mode for LAN Networks	41
Verifying a Service Peer Catalyst Switch in Local Area Bonjour Domain	41
Verifying a Service Discovery Gateway Agent Catalyst Switch in Local Area Bonjour Domain	43
Additional References for Local Area Bonjour in Unicast Mode for LAN Networks	43

CHAPTER 4

Configuring Wide Area Bonjour	45
Restrictions for Wide Area Bonjour for LAN and WLAN Networks	45
Information About Wide Area Bonjour LAN and WLAN Networks	45
How to Configure Wide Area Bonjour for LAN and WLAN Networks	46
Configuring Cisco Wide Area Bonjour Service Policy	46
Configuring Cisco Wide Area Bonjour Service-Routing	47
Verifying Wide Area Bonjour for LAN and WLAN Networks	48
Additional References for Wide Area Bonjour for LAN and WLAN Networks	49

CHAPTER 5

Configuration Examples for Cisco DNA Service for Bonjour	51
Configuration Examples for Local Area Bonjour in Unicast Mode for LAN Networks	51
Example: Single-VLAN Unicast Mode Bonjour	51
Example: Multiple-VLAN Unicast Mode Bonjour	54

Example: Configuring Unicast Mode Service-Routing for Multilayer Networks	57
Example: Migrating from mDNS Flood to Unicast Mode in Multilayer Networks	62
Example: Migrating from mDNS Flood to Unicast Mode in Routed Access Networks	64
Configuration Examples for Wide Area Bonjour for LAN and WLAN Networks	67

CHAPTER 6**Feature History for Cisco DNA Service for Bonjour 71**

Feature History for DNA Service for Bonjour	71
---	----



CHAPTER 1

Cisco DNA Service for Bonjour Solution Overview


The Apple Bonjour protocol is a zero-configuration solution that simplifies network configuration and enables communication between connected devices, services, and applications. Using Bonjour, you can discover and use shared services with minimal intervention and configuration. Bonjour is designed for single Layer 2 domains that are ideal for small, flat, single-domain setups, such as home networks. The Cisco Wide Area Bonjour solution eliminates the single Layer 2 domain constraint and expands the scope to enterprise-grade traditional wired and wireless networks, including overlay networks such as Cisco Software-Defined Access (SD-Access) and industry-standard BGP EVPN with VXLAN. The Cisco Catalyst 9000 series LAN switches and wireless LAN controllers follow the industry standard, RFC 6762-based multicast DNS (mDNS) specification to support interoperability with various compatible wired and wireless consumer products in enterprise networks.

The Wide Area Bonjour application is a software-defined, controller-based solution that enables devices to advertise and discover Bonjour services across Layer 2 domains, making these services applicable to a wide variety of wired and wireless enterprise networks. The Wide Area Bonjour application also addresses problems relating to security, policy enforcement, and services administration on a large scale. The new distributed architecture is designed to eliminate mDNS flood boundaries and transition to unicast-based service routing, providing policy enforcement points and enabling the management of Bonjour services. With the Wide Area Bonjour application, you can seamlessly introduce new services into the existing enterprise environment without modifying the existing network design or configuration.

The enhanced intuitive GUI provides you with centralized access control and monitoring capabilities, combined with the scalability and performance required for large-scale Bonjour services deployments for various supporting enterprise network types.

The following figure illustrates how the Cisco Wide Area Bonjour application operates across two integrated domain networks with end-to-end unicast-based service routing.

Figure 1: Cisco Wide Area Bonjour Solution

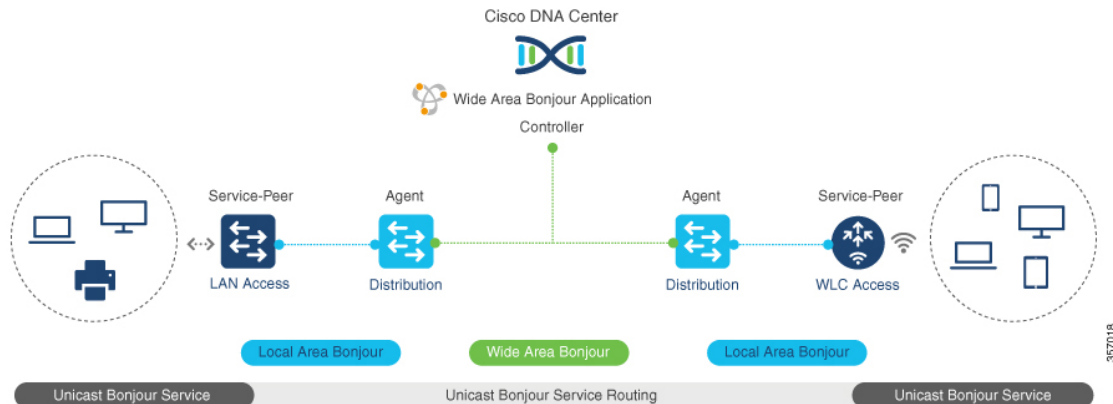

- Local-Area Service Discovery Gateway Domain - Multicast DNS Mode:** The classic Layer 2 multicast flood-n-learn-based deployment model. The service provider and receiver can discover and browse within the common VLAN or broadcast domain without any security and location-based policy enforcement. The Cisco Catalyst switches at the Layer 3 boundary function as the Service Discovery Gateway (SDG) to discover and distribute services between local wired or wireless VLANs based on applied policies. The inter-VLAN service routing at a single gateway is known as Local Area Bonjour.
 - Local Area Service Discovery Gateway Domain - Unicast Mode:** The new enhanced Layer 2 unicast policy-based deployment model. The new mDNS service discovery and distribution using Layer 2 unicast address enables flood-free LAN and wireless networks. Cisco Catalyst switches and Cisco Catalyst 9800 series wireless LAN controllers in Layer 2 mode introduce a new service-peer role, replacing classic flood-n-learn, for new unicast-based service routing support in the network. The service-peer switch and wireless LAN controller also replace mDNS flood-n-learn with unicast-based communication with any RFC 6762 mDNS-compatible wired and wireless endpoints.
 - Wide-Area Service Discovery Gateway Domain:** The Wide Area Bonjour domain is a controller-based solution. The Bonjour gateway role and responsibilities of Cisco Catalyst switches are extended from a single SDG switch to an SDG agent, enabling Wide Area Bonjour service routing beyond a single IP gateway. The network-wide distributed SDG agent devices establish a lightweight, stateful, and reliable communication channel with a centralized Cisco DNA Center controller running the Wide Area Bonjour application. Service routing between the SDG agents and the controller operates over regular IP networks using TCP port 9991. The SDG agents route locally discovered services based on the export policy.
- [Solution Components, on page 2](#)
 - [Supported Platforms, on page 3](#)
 - [Cisco Wide Area Bonjour Supported Network Design, on page 4](#)

Solution Components

The Cisco DNA Service for Bonjour solution is an end-to-end solution that includes the following key components and system roles to enable unicast-based service routing across the local area and Wide Area Bonjour domain:

- Cisco Service peer:** A Cisco Catalyst switch and Catalyst Wireless LAN Controller (WLC) in Layer 2 access function in service peer mode to support unicast-based communication with local attached endpoints and export service information to the upstream Cisco SDG agent in the distribution layer.

- **Cisco SDG agent:** A Cisco Catalyst switch functions as an SDG agent and communicates with the Bonjour service endpoints in Layer 3 access mode. At the distribution layer, the SDG agent aggregates information from the downstream Cisco service peer switch and WLC, and exports information to the central Cisco DNA controller.
- **Cisco DNA controller:** The Cisco DNA controller builds the Wide Area Bonjour domain with network-wide and distributed trusted SDG agents using a secure communication channel for centralized services management and controlled service routing.
- **Endpoints:** A Bonjour endpoint is any device that advertises or queries Bonjour services conforming to RFC 6762. The Bonjour endpoints can be in either LANs or WLANs. The Wide Area Bonjour application is designed to integrate with RFC 6762-compliant Bonjour services, including AirPlay, Google Chrome cast, AirPrint, and so on.

Supported Platforms

The following table lists the supported controllers, along with the supporting hardware and software versions.

Table 1: Supported Controllers with Supported Hardware and Software Versions

Supported Controller	Hardware	Software Version
Cisco DNA Center appliance	DN2-HW-APL DN2-HW-APL-L DN2-HW-APL-XL	Cisco DNA Center, Release 2.1.2
Cisco Wide Area Bonjour application	—	2.4.264.12003

The following table lists the supported SDG agents along with their licenses and software requirements.

Table 2: Supported SDG Agents with Supported Licenses and Software Requirements

Supported Platform	Supported Role	Local Area SDG	Wide Area SDG	Minimum Software
Cisco Catalyst 9200 Series Switches	SDG	Cisco DNA Advantage	Unsupported	Cisco IOS XE Amsterdam 17.3.2a
Cisco Catalyst 9200L Series Switches	—	Unsupported	Unsupported	—
Cisco Catalyst 9300 Series Switches	Service peer SDG agent	Cisco DNA Advantage	Cisco DNA Advantage	Cisco IOS XE Amsterdam 17.3.2a
Cisco Catalyst 9400 Series Switches	Service peer SDG agent	Cisco DNA Advantage	Cisco DNA Advantage	Cisco IOS XE Amsterdam 17.3.2a
Cisco Catalyst 9500 Series Switches	Service peer SDG agent	Cisco DNA Advantage	Cisco DNA Advantage	Cisco IOS XE Amsterdam 17.3.2a

Supported Platform	Supported Role	Local Area SDG	Wide Area SDG	Minimum Software
Cisco Catalyst 9500 High Performance Series Switches	Service peer SDG agent	Cisco DNA Advantage	Cisco DNA Advantage	Cisco IOS XE Amsterdam 17.3.2a
Cisco Catalyst 9600 Series Switches	Service peer SDG agent	Cisco DNA Advantage	Cisco DNA Advantage	Cisco IOS XE Amsterdam 17.3.2a
Cisco Catalyst 9800 WLC	Service peer	Cisco DNA Advantage	Unsupported	Cisco IOS XE Amsterdam 17.3.2a
Cisco Catalyst 9800-L WLC	Service peer	Cisco DNA Advantage	Unsupported	Cisco IOS XE Amsterdam 17.3.2a

Cisco Wide Area Bonjour Supported Network Design


The Cisco DNA Service for Bonjour supports a broad range of enterprise-grade networks. The end-to-end unicast-based Bonjour service routing is supported on traditional, Cisco SD-Access, and BGP EVPN-enabled wired and wireless networks.

Traditional Wired and Wireless Networks

Traditional networks are classic wired and wireless modes deployed in enterprise networks. Cisco DNA Service for Bonjour supports a broad range of network designs to enable end-to-end service routing.

The following figure illustrates traditional LAN network designs that are commonly deployed in an enterprise.


Figure 2: Enterprise Traditional LAN Network Design

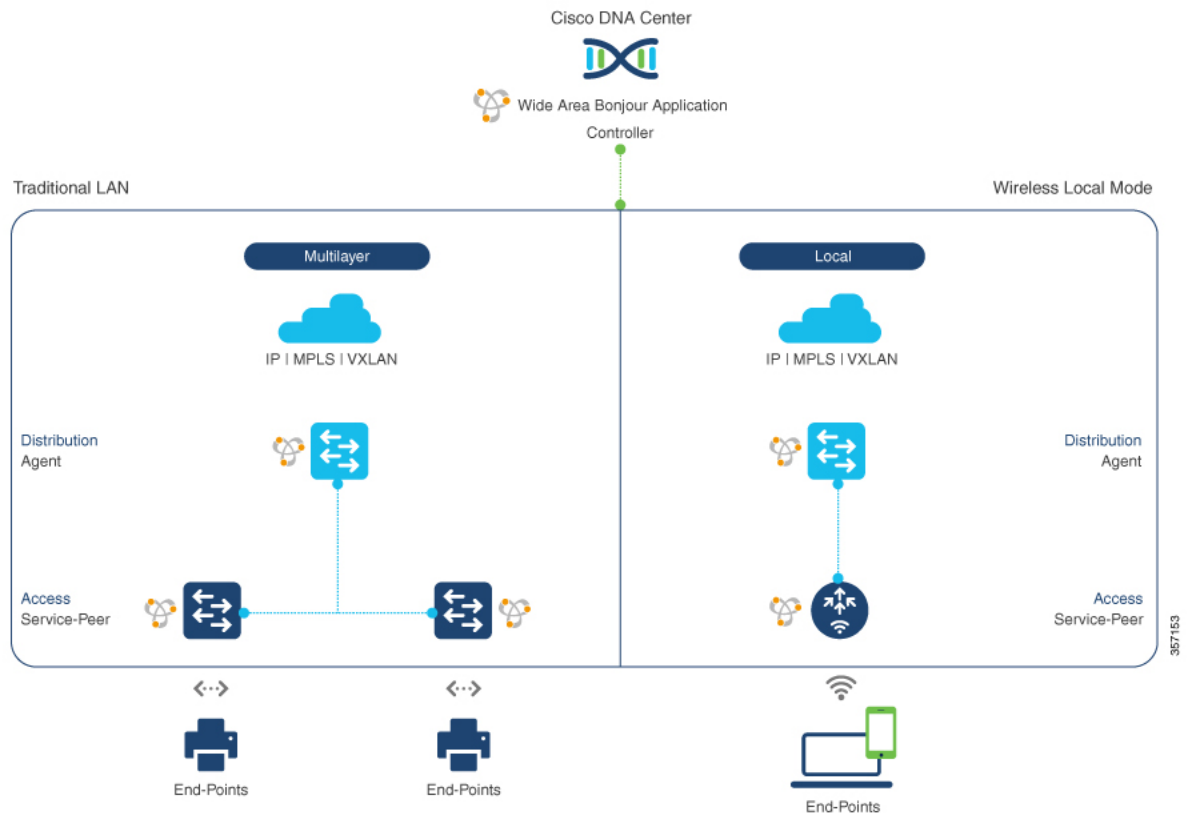

Wired Networks

The following figure shows the supported LAN network designs that are commonly deployed in an enterprise.

Figure 3: Enterprise Multilayer and Routed Access Network Design

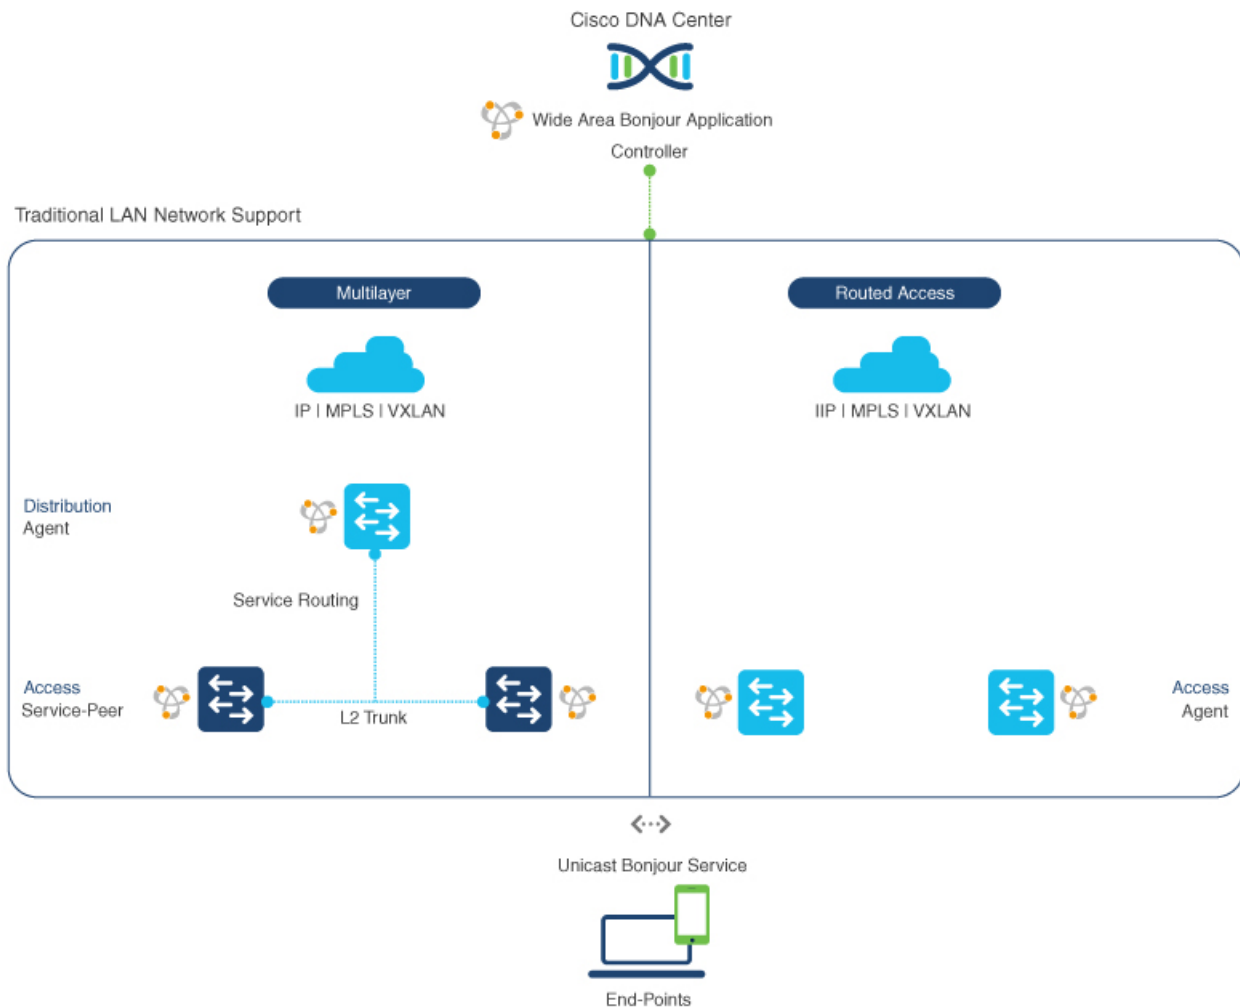

The SDG agent that provides Bonjour gateway functions is typically an IP gateway for wired endpoints that could reside in the distribution layer in multilayer network designs, or in the access layer in routed access network designs.


- **Multilayer LAN:** In this deployment mode, the Layer 2 access switch provides the first-hop Bonjour gateway function to locally attached wired endpoints. The Bonjour services and global discovery request are routed to the distribution layer systems that act as the IP gateway or SDG agent. There's no additional configuration or new requirement to modify the existing Layer 2 trunk settings between the access and distribution layers of the Cisco Catalyst switches. The policy-based service routing between the Layer 2 service-peer switches is performed by the SDG agent. The policy-based service routing between the SDG agents is performed by the Cisco DNA Center controller.
- **Routed Access:** In this deployment mode, the first-hop switch is an IP gateway boundary and, therefore, it must also perform the SDG agent role. The policy-based service routing between the SDG agents is performed by the Cisco DNA Center controller.

Wireless Networks

The Cisco DNA Service for Bonjour also supports various wireless LAN network designs that are commonly deployed in an enterprise. The Cisco Catalyst 9800 Series Wireless LAN Controller (WLC) can be deployed in a service-peer role supporting the mDNS gateway and paired with an upstream gateway switch for end-to-end service routing.

The following figure shows the supported wireless LAN network designs that are commonly deployed in an enterprise.

Figure 4: Enterprise Traditional Wireless LAN Network Design

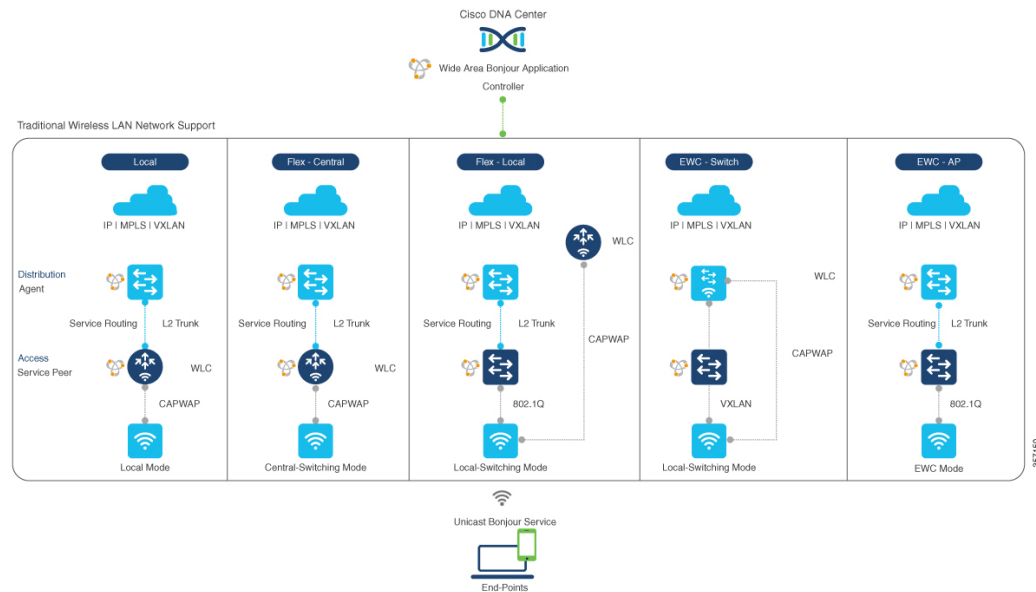

- Local Mode:** In this central switching wireless deployment mode, the Bonjour traffic is encapsulated within the CAPWAP tunnel from the Cisco access points to the centrally deployed Cisco Wireless LAN Controller. The Cisco access points are configured to be in local mode (central switching also allows the access point to be configured in FlexConnect mode). With central switching, the Cisco Catalyst 9800 Series Wireless LAN Controller provides the mDNS gateway function of Bonjour services in the service-peer role. The WLC can discover and distribute services to local wireless users and perform unicast service routing over a wireless management interface to the Cisco Catalyst switch in the distribution layer, which acts as the IP gateway and the SDG agent. There's no additional configuration or requirement to modify the existing Layer 2 trunk settings between the Cisco Wireless LAN Controller and the distribution layer of the Cisco Catalyst switch. The Cisco Wireless LAN Controller must be configured with Global Multicast and AP Multicast in Multicast mode. Unless the access point joins the wireless LAN controller-announced multicast group, communication to and from Bonjour endpoints is not enabled for the wireless user group.
- FlexConnect:** In FlexConnect local switching mode, both wired and wireless users share the same gateway in the access layer. The Layer 2 access switch provides the policy-based mDNS gateway function to locally attached wired and wireless users. The Cisco Catalyst switches in the distribution layer function as SDG agents for the LAN and wireless LAN user groups.
- Embedded Wireless Controller - Switch:** The Cisco Embedded Wireless Controller solution enables the lightweight integrated wireless LAN controller function within the Cisco Catalyst 9300 series switch. The Cisco Catalyst switches in the distribution layer function as SDG agents to the LAN and wireless

LAN user groups. The SDG agent in the distribution layer provides unicast service routing across all wireless access point and Layer 2 service-peer switches without any mDNS flooding. The embedded Cisco Wireless LAN Controller switch must be configured with Global Multicast and AP Multicast in Multicast mode and mDNS must be set in bridging mode.

- **Embedded Wireless Controller - Access Point:** The Cisco Embedded Wireless Controller solution enables the lightweight integrated wireless LAN controller function within the Cisco access points configured in the primary role. The wireless users share the same Bonjour gateway in the access layer as the wired endpoints. The Cisco Catalyst switches in the access layer function as service peers to the LAN and wireless LAN user groups. The SDG agent in the distribution layer provides unicast service routing across all Layer 2 service-peer switches in the Layer 2 network block without any mDNS flooding. AP multicast is required for Embedded Wireless mode AP, and mDNS must be set in bridging mode.



Note The Cisco AireOS-based WLC can be deployed as an mDNS pass-through network device between the wireless endpoints. The upstream SDG agent provides consistent Bonjour gateway functions for wireless endpoints, as for wired networks. In general, the IP gateway of wireless clients is also a Bonjour gateway. However, the placement of the SDG agent may vary depending on the wireless LAN deployment mode.


Cisco SD-Access Wired and Wireless Networks

Cisco DNA Service for Bonjour is supported for Cisco SD-Access-enabled wired and wireless networks. The Cisco Wide Area Bonjour service routing for fabric-enabled wired and wireless networks eliminates the need for Layer 2 flooding. The Layer 3 Fabric Edge switch in the access layer must be configured as the SDG agent and paired with the central Cisco DNA Center for end-to-end service routing. Wide Area Bonjour policies must be aligned with the SD-Access network policies with respect to virtual networks and SGT policies, if any.

Fabric-Enabled Wired and Wireless Networks

The following figure shows Cisco SD-Access-enabled wired and wireless networks without extending the Layer 2 network boundaries.

Figure 5: Cisco SD-Access Network Design

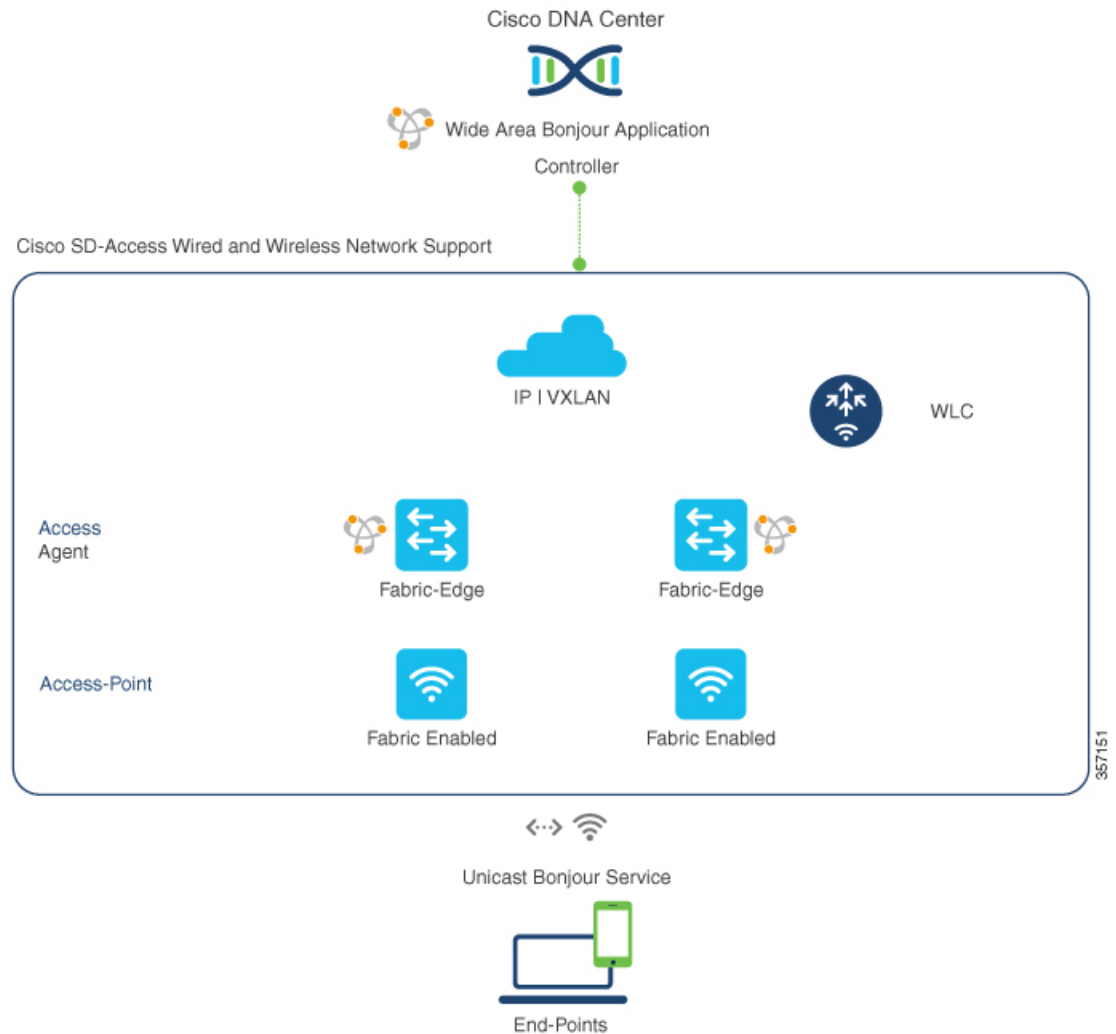

The Cisco DNA Service for Bonjour for SD-Access-enabled wired and wireless networks uses two logical components:


- **SDG agent:** The Layer 3 Fabric Edge switch in the access layer network is configured as the SDG agent. The mDNS gateway and Wide Area Bonjour service routing configuration is added only after SD-Access is configured.
- **Cisco DNA controller:** The Wide Area Bonjour application on Cisco DNA Center acts as the controller supporting policy and location-based service discovery and distribution between network-wide distributed Fabric Edge switches.

The Wide Area Bonjour communication between the SDG agent and the controller takes place through the network underlay. The SDG agent forwards the endpoint announcements or queries to the controller through the fabric underlay based on policies. After discovering a service, a Bonjour-enabled application establishes direct unicast communication between endpoints through the fabric overlay. This communication is subject to configured overlay IP routing and SGT policies, if any.

The Cisco Wireless LAN Controller must be configured with Global Multicast and AP Multicast in Multicast mode. The network administrator must enable IP Multicast in the underlay and ensure all fabric-enabled Cisco wireless access points have successfully joined the multicast group. The mDNS snooping configuration on the Cisco Wireless LAN Controller is ineffective and must remain in disabled mode.

Fabric-Enabled Policy Extended Node

Figure 6: Fabric-Enabled Policy Extended Node

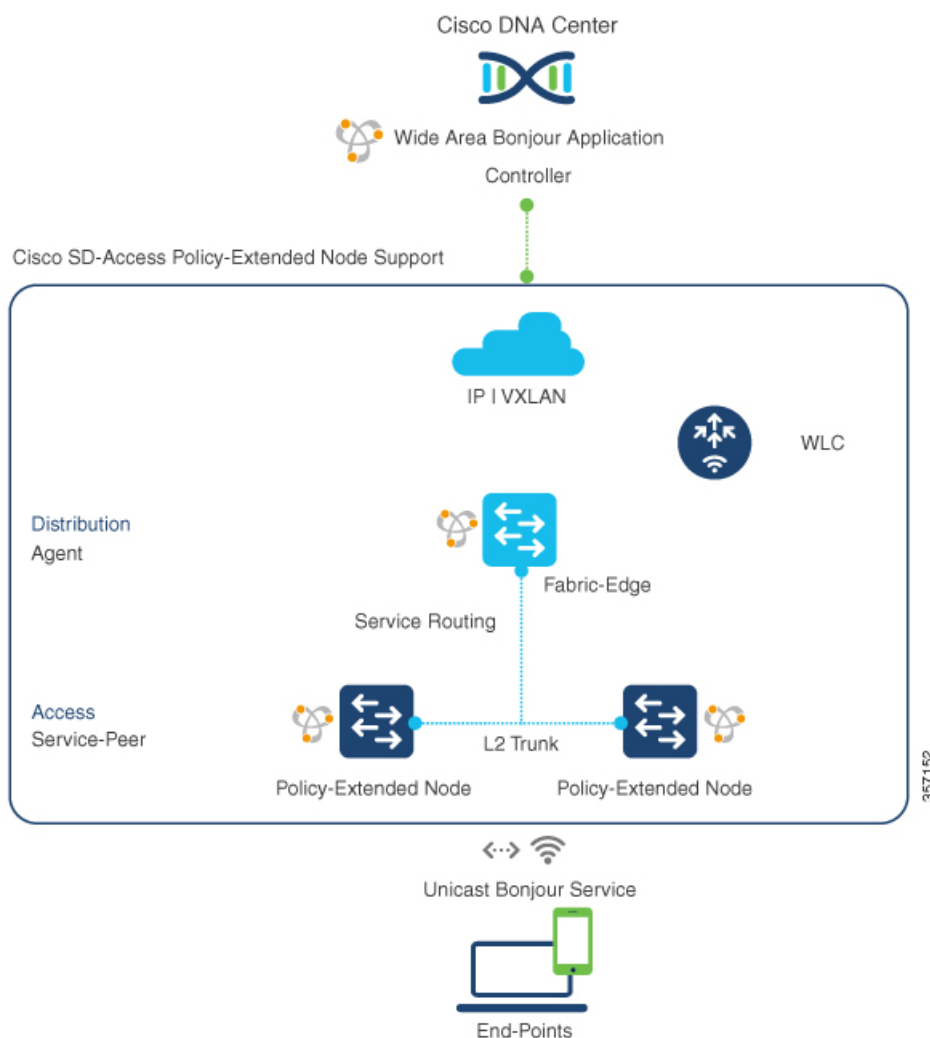


The security policy can be extended to Cisco Catalyst 9000 Series Switches at Layer 2 access with the Policy Extended Node (PEN) function in a Cisco SD-Access fabric network. The network security and mDNS service policy can be combined at the Layer 2 access PEN switch in a service-peer role combined with Fabric Edge supporting SDG agent mode in Layer 2/3 distribution layer for Wide Area Bonjour service routing with Cisco DNA Center.

BGP EVPN Networks

The BGP EVPN-based enterprise network provides a flexible Layer 3 segmentation and Layer 2 extension overlay network. Cisco DNA Service for Bonjour supports end-to-end service routing over all common deployment models, eliminating mDNS flooding over Layer 2 extended EVPN VXLAN networks (symmetric and asymmetric IRB) and service reachability challenges for Layer 3 segmented EVPN VXLAN networks in the fabric.

The following figure shows the BGP EVPN leaf switch in Layer 3 access mode supporting overlay Bonjour service routing for a BGP EVPN-enabled wired and wireless enterprise network over various types of Layer 2 networks and Layer 3 segmented VRF-enabled networks.

Figure 7: Overlay Bonjour Service for a BGP EVPN-Enabled Enterprise Network

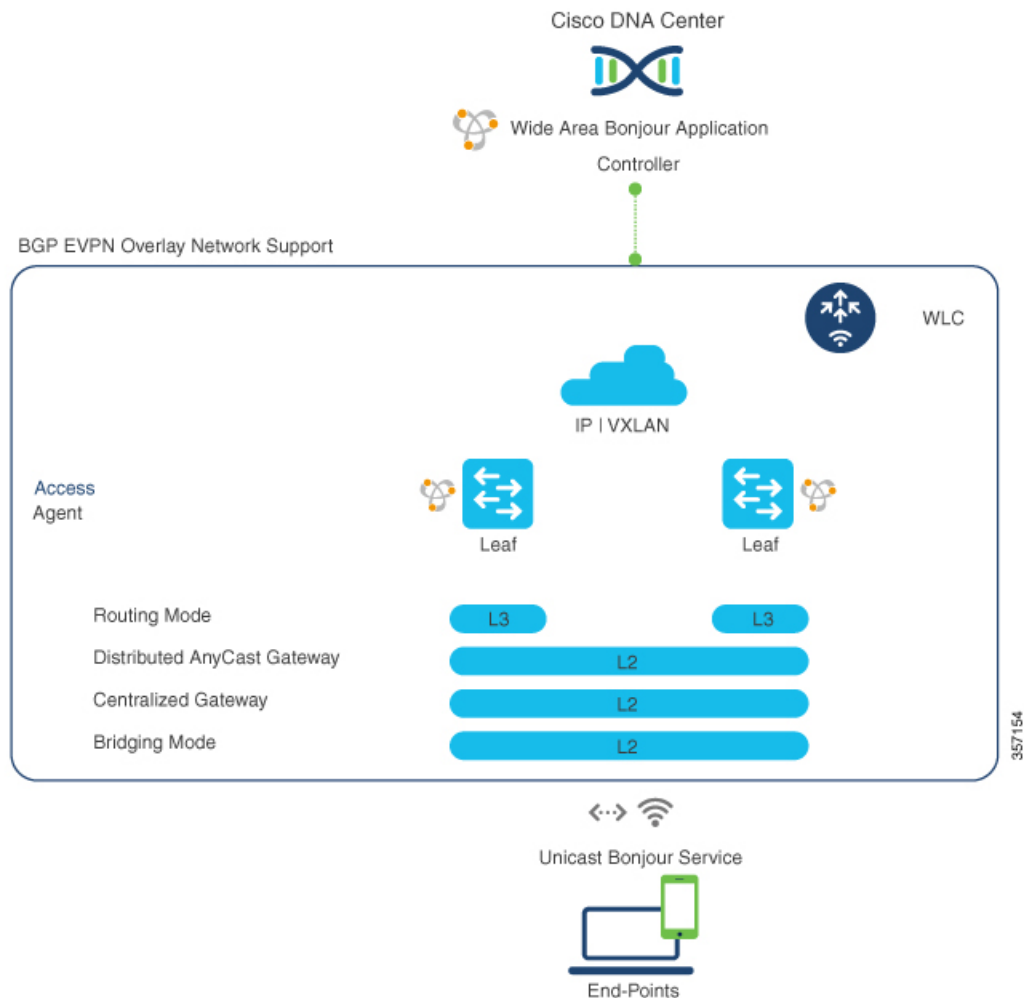


Cisco DNA Service for Bonjour supports Wide Area Bonjour service routing for BGP EVPN networks extended with Layer 2 service-peer network devices, such as a Cisco Catalyst switch or 9800 series WLC. The BGP EVPN leaf device in the distribution layer supports the SDG agent role for overlay service routing.

The Cisco DNA Service for Bonjour solution for BGP EVPN networks enables policy-based end-to-end service routing for virtual network environments. The solution helps protect enterprise network scale and performance by eliminating the Layer 2 mDNS flood over the VXLAN across the IP core network.

The following figure shows mDNS endpoints connecting the Layer 2 access switch in service-peer mode to the upstream BGP EVPN leaf switch in the Layer 2/3 distribution layer supporting overlay Bonjour service routing for a BGP EVPN-enabled wired and wireless enterprise network over various types of Layer 2 networks and Layer 3 segmented VRF-enabled networks.

Figure 8: mDNS Endpoints Connecting an L2 Switch to the Upstream BGP EVPN Leaf Switch

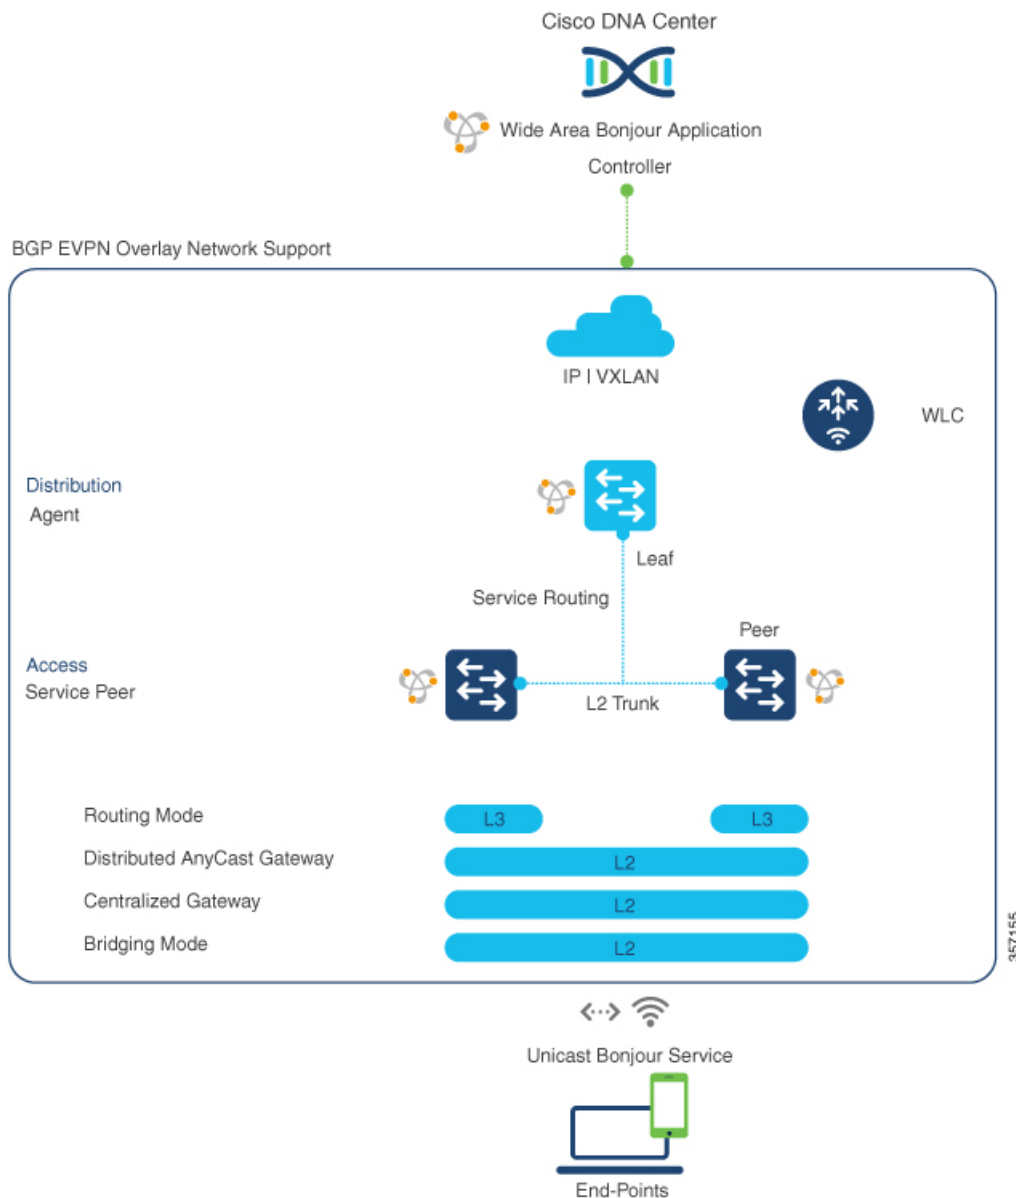

For more information about BGP EVPN networks, see the [BGP EVPN VXLAN Configuration Guide, Cisco IOS XE Amsterdam 17.2.x \(Catalyst 9600 Switches\)](#).



CHAPTER 2

Configuring Local Area Bonjour in Multicast DNS Mode for LAN and Wireless Networks

- [Configuring Local Area Bonjour Domain for Wired Networks, on page 13](#)
- [Configuring Local Area Bonjour Domain for Wireless Networks, on page 19](#)
- [Verifying Local and Wide Area Bonjour Domains, on page 25](#)

Configuring Local Area Bonjour Domain for Wired Networks

Enabling mDNS Gateway on the Device

To configure mDNS on the device, follow these steps:

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	mdns-sd gateway Example: Device(config)# mdns-sd gateway	Enables mDNS on the device and enters mDNS gateway configuration mode. Enter the following commands in mDNS gateway configuration mode to enable the respective functionalities: <ul style="list-style-type: none"> • air-print-helper: Enables IOS devices like iPADS to discover and use older printers that support Bonjour

	Command or Action	Purpose
		<ul style="list-style-type: none"> • cache-memory-max: Configures the percentage memory for cache • ingress-client: Configures Ingress Client Packet Tuners • rate-limit: Enables rate limiting of incoming mDNS packets • service-announcement-count: Configures maximum advertisements • service-announcement-timer: Configures advertisements announce timer periodicity • service-query-count: Configures maximum queries • service-query-timer: Configures query forward timer periodicity • service-type-enumeration: Configures service enumeration <p>Note For cache-memory-max, ingress-client, rate-limit, service-announcement-count, service-announcement-timer, service-query-count, service-query-timer, and service-type-enumeration commands, you can retain the default value of the respective parameter for general deployments. Configure a different value, if required, for a specific deployment.</p>
Step 4	exit Example: <pre>Device(config-mdns-sd)# exit</pre>	Exits mDNS gateway configuration mode.

Creating Custom Service Definition

Service definition is a construct that provides an admin friendly name to one or more mDNS service types or PTR Resource Record Name. By default, few built-in service definitions are already predefined and available for admin to use. In addition to built-in service definitions, admin can also define custom service definitions.

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	mdns-sd service-definition <i>service-definition-name</i> Example: Device(config)# mdns-sd service-definition CUSTOM1	Configures mDNS service definition. Note All the created custom service definitions are added to the primary service list. Primary service list comprises of a list of custom and built-in service definitions.
Step 4	service-type <i>string</i> Example: Device(config-mdns-ser-def)# service-type _custom1._tcp.local	Configures mDNS service type.
Step 5	Repeat step 4 to configure more than one service type in the custom service definition.	
Step 6	exit Example: Device(config-mdns-ser-def)# exit	Exit mDNS service definition configuration mode.

Creating Service List

mDNS service list is a collection of service definitions. To create a service list, follow these steps:

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.

	Command or Action	Purpose
Step 3	mdns-sd service-list <i>service-list-name</i> { in out } Example: Device(config)# mdns-sd service-list VLAN100-list in	Configures mDNS service list.
Step 4	match <i>service-definition-name</i> [message-type { any announcement query }] Example: Device(config-mdns-sl-in)# match PRINTER message-type announcement	Matches the service to the message type. Here, <i>service-definition-name</i> refers to the names of services, such as, <i>airplay</i> , <i>airserver</i> , <i>airtunes</i> , and so on. Note To add a service, the service name must be part of the primary service list. If the mDNS service list is set to IN, the applicable command syntax is: match <i>service-definition-name</i> [message-type { any announcement query }]. If the mDNS service list is set to OFF, the applicable command syntax is: match <i>service-definition-name</i> .
Step 5	exit Example: Device(config-mdns-sl-in)# exit	Exits mDNS service list configuration mode.

Creating Service Policy

A Service Policy that is applied to an interface specifies the allowed Bonjour service announcements or the queries of specific service types that should be processed, in ingress direction or egress direction or both. For this, the service policy specifies two service-lists, one each for ingress and egress directions. In the Local Area Bonjour domain, the same service policy can be attached to one or more Bonjour client VLANs; however, different VLANs may have different service policies.

To configure service policy with service lists, follow these steps:

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	configure terminal Example:	Enters global configuration mode.

	Command or Action	Purpose
	Device# <code>configure terminal</code>	
Step 3	<code>mdns-sd service-policy service-policy-name</code> Example: Device(config)# <code>mdns-sd service-policy mdns-policy1</code>	Configures mDNS service policy.
Step 4	<code>service-list service-list-name {in out}</code> Example: Device(config-mdns-ser-pol)# <code>service-list VLAN100-list in</code> Device(config-mdns-ser-pol)# <code>service-list VLAN300-list out</code>	Configures service lists for IN and OUT directions.
Step 5	<code>exit</code> Example: Device(config-mdns-ser-pol)# <code>exit</code>	Exits mDNS service policy configuration mode.

Associating Service Policy to an Interface

To configure mDNS on the device, follow these steps:

Procedure

	Command or Action	Purpose
Step 1	<code>enable</code> Example: Device> <code>enable</code>	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	<code>configure terminal</code> Example: Device# <code>configure terminal</code>	Enters global configuration mode.
Step 3	<code>interface interface-name</code> Example: Device(config)# <code>interface Vlan 601</code>	Enters interface mDNS configuration mode and enables interface configuration.
Step 4	<code>mdns-sd gateway</code> Example: Device(config-if)# <code>mdns-sd gateway</code>	Configures mDNS gateway on the interface. Enter the following commands in the interface mDNS gateway configuration mode to enable the respective functionalities: <ul style="list-style-type: none"> • active-query: Sets the time interval for SDG agent to refresh the active status of connected Bonjour client services. The timer value ranges from 60 to 120 seconds.

	Command or Action	Purpose
		<p>Note This configuration is mandatory only on VLANs whose Bonjour policy is configured to accept Bonjour service announcements from connected Bonjour clients. If the VLAN is configured to only accept Bonjour queries but not Bonjour service announcements, this configuration is optional.</p> <ul style="list-style-type: none"> • service-instance-suffix(Optional) : Appends the service instance suffix to any announced service name that is forwarded to the controller. • service-mdns-query [ptr all] : Configures mDNS query request message processing for the specified query types. If the service-mdns-query command is used without any keyword, then all Bonjour query types (PTR, SRV, and TXT) are processed by default. It is recommended to use the service-mdns-query ptr command. • service-policy <i>policy-name</i>: Attaches the specified service policy to the VLAN. Bonjour announcements, and queries received by and sent from the VLAN are governed by the policies configured in the service policy. This configuration is mandatory for all VLANs. <p>Note Service policies can only be attached at interface level.</p> <ul style="list-style-type: none"> • transport [all ipv4 ipv6] (Optional): Configures BCP parameter. It is recommended to use transport ipv4 command, except in those networks where the Bonjour clients send only IPv6 announcements and queries.
Step 5	<p>exit</p> <p>Example:</p> <pre>Device(config-if-mdns-sd)# exit</pre>	Exits mDNS gateway configuration mode.

Configuring Local Area Bonjour Domain for Wireless Networks

The configuration of local area Bonjour on a switch that acts as the SDG Agent in a wireless network involves the same set of procedures that are used to configure local area Bonjour on a switch that acts as the SDG Agent in a wired network.


The Bonjour protocol operates on service announcements and queries. Each query or advertisement is sent to the Bonjour multicast address ipv4 224.0.0.251 (ipv6 FF02::FB). This protocol uses mDNS on UDP port 5353.

The address used by the Bonjour protocol is link-local multicast address and therefore is only forwarded to the local L2 network. As, multicast DNS is limited to an L2 domain for a client to discover a service it has to be part of the same L2 domain, This is not always possible in any large scale deployment or enterprise.

In order to address this issue, the Cisco Catalyst 9800 Series Wireless Controller acts as a Bonjour Gateway. The controller then listens for Bonjour services, caches these Bonjour advertisements (AirPlay, AirPrint, and so on) from the source or host. For example, Apple TV responds back to Bonjour clients when asked or requested for a service. This way you can have sources and clients in different subnets.

By default, the mDNS gateway is disabled on the controller. To enable mDNS gateway functionality, you must explicitly configure mDNS gateway using CLI or Web UI.

Figure below illustrates a prerequisite configuration for Wireless network to enable seamless communication between SDG-Agent switches and Wireless endpoints.

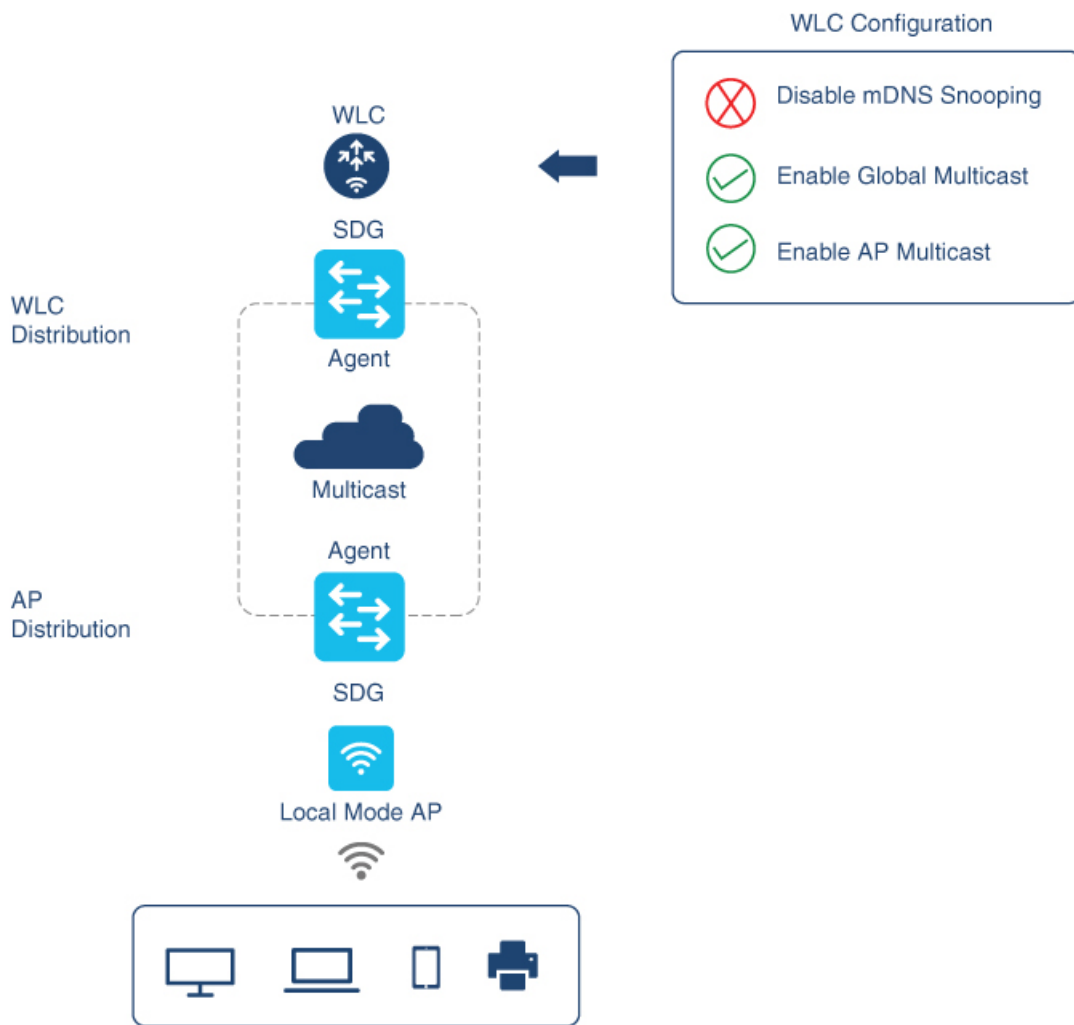

3553366

The Cisco WLC and Access Points by default prevents forwarding Layer 2 or Layer 3 Multicast frames between Wireless and Wired network infrastructure. The forwarding is supported with stateful capabilities enabled using AP Multicast. The network administrator must globally enable Multicast and configure unique Multicast Group to advertise in network. This multicast group is only required for Cisco Access-Points to enable Multicast over Multicast (MCMC) capabilities across the LAN network. The Bonjour solution does not require any Multicast requirements on Wireless Client VLAN; thus, it is optional and applicable only for other Layer 3 Multicast applications.

The core network must be configured with appropriate Multicast routing allowing AP’s to join WLC Multicast Group. The Multicast configuration must be enabled on Cisco WLC management VLAN and on Cisco Access Point of their own respective distribution layer switch.

Enabling mDNS Gateway on the Device

To configure mDNS on the device, follow these steps:

Procedure

	Command or Action	Purpose
Step 1	<p>enable</p> <p>Example: Device> enable</p>	<p>Enables privileged EXEC mode.</p> <p>Enter your password, if prompted.</p>
Step 2	<p>configure terminal</p> <p>Example: Device# configure terminal</p>	<p>Enters global configuration mode.</p>
Step 3	<p>mdns-sd gateway</p> <p>Example: Device(config)# mdns-sd gateway</p>	<p>Enables mDNS on the device and enters mDNS gateway configuration mode.</p> <p>Enter the following commands in mDNS gateway configuration mode to enable the respective functionalities:</p> <ul style="list-style-type: none"> • air-print-helper: Enables IOS devices like iPADS to discover and use older printers that support Bonjour • cache-memory-max: Configures the percentage memory for cache • ingress-client: Configures Ingress Client Packet Tuners • rate-limit: Enables rate limiting of incoming mDNS packets • service-announcement-count: Configures maximum advertisements • service-announcement-timer: Configures advertisements announce timer periodicity • service-query-count: Configures maximum queries • service-query-timer: Configures query forward timer periodicity • service-type-enumeration: Configures service enumeration

	Command or Action	Purpose
		<p>Note For cache-memory-max, ingress-client, rate-limit, service-announcement-count, service-announcement-timer, service-query-count, service-query-timer, and service-type-enumeration commands, you can retain the default value of the respective parameter for general deployments. Configure a different value, if required, for a specific deployment.</p>
Step 4	exit Example: Device(config-mdns-sd)# exit	Exits mDNS gateway configuration mode.

Creating Custom Service Definition

Service definition is a construct that provides an admin friendly name to one or more mDNS service types or PTR Resource Record Name. By default, few built-in service definitions are already predefined and available for admin to use. In addition to built-in service definitions, admin can also define custom service definitions.

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	mdns-sd service-definition <i>service-definition-name</i> Example: Device(config)# mdns-sd service-definition CUSTOM1	Configures mDNS service definition. <p>Note All the created custom service definitions are added to the primary service list. Primary service list comprises of a list of custom and built-in service definitions.</p>
Step 4	service-type <i>string</i> Example: Device(config-mdns-ser-def)# service-type _custom1._tcp.local	Configures mDNS service type.

	Command or Action	Purpose
Step 5	Repeat step 4 to configure more than one service type in the custom service definition.	
Step 6	exit Example: Device(config-mdns-ser-def)# exit	Exit mDNS service definition configuration mode.

Creating Service List

mDNS service list is a collection of service definitions. To create a service list, follow these steps:

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	mdns-sd service-list <i>service-list-name</i> {in out} Example: Device(config)# mdns-sd service-list VLAN100-list in	Configures mDNS service list.
Step 4	match <i>service-definition-name</i> [message-type {any announcement query}] Example: Device(config-mdns-sl-in)# match PRINTER message-type announcement	Matches the service to the message type. Here, <i>service-definition-name</i> refers to the names of services, such as, airplay, airserver, airtunes, and so on. Note To add a service, the service name must be part of the primary service list. If the mDNS service list is set to IN, the applicable command syntax is: match <i>service-definition-name</i> [message-type {any announcement query}]. If the mDNS service list is set to OFF, the applicable command syntax is: match <i>service-definition-name</i> .

	Command or Action	Purpose
Step 5	exit Example: Device(config-mdns-sl-in)# exit	Exits mDNS service list configuration mode.

Creating Service Policy

A Service Policy that is applied to an interface specifies the allowed Bonjour service announcements or the queries of specific service types that should be processed, in ingress direction or egress direction or both. For this, the service policy specifies two service-lists, one each for ingress and egress directions. In the Local Area Bonjour domain, the same service policy can be attached to one or more Bonjour client VLANs; however, different VLANs may have different service policies.

To configure service policy with service lists, follow these steps:

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	mdns-sd service-policy service-policy-name Example: Device(config)# mdns-sd service-policy mdns-policy1	Configures mDNS service policy.
Step 4	service-list service-list-name {in out} Example: Device(config-mdns-ser-pol)# service-list VLAN100-list in Device(config-mdns-ser-pol)# service-list VLAN300-list out	Configures service lists for IN and OUT directions.
Step 5	exit Example: Device(config-mdns-ser-pol)# exit	Exits mDNS service policy configuration mode.

Verifying Local and Wide Area Bonjour Domains

Verifying Service Discovery Gateway

The following is a sample output of the **show mdns-sd service-list** *service-list-name* {**in** | **out**} command.

```

Name      Direction  Service  Message-Type  Source
=====
VLAN100-list  In      Printer  Announcement  -
           In      Airplay  Query         -
           In      CUSTOM1  Any           -
VLAN300-list  Out     Printer  Announcement  V1200

```

The following is a sample output of the **show mdns-sd service-definition** *service-definition-name* **service-type** {*custom* | *built-in*} command.

```

Service   PTR          Type
=====
apple-tv   _airplay._tcp.local  Built-In
           _raop._tcp.local
apple-file-share  _afpovertcp._tcp.local  Built-In
CUSTOM1    _custom1._tcp.local     Custom
CUSTOM2    _customA._tcp.local     Custom
           _customA._tcp.local

```

The following is a sample output of the **show mdns-sd service-policy-name** **interface** *interface-name* command.

```

Name      Service-List-In  Service-List-Out
=====
mdns-policy-1  VLAN100-list    VLAN300-list
mdns-policy-2  VLAN400-list    VLAN400-list

```

The following is a sample output of the **show mdns-sd summary** [**interface** *interface-name*] command.

```

Global mDNS Gateway
=====
mDNS Gateway           : Enabled
Rate Limit             : 60 PPS (default)
AirPrint Helper        : Disabled

Interface : Vlan601
=====
mDNS Gateway           : Enabled
mDNS Service Policy    : policy1
Active Query           : Enabled
                       : Periodicity 60 Seconds
Transport Type         : Both IPv4 & IPv6
Service Instance Suffix : ghalwasi

```

```

mDNS Query Type          : ALL

Interface : Vlan602
=====
mDNS Gateway             : Enabled
mDNS Service Policy      : int602
Active Query              : Enabled
                          : Periodicity 100 Seconds

Transport Type           : Both IPv4 & IPv6
Service Instance Suffix : 602
mDNS Query Type          : ALL

```

Verifying Controller

The following is a sample output of the **show mdns controller summary** command.

```

Device# show mdns controller summary

Controller Summary
=====
Controller Name  : DNAC-BONJOUR-CONTROLLER
Controller IP    : 10.104.52.241
State           : UP
Port            : 9991
Interface       : Loopback0
Filter List     : policy1
Dead Time       : 00:01:00

```

The following is a sample output of the **show mdns controller export-summary** command.

```

Device# show mdns controller export-summary

Controller Export Summary
=====
Controller IP    : 10.104.52.241
State           : UP
Filter List     : policy1
Count           : 100
Delay Timer     : 30 seconds
Export          : 300
Drop            : 0
Next Export     : 00:00:01

```

The following is a sample output of the **show mdns controller statistics** command.

```

Device# show mdns controller statistics

Total BCP message sent      : 47589
Total BCP message received : 3
Interface WITHDRAW messages sent : 0
Clear cache messages sent  : 0
Total RESYNC state count   : 0
Last successful RESYNC     : Not-Applicable

```



```

Service Advertisements:
  IPv6 advertised           : 0
  IPv4 advertised           : 300
  Withdraws sent           : 0
  Advertisements Filtered  : 0
  Total service resynced   : 0

Service Queries:
  IPv6 queries sent        : 0
  IPv6 query responses received : 0
  IPv4 queries sent        : 0
  IPv4 query responses received : 0

```

The following is a sample output of the **show mdns controller detail** command.

```

Device# show mdns controller detail

Controller : DNAC-BONJOUR-CONTROLLER
  IP : 10.104.52.241, Dest Port : 9991, Src Port : 0, State : UP
  Source Interface : Loopback0, MD5 Disabled
  Hello Timer 0 sec, Dead Timer 0 sec, Next Hello 00:00:00
  Uptime 00:00:00
Service Announcement :
  Filter : policy1
  Count 100, Delay Timer 30 sec, Pending Announcement 0, Pending Withdraw
  0
  Total Export Count 300, Next Export in 00:00:16
Service Query :
  Query Suppression Disabled
  Query Count 50, Query Delay Timer 15 sec, Pending 0
  Total Query Count 0, Next Query in 00:00:01

```

Verifying Local Area Bonjour for Wired and Wireless Networks

The following is a sample output of the **show run** command.

```

mdns-sd gateway
  rate-limit 100
  service-query-count 100
  service-announcement-count 100

mdns-sd service-definition custom1
  service-type _airplay._tcp.local
  service-type _raop._tcp.local
  service-type _ipp._tcp.local
  service-type _afpovertcp._tcp.local
  service-type _nfs._tcp.local
  service-type _ssh._tcp.local
  service-type _dpap._tcp.local
  service-type _daap._tcp.local

```

```
service-type _ichat._tcp.local
service-type _presence._tcp.local
service-type _http._tcp.local
service-type _ipps._tcp.local
service-type _printer._tcp.local
service-type _smb._tcp.local
service-type _ftp._tcp.local
```

```
mdns-sd service-list list1 IN
  match custom1
mdns-sd service-list list2 OUT
match custom1
```

```
mdns-sd service-policy policy1
service-list list1 IN
service-list list2 OUT
```

```
service-export mdns-sd controller APIC-EM
controller-address 99.99.99.10
controller-port 9991
controller-service-policy policy1 OUT
controller-source-interface Loopback0
```



CHAPTER 3

Configuring Local Area Bonjour in Unicast Mode for LAN Networks

Cisco Catalyst 9000 Series switches and Cisco Catalyst 9800 Series WLC introduce the unicast mode function in Local Area Bonjour network domain. The new enhanced gateway function at the first hop of wired and wireless networks communicates directly with any industry standard RFC 6762 compliant mDNS end point in Layer 2 unicast mode. The new unicast mode communication eliminates the Layer 2 mDNS flood challenge in large-scale enterprise-grade LAN and WLAN networks. The unicast mode provides enhanced security, bandwidth, scale, and performance within the network.

- [Prerequisites for Local Area Bonjour in Unicast Mode for LAN Networks, on page 29](#)
- [Restrictions for Local Area Bonjour in Unicast Mode for LAN Networks, on page 30](#)
- [Information About Local Area Bonjour in Unicast Mode for LAN Networks, on page 30](#)
- [How to Configure Local Area Bonjour Unicast Mode for LAN Networks, on page 32](#)
- [Verifying Local Area Bonjour in Unicast Mode for LAN Networks, on page 41](#)
- [Additional References for Local Area Bonjour in Unicast Mode for LAN Networks, on page 43](#)

Prerequisites for Local Area Bonjour in Unicast Mode for LAN Networks

You must ensure that the Cisco Catalyst devices are successfully configured and are operational prior to implementing Cisco Local Area Bonjour in unicast mode for LAN networks. The following are the prerequisites that need to be verified on a Cisco Catalyst Switch before deploying it in SDG-Agent mode or Service-Peer mode:

- Verify that the targeted Cisco Catalyst switch platform is supported in SDG-Agent or Service-Peer mode from the support matrix.
- Verify that the targeted Cisco Catalyst SDG-Agent and Service-Peer switch is running the minimum required Cisco IOS XE software version.
- The Cisco Catalyst switch in SDG-Agent and Service-Peer mode must have the valid Cisco DNA Advantage license installed and running.
- In a Multilayer network with Layer 2 unicast service-routing, ensure that the SDG-Agent in distribution-layer and Service-Peer are interconnected through a Layer 2 trunk in static mode.

- Ensure that the SDG-Agent and Service-Peer switches have IP reachability on the same IPv4 subnet in global routing.

Restrictions for Local Area Bonjour in Unicast Mode for LAN Networks

- Local Area Bonjour in Unicast Mode for LAN Networks is not supported on Cisco Catalyst 2900 Series, Cisco Catalyst 3850 Series, Cisco Catalyst 3650 Series, Cisco Catalyst 4500 Series, Cisco Catalyst 6500 Series, and Cisco Catalyst 6800 Series switches.
- Cisco SD-Access for wired and wireless networks is supported only for releases starting from Cisco IOS XE Amsterdam 17.3.3.
- Cisco Embedded Wireless Controller on a Cisco Catalyst Series switch is supported only for releases starting from Cisco IOS XE Amsterdam 17.3.3.
- The Cisco Bonjour gateway solution follows the industry standard RFC 6762 Multicast DNS (mDNS) guidelines and only supports wired or wireless end points that comply with unicast mode.
- The Catalyst Switch Management Port is not supported for local area service-routing.

Information About Local Area Bonjour in Unicast Mode for LAN Networks

The zero-configuration service discovery and distribution capabilities use the link-local mDNS protocol to discover rich services intuitively without extensive user knowledge and intervention. RFC 6762 provides guidelines to discover services via Layer 2 multicast or Layer 2 unicast in a local segment. The receiving end point may request service discovery over an IPv4 and IPv6 network to collect information prior to use. The Layer 2 multicast frames are broadcast-category packets in a LAN and WLAN environment. Thus, they are flooded based on the Layer 2 flood boundary size across the network.

The Layer 2 or Layer 3 network boundary varies broadly in an enterprise network for LAN and wireless designs. The Local Area Bonjour domain introduces two new unicast communication modes. The unicast communication modes prevent mDNS flooding in the network for any current or evolving network deployment models. The following are the two new aspects of Local Area Bonjour Unicast modes:


- Unicast mode end points
- Unicast mode Layer 2 network

End Points for Unicast Mode

Starting with Cisco IOS XE Amsterdam Release 17.3.2, Cisco Catalyst 9000 Series switches and Cisco Catalyst 9800 Series WLCs introduce Layer 2 unicast service gateway solution. The mDNS endpoint continues to advertise or query services over Layer 2 mDNS. However, with the unicast mode settings enabled, the incoming mDNS IPv4 and IPv6 frames are handled uniquely. The unicast technique eliminates the mDNS flood challenges and provides a policy-based service query response to the requesting end points over a unicast

MAC address. The following figure illustrates the functional difference between the new Layer 2 unicast (flood-free) and the traditional Layer 2 Multicast (flood) communication with wired and wireless end points.

Figure 9: Layer 2 Unicast Mode End Points

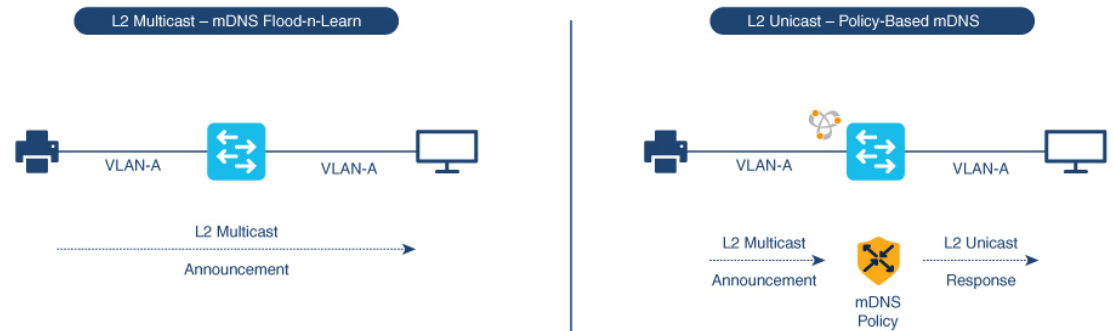

957087

Layer 2 Network for Unicast Mode


The Layer 3 boundary for wired and wireless networks can reside in the distribution layer with Layer 2 connections extended over trunk ports to an access layer switch or WLC. The association of the nonpruned or common VLAN ID to the trunk ports extends the Layer 2 flood boundary across the network.

Starting with Cisco IOS XE Amsterdam Release 17.3.2, Cisco Catalyst 9000 Series switches and Cisco Catalyst 9800 Series WLCs introduce the Service Peer role to eliminate transmitting mDNS flood over trunk ports. The Service Peer establishes a unicast Layer 3 IPv4-based service-routing session with the distribution layer system in Service Discovery Gateway (SDG) role. The Service Peer establishes the session over the existing Layer 2 trunk ports without modifying any existing Layer 2 VLAN configuration. The new mDNS trust port between access layer and distribution layer uses the existing out-of-band management network to statefully discover and distribute services (based on policies) to replace traditional flood-n-learn methods from the Layer 2 network.

If the Layer 3 boundary in a LAN environment is at the access layer, then the SDG mode provides integrated Service Peer role. Further, the SDG mode needs only Wide Area Bonjour with Cisco DNA Center for service-routing in a Layer 3 IP network.

The following figure illustrates a Layer 2 Network with the unicast mode and a traditional Layer 2 network with mDNS flood:

Figure 10: Unicast Mode Layer 2 Network

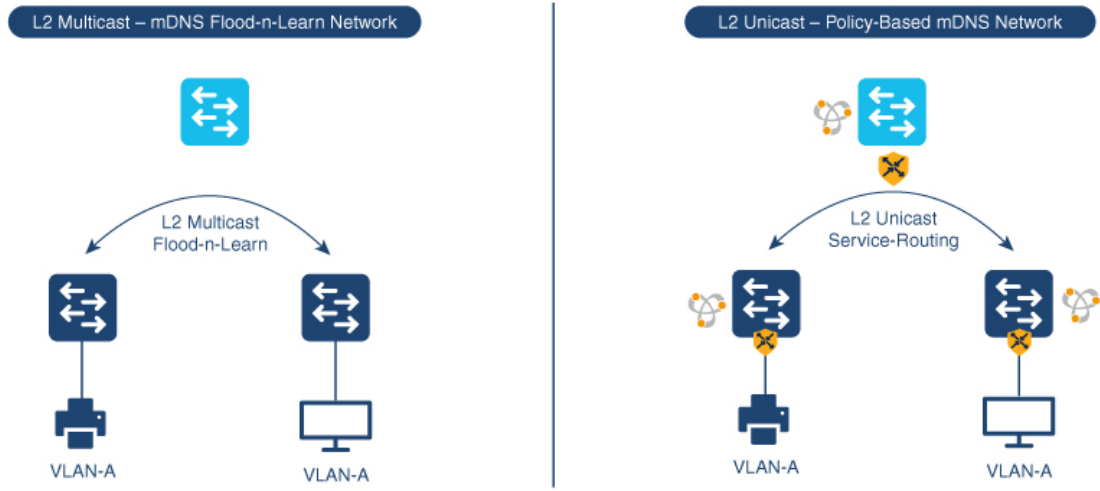

357088

How to Configure Local Area Bonjour Unicast Mode for LAN Networks

This section shows how to configure the first-hop Layer 2 LAN access switch in Service Peer mode, to enable mDNS gateway function with policies, and to enable peering with upstream Layer 3 gateway in SDG Agent mode. The procedure also applies to the first-hop Layer 3 LAN access switch and the first-hop Layer 3 gateway switch in SDG Agent mode.

Configuring mDNS Gateway Mode

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	mdns-sd gateway Example: Device(config)# mdns-sd gateway	Enables mDNS on the Layer 2 switch and enters mDNS gateway configuration mode. Enter the following commands in mDNS gateway configuration mode to enable the respective functionalities:

	Command or Action	Purpose
		<ul style="list-style-type: none"> • air-print-helper: Enables communication between Apple iOS devices like iPhones and iPads to discover and use older printers that do not support driverless AirPrint function. • cache-memory-max: Configures the percentage memory for cache. • rate-limit: Enables rate limiting of incoming mDNS packets. • service-announcement-count: Configures maximum service announcement count per scheduler to upstream SDG-Agent or Cisco DNA Center controller. Service advertisement count ranges from 10 to 500. • service-announcement-timer periodicity: Configures service advertisement time scheduler in seconds to upstream SDG-Agent or Cisco DNA Center controller. The value ranges from 5 to 36000 seconds. • service-query-count: Configures maximum service query request count per scheduler to upstream SDG-Agent or Cisco DNA Center controller. The value ranges from 10 to 500 service query count. • service-query-timer periodicity: Configures service query request time scheduler in seconds to upstream SDG-Agent or Cisco DNA Center controller. The value ranges from 5 to 36000 seconds.
<p>Step 4</p>	<p>mode service-peer</p> <p>Example:</p> <pre>Device(config-mdns-sd)# mode service-peer</pre>	<p>Configure mDNS gateway in either of the following modes based on system settings:</p> <ul style="list-style-type: none"> • service-peer: Enables the Layer 2 Catalyst Series switch in mDNS Service Peer mode. • sdg-agent: Enables the Layer 3 Catalyst Series switch in SDG Agent mode to peer with Cisco DNA Center controller for Wide Area Bonjour service-routing. <p>This is the default mode.</p>

	Command or Action	Purpose
Step 5	end Example: Device (config-mdns-sd) # end	Returns to privileged EXEC mode.

Configuring mDNS Service Policy

The mDNS service policy creates a service list that permits built-in or user-defined custom service-types. It then associates the service-list to a service-policy to enforce it in ingress or egress direction. It then applies the service-policy to the new VLAN configuration mode. This configuration remains the same on a Cisco Catalyst Series switch in both Service Peer and SDG Agent mode.

To configure an mDNS service policy and apply it on a target VLAN in Service Peer mode, perform the following steps:

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	mdns-sd service-list service-list-name {in out} Example: Device (config) # mdns-sd service-list VLAN100-LIST-IN in	Configures the incoming mDNS service list to classify one or more service types. A unique service list is required to process the incoming mDNS message and the outbound response to the requesting end points.
Step 4	match service-definition-name [message-type {any announcement query}] Example: Device (config-mdns-sl-in) # match APPLE-TV Device (config-mdns-sl-in) # match PRINTER-IPPS message-type announcement	Checks the inbound service-list. The switch either accepts or drops the incoming mDNS service type (like Apple TV) advertisement or query matching message type. The service list contains an implicit deny at the end. The default message-type is any .
Step 5	exit Example: Device (config-mdns-sl-in) # exit	Returns to global configuration mode.
Step 6	mdns-sd service-list service-list-name {in out}	Configures the outgoing mDNS service list to classify one or more service types.

	Command or Action	Purpose
	Example: Device (config) # mdns-sd service-list VLAN100-LIST-OUT out	A unique service list is required to process the incoming mDNS message and the outbound response to the requesting end points.
Step 7	match <i>service-definition-name</i> [message-type { any announcement query }] [location-filter <i>location-filter-name</i>] [source-interface { <i>mDNS-VLAN-number</i> <i>mDNS-VLAN-range</i> }] Example: Device (config-mdns-sl-out) # match APPLE-TV Device (config-mdns-sl-out) # match PRINTER-IPPS	<p>Checks the outgoing service-list. The switch provides a local service proxy function by responding with a matching service-type to the requesting end point. For example, the Apple-TV and Printer learned from VLAN 100 are distributed to the receiver in the same VLAN 100.</p> <p>The service-list contains an implicit deny at the end.</p> <p>The message-type for an outbound service list is optional.</p>
Step 8	exit Example: Device (config-mdns-sl-out) # exit	Returns to global configuration mode.
Step 9	mdns-sd service-policy <i>service-policy-name</i> Example: Device (config) # mdns-sd service-policy VLAN100-POLICY	Creates a unique mDNS service-policy.
Step 10	service-list <i>service-list-name</i> { in out } Example: Device (config-mdns-ser-policy) # service-list VLAN100-LIST-IN in Device (config-mdns-ser-policy) # service-list VLAN100-LIST-OUT out	Configures an mDNS service policy to associate with the service list for each direction.
Step 11	exit Example: Device (config-mdns-ser-policy) # exit	Returns to global configuration mode.
Step 12	vlan configuration <i>vlan-id</i> Example: Device (config) # vlan configuration 100 Device (config) # vlan configuration 101-110, 200	Enables VLAN configuration for advanced service parameters. One or more VLANs can be created for the same settings.
Step 13	mdns-sd gateway Example: Device (config-vlan) # mdns-sd gateway	Enables the mDNS gateway on the specified VLAN IDs.

	Command or Action	Purpose
Step 14	service-policy <i>service-policy-name</i> Example: Device (config-vlan-mdns) # service-policy VLAN100-POLICY	Associates an mDNS service policy with the specified VLAN IDs.
Step 15	end Example: Device (config-vlan-mdns) # end	Returns to privileged EXEC mode.

Configuring mDNS Location-Filter

A Cisco Catalyst Series switch in Unicast network mode provides, by default, a local service proxy between the mDNS service provider and the receiver connected in the same Layer 2 VLAN. Additionally, you can configure the mDNS location filter to allow service discovery and distribution between locally configured VLAN IDs. The configuration remains the same for both Service Peer and SDG Agent modes.

To enable the local service proxy on the switch to discover mDNS services between local VLANs, perform the following steps:

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	mdns-sd location-filter <i>location-filter-name</i> Example: Device (config) # mdns-sd location-filter LOCAL-PROXY	Configures a unique location filter.
Step 4	match location { all default ID } vlan <i>vlan-id</i> Example: Device (config-mdns-loc-filter) # match location-group default vlan 100 Device (config-mdns-loc-filter) # match location-group default vlan 101	Configures the match criteria that mutually distribute permitted services between grouped VLANs.
Step 5	mdns-sd service-list <i>service-list-name</i> { in out }	Configures the outgoing mDNS service list to classify one or more service types.

	Command or Action	Purpose
	Example: <pre>Device(config)# mdns-sd service-list VLAN100-LIST-OUT out</pre>	A unique service list is required to process the incoming mDNS message and the outbound response to the requesting end points.
Step 6	match <i>service-definition-name</i> [message-type { any announcement query }] [location-filter <i>location-filter-name</i>] Example: <pre>Device(config-mdns-sl-out)# match APPLE-TV location-filter LOCAL-PROXY</pre>	<p>Checks the outgoing service-list. The switch provides a local service proxy function by responding with a matching service-type to the requesting end point. For example, the Apple-TV and Printer learned from VLAN 100 are distributed to the receiver on different VLAN 101.</p> <p>The service-list contains an implicit deny at the end.</p> <p>The message-type for an outbound service list is optional.</p>
Step 7	exit Example: <pre>Device(config-mdns-sl-out)# exit</pre>	Returns to global configuration mode.
Step 8	mdns-sd service-policy <i>service-policy-name</i> Example: <pre>Device(config)# mdns-sd service-policy VLAN100-POLICY</pre>	Creates a unique mDNS service-policy.
Step 9	service-list <i>service-list-name</i> { in out } Example: <pre>Device(config-mdns-ser-policy)# service-list VLAN100-LIST-OUT out</pre>	Configures an mDNS service-policy to associate with the service-list for each direction.
Step 10	exit Example: <pre>Device(config-mdns-ser-policy)# exit</pre>	Returns to global configuration mode.
Step 11	vlan configuration <i>vlan-id</i> Example: <pre>Device(config)# vlan configuration 100 Device(config)# vlan configuration 101-110, 200</pre>	Enables VLAN configuration for advanced service parameters. One or more VLANs can be created for the same settings.
Step 12	mdns-sd gateway Example: <pre>Device(config-vlan)# mdns-sd gateway</pre>	Enables the mDNS gateway on the specified VLAN IDs.
Step 13	service-policy <i>service-policy-name</i> Example:	Associates an mDNS service-policy with the specified VLAN IDs.

	Command or Action	Purpose
	Device (config) # service-policy VLAN100-POLICY	
Step 14	end Example: Device (config) # end	Returns to privileged EXEC mode.

Configuring custom Service Definition

Cisco IOS XE supports various built-in mDNS service definition types that map the key mDNS PTR records to user-friendly names. For example, a built-in Apple-TV service type is associated with `_airplay._tcp.local` and `_raop._tcp.local` PTR records to successfully enable the service in the network. You can create custom service-definitions with matching mDNS PTR records to enable mDNS service-routing in the network.

To create a custom service definition, associate it with the service list and discover mDNS services between local VLANs, perform the following steps:

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	mdns-sd service-definition <i>service-definition-name</i> Example: Device (config) # mdns-sd service-definition APPLE-CLASSROOM	Configures a unique location filter.
Step 4	match location {all default id} vlan <i>vlan-id</i> Example: Device (config-mdns-ser-def) # service-type _classroom._tcp.local	Configures two or more local VLANs and mutually distributes permitted services between the grouped VLANs.
Step 5	end Example: Device (config) # end	Returns to privileged EXEC mode.

Configuring service-routing on Service Peer

The Layer 2 Cisco Catalyst switch in service-peer mode builds service-routing with an upstream distribution-layer switch in SDG Agent mode. To build service-routing the Layer 2 Cisco Catalyst switch requires at least one interface with valid IP address to reach upstream SDG Agent Catalyst switch. The switch management port is unsupported.

Table X below provides step-by-step configuration guidelines to enable service-routing on Cisco Catalyst switch in service-peer mode and setup mDNS trust interface settings.

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	vlan configuration <i>vlan-id</i> Example: Device(config)# vlan configuration 100 Device(config)# vlan configuration 101-110, 200	Enables VLAN configuration for advanced service parameters. One or more VLANs can be created for the same settings.
Step 4	mdns-sd gateway Example: Device(config-vlan)# mdns-sd gateway	Enables the mDNS gateway on the specified VLAN IDs. Enter the following commands in mDNS gateway configuration mode to enable the respective functionalities: <ul style="list-style-type: none"> • active-query timer [sec] : Enables refresh of discovered services and their records with a periodic mDNS query message for the permitted service types. The value ranges from 60 to 3600 seconds. • service-mdns-query {ptr srv txt} : Permits processing a specific query type. The default value is ptr. • transport {ipv4 ipv6 both} : Permits processing for IPv4 traffic, IPv6 traffic, or both. We recommend that you add only one network type to reduce redundant

	Command or Action	Purpose
		processing and avoid responses with same information over two network types. The default value is ipv4 .
Step 5	source interface <i>interface-id</i> Example: Device(config-vlan-mdns-sd) # source-interface vlan 4094	Selects the interface with a valid IP address that sources the service-routing session with the upstream Cisco Catalyst SDG Agent switch. Typically, the management VLAN interface is used.
Step 6	sdg-agent <i>ipv4-address</i> Example: Device(config-vlan-mdns-sd) # sdg-agent 10.0.0.254	Configures the IPv4 address for the SDG Agent. Typically, the management VLAN gateway address is used. If FHRP mode is being used, then use the FHRP virtual IP address of the management VLAN.
Step 7	end Example: Device(config-vlan-mdns-sd) # end	Returns to privileged EXEC mode.

Configuring service-routing on Service Discovery Gateway

Cisco Catalyst 9000 Series switches at the distribution layer support SDG Agent mode. SDG Agent mode enables the unicast mode of Bonjour service-routing with downstream Layer 2 access layer Ethernet switches and Cisco Catalyst 9800 Series WLCs.

To enable policy-based service discovery and distribution between locally paired service peers network devices, perform the following steps:



Note Configure the mDNS service policy as described in [Configuring mDNS Service Policy, on page 34](#).

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.

	Command or Action	Purpose
Step 3	mdns-sd service-peer group Example: Device(config)# mdns-sd service-peer group	Configures a unique Service Peer group.
Step 4	peer-group group-id Example: Device(config-mdns-svc-peer)# peer-group 1	Assigns a unique peer group ID to pair the Service Peers that permit mDNS service discovery and allows distribution within assigned group list. The allowed peer group range is 1 to 1000 for every SDG Agent switch.
Step 5	service-peer [ipv4-address] location-group {all default id} Example: Device(config-mdns-svc-peer-grp)# service-peer 10.0.0.1 location-group default Device(config-mdns-svc-peer-grp)# service-peer 10.0.0.2 location-group default	Configures at least one Service Peer to accept mDNS service advertisement or query message. When grouped with more than one Service Peers, the SDG Agent provides Layer 2 unicast mode routing between the configured peers. For example, the SDG Agent provides unicast-based service gateway function between the two Layer 2 service peer switches (10.0.0.1 and 10.0.0.2) that match the associated service policy.
Step 6	end Example: Device(config)# end	Returns to privileged EXEC mode.

Verifying Local Area Bonjour in Unicast Mode for LAN Networks

This section provides information about verifying Local Area Bonjour in unicast mode for both Service Peer and SDG Agent modes.

Verifying a Service Peer Catalyst Switch in Local Area Bonjour Domain

The following **show** commands are used to verify the various Local Area Bonjour domain mDNS service configuration parameters, cache records, statistics, and other information on a Cisco Catalyst Series switch configured in Service Peer mode.

Table 3: Commands to Verify a Service Peer Catalyst Switch in Local Area Bonjour Domain

Command	Purpose
show mdns-sd cache { all interface mac name service-peer static type vlan }	<p>Displays the available mDNS cache records that support multiple variables and provides granular source details. The following variables are available:</p> <ul style="list-style-type: none"> • all: Displays all available cache records discovered from multiple source connections of a system. • interface: Displays the available cache records discovered from specified Layer 3 interface. • mac: Displays the available cache records discovered from the specified MAC address. • name: Displays the available cache records based on the name of the service provider announced. • service-peer: Displays available cache records discovered from the specified Layer 2 Service Peer. • static: Displays the locally configured static mDNS cache entries. • type: Displays the available cache records based on the specific mDNS record type (PTR, SRV, TXT, A, or AAAA). • vlan: Displays the available cache records discovered from the specified Layer 2 VLAN ID in unicast mode.
show mdns-sd service-definition { name type }	<p>Displays the built-in and user-defined custom service definitions and provides the mapping from service name to mDNS PTR records.</p> <p>The service definitions can be filtered by name or by type.</p>
show mdns-sd service-list { direction name }	<p>Displays the configured inbound and outbound service lists that classify matching service types for a service policy.</p> <p>The service lists can be filtered by name or by direction.</p>
show mdns-sd service-peer statistics	<p>Displays the detailed mDNS packet statistics (number of packets sent to and received from the client, number of packets sent to and received from SDG-agent, and so on) that is processed by the system, when mDNS is configured in service-peer mode.</p>

Command	Purpose
<code>show mdns-sd service-policy { interface name }</code>	Displays the list of mDNS service policies mapped with inbound and outbound service lists. The service policies list can be filtered by the associated interface or by name.
<code>show mdns-sd statistics { all cache debug interface service-list service-policy services vlan }</code>	Displays the detailed mDNS statistics processed bi-directionally by the system on each mDNS-gateway-enabled VLAN, when mDNS is configured in unicast mode. The keywords for the mDNS statistics provide a detailed view on the interface, policy, service list, and services.
<code>show mdns-sd summary { interface vlan }</code>	Displays the brief information about mDNS gateway and the key configuration status on all VLANs and interfaces of the system.

Verifying a Service Discovery Gateway Agent Catalyst Switch in Local Area Bonjour Domain

See [Table 3: Commands to Verify a Service Peer Catalyst Switch in Local Area Bonjour Domain, on page 42](#) for the complete list of **show** commands that are used to verify the various Local Area Bonjour domain mDNS service configuration parameters, cache records, statistics, and other information on a Cisco Catalyst Series switch configured in SDG Agent mode.

Additional References for Local Area Bonjour in Unicast Mode for LAN Networks

Related Topic	Document Title
Cisco Wide Area Bonjour Application on Cisco DNA Center User Guide	Cisco Wide Area Bonjour Application on Cisco DNA Center User Guide, Release 2.1.2
DNA Service for Bonjour Deployment on Cisco Catalyst 9800 WLCs	Cisco Catalyst 9800 Series Wireless Controller Software Configuration Guide



CHAPTER 4

Configuring Wide Area Bonjour

Cisco Wide Area Bonjour domain enables global service-routing beyond a single IP gateway for traditional LAN and WLAN networks. In Cisco Wide Area Bonjour domain, Cisco Catalyst LAN switches are deployed in Layer 3 routed mode to act as distributed SDG Agents throughout the network. These SDG agents build a TCP-based, stateful, reliable, and light-weight communication channel with a Cisco DNA Center. The Cisco DNA Center must also be configured with Cisco Wide Area Bonjour application for policy-based global service discovery and distribution.

- [Restrictions for Wide Area Bonjour for LAN and WLAN Networks, on page 45](#)
- [Information About Wide Area Bonjour LAN and WLAN Networks, on page 45](#)
- [How to Configure Wide Area Bonjour for LAN and WLAN Networks, on page 46](#)
- [Verifying Wide Area Bonjour for LAN and WLAN Networks, on page 48](#)
- [Additional References for Wide Area Bonjour for LAN and WLAN Networks, on page 49](#)

Restrictions for Wide Area Bonjour for LAN and WLAN Networks


Wide Area Bonjour service-routing between Cisco DNA Center and a Catalyst SDG Agent Switch over management port is not supported. We recommend that you use a switch Loopback interface instead.

Information About Wide Area Bonjour LAN and WLAN Networks

Wide Area Bonjour, by definition, allows service-routing over an IP network without network boundaries. Hence, the core objective of Cisco Wide Area Bonjour is to advertise and browse Bonjour services in a global IP network that is limited to local or remote sites, as required. Typically, the LAN and Wireless LAN IP gateway deployed in SDG Agent mode build the stateful TCP-based unicast connection to the Cisco DNA Center for Wide Area Bonjour service-routing.

The fundamentals of service-routing are based on the policies defined in Local Area and Wide Area Bonjour domains. The policy defines implicit guidelines to accept, process and respond to mDNS services on the SDG Agent and the Cisco DNA-Center. The service policy carries multiple tuples to distinctly classify and distribute the service provider information along with granular network location. The following figure illustrates an end-to-end reference network model for Cisco Wide Area Bonjour.

Figure 11: Cisco Wide Area Bonjour Domain

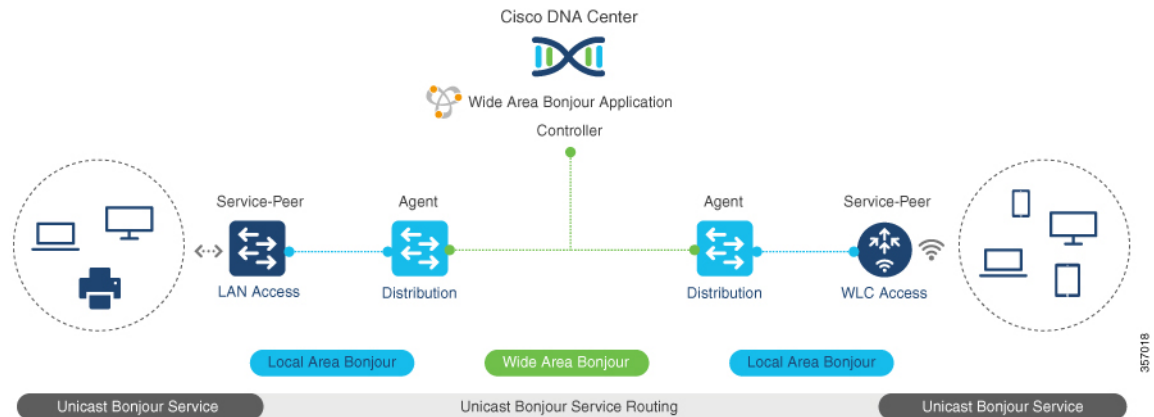

How to Configure Wide Area Bonjour for LAN and WLAN Networks

This section provides information about how to configure Wide Area Bonjour for LAN and WLAN networks. Configuration of Cisco Wide Area Bonjour requires you to configure the Cisco Catalyst Series switch in SDG Agent mode and build the service policies in Wide Area Bonjour application of Cisco DNA Center.

Configuring Cisco Wide Area Bonjour Service Policy

To build and apply the Wide Area Bonjour export service policy and enable service-routing, perform the following steps.



Note The controller-bound service policy does not require an ingress service policy.

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	mdns-sd service-list <i>service-list-name</i> { in out }	Configures the outgoing mDNS service list to classify one or more service types.

	Command or Action	Purpose
	Example: Device(config)# mdns-sd service-list WIDE-AREA-SERVICES-LIST-OUT out	A unique service list is required to process the incoming mDNS message and the outbound response to the requesting end points.
Step 4	match service-definition-name [message-type {any announcement query}] Example: Device(config-mdns-sl-out)# match APPLE-TV Device(config-mdns-sl-out)# match PRINTER-APPS	Checks and matches the outbound service list. The switch exports locally discovered services and requests remote service information from Wide Area Bonjour domain. The service announcement and query request are processed based on permitted, built-in, or custom service types. The service list contains an implicit deny at the end. The message-type for an outbound service-list is not required.
Step 5	mdns-sd service-policy service-policy-name Example: Device(config)# mdns-sd service-policy DNAC-CONTROLLER-POLICY	Creates a unique mDNS service policy.
Step 6	service-list service-list-name {in out} Example: Device(config-mdns-ser-policy)# service-list WIDE-AREA-SERVICES-LIST-OUT out	Configures an mDNS service policy to associate with the service-list for each direction.
Step 7	end Example: Device(config-mdns-sd)# end	Returns to privileged EXEC mode.

Configuring Cisco Wide Area Bonjour Service-Routing

To build and apply Wide Area Bonjour export service policy and setup controller parameters that enable service-routing, perform the following steps

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	configure terminal Example:	Enters global configuration mode.

	Command or Action	Purpose
	Device# configure terminal	
Step 3	service-export mdns-sd controller <i>controller-name</i> Example: Device(config)# service-export mdns-sd controller DNAC-BONJOUR-CONTROLLER	Configures the service export controller to enable Wide Area Bonjour service-routing with Cisco DNA Center. Only one service export can be configured.
Step 4	controller-address ipv4-address Example: Device(config-mdns-sd-se)# controller-address 100.0.0.1	Assigns the Cisco DNA Center IPv4 address to pair service-routing. Only one controller address can be configured.
Step 5	controller-source-interface interface-name Example: Device(config-mdns-sd-se)# controller-source-interface Loopback0	Configures the source interface to build service-routing from the SDG-Agent and the Cisco DNA Center. We recommend you to use the Loopback interface.
Step 6	controller-service-policy service-policy-name out Example: Device(config-mdns-sd-se)# controller-service-policy DNAC-CONTROLLER-POLICY out	Associates the controller-bound egress mDNS policy for Wide Area Bonjour service-routing.
Step 7	end Example: Device(config-mdns-sd-se)# end	Returns to privileged EXEC mode.

Verifying Wide Area Bonjour for LAN and WLAN Networks

The following **show** commands are used to verify Wide Area Bonjour for LAN and WLAN networks:

- **show mdns-sd controller detail**
- **show mdns-sd controller export-summary**
- **show mdns-sd controller statistics**
- **show mdns-sd controller summary**

Additional References for Wide Area Bonjour for LAN and WLAN Networks

Related Topic	Document Title
Cisco Wide Area Bonjour Application on Cisco DNA Center User Guide	Cisco Wide Area Bonjour Application on Cisco DNA Center User Guide, Release 2.1.2
DNA Service for Bonjour Deployment on Cisco Catalyst 9800 WLCs	Cisco Catalyst 9800 Series Wireless Controller Software Configuration Guide



CHAPTER 5

Configuration Examples for Cisco DNA Service for Bonjour

- [Configuration Examples for Local Area Bonjour in Unicast Mode for LAN Networks, on page 51](#)
- [Configuration Examples for Wide Area Bonjour for LAN and WLAN Networks, on page 67](#)


Configuration Examples for Local Area Bonjour in Unicast Mode for LAN Networks

This section provides configuration examples for Local Area Bonjour Domain in unicast mode.

Example: Single-VLAN Unicast Mode Bonjour

This example provides a sample configuration to implement Local Area Bonjour for single-VLAN unicast mode on an access layer switch. The following figure illustrates a single-VLAN unicast mode Bonjour network environment:

Figure 12: Single VLAN Unicast Mode Bonjour Network

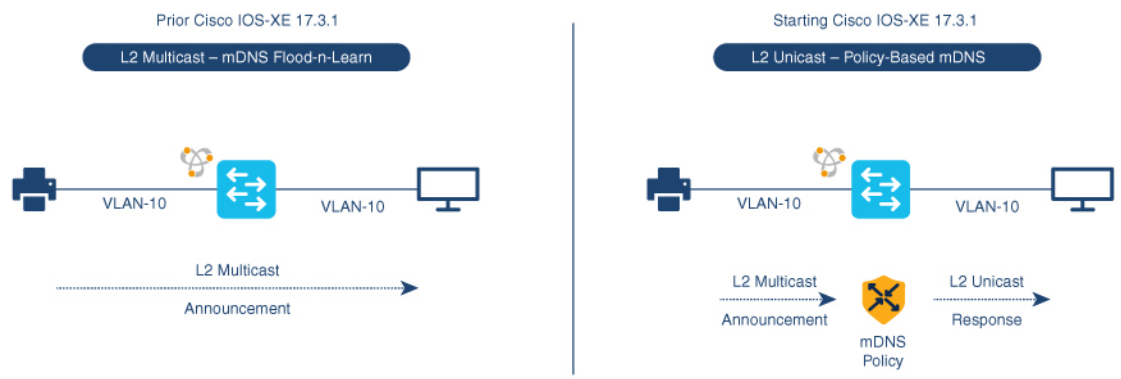

The preceding figure illustrates a multiple-VLAN unicast mode Bonjour network environment with an AirPrint-capable printer and a user computer (MacOS or Microsoft Windows). The devices are connected to an Ethernet network and are part of a common Layer 2 VLAN. Once you configure the devices using the

following sample configuration, the user computer can dynamically discover the printer using Layer 2 unicast and policy.



Note The sample configuration provided in this section can be applied on an access layer switch deployed as a Service-Peer (Layer 2 access) or as an SDG Agent (Layer 3 access).

Table 4: Configuring Single VLAN Unicast Mode Bonjour

Configuration Step	Sample Configuration
Step 1: Enable mDNS gateway and set the gateway mode.	! mdns-sd gateway mode service-peer !
Step 2: Create a unique mDNS inbound policy to permit ingress AirPrint service announcement from the service provider.	! mdns-sd service-list LOCAL-AREA-SERVICES-IN in match printer-ipps !
Step 3: Create a unique mDNS outbound policy to permit egress AirPrint service response to the service receiver.	! mdns-sd service-list LOCAL-AREA-SERVICES-OUT out match printer-ipps !
Step 4: Associate the inbound and outbound service lists to a unique service-policy.	! mdns-sd service-policy LOCAL-AREA-POLICY service-list LOCAL-AREA-SERVICES-IN service-list LOCAL-AREA-SERVICES-OUT !
Step 5: Activate unicast mDNS gateway on VLAN 10 and associate the service-policy with advanced parameters.	! vlan configuration 10 mdns-sd gateway service-policy LOCAL-AREA-POLICY active-query timer 3600 !

Verifying Single VLAN Unicast Mode Bonjour

Sample outputs for the following **show** commands on a Cisco Catalyst Series switch in Service Peer mode show the operational status after the discovery of AirPrint service from the local network:

```
Device# show mdns-sd summary vlan 10
VLAN : 10
=====
mDNS Gateway           : Enabled
mDNS Service Policy    : LOCAL-AREA-POLICY
Active Query           : Enabled
                       : Periodicity 3600 Seconds
Transport Type         : IPv4
Service Instance Suffix : Not-Configured
mDNS Query Type        : ALL
SDG Agent IP           : 10.0.1.254
Source Interface       : Vlan4094
```

Device#

```
Device# show mdns-sd service-policy name LOCAL-AREA-POLICY
Service Policy Name  Service List IN Name  Service List Out Name
=====
LOCAL-AREA-POLICY          LOCAL-AREA-SERVICES-IN  LOCAL-AREA-SERVICES-OUT
```

Device#

```
Device# show mdns-sd cache vlan 10
<NAME>                                TYPE      TTL/Remaining Vlan-Id/If-name  Mac Address
<RR Record Data>
_universal._sub._ipp._tcp.local        PTR       4500/4486      V110             ac18.2651.03fe
Bldg-1-FL1-PRN._ipp._tcp.local        PTR       4500/4486      V110             ac18.2651.03fe
Bldg-1-FL1-PRN._ipp._tcp.local        PTR       4500/4486      V110             ac18.2651.03fe
Bldg-1-FL1-PRN._ipp._tcp.local        SRV       4500/4486      V110             ac18.2651.03fe
0 0 631 Bldg-1-FL1-PRN.local          A         4500/4486      V110             ac18.2651.03fe
10.153.1.1
Bldg-1-FL1-PRN.local                  AAAA      4500/4486      V110             ac18.2651.03fe
2001:10:153:1:79:A40C:6BEE:AEEC
Bldg-1-FL1-PRN._ipp._tcp.local        TXT       4500/4486      V110             ac18.2651.03fe
(451)'txtvers=1''priority=30''ty=EPSON WF-3620 Series''usb_MFG=EPSON''usb_MDL=W~'~
```

Device#

```
Device# show mdns-sd statistics vlan 10
mDNS Statistics
```

```
V110:
mDNS packets sent          : 612
  IPv4 sent                : 612
    IPv4 advertisements sent : 0
    IPv4 queries sent       : 612
  IPv6 sent                : 0
    IPv6 advertisements sent : 0
    IPv6 queries sent       : 0
Unicast sent               : 0
mDNS packets rate limited  : 0
mDNS packets received      : 42
  advertisements received  : 28
  queries received         : 14
    IPv4 received          : 42
      IPv4 advertisements received : 28
      IPv4 queries received : 14
    IPv6 received          : 0
      IPv6 advertisements received : 0
      IPv6 queries received : 0
mDNS packets dropped       : 0
```

```
=====
Query Type                  : Count
=====
PTR                         : 12
SRV                         : 0
A                           : 0
AAAA                       : 0
TXT                         : 0
ANY                         : 3
=====
```

Example: Multiple-VLAN Unicast Mode Bonjour


```

PTR Name                Advertisement  Query
=====
_ipp._tcp.local         9              4
Device#
    
```

Example: Multiple-VLAN Unicast Mode Bonjour

This example provides a sample configuration to implement Local Area Bonjour for multiple-VLAN unicast mode on an access layer switch.

Figure 13: Multiple-VLAN Unicast Mode Bonjour Network

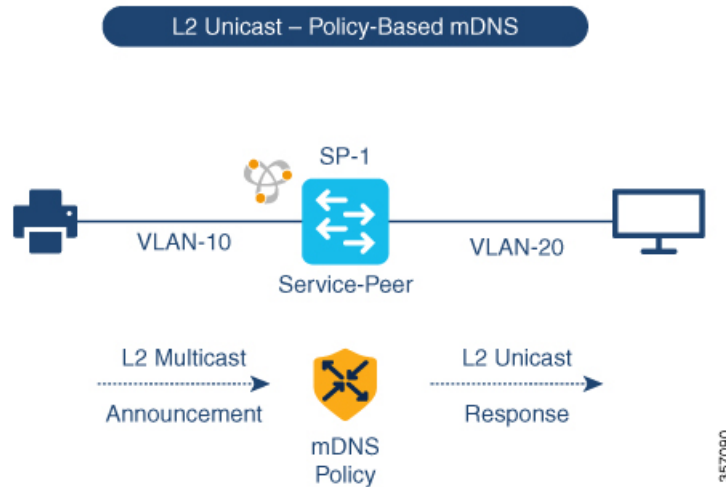

The preceding figure illustrates a multiple-VLAN unicast mode Bonjour network environment with an AirPrint-capable printer and a user computer (MacOS or Microsoft Windows). The devices are connected to an Ethernet network and are part of different Layer 2 VLANs for the same Ethernet switch. Once you configure the devices using the following sample configuration, the user computer can dynamically discover the printer using Layer 2 unicast and policy between the different VLANs.



Note The sample configuration provided in this section can be applied on an access layer switch deployed as a Service-Peer (Layer 2 access) or as an SDG Agent (Layer 3 access).

Table 5: Configuring Multiple VLAN Unicast Mode Bonjour

Configuration Step	Sample Configuration
Step 1: Enable mDNS gateway and set the gateway mode.	<pre> ! mdns-sd gateway mode service-peer ! </pre>

Configuration Step	Sample Configuration
Step 2: Create a location filter to enable local service proxy between the grouped VLANs.	<pre>! mdns-sd location-filter LOCAL-PROXY match location-group default vlan 10 match location-group default vlan 20 !</pre>
Step 3: Create a unique mDNS inbound policy to permit ingress AirPrint service announcement from service provider.	<pre>! mdns-sd service-list LOCAL-AREA-SERVICES-IN in match printer-ipps !</pre>
Step 4: Create a unique mDNS outbound policy to permit egress AirPrint service response to the service receiver. Associate the location filter to share AirPrint service information from grouped VLAN.	<pre>! mdns-sd service-list LOCAL-AREA-SERVICES-OUT out match printer-ipps location-filter LOCAL-PROXY !</pre>
Step 5: Associate the inbound and outbound service lists to a unique service-policy.	<pre>! mdns-sd service-policy LOCAL-AREA-POLICY service-list LOCAL-AREA-SERVICES-IN service-list LOCAL-AREA-SERVICES-OUT !</pre>
Step 6: Activate unicast mDNS gateway on VLAN 10 and VLAN 20. Associate the service-policy with advanced parameters.	<pre>! vlan configuration 10,20 mdns-sd gateway service-policy LOCAL-AREA-POLICY active-query timer 3600 !</pre>

Verifying Multiple VLAN Unicast Mode Bonjour

Sample outputs for the following **show** commands on a Cisco Catalyst Series switch in Service Peer mode show the operational status after the discovery of AirPrint service from the local network:

```
Device# show mdns-sd summary vlan 10
VLAN : 10
=====
mDNS Gateway           : Enabled
mDNS Service Policy   : LOCAL-AREA-POLICY
Active Query           : Enabled
                       : Periodicity 3600 Seconds
Transport Type         : IPv4
Service Instance Suffix : Not-Configured
mDNS Query Type        : ALL
SDG Agent IP           : 10.0.1.254
Source Interface       : Vlan4094
```

Device#

```
Device# show mdns-sd summary vlan 20
VLAN : 20
=====
mDNS Gateway           : Enabled
mDNS Service Policy   : LOCAL-AREA-POLICY
Active Query           : Enabled
                       : Periodicity 3600 Seconds
```

Example: Multiple-VLAN Unicast Mode Bonjour

```

Transport Type      :      IPv4
Service Instance Suffix :      Not-Configured
mDNS Query Type    :      ALL
SDG Agent IP       :      10.0.1.254
Source Interface   :      Vlan4094

```

Device#

Device# **show mdns-sd service-policy name LOCAL-AREA-POLICY**

```
Service Policy Name  Service List IN Name  Service List Out Name
=====
```

```
LOCAL-AREA-POLICY          LOCAL-AREA-SERVICES-IN  LOCAL-AREA-SERVICES-OUT
```

Device#

Device# **show mdns-sd cache vlan 10**

```

<NAME>                <TYPE>  <TTL>/Remaining  Vlan-Id/If-name  Mac Address
      <RR Record Data>
_universal._sub._ipp._tcp.local  PTR      4500/4486        V110             ac18.2651.03fe
  Bldg-1-FL1-PRN._ipp._tcp.local
_ipp._tcp.local              PTR      4500/4486        V110             ac18.2651.03fe
  Bldg-1-FL1-PRN._ipp._tcp.local
Bldg-1-FL1-PRN._ipp._tcp.local  SRV      4500/4486        V110             ac18.2651.03fe
  0 0 631 Bldg-1-FL1-PRN.local
Bldg-1-FL1-PRN.local          A        4500/4486        V110             ac18.2651.03fe
  10.153.1.1
Bldg-1-FL1-PRN.local          AAAA     4500/4486        V110             ac18.2651.03fe
  2001:10:153:1:79:A40C:6BEE:AEEC
Bldg-1-FL1-PRN._ipp._tcp.local  TXT      4500/4486        V110             ac18.2651.03fe
  (451)'txtvers=1''priority=30''ty=EPSON WF-3620 Series''usb_MFG=EPSON''usb_MDL=W~'~

```

Device#

Device# **show mdns-sd statistics vlan 10**

mDNS Statistics

```

V110:
mDNS packets sent          : 612
  IPv4 sent                 : 612
    IPv4 advertisements sent : 0
    IPv4 queries sent       : 612
  IPv6 sent                 : 0
    IPv6 advertisements sent : 0
    IPv6 queries sent       : 0
Unicast sent               : 0
mDNS packets rate limited  : 0
mDNS packets received      : 42
  advertisements received  : 28
  queries received         : 14
    IPv4 received          : 42
      IPv4 advertisements received: 28
      IPv4 queries received   : 14
    IPv6 received          : 0
      IPv6 advertisements received: 0
      IPv6 queries received   : 0
mDNS packets dropped       : 0

```

```

=====
Query Type                : Count
=====

```

```

PTR           : 2
SRV           : 0
A             : 0
AAAA         : 0
TXT           : 0
ANY          : 3


=====
PTR Name      Advertisement      Query
=====
_ipp._tcp.local      21          0
=====

Device#
    
```

Example: Configuring Unicast Mode Service-Routing for Multilayer Networks

This example provides a sample configuration to implement Local Area Bonjour in unicast mode service-routing for a multilayer network. The network has Layer 2 access switches and Layer 2 or Layer 3 boundary at distribution. The mDNS gateway mode on the Layer 2 access switches must be configured as Service Peers. The distribution layer switch gets configured in SDG Agent mode by default once you activate the mDNS gateway on the specified VLANs. The mDNS service discovery and distribution is extended using an IPv4-based service-routing protocol, instead of the Layer 2 mDNS flood-n-learn over the Layer 2 trunk ports.

Figure 14: Unicast Mode Service-Routing for a Multilayer Network

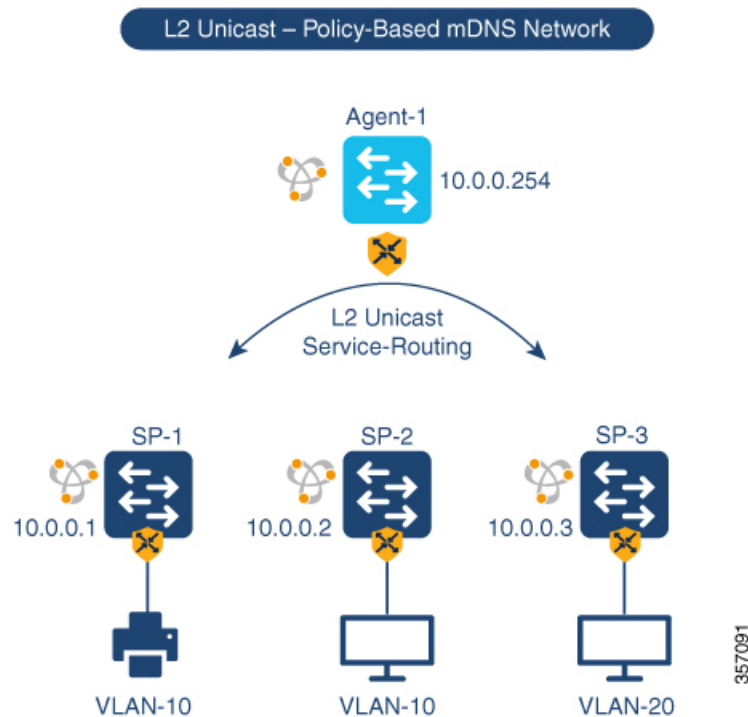

The preceding figure illustrates a VLAN unicast mode Bonjour network environment. The network has an AirPrint-capable printer connected in VLAN-10 of SP-1 switch. User-1 computer is connected in same VLAN 10 of SP-2. User-2 computer is connected to a different VLAN 20 of SP-3. Once you configure the devices using the following sample configuration, the user computers can dynamically discover the printer using Layer 2 unicast and policy on same and different VLAN IDs across the Layer 2 network.

Table 6: Configuring Unicast Mode Service-Routing for Multilayer Networks

Configuration Step	Service Peer Sample Configuration	SDG Agent Sample Configuration
Step 1: Enable mDNS gateway and set the gateway mode.	! <pre>mdns-sd gateway mode service-peer !</pre>	! <pre>mdns-sd gateway mode service-peer !</pre>
Step 2: Create a unique mDNS inbound policy to permit ingress AirPrint service announcement from service provider.	! <pre>mdns-sd service-list LOCAL-AREA-SERVICES-IN in match printer-ipps !</pre>	! <pre>mdns-sd service-list LOCAL-AREA-SERVICES-IN in match printer-ipps !</pre>
Step 3: Create a unique mDNS outbound policy to permit egress AirPrint service response to the service receiver. Associate the location filter to share AirPrint service information from the grouped VLAN.	! <pre>mdns-sd service-list LOCAL-AREA-SERVICES-OUT out match printer location-filter LOCAL-PROXY !</pre>	! <pre>mdns-sd service-list LOCAL-AREA-SERVICES-OUT out match printer location-filter LOCAL-PROXY !</pre>
Step 4: Associate the inbound and outbound service lists to a unique service-policy.	! <pre>mdns-sd service-policy LOCAL-AREA-POLICY service-list LOCAL-AREA-SERVICES-IN service-list LOCAL-AREA-SERVICES-OUT !</pre>	! <pre>mdns-sd service-policy LOCAL-AREA-POLICY service-list LOCAL-AREA-SERVICES-IN service-list LOCAL-AREA-SERVICES-OUT !</pre>
Step 5: Activate unicast mDNS gateway on VLAN 10 and VLAN 20. Associate the service-policy with advanced parameters. Configure the SDG-Agent IP address and the source interface on Service Peer to enable service-routing. No additional configuration required on SDG-Agent.	! <pre>vlan configuration 10,20 mdns-sd gateway service-policy LOCAL-AREA-POLICY active-query timer 4400 source-interface vlan 4094 sdg-agent 10.0.0.254 !</pre>	! <pre>vlan configuration 10,20 mdns-sd gateway service-policy LOCAL-AREA-POLICY !</pre>
Step 6: Configure mDNS Trust on Layer 2 trunk port of the switches.	! <pre>interface range TenG 1/0/1 - 2 switchport mode trunk mdns-sd trust !</pre>	! <pre>interface range TenG 1/0/1 - 6 switchport mode trunk mdns-sd trust !</pre>

Configuration Step	Service Peer Sample Configuration	SDG Agent Sample Configuration
Step 7: Configure service peer-group on the SDG Agent distribution switch and enable service-routing between the assigned Service Peer switch group.	No configuration is needed.	! mdns-sd service-peer group peer-group 1 service-peer 10.0.0.1 location-group default service-peer 10.0.0.2 location-group default service-peer 10.0.0.3 location-group default !

Verifying Unicast Mode Service-Routing for Multilayer Networks

Sample outputs for the following **show** commands on a Cisco Catalyst Series switch show the operational status after the discovery of AirPrint service from the local network:

```
Device# show mdns-sd summary vlan 10
VLAN : 10
```

```
=====
mDNS Gateway           : Enabled
mDNS Service Policy    : LOCAL-AREA-POLICY
Active Query           : Enabled
                      : Periodicity 3600 Seconds
Transport Type         : IPv4
Service Instance Suffix : Not-Configured
mDNS Query Type        : ALL
SDG Agent IP           : 10.0.1.254
Source Interface       : Vlan4094
```

Device#

```
Device# show mdns-sd summary vlan 20
VLAN : 20
```

```
=====
mDNS Gateway           : Enabled
mDNS Service Policy    : LOCAL-AREA-POLICY
Active Query           : Enabled
                      : Periodicity 3600 Seconds
Transport Type         : IPv4
Service Instance Suffix : Not-Configured
mDNS Query Type        : ALL
SDG Agent IP           : 10.0.1.254
Source Interface       : Vlan4094
```

Device#

```
Device# show mdns-sd service-policy name LOCAL-AREA-POLICY
```

```
Service Policy Name  Service List IN Name  Service List Out Name
=====
LOCAL-AREA-POLICY   LOCAL-AREA-SERVICES-IN  LOCAL-AREA-SERVICES-OUT
```

Device#

```
Device# show mdns-sd cache vlan 10
```

```
<NAME>                <TYPE>  <TTL>/Remaining  Vlan-Id/If-name  Mac Address
  <RR Record Data>
 _universal._sub._ipp._tcp.local  PTR      4500/4486        V110              ac18.2651.03fe
```

Example: Configuring Unicast Mode Service-Routing for Multilayer Networks

```

    Bldg-1-FL1-PRN._ipp._tcp.local
_ipp._tcp.local PTR 4500/4486 V110 ac18.2651.03fe
    Bldg-1-FL1-PRN._ipp._tcp.local
Bldg-1-FL1-PRN._ipp._tcp.local SRV 4500/4486 V110 ac18.2651.03fe
    0 0 631 Bldg-1-FL1-PRN.local
Bldg-1-FL1-PRN.local A 4500/4486 V110 ac18.2651.03fe
    10.153.1.1
Bldg-1-FL1-PRN.local AAAA 4500/4486 V110 ac18.2651.03fe
    2001:10:153:1:79:A40C:6BEE:AEEC
Bldg-1-FL1-PRN._ipp._tcp.local TXT 4500/4486 V110 ac18.2651.03fe
    (451)'txtvers=1'priority=30'ty=EPSON WF-3620 Series'usb_MFG=EPSON'usb_MDL=W~'~

```

Device#

```

Device# show mdns-sd statistics vlan 10
mDNS Statistics

```

```

V110:
mDNS packets sent : 612
  IPv4 sent : 612
    IPv4 advertisements sent : 0
    IPv4 queries sent : 612
  IPv6 sent : 0
    IPv6 advertisements sent : 0
    IPv6 queries sent : 0
Unicast sent : 0
mDNS packets rate limited : 0
mDNS packets received : 42
  advertisements received : 28
  queries received : 14
    IPv4 received : 42
      IPv4 advertisements received : 28
      IPv4 queries received : 14
    IPv6 received : 0
      IPv6 advertisements received : 0
      IPv6 queries received : 0
mDNS packets dropped : 0

```

```

=====
Query Type : Count
=====
PTR : 2
SRV : 0
A : 0
AAAA : 0
TXT : 0
ANY : 3

```

```

=====
PTR Name Advertisement Query
=====
_ipp._tcp.local 21 0

```

Device#

```

Device# show mdns-sd summary vlan 10
VLAN : 10

```

```

=====
mDNS Gateway : Enabled
mDNS Service Policy : LOCAL-AREA-POLICY
Active Query : Enabled
              : Periodicity 3600 Seconds

```

```

Transport Type           : IPv4
Service Instance Suffix : Not-Configured
mDNS Query Type         : ALL
SDG Agent IP            : 10.0.1.254
Source Interface        : Vlan4094

```

Device#

Device# **show mdns-sd summary vlan 20**

```

VLAN : 20
=====
mDNS Gateway           : Enabled
mDNS Service Policy    : LOCAL-AREA-POLICY
Active Query           : Enabled
                       : Periodicity 3600 Seconds
Transport Type         : IPv4
Service Instance Suffix : Not-Configured
mDNS Query Type        : ALL
SDG Agent IP           : 10.0.1.254
Source Interface       : Vlan4094

```

Device#

Device# **show mdns-sd service-policy name LOCAL-AREA-POLICY**

```

Service Policy Name  Service List IN Name  Service List Out Name
=====
LOCAL-AREA-POLICY   LOCAL-AREA-SERVICES-IN  LOCAL-AREA-SERVICES-OUT

```

Device#

Device# **show mdns-sd sdg service-peer summary**

```

Cache-Sync Interval: 15
Service-Peer: 40.1.1.10 Port: 10991
Uptime: 30 Hrs 24 Mins 40 secs, Cache-Sync Sent: 117
Last Cache-Sync Time: Thu Apr 16 20:50:27 2020

Service-Peer: 40.1.1.20 Port: 10991
Uptime: 31 Hrs 1 Mins 44 secs, Cache-Sync Sent: 120
Last Cache-Sync Time: Thu Apr 16 20:58:44 2020

```

Device# **show mdns-sd sp-sdg statistics**

```

                                                    One min, 5 mins, 1 hour
Average Input rate (pps) : 15,      5,      2
Average Output rate (pps) :      5,    14,      2
Messages received:
  Query                   : 219
  ANY query                : 0
  Advertisements          : 10
  Advertisement Withdraw  : 19
  Interface down          : 2
  Vlan down               : 0
  Service-peer ID change  : 0
  Service-peer cache clear : 0
  Resync response         : 0
Messages sent:
  Query response          : 129
  ANY Query response      : 0
  Cache-sync             : 27
  Get service-instance    : 0


```

Device#

Example: Migrating from mDNS Flood to Unicast Mode in Multilayer Networks

Prior to Cisco IOS XE Amsterdam 17.3.1 release, Layer 2 LAN switches functioned as an intermediate pass-through system between an upstream SDG Agent in distribution layer and locally attached wired mDNS end points. This example provides a sample configuration to migrate from mDNS flood to unicast mode in multilayer networks. The network has Layer 2 access switches and Layer 2 or Layer 3 boundary at distribution.

Figure 15: Migration from mDNS Flood to Layer 2 Service-Routing Unicast Mode

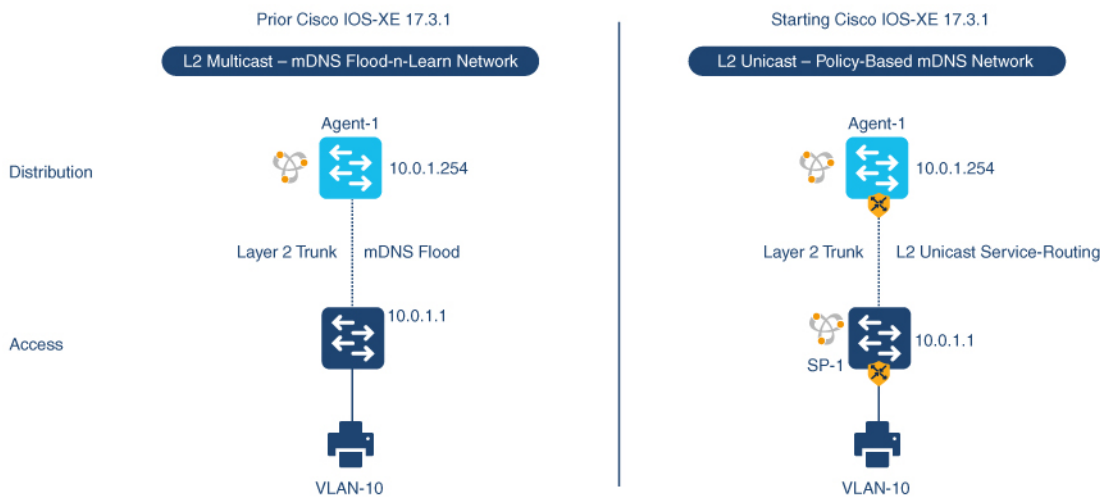

3E7092

The preceding figure illustrates a sample multilayer network that provides key gateway functional difference before and after upgrading to Cisco IOS XE Amsterdam 17.3.1 release.

The following table provides sample configurations for a traditional mDNS flood-based network and a Cisco Catalyst Series switch in SDG Agent mode that operates in a Layer 2 network environment.

Table 7: Layer 2 Access Configuration and Layer 3 SDG Agent Configuration

Layer 2 Access Sample Configuration	Layer 3 SDG Agent Sample Configuration
<pre>! interface TenG 1/1 switchport mode trunk switchport trunk allowed vlan 10,4094 ! interface Vlan 4094 description CAMPUS LAN MGMT ip address 10.0.1.1 255.255.255.0 no shutdown !</pre>	<pre>! interface TenG 1/1 switchport mode trunk switchport trunk allowed vlan 10,4094 ! interface Vlan 4094 description CAMPUS LAN MGMT ip address 10.0.1.254 255.255.255.0 no shutdown ! mdns-sd gateway ! mdns-sd service-list LOCAL-AREA-SERVICES-IN in match printer-ipps ! mdns-sd service-list LOCAL-AREA-SERVICES-OUT out match printer-ipps ! mdns-sd service-policy LOCAL-AREA-POLICY service-list LOCAL-AREA-SERVICES-IN service-list LOCAL-AREA-SERVICES-OUT ! ! mDNS Flood-based gateway ! interface vlan 10 mdns-sd gateway service-policy LOCAL-AREA-POLICY active-query timer 3600 !</pre>

The following table provides sample configurations for migration to a Layer 2 unicast-based network for a Cisco Catalyst switch in SDG Agent and Service Peer mode that operates in a Layer 2 network environment. The Layer 2 unicast routing functions between SDG Agent and Service Peer. Thus, no further controller-bound policy or export configuration change is required for the migration to unicast mode.

Table 8: Configuring Layer 2 Access and Layer 3 SDG Agent for Migration to Layer 2 Service-Routing Unicast Mode

Configuration Step	Layer 2 Access Sample Configuration	Layer 3 SDG Agent Sample Configuration
<p>Step 1: Enable Layer 2 Trunk mode between access and distribution switches.</p>	<pre>! interface TenG 1/1 switchport mode trunk switchport trunk allowed vlan 10, 4094 mdns trust !</pre>	<pre>! interface TenG 1/1 switchport mode trunk switchport trunk allowed vlan 10, 4094 mdns trust !</pre>
<p>Step 2: Configure the LAN management VLAN and assign a valid IP range.</p>	<pre>! interface Vlan 4094 description CAMPUS LAN MGMT ip add 10.0.1.1 255.255.255.0 no shutdown !</pre>	<pre>! interface Vlan 4094 description CAMPUS LAN MGMT ip add 10.0.1.254 255.255.255.0 no shutdown !</pre>


Configuration Step	Layer 2 Access Sample Configuration	Layer 3 SDG Agent Sample Configuration
Step 3: Enable mDNS gateway and modes at access and distribution switches.	! mdns-sd gateway mode service-peer !	! mdns-sd gateway mode sdg-agent !
Step 4: Create a unique mDNS inbound policy to permit ingress AirPrint service announcement from the service provider.	! mdns-sd service-list LOCAL-AREA-SERVICES-IN in match printer-ipps !	! mdns-sd service-list LOCAL-AREA-SERVICES-IN in match printer-ipps !
Step 5: Create a unique mDNS outbound policy to permit egress AirPrint service response to the service receiver. Associate the location filter to share AirPrint service information from the grouped VLAN.	! mdns-sd service-list LOCAL-AREA-SERVICES-OUT out match printer-ipps !	! mdns-sd service-list LOCAL-AREA-SERVICES-OUT out match printer-ipps !
Step 6: Associate inbound and outbound service lists to a unique service policy.	! mdns-sd service-policy LOCAL-AREA-POLICY service-list LOCAL-AREA-SERVICES-IN service-list LOCAL-AREA-SERVICES-OUT !	! mdns-sd service-policy LOCAL-AREA-POLICY service-list LOCAL-AREA-SERVICES-IN service-list LOCAL-AREA-SERVICES-OUT !
Step 7: Disable mDNS gateway from the SVI interface.	No configuration is needed.	! interface vlan 10 no mdns-sd gateway !
Step 8: Enable a unicast-based mDNS gateway on VLAN 10. Associate the service policy with advanced parameters. Configure the SDG Agent IP address and the source interface settings on the Service Peer.	! ! mDNS Unicast based gateway ! vlan configuration 10 mdns-sd gateway service-policy LOCAL-AREA-POLICY active-query timer 3600 sdg-agent 10.0.0.254 source-interface Vlan 4094 !	! ! mDNS Unicast based gateway ! vlan configuration 10 mdns-sd gateway service-policy LOCAL-AREA-POLICY active-query timer 3600 ! !
Step 9: Clear cache on the SDG Agent to remove stale entries which are learnt from the mDNS flood.	No configuration is needed.	! clear mdns-sd cache !

Example: Migrating from mDNS Flood to Unicast Mode in Routed Access Networks

Prior to Cisco IOS XE Amsterdam 17.3.1 release, a Layer 3 Access LAN switch limits the extension of mDNS flood to the upstream Layer 3 network. However, it continues to flood the incoming mDNS frames to all ports

participating in a common Layer 2 broadcast domain. This example provides a sample configuration to migrate from mDNS flood to unicast mode in Layer 3 or routed access networks. The network has Layer 2 access switches and Layer 2 or Layer 3 boundary at distribution.

Figure 16: Migration from mDNS Flood to Layer 3 Unicast Mode

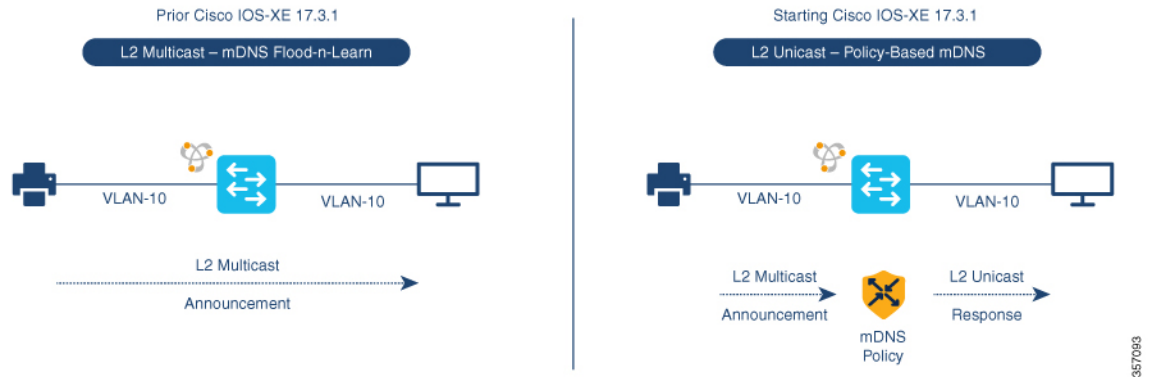

The preceding figure illustrates a sample routed access network that provides key gateway functional difference before and after upgrading to Cisco IOS XE Amsterdam 17.3.1 release.

The following table provides sample configurations for a traditional mDNS flood-based network and a Cisco Catalyst Series switch in SDG Agent mode that operates in a Layer 2 network environment.

Table 9: Layer 2 Access Configuration and Layer 3 SDG Agent Configuration

Layer 2 Access Sample Configuration	Layer 3 SDG Agent Sample Configuration
<pre>! interface TenG 1/1 switchport mode trunk switchport trunk allowed vlan 10,4094 ! interface Vlan 4094 description CAMPUS LAN MGMT ip address 10.0.1.1 255.255.255.0 no shutdown !</pre>	<pre>! interface TenG 1/1 switchport mode trunk switchport trunk allowed vlan 10,4094 ! interface Vlan 4094 description CAMPUS LAN MGMT ip address 10.0.1.254 255.255.255.0 no shutdown ! mdns-sd gateway ! mdns-sd service-list LOCAL-AREA-SERVICES-IN in match printer-ipps ! mdns-sd service-list LOCAL-AREA-SERVICES-OUT out match printer-ipps ! mdns-sd service-policy LOCAL-AREA-POLICY service-list LOCAL-AREA-SERVICES-IN service-list LOCAL-AREA-SERVICES-OUT ! ! mDNS Flood-based gateway ! interface vlan 10 mdns-sd gateway service-policy LOCAL-AREA-POLICY active-query timer 3600 !</pre>

The following table provides sample configurations for migration to a Layer 2 unicast-based network for a Cisco Catalyst switch in SDG Agent and Service Peer mode that operates in a Layer 3 network environment. The unicast mode function is a local function on the SDG Agent. Thus, no further controller bound policy or export configuration change required for the migration to unicast mode.


Table 10: Configuring Layer 2 Access and Layer 3 SDG Agent for Migration to Layer 3 Unicast Mode

Configuration Step	Layer 2 Access Sample Configuration	Layer 3 SDG Agent Sample Configuration
Step 1: Enable mDNS gateway and modes at access and distribution switches.	No configuration is needed.	! mdns-sd gateway mode sdg-agent !
Step 2: Create a unique mDNS inbound policy to permit ingress AirPrint service announcement from the service provider.		! mdns-sd service-list LOCAL-AREA-SERVICES-IN in match printer-ipps !
Step 3: Create a unique mDNS outbound policy to permit egress AirPrint service response to the service receiver. Associate the location filter to share AirPrint service information from the grouped VLAN.		! mdns-sd service-list LOCAL-AREA-SERVICES-OUT out match printer-ipps !
Step 4: Associate inbound and outbound service lists to a unique service policy.		! mdns-sd service-policy LOCAL-AREA-POLICY service-list LOCAL-AREA-SERVICES-IN service-list LOCAL-AREA-SERVICES-OUT !
Step 5: Disable mDNS gateway from the SVI interface.		!! interface vlan 10 no mdns-sd gateway !
Step 6: Enable a unicast-based mDNS gateway on VLAN 10. Associate the service policy with advanced parameters.		! ! mDNS Unicast based gateway ! vlan configuration 10 mdns-sd gateway service-policy LOCAL-AREA-POLICY active-query timer 3600 !

Configuration Examples for Wide Area Bonjour for LAN and WLAN Networks

This section provides a configuration example to show the implementation of Wide Area Bonjour on a Cisco Catalyst Series switch deployed in SDG Agent mode.

Figure 17: Cisco Wide Area Bonjour Configuration

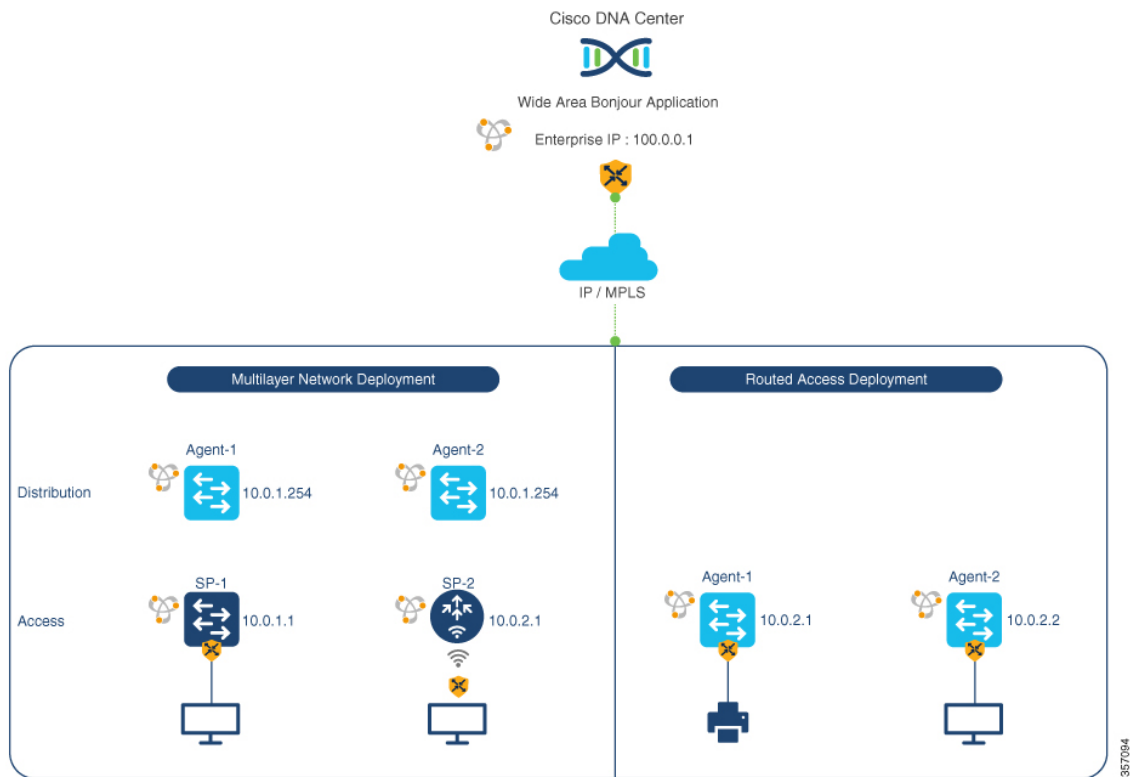

The preceding figure illustrates multiple network deployment models. Each deployment model provides an IP gateway to wired and wireless end points at different layers of the network. The configuration procedure remains common across all deployment models.

The following table provides a sample configuration for Cisco Wide Area Bonjour:

Table 11: Configuring Cisco Wide Area Bonjour

Configuration Step	Sample Configuration
Step 1: Enable an mDNS gateway and set the gateway mode on one or more SDG Agent switch. The mDNS gateway is enabled by default.	<pre>! mdns-sd gateway mode sdg-agent !</pre>
Step 2: Create a unique mDNS outbound policy to permit advertising the local AirPrint service and discover the remote AirPrint from Cisco DNA Center.	<pre>! mdns-sd service-list WIDE-AREA-SERVICES-OUT out match printer-ipps !</pre>
Step 3: Associate the outbound service list to a unique service policy.	<pre>! mdns-sd service-policy DNAC-CONTROLLER-POLICY service-list WIDE-AREA-SERVICES-OUT !</pre>

Configuration Step	Sample Configuration
Step 4: Configure service-routing parameters and associate the export policy to enable functions.	<pre>! service-export mdns-sd controller DNAC-BONJOUR-CONTROLLER controller-address 100.0.0.1 controller-source-interface Loopback0 controller-policy DNAC-CONTROLLER-POLICY !</pre>



CHAPTER 6

Feature History for Cisco DNA Service for Bonjour

- [Feature History for DNA Service for Bonjour, on page 71](#)

Feature History for DNA Service for Bonjour

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Release	Modification
Cisco IOS 15.2(6) E2	Cisco DNA Service for Local Area Bonjour and Wide Area Bonjour was introduced on the following platforms: <ul style="list-style-type: none">• Cisco Catalyst 2960-X Series Switches• Cisco Catalyst 2960-XR Series Switches
Cisco IOS 15.5(1)SY4	Cisco DNA Service for Local Area Bonjour and Wide Area Bonjour was introduced on Cisco Catalyst 6800 Series Switches.
Cisco IOS XE 3.11.0 E	Cisco DNA Service for Local Area Bonjour and Wide Area Bonjour was introduced on the following platforms: <ul style="list-style-type: none">• Cisco Catalyst 4500-E Series Switches• Cisco Catalyst 4500-X Series Switches

Release	Modification
Cisco IOS XE Gibraltar 16.11.1	<p>Cisco DNA Service for Local Area Bonjour and Wide Area Bonjour was introduced on the following platforms:</p> <ul style="list-style-type: none"> • Cisco Catalyst 3650 Series Switches • Cisco Catalyst 3850 Series Switches • Cisco Catalyst 9300 Series Switches • Cisco Catalyst 9400 Series Switches • Cisco Catalyst 9500 Series Switches • Cisco Catalyst 9500 Series Switches - High Performance • Cisco Catalyst 9600 Series Switches • Cisco Catalyst 9800 Series Wireless Controllers • Cisco 5500 Series Wireless Controllers • Cisco 8540 Wireless Controllers • Cisco 4000 Series Integrated Services Routers (ISR)
Cisco IOS XE Amsterdam 17.1.1	Cisco DNA Service for Local Area Bonjour was introduced on Cisco Catalyst 9200 Series Switches.