



MACsec Encryption

This chapter contains the following sections:

- [MACsec and the MACsec Key Agreement \(MKA\) Protocol, on page 1](#)
- [Certificate Based MACsec , on page 8](#)
- [How to Configure MACsec Encryption, on page 9](#)

MACsec and the MACsec Key Agreement (MKA) Protocol

MACsec is the IEEE 802.1AE standard for authenticating and encrypting packets between two MACsec-capable devices. The switch supports 802.1AE encryption with MACsec Key Agreement (MKA) on on switch-to-host links for encryption between the switch and host device. The switch also supports MACsec encryption for switch-to-switch (inter-network device) security using MKA-based key exchange protocol. The MKA protocol provides the required session keys and manages the required encryption keys.



Note When switch-to-switch MACsec is enabled, all traffic is encrypted except EAP-over-LAN (EAPOL) packets.



Important On the ESS-3300, MACsec is supported on 1 gigabit ethernet downlink ports only.

Link layer security can include both packet authentication between switches and MACsec encryption between switches (encryption is optional).

Table 1: MACsec Support on Switch Ports

Connections	MACsec support
Switch-to-host	MACsec MKA encryption
Switch-to-switch	MACsec MKA encryption

Cisco TrustSec is meant only for switch-to-switch links and is not supported on switch ports connected to end hosts, such as PCs or IP phones. MKA is supported on switch-to-host facing links as well as switch-to-switch links. Host-facing links typically use flexible authentication ordering for handling heterogeneous devices with or without IEEE 802.1x, and can optionally use MKA-based MACsec encryption.

Network Edge Access Topology (NEAT) is used for compact switches to extend security outside the wiring closet.

MACsec and MACsec Key Agreement (MKA) are implemented after successful authentication using certificate-based MACsec or Pre Shared Key (PSK) framework.

MKA Policies


To enable MKA on an interface, a defined MKA policy should be applied to the interface. You can configure these options:

- Policy name, not to exceed 16 ASCII characters.
- Confidentiality (encryption) offset of 0, 30, or 50 bytes for each physical interface

Single-Host Mode

The figure shows how a single EAP authenticated session is secured by MACsec by using MKA.

Figure 1: MACsec in Single-Host Mode with a Secured Data Session

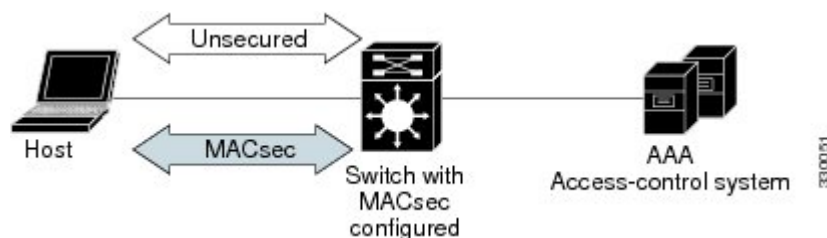

Switch-to-Switch MKA MACsec Must Secure Policy

When MACsec is enabled on an interface, all interface traffic except EAPoL traffic is secured by default ("must-secure" is the default) on both the ingress and the egress. Unencrypted packets are dropped until the MKA session is secured. However, to enable MACsec on selected interfaces, you can choose to allow unencrypted packets to be transmitted or received from the same physical interface by setting **macsec access-control** to **should-secure**. This option allows unencrypted traffic to flow until the MKA session is secured. After the MKA session is secured, only encrypted traffic can flow. For configuration details, see [Configuring MACsec MKA on an Interface using PSK, on page 16](#).

MKA/MACsec for Port Channel

MKA/MACsec can be configured on the port members of a port channel. MKA/MACsec is agnostic to the port channel since the MKA session is established between the port members of a port channel.



Note Etherchannel links that are formed as part of the port channel can either be congruent or disparate i.e. the links can either be MACsec-secured or non-MACsec-secured. MKA session between the port members is established even if a port member on one side of the port channel is not configured with MACsec.

Policy Name	KS Priority	Delay Protect	Replay Protect	Window Size	Conf Offset	Cipher Suite(s)	Interfaces Applied
DEFAULT POLICY	0	FALSE	TRUE	0	0	GCM-AES-128	
p1	1	FALSE	TRUE	0	0	GCM-AES-128	
p2	2	FALSE	TRUE	0	0	GCM-AES-128	Gi1/0/1

```
Switch#sh mka poli
Switch#sh mka policy p2
Switch#sh mka policy p2 ?
  detail      Detailed configuration/information for MKA Policy
  sessions    Summary of all active MKA Sessions with policy applied
  |           Output modifiers
<cr>
```

```
Switch#sh mka policy p2 de
```

```
MKA Policy Configuration ("p2")
=====
MKA Policy Name..... p2
Key Server Priority... 2
Confidentiality Offset. 0
Send Secure Announcement..DISABLED
Cipher Suite(s)..... GCM-AES-128
```

```
Applied Interfaces...
  GigabitEthernet1/0/1
```

```
Switch#sh mka policy p2
```

```
MKA Policy Summary...
```

Policy Name	KS Priority	Delay Protect	Replay Protect	Window Size	Conf Offset	Cipher Suite(s)	Interfaces Applied
p2	2	FALSE	TRUE	0	0	GCM-AES-128	Gi1/0/1

```
Switch#sh mka se?
sessions
```

```
Switch#sh mka ?
  default-policy  MKA Default Policy details
  keychains       MKA Pre-Shared-Key Key-Chains
  policy          MKA Policy configuration information
  presharedkeys  MKA Preshared Keys
  sessions        MKA Sessions summary
  statistics      Global MKA statistics
  summary         MKA Sessions summary & global statistics
```

```
Switch#sh mka statis
Switch#sh mka statistics ?
  interface      Statistics for a MKA Session on an interface
  local-sci      Statistics for a MKA Session identified by its Local Tx-SCI
  |             Output modifiers
<cr>
```

```
Switch#sh mka statistics inter
Switch#show mka statistics interface G1/0/1
```

```
MKA Statistics for Session
```



```

SA Statistics
  SAKs Generated..... 1
  SAKs Rekeyed..... 0
  SAKs Received..... 0
  SAK Responses Received..... 1

MKPDU Statistics
  MKPDUs Validated & Rx..... 89589
    "Distributed SAK"..... 0
    "Distributed CAK"..... 0
  MKPDUs Transmitted..... 89600
    "Distributed SAK"..... 1
    "Distributed CAK"..... 0

MKA Error Counter Totals
=====
Session Failures
  Bring-up Failures..... 0
  Reauthentication Failures..... 0
  Duplicate Auth-Mgr Handle..... 0

SAK Failures
  SAK Generation..... 0
  Hash Key Generation..... 0
  SAK Encryption/Wrap..... 0
  SAK Decryption/Unwrap..... 0
  SAK Cipher Mismatch..... 0

CA Failures
  Group CAK Generation..... 0
  Group CAK Encryption/Wrap..... 0
  Group CAK Decryption/Unwrap..... 0
  Pairwise CAK Derivation..... 0
  CKN Derivation..... 0
  ICK Derivation..... 0
  KEK Derivation..... 0
  Invalid Peer MACsec Capability... 0

MACsec Failures
  Rx SC Creation..... 0
  Tx SC Creation..... 0
  Rx SA Installation..... 0
  Tx SA Installation..... 0

MKPDU Failures
  MKPDU Tx..... 0
  MKPDU Rx Validation..... 0
  MKPDU Rx Bad Peer MN..... 0
  MKPDU Rx Non-recent Peerlist MN.. 0

Switch#

```

Certificate Based MACsec

The Certificate based MACsec Encryption feature uses 802.1X port-based authentication with Extensible Authentication Protocol – Transport Layer Security (EAP-TLS) to carry Certificates for ports where MACsec encryption is required. EAP-TLS mechanism is used for the mutual authentication and to get the Master Session Key (MSK) from which the Connectivity Association Key (CAK) is derived for the MACsec Key Agreement (MKA) protocol.

This feature allows keys to be managed at a centralized server (CA) over PSK (Pre-Shared Key) based MACsec. Switch to switch MACsec is supported. See [Configuring Certificate Based MACsec, on page 18](#) for more information.

How to Configure MACsec Encryption

Limitations and Restrictions

MACsec has these limitations and restrictions:

- Ports should be in access mode or trunk mode.
- MKA is not supported on port-channels. Individual links that comprise the port-channel can use MACsec.
- High Availability for MKA is not supported.
- Ports with **no switchport** are not supported.
- ESS3300 uplink ports do not have a PHY and hence do not support MACSec.

Prerequisites for MACsec Encryption

Prerequisites for MACsec Encryption:

- Ensure that 802.1x authentication and AAA are configured on your device.

Configuring MKA and MACsec

Default MACsec MKA Configuration

MACsec is disabled. No MKA policies are configured.

MKA-PSK: CKN Behavior Change

A change was made in Cisco IOS XE from how the CKN (the "key") was implemented in Cisco IOS Classic. When an IE switch running Cisco IOS XE needs to make a PreShared Key (PSK) MACSec connection with an IE switch running Cisco IOS Classic, the configured "key" value must be 64 hex characters long. Also, the "key" value must match the same on the IE switch running Cisco IOS Classic. The same "key" value on the Cisco IOS Classic side does not have to pad zeros.

This Cisco IOS XE example shows key chain configuration when connecting two Cisco IOS XE devices:

```
configure terminal
key chain KEYCHAINONE macsec
key 1234
cryptographic-algorithm aes-128-cmac
key-string 123456789ABCDEF0123456789ABCDEF0
lifetime local 12:21:00 Sep 9 2015 infinite
end
```

For the above example, following is the output for the two Cisco IOS XE connected devices for the **show mka session** command:

For the above example, following is the **show mka session** output on the Cisco IOS XE device:

```

Device# show mka session
Total MKA Sessions..... 1
Secured Sessions.... 1
Pending Sessions.... 0

-----
Interface      Local-TxSCI      Policy-Name      Inherited      Key-Server
Port-ID        Peer-RxSCI       MACsec-Peers     Status         CKN
-----
Gi1/1          34c0.f983.6c81/0001 POLICYONE        NO             YES
1              54a2.7498.5b01/0001 1                 Secured        12340000000000000000
                                                00000000000000000000
                                                0000000000000000
                                                000000000000

```

Configuring an MKA Policy

SUMMARY STEPS

1. **configure terminal**
2. **mka policy *policy name***
3. **send-secure-announcements**
4. **key-server *priority***
5. **include-icv-indicator**
6. **macsec-cipher-suite *gcm-aes-128***
7. **confidentiality-offset *Offset value***
8. **end**
9. **show mka policy**

DETAILED STEPS

	Command or Action	Purpose
Step 1	configure terminal	Enter global configuration mode.
Step 2	mka policy <i>policy name</i>	Identify an MKA policy, and enter MKA policy configuration mode. The maximum policy name length is 16 characters. Note The default MACsec cipher suite in the MKA policy will always be "GCM-AES-128". If the device supports both "GCM-AES-128" and "GCM-AES-256" ciphers, it is highly recommended to define and use a user defined MKA policy to include both 128 and 256 bits ciphers or only 256 bits cipher, as may be required.
Step 3	send-secure-announcements	Enabled secure announcements.

	Command or Action	Purpose
		Note By default, secure announcements are disabled.
Step 4	<code>key-server priority</code>	Configure MKA key server options and set priority (between 0-255). Note When value of key server priority is set to 255, the peer can not become the key server. The key server priority value is valid only for MKA PSK; and not for MKA EAPTLS.
Step 5	<code>include-icv-indicator</code>	Enables the ICV indicator in MKPDU. Use the no form of this command to disable the ICV indicator — no include-icv-indicator .
Step 6	<code>macsec-cipher-suite gcm-aes-128</code>	Configures cipher suite for deriving SAK with 128-bit encryption.
Step 7	<code>confidentiality-offset Offset value</code>	Set the Confidentiality (encryption) offset for each physical interface Note Offset Value can be 0, 30 or 50. If you are using Anyconnect on the client, it is recommended to use Offset 0.
Step 8	<code>end</code>	Returns to privileged EXEC mode.
Step 9	<code>show mka policy</code>	Verify your entries.

Example

This example configures the MKA policy:

```
Switch(config)# mka policy mka_policy
Switch(config-mka-policy)# key-server priority 200
Switch(config-mka-policy)# macsec-cipher-suite gcm-aes-128
Switch(config-mka-policy)# confidentiality-offset 30
Switch(config-mka-policy)# end
```

Configure Switch-to-host MACsec Encryption

Follow these steps to configure MACsec on an interface with one MACsec session for voice and one for data:

SUMMARY STEPS

1. `enable`
2. `configureterminal`
3. `interface type number`
4. `switchport access vlanvlan-id`
5. `switchport mode access`

6. **macsec**
7. **authentication event linksec fail action authorize vlan *vlan-id***
8. **authentication host-mode multi-domain**
9. **authentication linksec policy must-secure**
10. **authentication port-control auto**
11. **authentication periodic**
12. **authentication timer reauthenticate**
13. **authentication violation protect**
14. **mka policy *policy-name***
15. **dot1x pae authenticator**
16. **spanning-tree portfast**
17. **end**
18. **show authentication session interface *interface-id***
19. **show mka sessions**

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. <ul style="list-style-type: none">• Enter the password if prompted.
Step 2	configureterminal Example: Device> configure terminal	Enters the global configuration mode.
Step 3	interface <i>type number</i> Example: Device(config)# interface GigabitEthernet 1/0/1	Identifies the MACsec interface, and enters interface configuration mode. The interface must be a physical interface.
Step 4	switchport access vlan <i>vlan-id</i> Example: Device(config-if)# switchport access vlan 1	Configures the access VLAN for the port.
Step 5	switchport mode access Example: Device(config-if)# switchport mode access	Configures the interface as an access port.
Step 6	macsec Example: Device(config-if)# macsec	Enables 802.1ae MACsec on the interface. The macsec command enables MKA MACsec on switch-to-host links only.
Step 7	authentication event linksec fail action authorize vlan <i>vlan-id</i> Example:	(Optional) Specifies that the switch processes authentication link-security failures resulting from unrecognized user credentials by authorizing a restricted VLAN on the port after a failed authentication attempt.

	Command or Action	Purpose
	<code>Device(config-if)# authentication event linksec fail action authorize vlan 1</code>	
Step 8	authentication host-mode multi-domain Example: <code>Device(config-if)# authentication host-mode multi-domain</code>	Configures authentication manager mode on the port to allow both a host and a voice device to be authenticated on the 802.1x-authorized port. If not configured, the default host mode is single.
Step 9	authentication linksec policy must-secure Example: <code>Device(config-if)# authentication linksec policy must-secure</code>	Sets the LinkSec security policy to secure the session with MACsec if the peer is available. If not set, the default is <i>should secure</i> .
Step 10	authentication port-control auto Example: <code>Device(config-if)# authentication port-control auto</code>	Enables 802.1x authentication on the port. The port changes to the authorized or unauthorized state based on the authentication exchange between the switch and the client.
Step 11	authentication periodic Example: <code>Device(config-if)# authentication periodic</code>	(Optional) Enables or disables re-authentication for this port .
Step 12	authentication timer reauthenticate Example: <code>Device(config-if)# authentication timer reauthenticate</code>	(Optional) Enters a value between 1 and 65535 (in seconds). Obtains re-authentication timeout value from the server. Default re-authentication time is 3600 seconds.
Step 13	authentication violation protect Example: <code>Device(config-if)# configure terminal</code>	Configures the port to drop unexpected incoming MAC addresses when a new device connects to a port or when a device connects to a port after the maximum number of devices are connected to that port. If not configured, the default is to shut down the port.
Step 14	mka policy <i>policy-name</i> Example: <code>Device(config-if)# mka policy mka_policy</code>	Applies an existing MKA protocol policy to the interface, and enable MKA on the interface. If no MKA policy was configured (by entering themka policy global configuration command).
Step 15	dot1x pae authenticator Example: <code>Device(config-if)# dot1x pae authenticator</code>	Configures the port as an 802.1x port access entity (PAE) authenticator.
Step 16	spanning-tree portfast Example: <code>Device(config-if)# spanning-tree portfast</code>	Enables spanning tree Port Fast on the interface in all its associated VLANs. When the Port Fast feature is enabled, the interface changes directly from a blocking state to a forwarding state without making the intermediate spanning-tree state changes

	Command or Action	Purpose
Step 17	end Example: Device(config)# end	Exits interface configuration mode and returns to privileged EXEC mode.
Step 18	show authentication session interface <i>interface-id</i> Example: Device# show authentication session interface GigabitEthernet 1/0/1	Verifies the authorized session security status.
Step 19	show mka sessions Example: Device# show mka sessions	Verifies the established MKA sessions.

Configuring MACsec MKA using Pre Shared Key (PSK)

SUMMARY STEPS

1. **configure terminal**
2. **key chain** *key-chain-name* **macsec**
3. **key** *hex-string*
4. **cryptographic-algorithm** {*gcm-aes-128* | *gcm-aes-256*}
5. **key-string** { [0|6|7] *pwd-string* | *pwd-string*}
6. **lifetime local** [*start timestamp {hh::mm::ss | day | month | year}*] [**duration** *seconds* | *end timestamp {hh::mm::ss | day | month | year}*]
7. **end**

DETAILED STEPS

	Command or Action	Purpose
Step 1	configure terminal	Enter global configuration mode.
Step 2	key chain <i>key-chain-name</i> macsec	Configures a key chain and enters the key chain configuration mode.
Step 3	key <i>hex-string</i>	Configures a unique identifier for each key in the keychain and enters the keychain's key configuration mode. Note For 128-bit encryption, use 32 hex digit key-string. For 256-bit encryption, use 64 hex digit key-string.
Step 4	cryptographic-algorithm { <i>gcm-aes-128</i> <i>gcm-aes-256</i> }	Set cryptographic authentication algorithm with 128-bit or 256-bit encryption.
Step 5	key-string { [0 6 7] <i>pwd-string</i> <i>pwd-string</i> }	Sets the password for a key string. Only hex characters must be entered..

	Command or Action	Purpose
Step 6	lifetime local [<i>start timestamp {hh::mm::ss / day / month / year}</i>] [duration seconds <i>end timestamp {hh::mm::ss / day / month / year}</i>]	Sets the lifetime of the pre shared key.
Step 7	end	Returns to privileged EXEC mode.

Example

Following is an indicative example:

```
Switch(config)# Key chain keychain1 macsec
Switch(config-key-chain)# key 1000
Switch(config-keychain-key)# cryptographic-algorithm gcm-aes-128
Switch(config-keychain-key)# key-string 12345678901234567890123456789012
Switch(config-keychain-key)# lifetime local 12:12:00 July 28 2016 12:19:00 July 28 2016
Switch(config-keychain-key)# end
```

Configuring MACsec MKA on an Interface using PSK



Note To avoid traffic drop across sessions, the **mka policy** command must be configured before the **mka pre-shared-key key-chain** command.

SUMMARY STEPS

1. **configure terminal**
2. **interface** *interface-id*
3. **macsec access-control should-secure**
4. **macsec**
5. **mka policy** *policy-name*
6. **mka pre-shared-key key-chain** *key-chain name*
7. **macsec replay-protection window-size** *frame number*
8. **end**

DETAILED STEPS

	Command or Action	Purpose
Step 1	configure terminal	Enter global configuration mode.
Step 2	interface <i>interface-id</i>	Enters interface configuration mode.
Step 3	macsec access-control should-secure	(Optional) Allows unencrypted traffic to flow until the MKA session is secured. After the MKA session is secured, only encrypted traffic can flow. By default, traffic is dropped until the MKA session is secured.

	Command or Action	Purpose
		To revert to the default behavior, use the no macsec access-control should-secure command.
Step 4	macsec	Enables MACsec on the interface.
Step 5	mka policy <i>policy-name</i>	Configures an MKA policy.
Step 6	mka pre-shared-key key-chain <i>key-chain name</i>	Configures an MKA pre-shared-key key-chain name.
Step 7	macsec replay-protection window-size <i>frame number</i>	Sets the MACsec window size for replay protection.
Step 8	end	Returns to privileged EXEC mode.

Example

The following example configures an MKA policy and an MKA pre-shared-key key-chain name, and sets the MACsec window size for replay protection:

```
Switch(config)# interface GigabitEthernet 1/1
Switch(config-if)# mka policy mka_policy
Switch(config-if)# mka pre-shared-key key-chain key-chain-name
Switch(config-if)# macsec replay-protection window-size 10
Switch(config-if)# end
```



Note It is not recommended to change the MKA policy on an interface with MKA PSK configured when the session is running. However, if a change is required, you must reconfigure the policy as follows:

1. Disable the existing session by removing macsec configuration on each of the participating nodes using the **no macsec** command.
2. Configure the MKA policy on the interface on each of the participating nodes using the **mka policy policy-name** command.
3. Enable the new session on each of the participating node by using the **macsec** command.

The following examples show how to configure the interface to use **should-secure** instead of the default **must-secure** and how to change it back to the default **must-secure**.



Note Modifying **access-control** is not allowed when the session is up and running. You first need to remove the MACsec configuration by using the **no macsec** command, and then configure **access-control**.

Example 1: To change from **must-secure** to **should-secure**:

```
Switch(config-if)#no macsec
Switch(config-if)#macsec access-control should-secure
Switch(config-if)#macsec // this switches the access-control from must-secure & restarts
the macsec session with new behaviour.
```

Example 2: To change from **should-secure** to **must-secure**:

```
Switch(config-if)#no macsec
Switch(config-if)#no macsec access-control
Switch(config-if)#macsec
```

Configuring Certificate Based MACsec

To configure MACsec with MKA on point-to-point links, perform these tasks:

- [Generating Key Pairs](#)
- [Configuring Enrollment using SCEP](#)
- [Configuring Enrollment Manually](#)
- [Enabling 802.1x Authentication and Configuring AAA, on page 23](#)
- [Configuring EAP-TLS Profile and 802.1x Credentials, on page 25](#)
- [Applying the 802.1x MKA MACsec Configuration on Interfaces, on page 27](#)

Prerequisites for Certificate Based MACsec

- Ensure that you have a Certificate Authority (CA) server configured for your network.
- Generate a CA certificate or obtain a third-party certificate.
- Ensure that you have configured Cisco Identity Services Engine (ISE).
- Ensure that 802.1x authentication and AAA are configured on your device.

Generating Key Pairs

SUMMARY STEPS

1. **enable**
2. **configure terminal**
3. **crypto key generate rsa label *label-name* general-keys modulus *size***
4. **end**
5. **show authentication session interface *interface-id***

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	configure terminal Example:	Enters global configuration mode.

	Command or Action	Purpose
	Device# <code>configure terminal</code>	
Step 3	crypto key generate rsa label <i>label-name</i> general-keys modulus <i>size</i> Example: Device(config)# <code>crypto key generate rsa label general-keys modulus 2048</code>	Generates a RSA key pair for signing and encryption. You can also assign a label to each key pair using the label keyword. The label is referenced by the trustpoint that uses the key pair. If you do not assign a label, the key pair is automatically labeled <Default-RSA-Key>. If you do not use additional keywords this command generates one general purpose RSA key pair. If the modulus is not specified, the default key modulus of 1024 is used. You can specify other modulus sizes with the modulus keyword.
Step 4	end Example: Device(config)# <code>end</code>	Exits global configuration mode and returns to privileged EXEC mode.
Step 5	show authentication session interface <i>interface-id</i> Example: Device# <code>show authentication session interface gigabitethernet 0/1/1</code>	Verifies the authorized session security status.

Configuring Enrollment using SCEP

Simple Certificate Enrollment Protocol (SCEP) is a Cisco-developed enrollment protocol that uses HTTP to communicate with the certificate authority (CA) or registration authority (RA). SCEP is the most commonly used method for sending and receiving requests and certificates.

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device> <code>enable</code>	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	configure terminal Example: Device# <code>configure terminal</code>	Enters global configuration mode.
Step 3	crypto pki trustpoint <i>server name</i> Example: Device(config)# <code>crypto pki trustpoint ka</code>	Declares the trustpoint and a given name and enters ca-trustpoint configuration mode.
Step 4	enrollment url <i>url name pem</i> Example:	Specifies the URL of the CA on which your device should send certificate requests.

	Command or Action	Purpose
	<pre>Device(ca-trustpoint)# enrollment url http://url:80</pre>	<p>An IPv6 address can be added in the URL enclosed in brackets. For example: <code>http://[2001:DB8:1:1::1]:80</code>.</p> <p>The <code>pem</code> keyword adds privacy-enhanced mail (PEM) boundaries to the certificate request.</p>
Step 5	<p>rsakeypair <i>key-label</i> <i>key-size</i> <i>encryption-key-size</i></p> <p>Example:</p> <pre>Device(ca-trustpoint)# rsakeypair exampleCAkeys</pre>	<p>Specifies which key pair to associate with the certificate.</p> <ul style="list-style-type: none"> A key pair with the <i>key-label</i> argument will be generated during enrollment if it does not already exist or if the auto-enroll regenerate command was issued. Specify the <i>key-size</i> argument for generating the key, and specify the <i>encryption-key-size</i> argument to request separate encryption, signature keys, and certificates. The <i>key-size</i> and <i>encryption-key-size</i> must be the same size. Length of less than 2048 is not recommended. <p>Note The rsakeypair name must match the trust-point name.</p> <p>Note If this command is not enabled, the FQDN key pair is used.</p>
Step 6	<p>serial-number none</p> <p>Example:</p> <pre>Device(ca-trustpoint)# serial-number none</pre>	<p>The none keyword specifies that a serial number will not be included in the certificate request.</p>
Step 7	<p>ip-address none</p> <p>Example:</p> <pre>Device(ca-trustpoint)# ip-address none</pre>	<p>The none keyword specifies that no IP address should be included in the certificate request.</p>
Step 8	<p>revocation-check <i>crl</i></p> <p>Example:</p> <pre>Device(ca-trustpoint)# revocation-check crl</pre>	<p>Specifies CRL as the method to ensure that the certificate of a peer has not been revoked.</p>
Step 9	<p>auto-enroll <i>percent</i> regenerate</p> <p>Example:</p> <pre>Device(ca-trustpoint)# auto-enroll 90 regenerate</pre>	<p>Enables auto-enrollment, allowing the client to automatically request a rollover certificate from the CA.</p> <p>If auto-enrollment is not enabled, the client must be manually re-enrolled in your PKI upon certificate expiration.</p> <p>By default, only the Domain Name System (DNS) name of the device is included in the certificate.</p> <p>Use the <i>percent</i> argument to specify that a new certificate will be requested after the percentage of the lifetime of the current certificate is reached.</p>

	Command or Action	Purpose
		<p>Use the regenerate keyword to generate a new key for the certificate even if a named key already exists.</p> <p>If the key pair being rolled over is exportable, the new key pair will also be exportable. The following comment will appear in the trustpoint configuration to indicate whether the key pair is exportable: “! RSA key pair associated with trustpoint is exportable.”</p> <p>It is recommended that a new key pair be generated for security reasons.</p>
Step 10	exit Example: Device (ca-trustpoint) # exit	Exits ca-trustpoint configuration mode and returns to global configuration mode.
Step 11	crypto pki authenticate name Example: Device (config) # crypto pki authenticate myca	Retrieves the CA certificate and authenticates it.
Step 12	end Example: Device (config) # end	Exits global configuration mode and returns to privileged EXEC mode.
Step 13	show crypto pki certificate trustpoint name Example: Device # show crypto pki certificate ka	Displays information about the certificate for the trust point.

Configuring Enrollment Manually

If your CA does not support SCEP or if a network connection between the router and CA is not possible. Perform the following task to set up manual certificate enrollment:

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device > enable	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	configure terminal Example: Device # configure terminal	Enters global configuration mode.
Step 3	crypto pki trustpoint server name Example:	Declares the trustpoint and a given name and enters ca-trustpoint configuration mode.

	Command or Action	Purpose
	Device# <code>crypto pki trustpoint ka</code>	
Step 4	<p>enrollment url <i>url-name</i></p> <p>Example:</p> <pre>Device(ca-trustpoint)# enrollment url http://url:80</pre>	<p>Specifies the URL of the CA on which your device should send certificate requests.</p> <p>An IPv6 address can be added in the URL enclosed in brackets. For example: <code>http://[2001:DB8:1:1::1]:80</code>.</p> <p>The <code>pem</code> keyword adds privacy-enhanced mail (PEM) boundaries to the certificate request.</p>
Step 5	<p>rsakeypair <i>key-label key-size encryption-key-size</i></p> <p>Example:</p> <pre>Device(ca-trustpoint)# rsakeypair exampleCAkeys</pre>	<p>Specifies which key pair to associate with the certificate.</p> <ul style="list-style-type: none"> A key pair with the <i>key-label</i> argument will be generated during enrollment if it does not already exist or if the auto-enroll regenerate command was issued. Specify the <i>key-size</i> argument for generating the key, and specify the <i>encryption-key-size</i> argument to request separate encryption, signature keys, and certificates. The <i>key-size</i> and <i>encryption-key-size</i> must be the same size. Length of less than 2048 is not recommended. <p>Note The rsakeypair name must match the trust-point name.</p> <p>Note If this command is not enabled, the FQDN key pair is used.</p>
Step 6	<p>serial-number <i>none</i></p> <p>Example:</p> <pre>Device(ca-trustpoint)# serial-number none</pre>	<p>Specifies that serial numbers will not be included in the certificate request.</p>
Step 7	<p>ip-address <i>none</i></p> <p>Example:</p> <pre>Device(ca-trustpoint)# ip-address none</pre>	<p>The none keyword specifies that no IP address should be included in the certificate request.</p>
Step 8	<p>revocation-check <i>crl</i></p> <p>Example:</p> <pre>Device(ca-trustpoint)# revocation-check crl</pre>	<p>Specifies CRL as the method to ensure that the certificate of a peer has not been revoked.</p>
Step 9	<p>exit</p> <p>Example:</p> <pre>Device(ca-trustpoint)# exit</pre>	<p>Exits <code>ca-trustpoint</code> configuration mode and returns to global configuration mode.</p>
Step 10	<p>crypto pki authenticate <i>name</i></p> <p>Example:</p>	<p>Retrieves the CA certificate and authenticates it.</p>

	Command or Action	Purpose
	Device(config)# <code>crypto pki authenticate myca</code>	
Step 11	<p><code>crypto pki enroll name</code></p> <p>Example:</p> <pre>Device(config)# crypto pki enroll myca</pre>	<p>Generates certificate request and displays the request for copying and pasting into the certificate server.</p> <p>Enter enrollment information when you are prompted. For example, specify whether to include the device FQDN and IP address in the certificate request.</p> <p>You are also given the choice about displaying the certificate request to the console terminal.</p> <p>The base-64 encoded certificate with or without PEM headers as requested is displayed.</p>
Step 12	<p><code>crypto pki import name certificate</code></p> <p>Example:</p> <pre>Device(config)# crypto pki import myca certificate</pre>	<p>Imports a certificate via TFTP at the console terminal, which retrieves the granted certificate.</p> <p>The device attempts to retrieve the granted certificate via TFTP using the same filename used to send the request, except the extension is changed from “.req” to “.cert”. For usage key certificates, the extensions “-sign.cert” and “-encr.cert” are used.</p> <p>The device parses the received files, verifies the certificates, and inserts the certificates into the internal certificate database on the switch.</p> <p>Note Some CAs ignore the usage key information in the certificate request and issue general purpose usage certificates. If your CA ignores the usage key information in the certificate request, only import the general purpose certificate. The router will not use one of the two key pairs generated.</p>
Step 13	<p><code>end</code></p> <p>Example:</p> <pre>Device(config)# end</pre>	Exits global configuration mode and returns to privileged EXEC mode.
Step 14	<p><code>show crypto pki certificate trustpoint name</code></p> <p>Example:</p> <pre>Device# show crypto pki certificate ka</pre>	Displays information about the certificate for the trust point.

Enabling 802.1x Authentication and Configuring AAA

SUMMARY STEPS

1. enable
2. configure terminal
3. aaa new-model

4. dot1x system-auth-control
5. radius server *name*
6. address *ip-address* auth-port *port-number* acct-port *port-number*
7. automate-tester username *username*
8. key *string*
9. radius-server deadtime *minutes*
10. exit
11. aaa group server radius *group-name*
12. server *name*
13. exit
14. aaa authentication dot1x default group *group-name*
15. aaa authorization network default group *group-name*

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	aaa new-model Example: Device(config)# aaa new-model	Enables AAA.
Step 4	dot1x system-auth-control Example: Device(config)# dot1x system-auth-control	Enables 802.1X on your device.
Step 5	radius server <i>name</i> Example: Device(config)# radius server ISE	Specifies the name of the RADIUS server configuration for Protected Access Credential (PAC) provisioning and enters RADIUS server configuration mode.
Step 6	address <i>ip-address</i> auth-port <i>port-number</i> acct-port <i>port-number</i> Example: Device(config-radius-server)# address ipv4 <ISE ipv4 address> auth-port 1645 acct-port 1646	Configures the IPv4 address for the RADIUS server accounting and authentication parameters.
Step 7	automate-tester username <i>username</i> Example: Device(config-radius-server)# automate-tester username dummy	Enables the automated testing feature for the RADIUS server. With this practice, the device sends periodic test authentication messages to the RADIUS server. It looks

	Command or Action	Purpose
		for a RADIUS response from the server. A success message is not necessary - a failed authentication suffices, because it shows that the server is alive.
Step 8	<p><i>key string</i></p> <p>Example:</p> <pre>Device(config-radius-server)# key dummy123</pre>	Configures the authentication and encryption key for all RADIUS communications between the device and the RADIUS server.
Step 9	<p>radius-server deadtime <i>minutes</i></p> <p>Example:</p> <pre>Device(config-radius-server)# radius-server deadtime 2</pre>	Improves RADIUS response time when some servers might be unavailable and skips unavailable servers immediately.
Step 10	<p>exit</p> <p>Example:</p> <pre>Device(config-radius-server)# exit</pre>	Returns to global configuration mode.
Step 11	<p>aaa group server radius <i>group-name</i></p> <p>Example:</p> <pre>Device(config)# aaa group server radius ISEGRP</pre>	Groups different RADIUS server hosts into distinct lists and distinct methods, and enters server group configuration mode.
Step 12	<p>server <i>name</i></p> <p>Example:</p> <pre>Device(config-sg)# server name ISE</pre>	Assigns the RADIUS server name.
Step 13	<p>exit</p> <p>Example:</p> <pre>Device(config-sg)# exit</pre>	Returns to global configuration mode.
Step 14	<p>aaa authentication dot1x default group <i>group-name</i></p> <p>Example:</p> <pre>Device(config)# aaa authentication dot1x default group ISEGRP</pre>	Sets the default authentication server group for IEEE 802.1x.
Step 15	<p>aaa authorization network default group <i>group-name</i></p> <p>Example:</p> <pre>aaa authorization network default group ISEGRP</pre>	Sets the network authorization default group.

Configuring EAP-TLS Profile and 802.1x Credentials

SUMMARY STEPS

1. enable
2. configure terminal
3. eap profile *profile-name*
4. method tls

5. pki-trustpoint *name*
6. exit
7. dot1x credentials *profile-name*
8. username *username*
9. pki-trustpoint *name*
10. end

DETAILED STEPS

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	eap profile <i>profile-name</i> Example: Device(config)# eap profile EAPTLS-PROF-IOSCA	Configures EAP profile and enters EAP profile configuration mode.
Step 4	method tls Example: Device(config-eap-profile)# method tls	Enables EAP-TLS method on the device.
Step 5	pki-trustpoint <i>name</i> Example: Device(config-eap-profile)# pki-trustpoint POLESTAR-IOS-CA	Sets the default PKI trustpoint.
Step 6	exit Example: Device(config-eap-profile)# exit	Returns to global configuration mode.
Step 7	dot1x credentials <i>profile-name</i> Example: Device(config)# dot1x credentials EAPTLSCRED-IOSCA	Configures 802.1x credentials profile and enters dot1x credentials configuration mode.
Step 8	username <i>username</i> Example: Device(config-dot1x-cred)# username asr1000@polestar.company.com	Sets the authentication user ID.
Step 9	pki-trustpoint <i>name</i> Example:	Sets the default PKI trustpoint.

	Command or Action	Purpose
	Device(config-dot1x-cred)# pki-trustpoint POLESTAR-IOS-CA	
Step 10	end Example: Device(config-dot1x-cred)# end	Returns to privileged EXEC mode.

Applying the 802.1x MKA MACsec Configuration on Interfaces

To apply MACsec MKA using certificate-based MACsec encryption to interfaces, perform the following task:

Procedure

	Command or Action	Purpose
Step 1	enable Example: Device> enable	Enables privileged EXEC mode. Enter your password, if prompted.
Step 2	configure terminal Example: Device# configure terminal	Enters global configuration mode.
Step 3	interface <i>interface-id</i> Example: Device(config)# interface gigabitethernet 2/9	Identifies the MACsec interface, and enters interface configuration mode. The interface must be a physical interface.
Step 4	macsec Example: Device(config-if)# macsec	Enables MACsec on the interface.
Step 5	authentication periodic Example: Device(config-if)# authentication periodic	(Optional) Enables reauthentication for this port.
Step 6	authentication timer reauthenticate interval Example: Device(config-if)# authentication timer reauthenticate interval	(Optional) Sets the reauthentication interval.
Step 7	access-session host-mode multi-domain Example: Device(config-if)# access-session host-mode multi-domain	Allows hosts to gain access to the interface.

	Command or Action	Purpose
Step 8	access-session closed Example: Device(config-if)# access-session closed	Prevents preauthentication access on the interface.
Step 9	access-session port-control auto Example: Device(config-if)# access-session port-control auto	Sets the authorization state of a port.
Step 10	dot1x pae both Example: Device(config-if)# dot1x pae both	Configures the port as an 802.1X port access entity (PAE) supplicant and authenticator.
Step 11	dot1x credentials <i>profile</i> Example: Device(config-if)# dot1x credentials EAPTLS-CRED-IOSCA	Assigns a 802.1x credentials profile to the interface.
Step 12	dot1x supplicant eap profile <i>name</i> Example: Device(config-if)# dot1x supplicant eap profile EAPTLS-PROF-IOSCA	Assigns the EAP-TLS profile to the interface.
Step 13	dot1x authenticator eap profile <i>name</i> Example: Device(config-if)# dot1x authenticator eap profile EAPTLS-PROF-IOSCA	Assigns the EAP profile to use during 802.1x authentication.
Step 14	service-policy type control subscriber <i>control-policy name</i> Example: Device(config-if)# service-policy type control subscriber DOT1X_POLICY_RADIUS	Applies a subscriber control policy to the interface.
Step 15	exit Example: Device(config-if)# exit	Returns to privileged EXEC mode.
Step 16	show macsec interface interface-id Example: Device# show macsec interface GigabitEthernet 2/9	Displays MACsec details for the interface.
Step 17	show access-session interface <i>interface-id</i> details Example: Device# show access-session interface GigabitEthernet 2/9 details	Verifies successful dot1x authentication and authorization. This is the first thing to check. If dot1x authentication fails, then MKA will never start.

	Command or Action	Purpose
Step 18	show mka session interface <i>interface-id</i> details Example: Device# show mka session interface GigabitEthernet 2/9 details	Displays detailed MKA session status.

Example: Switch-to-Switch Certificate Based MACsec

An example configuration of switch-to-switch certificate based MACsec is shown below.

```

configure terminal
aaa new-model
aaa local authentication default authorization default
!
!
aaa authentication dot1x default group radius local
aaa authorization exec default local
aaa authorization network default group radius local
aaa authorization auth-proxy default group radius
aaa authorization credential-download default local
aaa accounting identity default start-stop group radius
!
!
aaa attribute list MUSTS
  attribute type linksec-policy must-secure
!
aaa attribute list macsec-dot1x-credentials
  attribute type linksec-policy must-secure
!
aaa attribute list MUSTS_CA
  attribute type linksec-policy must-secure
!
aaa attribute list SHOULD_S_CA
  attribute type linksec-policy should-secure
!
aaa attribute list mkadt_CA
  attribute type linksec-policy must-secure
!
aaa session-id common

username MUST aaa attribute list MUSTS_CA
username MUSTS.mkadt.cisco.com

crypto pki trustpoint demo
  enrollment terminal
  serial-number
  fqdn MUSTS.mkadt.cisco.com
  subject-name cn=MUSTS.mkadt.cisco.com,OU=CSG Security,O=Cisco Systems,L=Bengaluru,ST=KA,C=IN

  subject-alt-name MUSTS.mkadt.cisco.com
  revocation-check none
  rsakeypair demo 2048
  hash sha256

eap profile EAP_P
  method tls
  pki-trustpoint demo

dot1x system-auth-control
dot1x credentials MUSTS-CA

```

Example: Switch-to-Switch Certificate Based MACsec

```

username MUST
password 0 MUST_CA
!
dot1x credentials MUSTS
username MUSTS.mkadt.cisco.comcrypto pki authenticate demo

crypto pki authenticate
crypto pki enroll demo
crypto pki import demo certificate

policy-map type control subscriber MUSTS_1
event session-started match-all
  10 class always do-until-failure
    10 authenticate using dot1x both
event authentication-failure match-all
  10 class always do-until-failure
    10 terminate dot1x
    20 authentication-restart 10
event authentication-success match-all
  10 class always do-until-failure
    10 activate service-template DEFAULT_LINKSEC_POLICY_MUST_SECURE

interface GigabitEthernet2/9
switchport mode access
macsec
access-session host-mode multi-host
access-session closed
access-session port-control auto
dot1x pae both
dot1x authenticator eap profile EAP_P
dot1x credentials MUSTS
dot1x supplicant eap profile EAP_P
service-policy type control subscriber MUSTS_1

```

The following example shows output of the **show mka sessions** command for Switch-to-Switch Certificate Based MACsec.

```
show mka sessions
```

```
Total MKA Sessions..... 1
  Secured Sessions... 1
  Pending Sessions... 0
```

Interface	Local-TxSCI	Policy-Name	Inherited	Key-Server
Port-ID	Peer-RxSCI	MACsec-Peers	Status	CKN
Gi2/14	40ce.24b7.617d/0002	pol_1	NO	YES
2	f8b7.e2e5.ad88/0002	1	Secured	
	80690202D09A9801BE98FC89D5380098			

```
show mka sessions interface GigabitEthernet2/14 detail
```

```
MKA Detailed Status for MKA Session
```

```
=====  
Status: SECURED - Secured MKA Session with MACsec
```

```
Local Tx-SCI..... 40ce.24b7.617d/0002
Interface MAC Address... 40ce.24b7.617d
MKA Port Identifier..... 2
```



```

Session timeout: 1800s (local), Remaining: 1470s
Timeout action: Reauthenticate
Common Session ID: 6514030B000000998FEDD629
Acct Session ID: 0x0000000e
Handle: 0x5900003a
Current Policy: MUSTS_1

```

```

Local Policies:
Service Template: DEFAULT_LINKSEC_POLICY_MUST_SECURE (priority 150)

```

```

Server Policies:
Security Policy: Must Secure
Security Status: Link Secured

```

```

Method status list:
Method          State
dot1x           Authc Success
dot1xSup        Authc Success

```

Configuring MKA/MACsec for Port Channel

Configuring MKA/MACsec for Port Channel Using PSK

SUMMARY STEPS

1. **configure terminal**
2. **interface** *interface-id*
3. **macsec**
4. **mka policy** *policy-name*
5. **mka pre-shared-key key-chain** *key-chain-name*
6. **channel-group** *channel-group-number* **mode** {**active** | **passive** } | {**on** }
7. **end**

DETAILED STEPS

	Command or Action	Purpose
Step 1	configure terminal	Enter global configuration mode.
Step 2	interface <i>interface-id</i>	Enters interface configuration mode.
Step 3	macsec	Enables MACsec on the interface. Supports layer 2 and layer 3 port channels.
Step 4	mka policy <i>policy-name</i>	Configures an MKA policy.
Step 5	mka pre-shared-key key-chain <i>key-chain-name</i>	Configures an MKA pre-shared-key key-chain name. Note The MKA pre-shared key can be configured on either physical interface or sub-interfaces and not on both.

	Command or Action	Purpose
Step 6	<code>channel-group channel-group-number mode {active passive } {on }</code>	<p>Configures the port in a channel group and sets the mode. The channel-number range is from 1 to 4096. The port channel associated with this channel group is automatically created if the port channel does not already exist. For mode, select one of the following keywords:</p> <ul style="list-style-type: none"> • on — Forces the port to channel without PAGP or LACP. In the on mode, an EtherChannel exists only when a port group in the on mode is connected to another port group in the on mode. • active — Enables LACP only if a LACP device is detected. It places the port into an active negotiating state in which the port starts negotiations with other ports by sending LACP packets. • passive — Enables LACP on the port and places it into a passive negotiating state in which the port responds to LACP packets that it receives, but does not start LACP packet negotiation.
Step 7	<code>end</code>	Returns to privileged EXEC mode.

Configuring Port Channel Logical Interfaces for Layer 2 EtherChannels

To create a port channel interface for a Layer 2 EtherChannel, perform this task:

SUMMARY STEPS

1. `configure terminal`
2. `[no] interface port-channel channel-group-number`
3. `switchport`
4. `switchport mode {access | trunk }`
5. `end`

DETAILED STEPS

	Command or Action	Purpose
Step 1	<code>configure terminal</code>	Enter global configuration mode.
Step 2	<code>[no] interface port-channel channel-group-number</code>	<p>Creates the port channel interface.</p> <p>Note Use the no form of this command to delete the port channel interface.</p>
Step 3	<code>switchport</code>	Switches an interface that is in Layer 3 mode into Layer 2 mode for Layer 2 configuration.
Step 4	<code>switchport mode {access trunk }</code>	Assigns all ports as static-access ports in the same VLAN, or configure them as trunks.

	Command or Action	Purpose
Step 5	end	Returns to privileged EXEC mode.

Configuring Port Channel Logical Interfaces for Layer 3 EtherChannels

To create a port channel interface for a Layer 3 EtherChannel, perform this task:

SUMMARY STEPS

1. **configure terminal**
2. **interface port-channel** *interface-id*
3. **no switchport**
4. **ip address** *ip-address subnet_mask*
5. **end**

DETAILED STEPS

	Command or Action	Purpose
Step 1	configure terminal	Enter global configuration mode.
Step 2	interface port-channel <i>interface-id</i>	Enters interface configuration mode.
Step 3	no switchport	Switches an interface that is in Layer 2 mode into Layer 3 mode for Layer 3 configuration.
Step 4	ip address <i>ip-address subnet_mask</i>	Assigns an IP address and subnet mask to the EtherChannel.
Step 5	end	Returns to privileged EXEC mode.

Example: Configuring MACsec MKA for Port Channel using PSK

Etherchannel Mode — Static/On

The following is a sample configuration on Device 1 and Device 2 with EtherChannel Mode on.

```
key chain KC macsec
  key 1000
    cryptographic-algorithm aes-128-cmac
    key-string FC8F5B10557C192F03F60198413D7D45
  end

mka policy POLICY
  key-server priority 0
  macsec-cipher-suite gcm-aes-128
  confidentiality-offset 0
  end

interface Te1/0/1
  channel-group 2 mode on
  macsec
  mka policy POLICY
  mka pre-shared-key key-chain KC
  end
```


Configuring MACsec Cipher Announcement

Configuring an MKA Policy for Secure Announcement

SUMMARY STEPS

1. `configure terminal`
2. `mka policy policy-name`
3. `key-server priority`
4. `[no] send-secure-announcements`
5. `macsec-cipher-suite {gcm-aes-128 | gcm-aes-256}`
6. `end`
7. `show mka policy`

DETAILED STEPS

	Command or Action	Purpose
Step 1	<code>configure terminal</code>	Enter global configuration mode.
Step 2	<code>mka policy <i>policy-name</i></code>	Identify an MKA policy, and enter MKA policy configuration mode. The maximum policy name length is 16 characters. Note The default MACsec cipher suite in the MKA policy will always be "GCM-AES-128". If the device supports both "GCM-AES-128" and "GCM-AES-256" ciphers, it is highly recommended to define and use a user defined MKA policy to include both 128 and 256 bits ciphers or only 256 bits cipher, as may be required.
Step 3	<code>key-server <i>priority</i></code>	Configure MKA key server options and set priority (between 0-255). Note When value of key server priority is set to 255, the peer can not become the key server. The key server priority value is valid only for MKA PSK; and not for MKA EAPTLS.
Step 4	<code>[no] send-secure-announcements</code>	Enables sending of secure announcements. Use the no form of the command to disable sending of secure announcements. By default, secure announcements are disabled.
Step 5	<code>macsec-cipher-suite {<i>gcm-aes-128</i> <i>gcm-aes-256</i>}</code>	Configures cipher suite for deriving SAK with 128-bit or 256-bit encryption.
Step 6	<code>end</code>	Returns to privileged EXEC mode.

	Command or Action	Purpose
Step 7	show mka policy	Verify your entries.

Configuring Secure Announcement Globally (Across all the MKA Policies)

SUMMARY STEPS

1. configure terminal
2. [no] mka defaults policy send-secure-announcements
3. end

DETAILED STEPS

	Command or Action	Purpose
Step 1	configure terminal	Enter global configuration mode.
Step 2	[no] mka defaults policy send-secure-announcements	Enables sending of secure announcements in MKPDUs across MKA policies. By default, secure announcements are disabled.
Step 3	end	Returns to privileged EXEC mode.

Configuring EAPoL Announcements on an interface

SUMMARY STEPS

1. configure terminal
2. interface *interface-id*
3. [no] eapol announcement
4. end

DETAILED STEPS

	Command or Action	Purpose
Step 1	configure terminal	Enter global configuration mode.
Step 2	interface <i>interface-id</i>	Identifies the MACsec interface, and enter interface configuration mode. The interface must be a physical interface.
Step 3	[no] eapol announcement	Enable EAPoL announcements. Use the no form of the command to disable EAPoL announcements. By default, EAPoL announcements are disabled.
Step 4	end	Returns to privileged EXEC mode.


```

Member Identifier (MI)... D46CBEC05D5D67594543CEAE
Message Number (MN)..... 89567
EAP Role..... NA
Key Server..... YES
MKA Cipher Suite..... AES-128-CMAC

Latest SAK Status..... Rx & Tx
Latest SAK AN..... 0
Latest SAK KI (KN)..... D46CBEC05D5D67594543CEAE00000001 (1)
Old SAK Status..... FIRST-SAK
Old SAK AN..... 0
Old SAK KI (KN)..... FIRST-SAK (0)

SAK Transmit Wait Time... 0s (Not waiting for any peers to respond)
SAK Retire Time..... 0s (No Old SAK to retire)

MKA Policy Name..... p2
Key Server Priority..... 2
Delay Protection..... NO
Replay Protection..... YES
Replay Window Size..... 0
Confidentiality Offset... 0
Algorithm Agility..... 80C201
Send Secure Announcement.. DISABLED
SAK Cipher Suite..... 0080C20001000001 (GCM-AES-128)
MACsec Capability..... 3 (MACsec Integrity, Confidentiality, & Offset)
MACsec Desired..... YES

# of MACsec Capable Live Peers..... 1
# of MACsec Capable Live Peers Responded.. 1

Live Peers List:
  MI                      MN                      Rx-SCI (Peer)          KS Priority
  -----
  38046BA37D7DA77E06D006A9  89555                c800.8459.e764/002a   10

Potential Peers List:
  MI                      MN                      Rx-SCI (Peer)          KS Priority
  -----

Dormant Peers List:
  MI                      MN                      Rx-SCI (Peer)          KS Priority
  -----

The following is a sample output of the show mka sessions details command with secure announcement disabled.

# show mka sessions details
MKA Detailed Status for MKA Session
=====
Status: SECURED - Secured MKA Session with MACsec

Local Tx-SCI..... 204c.9e85.ede4/002b

```



```
# show mka policy p2 detail
MKA Policy Configuration ("p2")
=====
MKA Policy Name..... p2
Key Server Priority.... 2
Confidentiality Offset. 0
Send Secure Announcement..DISABLED
Cipher Suite(s)..... GCM-AES-128

Applied Interfaces...
  GigabitEthernet1/0/1
```