



Configuring Platform Event Filters

This chapter includes the following sections:

- [Platform Event Filters, page 1](#)
- [Enabling Platform Event Alerts, page 1](#)
- [Disabling Platform Event Alerts, page 2](#)
- [Configuring Platform Event Filters, page 3](#)
- [Interpreting Platform Event Traps, page 5](#)

Platform Event Filters

A platform event filter (PEF) can trigger an action and generate an alert when a critical hardware-related event occurs. For each PEF, you can choose the action to be taken (or take no action) when a platform event occurs. You can also choose to generate and send an alert when a platform event occurs. Alerts are sent as an SNMP trap, so you must configure an SNMP trap destination before the alerts can be sent.

You can globally enable or disable the generation of platform event alerts. When disabled, alerts are not sent even if PEFs are configured to send them.

Enabling Platform Event Alerts


Before You Begin

You must log in as a user with admin privileges to enable platform event alerts.

Procedure

- Step 1** In the **Navigation** pane, click the **Admin** tab.
- Step 2** On the **Admin** tab, click **Event Management**.

Figure 1: Event Management

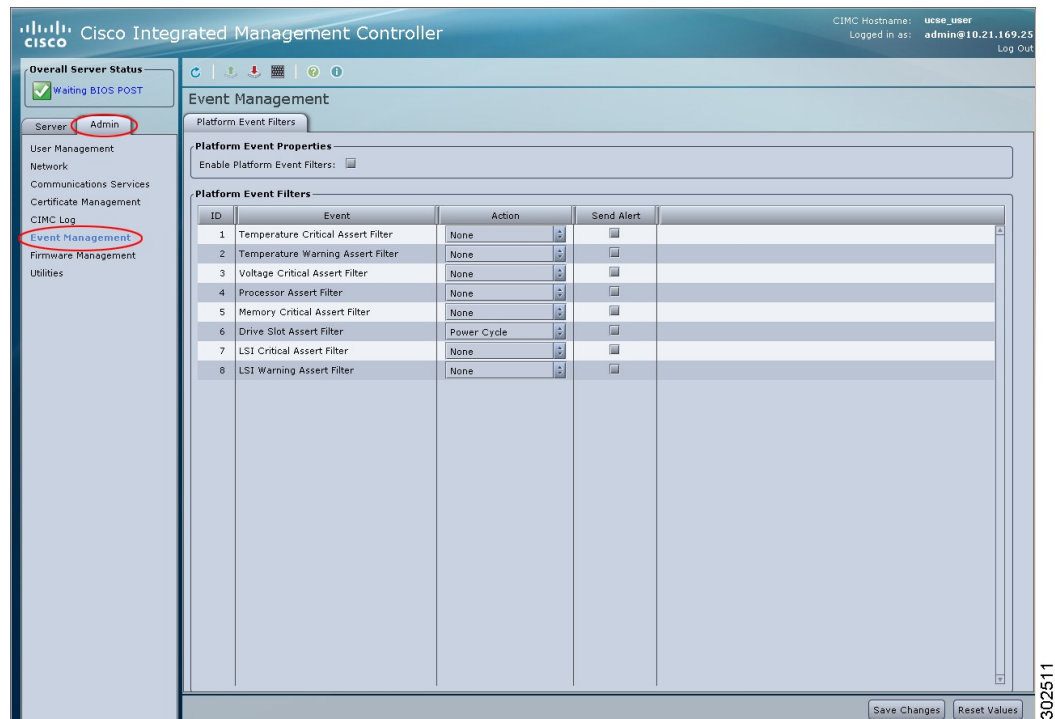

- Step 3** In the **Event Management** pane, click the **Platform Event Filters** tab.
- Step 4** In the **Platform Event Alerts** area, check the **Enable Platform Event Alerts** check box.
- Step 5** Click **Save Changes**.

Disabling Platform Event Alerts


Before You Begin

You must log in as a user with admin privileges to disable platform event alerts.

Procedure

- Step 1** In the Navigation pane, click the **Admin** tab.
- Step 2** On the **Admin** tab, click **Event Management**.

Figure 2: Event Management

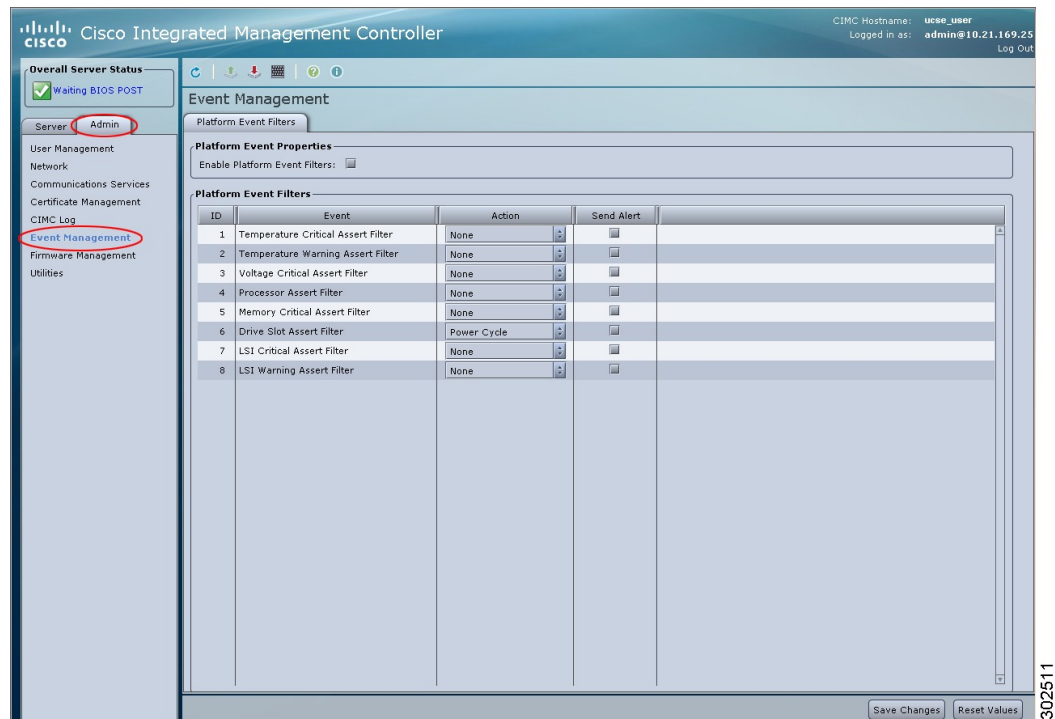

- Step 3** In the **Event Management** pane, click the **Platform Event Filters** tab.
- Step 4** In the **Platform Event Alerts** area, uncheck the **Enable Platform Event Alerts** check box.
- Step 5** Click **Save Changes**.

Configuring Platform Event Filters


Before You Begin

You must log in as a user with admin privileges to configure platform event filters.

Procedure

- Step 1** In the **Navigation** pane, click the **Admin** tab.
- Step 2** On the **Admin** tab, click **Event Management**.

Figure 3: Event Management

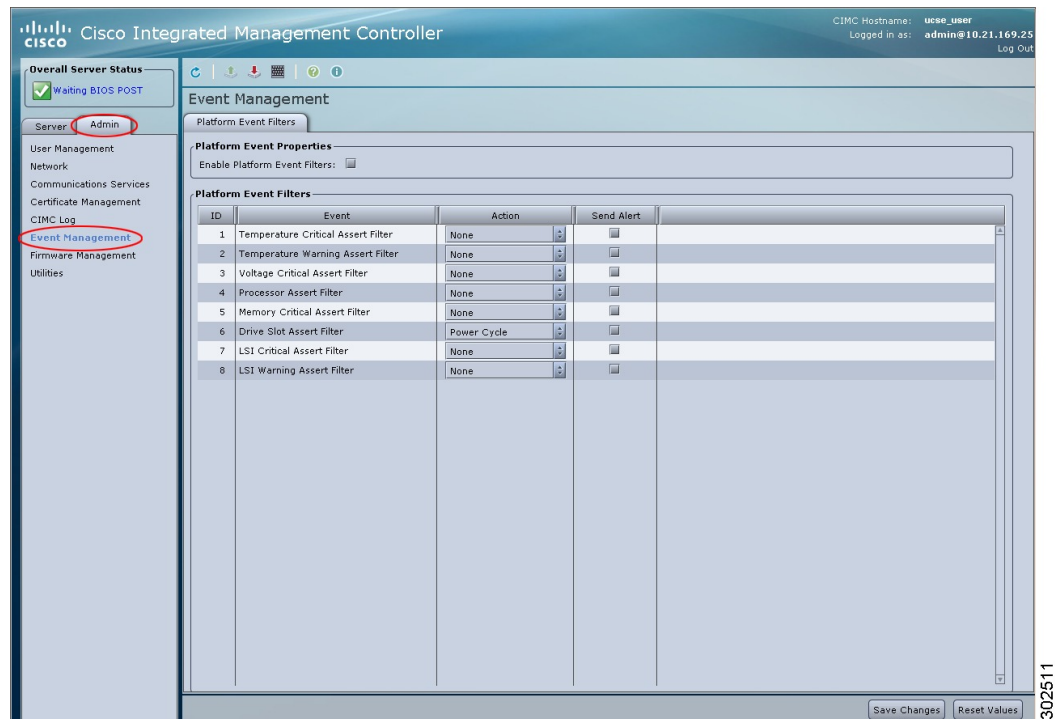

- Step 3** In the **Event Management** pane, click the **Platform Event Filters** tab.
- Step 4** In the **Platform Event Filters** area, complete the following fields for each event:

Name	Description
ID column	The unique filter ID.
Event column	The name of the event filter.
Action column	For each filter, select the desired action from the scrolling list box. This can be one of the following: <ul style="list-style-type: none"> • None—No action is taken. • Reboot—The server is rebooted. • Power Cycle—The server is power cycled. • Power Off—The server is powered off.

Name	Description
Send Alert column	<p>For each filter that you want to send an alert, check the associated check box in this column.</p> <p>Note In order to send an alert, the filter trap settings must be configured properly and the Enable Platform Event Filters check box must also be checked.</p>

Step 5 Click Save Changes.

What to Do Next

If you configure any PEFs to send an alert, complete the following tasks:

- [Enabling Platform Event Alerts, on page 1](#)
- [Configuring SNMP Trap Settings](#)

Interpreting Platform Event Traps

A CIMC platform event alert sent as an SNMP trap contains an enterprise object identifier (OID) in the form 1.3.6.1.4.1.3183.1.1.0.event. The first ten fields of the OID represent the following information: iso(1).org(3).dod(6).internet(1).private(4).enterprises(1).wired_for_management(3183).PET(1).version(1).version(0), indicating an IPMI platform event trap (PET) version 1.0 message. The last field is an event number, indicating the specific condition or alert being notified.

Platform Event Trap Descriptions

The following table provides a description of the event being notified in a platform event trap message, based on the event number in the trap OID.

Event Number [Note 1]		Platform Event Description
0	0h	Test Trap
65799	010107h	Temperature Warning
65801	010109h	Temperature Critical
131330	020102h	Under Voltage, Critical
131337	020109h	Voltage Critical
196871	030107h	Current Warning
262402	040102h	Fan Critical
459776	070400h	Processor related (IOH-Thermalert/Caterr sensor) – predictive failure deasserted

Event Number [Note 1]		Platform Event Description
459777	070401h	Processor related (IOH-Thermalert/Caterr sensor) – predictive failure asserted
460032	070500h	Processor Power Warning – limit not exceeded
460033	070501h	Processor Power Warning – limit exceeded
524533	0800F5h	Power Supply Critical
524551	080107h	Power Supply Warning
525313	080401h	Discrete Power Supply Warning
527105	080B01h	Power Supply Redundancy Lost
527106	080B02h	Power Supply Redundancy Restored
552704	086F00h	Power Supply Inserted
552705	086F01h	Power Supply Failure
552707	086F03h	Power Supply AC Lost
786433	0C0001h	Correctable ECC Memory Errors, Release 1.3(1) and later releases, filter set to accept all reading types [Note 4]
786439	0C0007h	DDR3_INFO sensor LED - RED bit asserted (Probable ECC error on a DIMM), Generic Sensor [Notes 2,3] Note Displayed for the E-Series Servers and the SM E-Series NCE. Not displayed for the EHWIC E-Series NCE and the NIM E-Series NCE.
786689	0C0101h	Correctable ECC Memory Errors, Release 1.3(1) and later releases
818945	0C7F01h	Correctable ECC Memory Errors, Release 1.2(x) and earlier releases
818951	0C7F07h	DDR3_INFO sensor LED - RED bit asserted (Probable ECC error on a DIMM), 1.2(x) and earlier releases [Note 3] Note Displayed for the E-Series Servers and the SM E-Series NCE. Not displayed for the EHWIC E-Series NCE and the NIM E-Series NCE.
851968	0D0000h	HDD sensor indicates no fault, Generic Sensor [Note 2]
851972	0D0004h	HDD sensor indicates a fault, Generic Sensor [Note 2]
854016	0D0800h	HDD Absent, Generic Sensor [Note 2]
854017	0D0801h	HDD Present, Generic Sensor [Note 2]
880384	0D6F00h	HDD Present, no fault indicated
880385	0D6F01h	HDD Fault
880512	0D6F80h	HDD Not Present
880513	0D6F81h	HDD is deasserted but not in a fault state

Event Number [Note 1]		Platform Event Description
884480	0D7F00h	Drive Slot LED Off
884481	0D7F01h	Drive Slot LED On
884482	0D7F02h	Drive Slot LED fast blink
884483	0D7F03h	Drive Slot LED slow blink
884484	0D7F04h	Drive Slot LED green
884485	0D7F05h	Drive Slot LED amber
884486	0D7F01h	Drive Slot LED blue
884487	0D7F01h	Drive Slot LED read
884488	0D7F08h	Drive Slot Online
884489	0D7F09h	Drive Slot Degraded
Note	When the event filter is set to accept all reading types, bits 15:8 of the hex event number are masked to 0. For example, event number 786689 (0C0101h) becomes 786433 (0C0001h).	

