

Problemen met IS-IS-nabijheid oplossen

Inhoud

[Inleiding](#)

[Voorwaarden](#)

[Vereisten](#)

[Gebruikte componenten](#)

[IS-IS-aanhechting naar beneden](#)

[ISIS-nabijheid naar beneden \(niet gerelateerd aan MTU-mismatch\)](#)

[IS-IS-nabijheid instabiel](#)

[IS-IS-nabijheid instabiel \(willekeurige flappen\)](#)

Inleiding

In dit document wordt beschreven hoe problemen met het IS-IS-protocol voor Cisco IOS® XE-platforms kunnen worden opgelost.

Voorwaarden

Vereisten

Cisco raadt kennis van de volgende onderwerpen aan:

- Intermediair systeem naar intermediair systeem (IS-IS)
- Cisco IOS XE

Voor meer informatie over deze onderwerpen, zie:

- [IP-routing: ISIS-configuratiehandleiding](#)
- [IS-IS-nabijheid en gebiedstypen configureren](#)

Gebruikte componenten

De informatie in dit document is gebaseerd op Cisco IOS XE-software.

De informatie in dit document is gebaseerd op de apparaten in een specifieke laboratoriumomgeving. Alle apparaten die in dit document worden beschreven, hadden een opgeschoonde (standaard)configuratie. Als uw netwerk live is, moet u zorgen dat u de potentiële impact van elke opdracht begrijpt.

IS-IS-aanhechting naar beneden

Deze sectie biedt een oplossing voor het veel voorkomende probleem van IS-IS down. Dit netwerkdiagram wordt als voorbeeld gebruikt:



Topologie bij baseline

IS-IS ligt tussen DeviceA en DeviceB.

<#root>

DeviceA#

show isis neighbors detail

System Id	Type Interface	IP Address	State Holdtime	Circuit Id
DeviceA#				

<#root>

DeviceB#

show isis neighbors detail

System Id	Type Interface	IP Address	State Holdtime	Circuit Id
DeviceA	L1L2 Tve1/0/9	192.0.2.1	DOWN 28	05
Area Address(es): 49.0001				
SNPA: a84f.b1c3.9484				
State Changed: never				
Format: Phase V				
Remote TID: 0				
Local TID: 0				
Interface name: TwentyFiveGigE1/0/9				
Neighbor Circuit Id: 5				
Adj sync: Full				

Diagnose van het probleem:

1. De connectiviteit tussen de apparaten valideren.

<#root>

DeviceA#

ping 192.0.2.2 size 1500 df-bit

Type escape sequence to abort.

Sending 5, 1500-byte ICMP Echos to 192.0.2.2, timeout is 2 seconds:

Packet sent with the DF bit set

!!!!!!

Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms

DeviceA#

<#root>

DeviceB#

ping 192.0.2.1 size 1500 df-bit

Type escape sequence to abort.

Sending 5, 1500-byte ICMP Echos to 192.0.2.1, timeout is 2 seconds:

Packet sent with the DF bit set

!!!!!!

Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms

DeviceB#

2. Controleer de configuratie aan beide zijden.

<#root>

DeviceA#

show running-config | sec router isis

```
ip router isis
router isis
 net 49.0001.0000.0000.000a.00
```

DeviceA#

<#root>

DeviceB#

show running-config | sec router isis

```
ip router isis
```

```
router isis
 net 49.0001.0000.0000.000b.00
DeviceB#
```

3. Valideren als de aangrenzende locatie aan de Connectionless Network Service (CLNS). Dit geeft een overzicht van de burens die op uw apparaat zijn aangesloten.

<#root>

DeviceA#

show clns neighbors detail

System Id	Interface	SNPA	State	Holdtime	Type	Protocol
0000.0000.000B	Te0/0/4					
6c31.0edb.3b5f						

Up

257 IS ES-IS
Area Address(es): 49.0001

Uptime: 02:02:11

Interface name: TenGigabitEthernet0/0/4
DeviceA#

<#root>

DeviceB#

show clns neighbors detail

System Id	Interface	SNPA	State	Holdtime	Type	Protocol
0000.0000.000A	Twe1/0/9					
a84f.b1c3.9484						

Down

20 L1L2 IS-IS
Area Address(es): 49.0001
IP Address(es): 192.0.2.1*

Uptime: 02:02:09

NSF capable
Interface name: TwentyFiveGigE1/0/9
DeviceB#

De mac-adressen die op elke CLNS-buur worden vermeld, zijn de mac-adressen van de externe apparaten die met het lokale apparaat samenwerken.

<#root>

DeviceA#

show interface TenGigabitEthernet0/0/4

TenGigabitEthernet0/0/4 is up, line protocol is up
Hardware is 8xSFP+, address is

a84f.b1c3.9484 (bia a84f.b1c3.9484) < mac address appeared on SNPA DeviceB

Internet address is 192.0.2.1/30
MTU 1500 bytes, BW 10000000 Kbit/sec, DLY 10 usec,
reliability 255/255, txload 1/255, rxload 1/255

<#root>

DeviceB#

show interface TwentyFiveGigE1/0/9

TwentyFiveGigE1/0/9 is up, line protocol is up (connected)
Hardware is Twenty Five Gigabit Ethernet, address is

6c31.0edb.3b5f (bia 6c31.0edb.3b5f) < mac address appeared on SNPA DeviceA

Internet address is 192.0.2.2/30
MTU 9216 bytes, BW 10000000 Kbit/sec, DLY 10 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation ARPA, loopback not set

4. Voer de opdracht `show clns interface` uit om te valideren of de parameters overeenkomen met de peer.

Zorg ervoor dat deze waarden overeenkomen:

- Maximale transmissie-eenheid (MTU)
- circuittype

Apparaat A
<#root> DeviceA# show clns interface TenGigabitEthernet0/0/4 TenGigabitEthernet0/0/4 is up, line protocol is up Attached to: isis Checksums enabled,

MTU 1497

, Encapsulation SAP
ERPDUs enabled, min. interval 10 msec.
CLNS fast switching disabled
CLNS SSE switching disabled
DEC compatibility mode OFF for this interface
Next ESH/ISH in 19 seconds
Routing Protocol: IS-IS

Circuit Type: level-1-2

Interface number 0x0, local circuit ID 0x5
Neighbor Extended Local Circuit ID: 0x0
Level-1 Metric: 10, Priority: 64, Circuit ID: DeviceA.05
Level-1 IPv6 Metric: 10
Number of active level-1 adjacencies: 0
Level-2 Metric: 10, Priority: 64, Circuit ID: DeviceA.05
Level-2 IPv6 Metric: 10
Number of active level-2 adjacencies: 0
Next IS-IS Hello in 908 milliseconds

if state DOWN

DeviceB

<#root>

DeviceB#

show clns interface TwentyFiveGigE1/0/9

TwentyFiveGigE1/0/9 is up, line protocol is up
Attached to: isis
Checksums enabled,

MTU 9213


, Encapsulation SAP
ERPDUs enabled, min. interval 10 msec.
CLNS fast switching disabled
CLNS SSE switching disabled
DEC compatibility mode OFF for this interface
Next ESH/ISH in 8 seconds
Routing Protocol: IS-IS

Circuit Type: level-1-2

Interface number 0x0, local circuit ID 0xB
Neighbor Extended Local Circuit ID: 0x5
Neighbor System-ID: 0000.0000.000A
P2P retransmit queue size: 0
Level-1 Metric: 10, Priority: 64, Circuit ID: DeviceB.0B
Level-1 IPv6 Metric: 10
Number of active level-1 adjacencies: 0
Level-2 Metric: 10, Priority: 64, Circuit ID: DeviceB.0B
Level-2 IPv6 Metric: 10
Number of active level-2 adjacencies: 0
Next IS-IS Hello in 2 seconds

```
if state INIT
```

In dit scenario is het probleem gerelateerd aan de MTU-mismatch. Als de externe peer niet toegankelijk is, kan de `debug isis adj-packets` MTU-waarde worden verzonden en ontvangen.

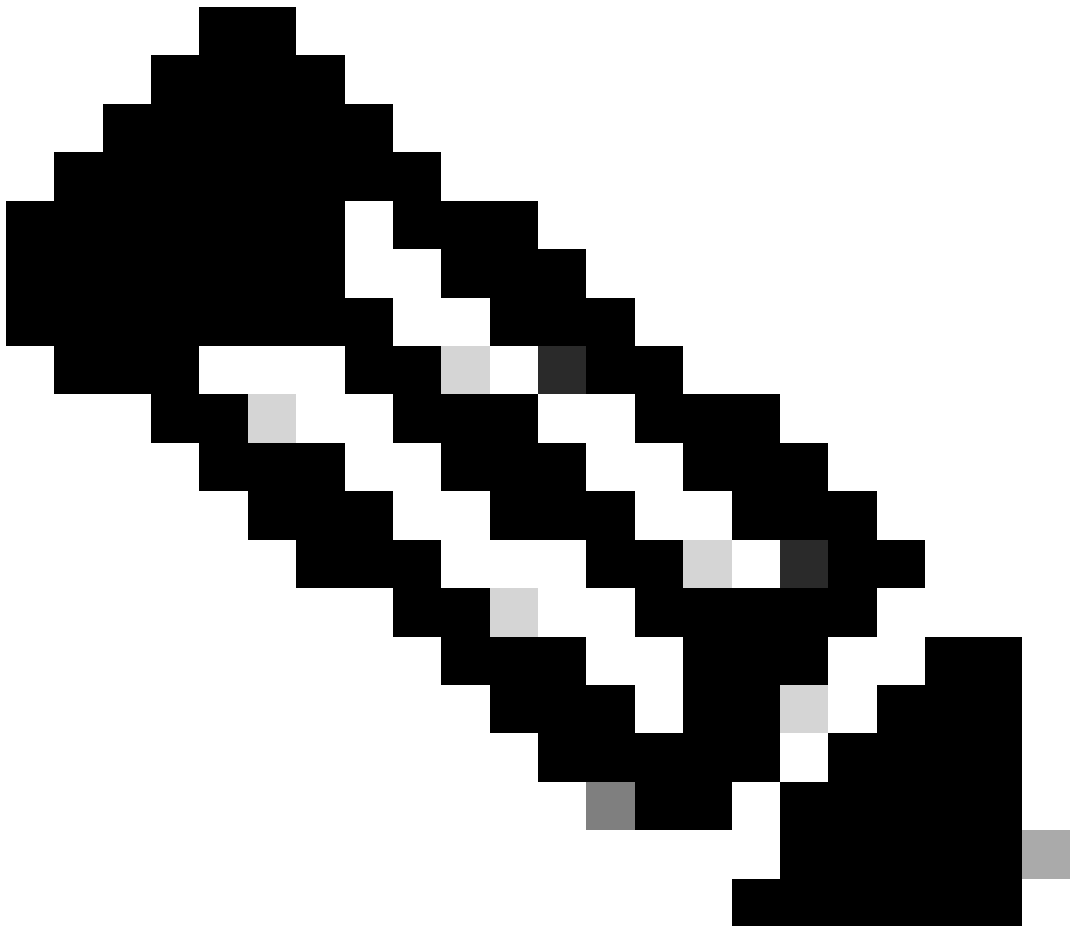

Opmerking: dit is alleen van toepassing als de opdracht wordt `show clns interface`afgedrukt if `state INIT`.

<#root>

DeviceA#

`debug isis adj-packets TenGigabitEthernet 0/0/4`

IS-IS Adjacency related packets debugging is on for router process null

```

*Jul 18 23:24:16.598: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
*Jul 18 23:24:16.599: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN,
length 1496 < MTU sent to the neighbor >

*Jul 18 23:24:25.189: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
*Jul 18 23:24:25.189: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length
*Jul 18 23:24:34.057: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
*Jul 18 23:24:34.057: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length
*Jul 18 23:24:42.866: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
*Jul 18 23:24:42.866: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length
*Jul 18 23:24:51.646: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
*Jul 18 23:24:51.646: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length
*Jul 18 23:24:59.606: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
*Jul 18 23:24:59.606: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length

```

<#root>

DeviceB#

debug isis adj-packets twentyFiveGigE 1/0/9

```

*Jul 18 23:53:22.420: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:INIT,
length 9212 < MTU sent to the neighbor >

```

```

*Jul 18 23:53:22.591: ISIS-Adj: Rec serial IIH from a84f.b1c3.9484 (TwentyFiveGigE1/0/9)
*Jul 18 23:53:22.591: ISIS-Adj: cir type L1L2, cir id 05,
length 1496 < MTU received from neighbor >

```

```

*Jul 18 23:53:22.592: ISIS-Adj: rcvd state DOWN, old state INIT, new state INIT, nbr usable TRUE
*Jul 18 23:53:22.592: ISIS-Adj: RCV:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x49000184 Length:5
*Jul 18 23:53:22.592: ISIS-Adj: Nghbr Ckt ID changed: FALSE
*Jul 18 23:53:22.592: ISIS-Adj: newstate:1, state_changed:0, going_up:0, going_down:0
*Jul 18 23:53:22.592: ISIS-Adj: Action = ACCEPT
*Jul 18 23:53:22.592: ISIS-Adj: ACTION_ACCEPT:
...

```

ISIS-nabijheid naar beneden (niet gerelateerd aan MTU-mismatch)

IS-IS is down en MTU komt overeen op de interfaces.

<#root>

DeviceA#

show cns neighbors

System Id	Interface	SNPA	State	Holdtime	Type	Protocol
-----------	-----------	------	-------	----------	------	----------

DeviceA#

<#root>

DeviceB#

show clns neighbors

System Id	Interface	SNPA	State	Holdtime	Type	Protocol
-----------	-----------	------	-------	----------	------	----------

DeviceB#

1. De configuratie valideren die overeenkomt met de peer.
2. Zorg ervoor dat de fysieke interface in een goede staat is om te verzenden (geen fouten of problemen met lichtniveaus).
3. Controleer de connectiviteit tussen peers (pingtest waarbij de MTU-grootte en de df-bit worden toegevoegd).
4. Valideer de CLNS-buren tussen de peers.
5. Zorg ervoor dat beide uiteinden dezelfde MTU en hetzelfde Circuit-Type hebben, samen met de staat.

Apparaat A

<#root>

DeviceA#

show clns interface TenGigabitEthernet 0/0/4

TenGigabitEthernet0/0/4 is up, line protocol is up
Attached to: isis
Checksums enabled,

MTU 1497

, Encapsulation SAP
ERPDUs enabled, min. interval 10 msec.
CLNS fast switching disabled
CLNS SSE switching disabled
DEC compatibility mode OFF for this interface
Next ESH/ISH in 41 seconds
Routing Protocol: IS-IS

Circuit Type: level-1-2

Interface number 0x0, local circuit ID 0x5
Neighbor Extended Local Circuit ID: 0x0
Level-1 Metric: 10, Priority: 64, Circuit ID: DeviceA.05
Level-1 IPv6 Metric: 10
Number of active level-1 adjacencies: 0
Level-2 Metric: 10, Priority: 64, Circuit ID: DeviceA.05
Level-2 IPv6 Metric: 10

```
Number of active level-2 adjacencies: 0
Next IS-IS Hello in 2 seconds
```

```
if state DOWN
```

DeviceB

```
<#root>
```

```
DeviceB#
```

```
show clns interface twentyFiveGigE 1/0/9
```

```
TwentyFiveGigE1/0/9 is up, line protocol is up
Attached to: isis
Checksums enabled,
```

```
MTU 1497
```

```
, Encapsulation SAP
ERPDUs enabled, min. interval 10 msec.
CLNS fast switching disabled
CLNS SSE switching disabled
DEC compatibility mode OFF for this interface
Next ESH/ISH in 42 seconds
Routing Protocol: IS-IS
```

```
Circuit Type: level-1-2
```

```
Interface number 0x0, local circuit ID 0xB
Neighbor Extended Local Circuit ID: 0x0
P2P retransmit queue size: 0
Level-1 Metric: 10, Priority: 64, Circuit ID: DeviceB.0B
Level-1 IPv6 Metric: 10
Number of active level-1 adjacencies: 0
Level-2 Metric: 10, Priority: 64, Circuit ID: DeviceB.0B
Level-2 IPv6 Metric: 10
Number of active level-2 adjacencies: 0
Next IS-IS Hello in 5 seconds
```

```
if state DOWN
```

6. Schakel de verzonden en ontvangen pakketten in `debug isis adj-packet` en valideer deze.

```
<#root>
```

```
DeviceA#
```

```
debug isis adj-packets TenGigabitEthernet 0/0/4
```

```
IS-IS Adjacency related packets debugging is on for router process null
*Jul 19 13:32:52.788: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
*Jul 19 13:32:52.788: ISIS-Adj:
```

Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length 1496

```
*Jul 19 13:33:00.708: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
*Jul 19 13:33:00.709: ISIS-Adj:
```

Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length 1496

```
*Jul 19 13:33:09.726: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
*Jul 19 13:33:09.726: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length
*Jul 19 13:33:18.376: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
*Jul 19 13:33:18.376: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length
*Jul 19 13:33:26.132: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
*Jul 19 13:33:26.132: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length
DeviceA#
```

<#root>

DeviceB#

debug isis adj-packets TwentyFiveGigE1/0/9

IS-IS Adjacency related packets debugging is on for router process null

```
*Jul 19 14:01:32.125: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x0 Length:5
*Jul 19 14:01:32.125: ISIS-Adj:
```

Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:DOWN, length 1496

```
*Jul 19 14:01:40.005: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x0 Length:5
*Jul 19 14:01:40.005: ISIS-Adj:
```

Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:DOWN, length 1496

```
*Jul 19 14:01:49.602: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x0 Length:5
*Jul 19 14:01:49.602: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:DOWN, length 1496
*Jul 19 14:01:58.284: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x0 Length:5
*Jul 19 14:01:58.284: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:DOWN, length 1496
```

Beide apparaten worden verzonden, maar ze ontvangen het Hello Packet niet van hun burens.

7. Schakel een opname in om te valideren dat de pakketten naar elke buur worden verzonden.

Zodra de opname is voltooid, exporteert u deze naar de bootflash of flash als een .pcap file bestand en uploadt u deze naar een TFTP-server voor meer informatie.

<#root>

DeviceA#

show monitor cap cap parameter

```
monitor capture cap interface TenGigabitEthernet0/0/4 BOTH < Interface from where send and receive the H
monitor capture cap control-plane IN < Packets to be process and generated by the CPU >

monitor capture cap access-list TAC < ACL for capture only the IS-IS packets >

monitor capture cap buffer size 10
```

```
monitor capture cap limit pps 1000
```

```
DeviceA#
```

```
show access-list TAC
```

```
Extended MAC access list TAC  
  permit host
```

```
a84f.b1c3.9484
```

```
host
```

```
0900.2b00.0005 < Local MAC address towards the IS-IS Hello >
```

```
  permit host
```

```
6c31.0edb.3b5f host 0900.2b00.0005 < Remote MAC address towards the IS-IS Hello >
```

```
<#root>
```

```
DeviceB#
```

```
show monitor capture cap parameter
```


```
monitor capture cap interface TwentyFiveGigE1/0/9 BOTH < Interface from where send and receive the Hello >
```

```
monitor capture cap control-plane BOTH < Packets to be process and generated by the CPU >
```

```
monitor capture
```

```
cap match any < match all the packets on the switch >
```

```
monitor capture cap buffer size 10
```

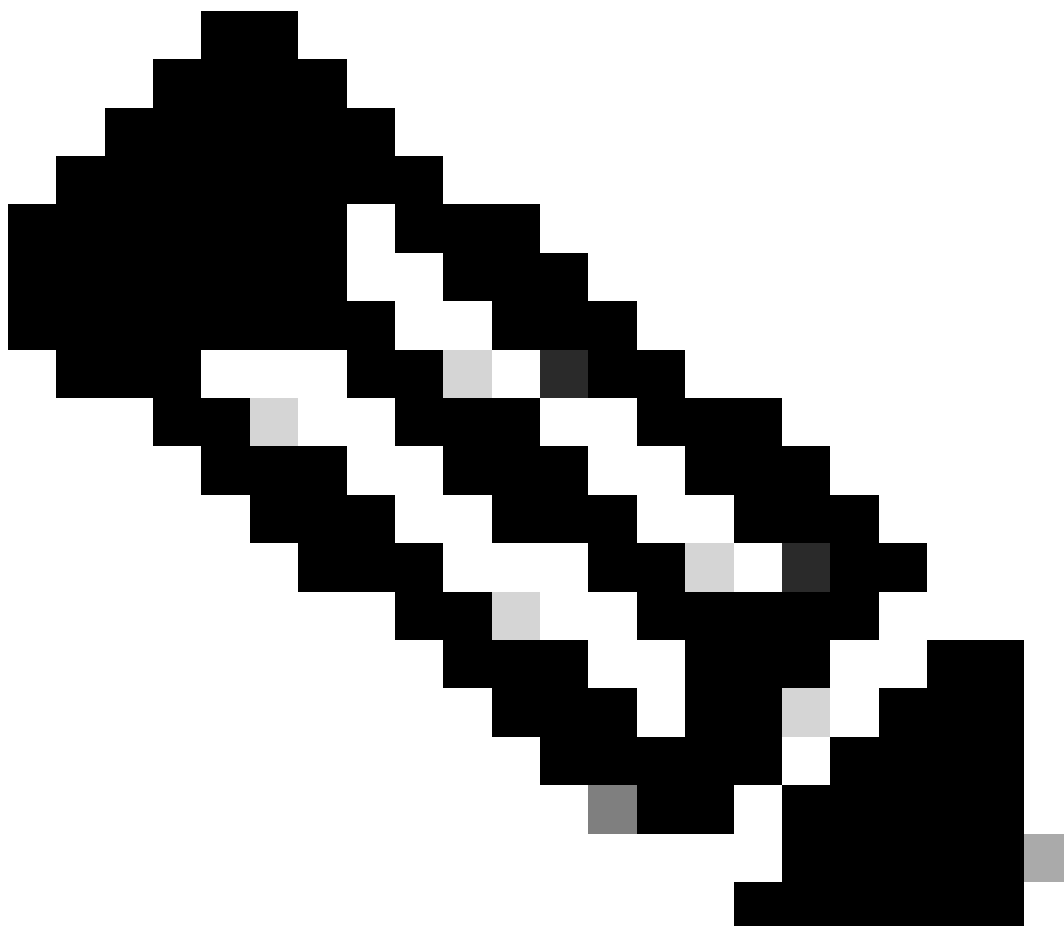

Opmerking: EPC bij Catalyst Cisco IOS XE-switches vangt alleen uitgaande IS-IS-hellos op en niet de ingangspakketten. Als alternatief worden SPAN-opnamen aanbevolen.

Een verwijzing naar de Hello Packets wordt getoond in deze tabel.

Naam	Bestemmings-MAC-adres
Alle L1-IS's	0180 C200 0014
Alle L2-IS's	0180 C200 0015
Alle IS's	0900,2b00,0005
Alle ES's	0900,2b00,0004

8. Controleer de geëxporteerde afvang en zorg ervoor dat de hello-pakketten tussen burens worden uitgewisseld.

DeviceA stuurt de hello-pakketten door hun systeem-ID (rood vierkant) toe te voegen. Het wordt verwacht dat het een pakket van zijn buurman met zijn systeem-ID ontvangt. In deze opname kunt u waarden dat DeviceB deze pakketten niet doorstuurt naar de peer.

eth.dst == 09:00:2b:00:00:05

Nr	Time	Source	Destination	seq
1	2023-07-19 08:31:55.703958	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
3	2023-07-19 08:32:05.236987	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
4	2023-07-19 08:32:14.076991	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
5	2023-07-19 08:32:23.127984	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a

> Frame 3: 1513 bytes on wire (12104 bits), 1513 bytes captured (12104 bits)

IEEE 802.3 Ethernet

> Destination: DEC-MAP-(or-OSI?)-Intermediate-System-Hello? (09:00:2b:00:00:05)

> Source: Cisco_c3:94:84 (a8:4f:b1:c3:94:84)

Length: 1499

Logical-Link Control

ISO 10589 ISIS InTRA Domain Routeing Information Exchange Protocol

Intradomain Routing Protocol Discriminator: ISIS (0x83)

Length Indicator: 20

Version/Protocol ID Extension: 1

ID Length: 0

000. = Reserved: 0x0

...1 0001 = PDU Type: P2P HELLO (17)

Version: 1

Reserved: 0

Maximum Area Addresses: 0

ISIS HELLO

.... ..11 = Circuit type: Level 1 and 2 (0x3)

0000 00.. = Reserved: 0x00

SystemID {Sender of PDU}: 0000.0000.000a

Holding timer: 30

PDU length: 1496

Local circuit ID: 5

> Restart Signaling (t=211, l=3)

> Point-to-point Adjacency State (t=240, l=5)

> Protocols Supported (t=129, l=1)

> Area address(es) (t=1, l=4)

> IP Interface address(es) (t=132, l=4)

> Padding (t=8, l=255)

> Padding (t=8, l=255)

> Padding (t=8, l=255)

> Padding (t=8, l=255)

> Padding (t=8, l=255)

> Padding (t=8, l=162)

Hello packet

Source from local interface(MAC)

Destination MAC IS-IS Point to Point

System ID sent to the neighbor

DeviceA ISIS Down Capture

DeviceB capture laat zien dat de hello-pakketten naar de buurman (rood vierkant) worden verzonden. Net als bij de laatste opname ontvangt het echter niet de Hello-pakketten van zijn buurman.

eth.dst == 09:00:2b:00:00:05				
Nr	Time	Source	Destination	seq
1	2023-07-19 09:00:28.028914	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2	2023-07-19 09:00:35.603384	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
3	2023-07-19 09:00:45.386207	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
4	2023-07-19 09:00:54.772284	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b

> Frame 1: 1513 bytes on wire (12104 bits), 1513 bytes captured (12104 bits) on interface /tmp/epc_ws/wif_to_ts_pipe, id 0	
✓ IEEE 802.3 Ethernet > Destination: DEC-MAP-(or-OSI?)-Intermediate-System-Hello? (09:00:2b:00:00:05) > Source: Cisco_db:3b:5f (6c:31:0e:db:3b:5f) Length: 1499	Hello packet Source MAC address (local Interface) Destination MAC IS-IS Point to Point
> Logical-Link Control	
✓ ISO 10589 ISIS InTRA Domain Routeing Information Exchange Protocol Intradomain Routing Protocol Discriminator: ISIS (0x83) Length Indicator: 20 Version/Protocol ID Extension: 1 ID Length: 0 000. = Reserved: 0x0 ...1 0001 = PDU Type: P2P HELLO (17) Version: 1 Reserved: 0 Maximum Area Addresses: 0	
✓ ISIS HELLO11 = Circuit type: Level 1 and 2 (0x3) 0000 00.. = Reserved: 0x00 SystemID {Sender of PDU}: 0000.0000.000b Holding timer: 30 PDU length: 1496 Local circuit ID: 11 > Restart Signaling (t=211, l=3) > Point-to-point Adjacency State (t=240, l=5) > Protocols Supported (t=129, l=1) > Area address(es) (t=1, l=4) > IP Interface address(es) (t=132, l=4) > Padding (t=8, l=255) > Padding (t=8, l=255) > Padding (t=8, l=255) > Padding (t=8, l=255) > Padding (t=8, l=255) > Padding (t=8, l=162)	

DeviceB ISIS Down Capture

Het probleem in dit scenario is te wijten aan een tussenliggend apparaat dat het niet mogelijk maakt om de hello-pakketten te verzenden. Als u een vergelijkbare situatie waarneemt en verder problemen wilt oplossen, opent u een Cisco TAC-case.

IS-IS-nabijheid instabiel

Deze sectie biedt een oplossing voor het veelvoorkomende probleem van IS-IS-kleppen.

Diagnose van het probleem:

IS-IS is instabiel tussen DeviceA en DeviceB.

<#root>

DeviceA#

show logging

Jul 19 15:05:03.623:

%CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Down, hold time expired

Jul 19 15:05:15.075: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Up, new ad

Jul 19 15:07:04.575: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Down, hold

Jul 19 15:07:15.759: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Up, new ad

Jul 19 15:09:04.983: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Down, hold

Jul 19 15:09:14.835: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Up, new ad

<#root>

DeviceB#

show logging

Jul 19 15:05:02.316:

%CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Down, hold time expired

Jul 19 15:05:18.191: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Up, new adjace

Jul 19 15:07:09.280: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Down, hold tim

Jul 19 15:07:18.876: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Up, new adjace

Jul 19 15:09:06.080: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Down, hold tim

Jul 19 15:09:17.948: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Up, new adjace

1. Controleer de connectiviteit tussen peers (pingtest met MTU-grootte en de df-bitset).
2. Zorg ervoor dat de fysieke interface in een goede staat is om te verzenden (geen fouten of problemen met lichtniveaus).
3. Valideer de CLNS-buren die verkeer naar elkaar sturen met de **show clns traffic interface** opdracht.

<#root>

DeviceA#

show clns traffic interface TenGigabitEthernet0/0/4

CLNS: Time since last clear: 00:01:57

CLNS & ISIS Output: 3, Input: 21

Dropped Protocol not enabled on interface: 0

CLNS Local: 0, Forward: 0

Interface TenGigabitEthernet0/0/4:

IS-IS: Time since last clear: 00:01:57

IS-IS: Level-1 Hellos (sent/rcvd): 0/0

IS-IS: Level-2 Hellos (sent/rcvd): 0/0

IS-IS: PTP Hellos (sent/rcvd): 15/11 < DeviceA sends hello packets and receives less than its sends

IS-IS: Level-1 LSPs flooded (sent/rcvd): 2/2

IS-IS: Level-2 LSPs flooded (sent/rcvd): 2/2

IS-IS: Level-1 CSNPs (sent/rcvd): 1/1

IS-IS: Level-2 CSNPs (sent/rcvd): 1/1

IS-IS: Level-1 PSNPs (sent/rcvd): 1/1

IS-IS: Level-2 PSNPs (sent/rcvd): 1/1

IS-IS: Level-1 DR Elections: 0

IS-IS: Level-2 DR Elections: 0

<#root>

DeviceB#

show clns traffic interface TwentyFiveGigE1/0/9

CLNS: Time since last clear: 00:00:27

CLNS queue depth: 0/100, drops: 0, highest: 2

CLNS & ISIS Output: 1, Input: 14

Dropped Protocol not enabled on interface: 0

CLNS Local: 0, Forward: 0

Interface TwentyFiveGigE1/0/9:

IS-IS: Time since last clear: 00:00:27

IS-IS: Level-1 Hellos (sent/rcvd): 0/0

IS-IS: Level-2 Hellos (sent/rcvd): 0/0

IS-IS: PTP Hellos (sent/rcvd): 4/5 < DeviceB, sends and receives a couple of hellos in comparison v

IS-IS: Level-1 LSPs flooded (sent/rcvd): 2/2

IS-IS: Level-2 LSPs flooded (sent/rcvd): 2/2

IS-IS: Level-1 CSNPs (sent/rcvd): 1/1


IS-IS: Level-2 CSNPs (sent/rcvd): 1/1

IS-IS: Level-1 PSNPs (sent/rcvd): 1/1

IS-IS: Level-2 PSNPs (sent/rcvd): 1/1

IS-IS: Level-1 DR Elections: 0

IS-IS: Level-2 DR Elections: 0

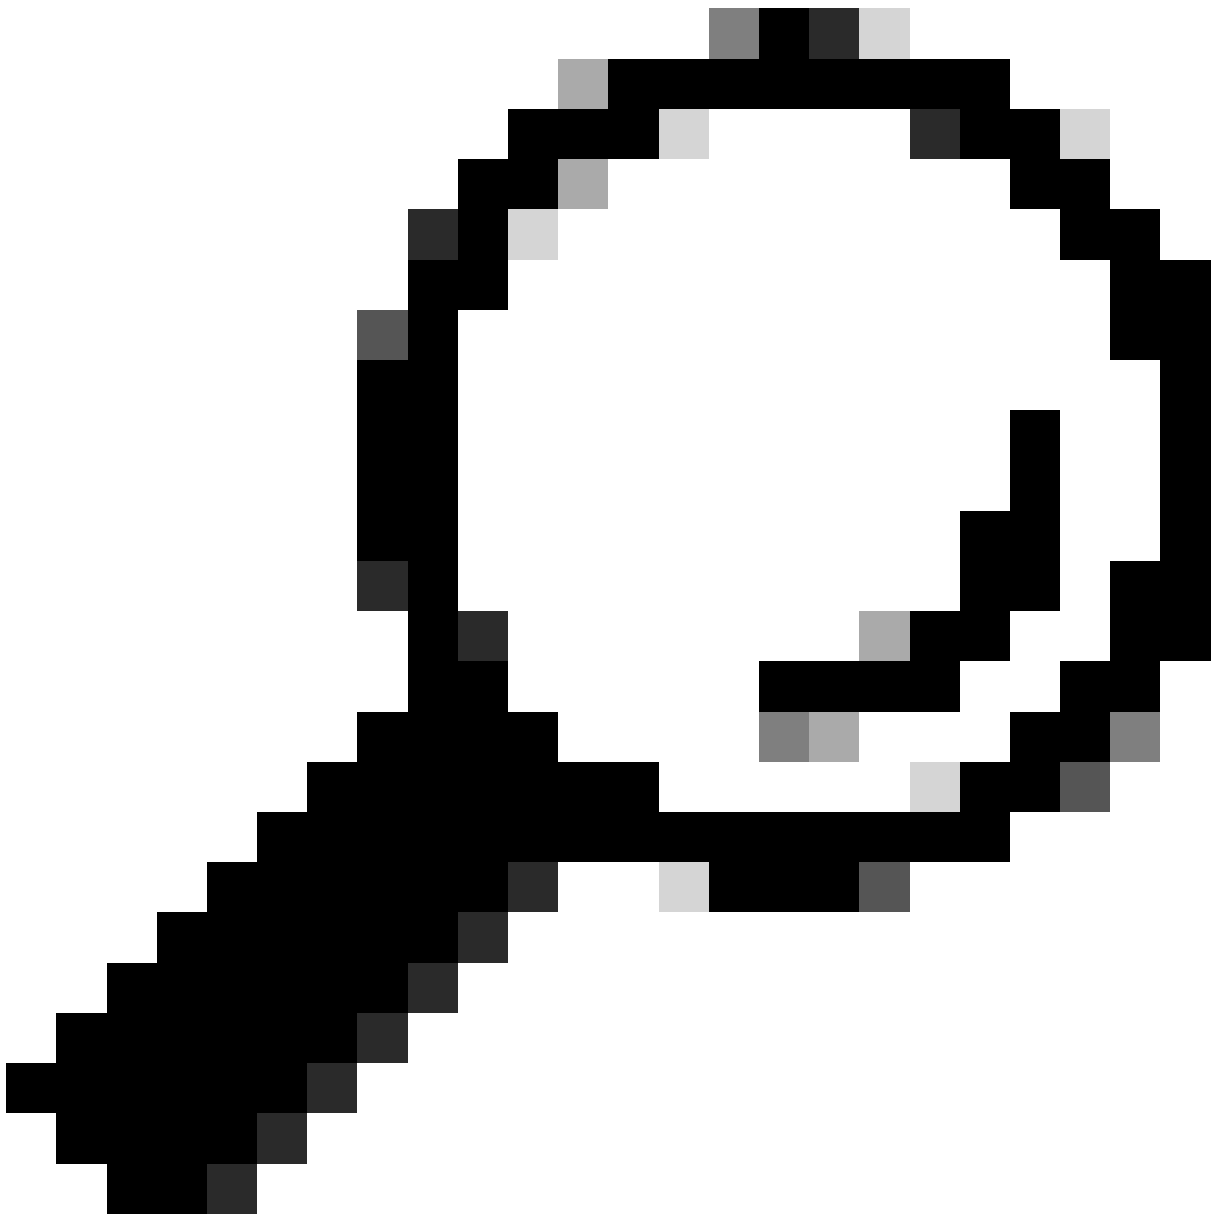

Tip: Met de opdracht `cls traffic` worden de IS-IS-hellos weergegeven op basis van het IS-IS-niveau en het IS-IS-netwerktipe.

4. Schakel debug ISIS adj-packets

in om te zien welke pakketten tussen burens worden uitgewisseld.

```
<#root>
```

```
DeviceA#
```

```
show isis adj-packets TenGigabitEthernet0/0/4
```

```
< Hellos sent to the DeviceB with no response >
```

Jul 19 18:58:34.779: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 19 18:58:34.779: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496
Jul 19 18:58:42.719: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 19 18:58:42.719: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496
Jul 19 18:58:50.430: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 19 18:58:50.430: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496
Jul 19 18:58:58.356: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 19 18:58:58.356: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496

< IS-IS declares the protocol down >

Jul 19 18:59:01.879: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4)
Down, hold time expired

< IS-IS sends hellos to the neighbor and receives a response from DeviceB >

Jul 19 18:59:01.879: ISIS-Adj: L2 adj count 0
Jul 19 18:59:07.724: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
Jul 19 18:59:07.724: ISIS-Adj:

Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length 1496

Jul 19 18:59:15.894: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x0 Length:5
Jul 19 18:59:15.894: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:DOWN, length 1496
Jul 19 18:59:15.896: ISIS-Adj:

Rec serial IIH from 6c31.0edb.3b5f (TenGigabitEthernet0/0/4)

Jul 19 18:59:15.896: ISIS-Adj: cir type L2, cir id 0B, length 1496
Jul 19 18:59:15.896: ISIS-Adj:

RCV:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15

Jul 19 18:59:15.896: ISIS-Adj: Nghbr Ckt ID changed: TRUE
Jul 19 18:59:15.896: ISIS-Adj: received Neighbor System-ID (must be our) 0000.0000.000A
Jul 19 18:59:15.896: ISIS-Adj: received Neighbor ext.circuit ID (must be our) 0x5
Jul 19 18:59:15.896: ISIS-Adj: newstate:1, state_changed:1, going_up:0, going_down:0
Jul 19 18:59:15.896: ISIS-Adj: Action = GOING UP, new type = L2

< DeviceA declares that the adjacency is UP and starts to establish the session >

Jul 19 18:59:15.896: ISIS-Adj: New serial adjacency
Jul 19 18:59:15.896: ISIS-Adj:

rcvd state INIT, old state DOWN, new state INIT, nbr usable TRUE

Jul 19 18:59:15.898: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 19 18:59:15.898: ISIS-Adj:

Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:INIT, length 1496

Jul 19 18:59:15.900: ISIS-Adj: Rec serial IIH from 6c31.0edb.3b5f (TenGigabitEthernet0/0/4)
Jul 19 18:59:15.900: ISIS-Adj: cir type L2, cir id 0B, length 1496
Jul 19 18:59:15.900: ISIS-Adj:

rcvd state UP, old state INIT, new state UP, nbr usable TRUE

Jul 19 18:59:15.900: ISIS-Adj: RCV:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15

Jul 19 18:59:15.900: ISIS-Adj: Nghbr Ckt ID changed: FALSE
Jul 19 18:59:15.900: ISIS-Adj: received Neighbor System-ID (must be our) 0000.0000.000A
Jul 19 18:59:15.900: ISIS-Adj: received Neighbor ext.circuit ID (must be our) 0x5
Jul 19 18:59:15.900: ISIS-Adj: newstate:0, state_changed:1, going_up:1, going_down:0
Jul 19 18:59:15.900: ISIS-Adj: Action = GOING UP, new type = L2
Jul 19 18:59:15.900: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4)

Up, new adjacency

<#root>

DeviceB#

debug isis adj-packets TwentyFiveGigE1/0/9

< Hello sent to the DeviceA with no response >

Jul 19 18:58:44.105: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15
Jul 19 18:58:44.105: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496
Jul 19 18:58:51.814: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15
Jul 19 18:58:51.814: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496
Jul 19 18:58:59.768: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15
Jul 19 18:58:59.768: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496

< IS-IS declares the protocol down >

Jul 19 18:59:07.886: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9)

Down, hold time expired

< IS-IS sends hellos to the neighbor and receives a response from DeviceA >

Jul 19 18:59:07.887: ISIS-Adj: L2 adj count 0
Jul 19 18:59:08.422: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x0 Length:5
Jul 19 18:59:08.422: ISIS-Adj:

Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:DOWN, length 1496

Jul 19 18:59:16.144: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x0 Length:5
Jul 19 18:59:16.144: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:DOWN, length 1496
Jul 19 18:59:19.001: ISIS-Adj:

Rec serial IIH from a84f.b1c3.9484 (TwentyFiveGigE1/0/9)

Jul 19 18:59:19.001: ISIS-Adj: cir type L2, cir id 05, length 1496
Jul 19 18:59:19.001: ISIS-Adj:

RCV:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0x49000184 Length:5

Jul 19 18:59:19.001: ISIS-Adj: Nghbr Ckt ID changed: TRUE
Jul 19 18:59:19.001: ISIS-Adj: newstate:1, state_changed:1, going_up:0, going_down:0
Jul 19 18:59:19.001: ISIS-Adj: Action = GOING UP, new type = L2

< DeviceB declares that the adjacency is UP and starts to establish the session >

Jul 19 18:59:19.001: ISIS-Adj: New serial adjacency

```
Jul 19 18:59:19.001: ISIS-Adj:
rcvd state DOWN, old state DOWN, new state INIT, nbr usable TRUE

Jul 19 18:59:19.002: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15
Jul 19 18:59:19.002: ISIS-Adj:
Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:INIT, length 1496

Jul 19 18:59:19.004: ISIS-Adj: Rec serial IIH from a84f.b1c3.9484 (TwentyFiveGigE1/0/9)
Jul 19 18:59:19.004: ISIS-Adj: cir type L2, cir id 05, length 1496
Jul 19 18:59:19.004: ISIS-Adj:
rcvd state INIT, old state INIT, new state UP, nbr usable TRUE

Jul 19 18:59:19.004: ISIS-Adj: RCV:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 19 18:59:19.004: ISIS-Adj: Nghbr Ckt ID changed: FALSE
Jul 19 18:59:19.004: ISIS-Adj: received Neighbor System-ID (must be our) 0000.0000.000B
Jul 19 18:59:19.004: ISIS-Adj: received Neighbor ext.circuit ID (must be our) 0xB
Jul 19 18:59:19.004: ISIS-Adj: newstate:0, state_changed:1, going_up:1, going_down:0
Jul 19 18:59:19.004: ISIS-Adj: Action = GOING UP, new type = L2
Jul 19 18:59:19.004: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9)
Up, new adjacency
```

5. Schakel een opname in om te valideren dat de pakketten naar elke buur worden verzonden. Zodra de opname is voltooid, exporteert u de opname naar de bootflash als een .pcap file bestand en uploadt u deze naar een TFTP-server voor meer informatie.

DeviceA ontvangt een pakket van DeviceB (19:19 .05) nadat dit pakket is ontvangen. DeviceA stuurt zijn bijbehorende hallo zonder enig antwoord van de buurman totdat het de wachttijd bereikt die standaard 30 seconden is (rood vierkant).

Dit is wanneer deze router de nabijheid naar beneden verklaart. Na deze periode stuurt DeviceB zijn hallo en wordt deze ontvangen door DeviceA en worden deze pakketten zonder problemen uitgewisseld (groen vierkant).

eth.dst == 09:00:2b:00:00:05				
Nr	Time	Source	Destination	seq
1	19:14:48.784947	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2	19:14:49.664958	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
3	19:14:57.201985	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
4	19:14:57.520969	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
5	19:15:05.147987	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
6	19:15:06.439964	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
7	19:15:16.015990	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
8	19:15:25.153983	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
9	19:15:32.868943	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:15:35.149986	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:15:45.071987	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:15:51.718956	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:15:51.720955	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:15:51.721947	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:15:51.722954	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:15:51.723961	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:16:00.949947	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:16:01.164984	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:16:08.904951	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:16:09.835955	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:16:16.435966	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:16:19.244982	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:16:23.987940	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:16:28.034986	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:16:33.752951	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:16:37.050992	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:16:41.765951	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:16:44.948940	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:16:49.618956	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:16:53.623960	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:16:58.815952	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:17:01.182989	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:17:08.310973	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
	19:17:09.463965	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
	19:17:10.705954	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
> Frame 5: 1513 bytes on wire (12104 bits), 1513 bytes captured (12104 bits) > IEEE 802.3 Ethernet > Logical-Link Control > ISO 10589 ISIS InTRA Domain Routeing Information Exchange Protocol > ISIS HELLO				

ISIS instabiel DeviceA

Opname van DeviceB is vergelijkbaar met het symptoom van de peer. Het apparaat ontvangt geen hello-pakketten van zijn buurman. Het laatste pakket wordt verzonden vanaf DeviceB zonder antwoord van DeviceA totdat het de wachttijd van 30 seconden bereikt. Deze switch beschouwt de nabijheid naar beneden. Na deze storing ontvangt de switch de hallo van DeviceA en start de buurt.

eth.dst == 09:00:2b:00:00:05				
Nr	Time	Source	Destination	seq
4	01:11:27.332388	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
5	01:11:27.894819	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:11:34.859121	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:11:35.738192	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:11:43.274969	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:11:43.594828	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:11:51.221556	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:11:52.513395	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:11:59.401211	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:08.669824	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:17.078248	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:22.514746	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:31.351461	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:37.791466	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:37.793033	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:12:37.794384	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:37.794895	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:12:37.796641	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:47.022577	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:47.237364	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:12:54.976460	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:12:55.908343	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:13:02.507283	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:13:05.317018	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:13:10.059795	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:13:14.106249	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:13:19.824557	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:13:23.122303	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:13:27.837176	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:13:31.019915	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:13:35.690382	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
	01:13:39.695453	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
	01:13:44.887023	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b

```

> Frame 32: 1513 bytes on wire (12104 bits), 1513 bytes captured (12104 bits) on interface \Device\NPF_{D6BBE860-9886-4A6C-BDD5-8E2837C66FB0}, id 0
> IEEE 802.3 Ethernet
> Logical-Link Control
> ISO 10589 ISIS InTRA Domain Routeing Information Exchange Protocol
> ISIS HELLO

```

ISIS Instable DeviceB

Dit concludeert dat er een probleem is met het transport en u moet nagaan waarom de pakketten verloren gaan.

IS-IS-nabijheid instabiel (willekeurige flappen)

IS-IS is instabiel tussen DeviceA en DeviceB. Het protocol stuit op willekeurige flappen.

```
<#root>
```

DeviceA#

show logging

```

Jul 21 10:03:38.633: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Down, hold
Jul 21 10:05:10.272: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Up, new ad
Jul 21 10:33:41.528: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Down, hold
Jul 21 10:35:07.979: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Up, new ad
Jul 21 11:03:42.442: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Down, hold
Jul 21 11:05:08.469: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Up, new ad

```

<#root>


DeviceB#

show logging

```
Jul 21 10:03:44.535: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Down, hold tim
Jul 21 10:05:13.281: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Up, new adjace
Jul 21 10:33:38.408: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Down, hold tim
Jul 21 10:35:10.989: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Up, new adjace
Jul 21 11:03:39.291: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Down, hold tim
Jul 21 11:05:11.479: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Up, new adjace
```

Wanneer het probleem zich voordoet, moet u ervoor zorgen dat u doorgaat met deze acties:

1. Controleer of de configuratie overeenkomt met de peer.
2. Zorg ervoor dat de fysieke interface in een goede staat is om te verzenden (geen fouten of problemen met lichtniveaus).
3. Controleer de connectiviteit tussen peers (ping-test met MTU-grootte en de df-bit-set).

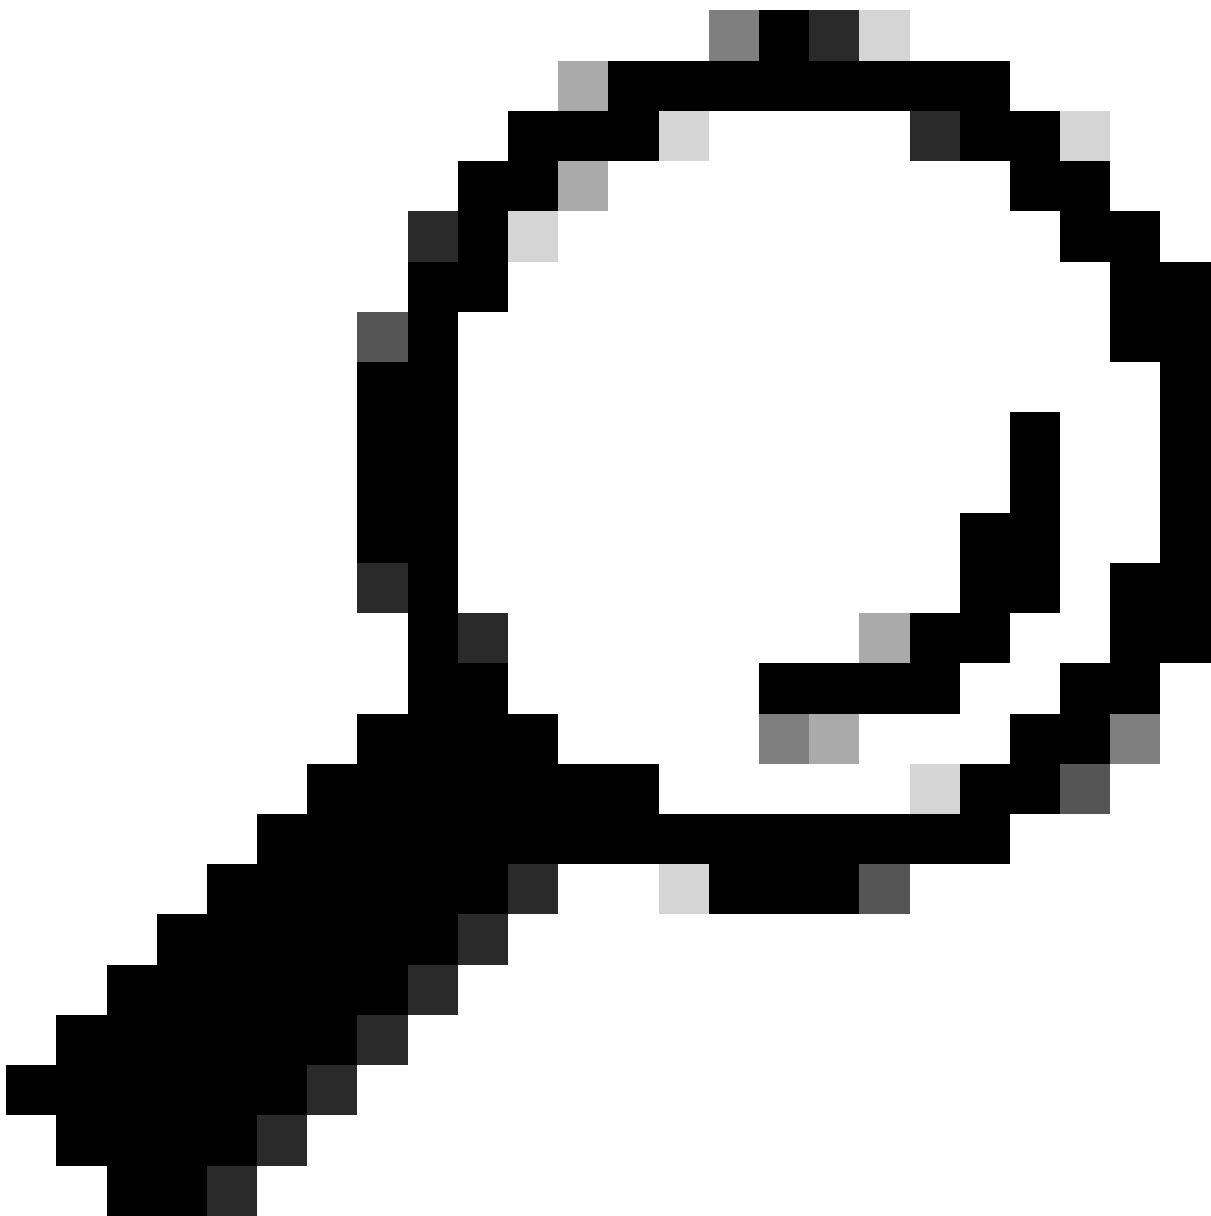

Tip: Het is niet eenvoudig om dit soort problemen op te lossen vanwege de conditie van de willekeurige flappen. Overweeg om deze situatie aan te pakken scripts te gebruiken om de nodige opdrachten uit te voeren en problemen op te lossen.

4. Ga verder met het configureren van een beeldscherm afbeelding met een Access-lijst om specifieker te zijn over het oplossen van problemen.

5. Schakel de logboekconsole uit en schakel de `debug isis adj-packets` computer in.

```
<#root>
```

```
DeviceA(config)#
```

```
no logging console
```

```
DeviceA(config)#exit
DeviceA#

debug isis adj-packets TenGigabitEthernet0/0/4
```

6. Schakel de pakketopname op de apparatuur in en activeer deze.

<#root>

DeviceA#

```
show monitor capture cap parameter
```

```
monitor capture cap interface TenGigabitEthernet0/0/4 BOTH
monitor capture cap control-plane IN
monitor capture cap
```

```
access-list TAC > match only the packets allowed on the ACL
```

```
monitor capture cap buffer size 100
```

```
circular > when the capture reaches the size of 100 MB this overwrite the previous information.
```

```
monitor capture cap limit pps 1000
```

DeviceA#

```
show access-lists TAC
```

```
Extended MAC access list TAC
permit
```

```
host a84f.b1c3.9484 host 0900.2b00.0005 < Local MAC address towards the IS-IS Hello >
permit
```

```
host 6c31.0edb.3b5f host 0900.2b00.0005 < Remote MAC address towards the IS-IS Hello >
```

```
DeviceA#monitor capture cap start
```

7. Configureer de Embedded Event Manager (EEM) op het Cisco-apparaat. Zodra het probleem het syslog-patroon activeert, genereert dit logs die als een .txt bestand op de flash worden opgeslagen. Upload ze naar een TFTP-server voor meer informatie.

<#root>

DeviceA#

```
show running-config | sec event
```

```
event manager applet ISIS_Flap authorization bypass
```

```
event syslog pattern "%CLNS-5-ADJCHANGE:.*hold time expired"
```

```
action 1.0 syslog msg "ISIS down Please wait - capturing the traffic"  
action 1.1 cli command "enable"  
action 1.2 cli command "show clns interface ten0/0/4 | append bootflash:ISIS_DeviceA.txt"  
action 1.3 cli command "show clns traffic interface tenGigabitEthernet 0/0/4 |
```

```
append bootflash:ISIS_DeviceA.txt"
```

```
action 2.0 cli command "show logging | append bootflash:debug_DeviceA.txt"  
action 2.1 cli command "undebg all"  
action 2.2 cli command "monitor capture cap stop"  
action 3.0 cli command "end"
```

For switches to append the logs it is necessary to use the

append flash:

, as example:

```
event manager applet ISIS_Flap authorization bypass  
event syslog pattern "%CLNS-5-ADJCHANGE:.*hold time expired"  
action 1.0 syslog msg "ISIS down Please wait - capturing the traffic"  
action 1.1 cli command "enable"  
action 1.2 cli command "show clns interface ten0/0/4 | append  
flash:ISIS_DeviceB.txt"
```

```
action 3.0 cli command "end"
```

8. Zodra het probleem is getriggerd, gaat u verder met het exporteren van de opname op de bootflash / flash en zorgt u ervoor dat de bestanden.txt correct op dezelfde locatie worden opgeslagen.

<#root>

DeviceA#

```
monitor capture cap export bootflash:ISIS_DeviceA.pcap
```

Exported Successfully

DeviceA#

dir bootflash:*.txt

Directory of bootflash:/*.txt

Directory of bootflash:/

19 -rw- 6048 Jul 22 2023 13:33:40 +00:00

ISIS_DeviceA.txt

20 -rw- 103153 Jul 22 2023 13:33:40 +00:00

debug_DeviceA.txt

26975526912 bytes total (20527607808 bytes free)

DeviceB#

monitor capture cap export location flash:ISIS_DeviceB.pcap

Exported Successfully

DeviceB#

dir bootflash:*.txt

Directory of bootflash:/*.txt

Directory of bootflash:/

356939 -rw- 660 Jul 22 2023 13:33:42 +00:00

ISIS_DeviceB.txt

356943 -rw- 103283 Jul 22 2023 13:33:42 +00:00

debug_DeviceB.txt

9. Upload de bestanden naar een TFTP-server om de logs tussen apparaten te vergelijken.

<#root>

DeviceA#

copy bootflash:ISIS_DeviceA.txt tftp:

Address or name of remote host []?

< TFTP IP address >

Destination filename [

ISIS_DeviceA.txt

]?

!!
18144 bytes copied in 0.095 secs (190989 bytes/sec)

10. Vergelijk de opnames en logs om te valideren of de pakketten van beide routers worden verzonden en ontvangen.

Analyse van de IS-IS-logs:

- Beide IS-IS-interfaces zijn geconfigureerd met hetzelfde netwerktype L1-L2.
- De status Interfaces (als de status DOWN is ingesteld) laat zien dat beide interfaces het Hello-pakket niet ontvangen.
- IS-IS: PTP Hellos heeft een mismatch in de verzonden en ontvangen pakketten. Terwijl DeviceA 205 pakketten verzendt en 199 van de peer ontvangt, heeft DeviceB 202 van de 202. Dit geeft aan dat het transport niet betrouwbaar is.

<#root>

DeviceA

TenGigabitEthernet0/0/4 is up, line protocol is up
Attached to: isis
Checksums enabled, MTU 1497, Encapsulation SAP
ERPDUs enabled, min. interval 10 msec.
CLNS fast switching disabled
CLNS SSE switching disabled
DEC compatibility mode OFF for this interface
Next ESH/ISH in 30 seconds
Routing Protocol: IS-IS

Circuit Type: level-1-2

Interface number 0x0, local circuit ID 0x5
Neighbor Extended Local Circuit ID: 0x0
Level-1 Metric: 10, Priority: 64, Circuit ID: DeviceA.05
Level-1 IPv6 Metric: 10
Number of active level-1 adjacencies: 0
Level-2 Metric: 10, Priority: 64, Circuit ID: DeviceA.05
Level-2 IPv6 Metric: 10
Number of active level-2 adjacencies: 0
Next IS-IS Hello in 574 milliseconds

if state DOWN

CLNS: Time since last clear: 00:29:37
CLNS & ISIS Output: 33, Input: 241
Dropped Protocol not enabled on interface: 0
CLNS Local: 0, Forward: 0

Interface TenGigabitEthernet0/0/4:
IS-IS: Time since last clear: 00:29:37
IS-IS: Level-1 Hellos (sent/rcvd): 0/0
IS-IS: Level-2 Hellos (sent/rcvd): 0/0

IS-IS: PTP Hellos (sent/rcvd): 205/199
IS-IS: Level-1 LSPs flooded (sent/rcvd): 2/2
IS-IS: Level-2 LSPs flooded (sent/rcvd): 2/2

IS-IS: Level-1 CSNPs (sent/rcvd): 0/0
IS-IS: Level-2 CSNPs (sent/rcvd): 0/0
IS-IS: Level-1 PSNPs (sent/rcvd): 2/2
IS-IS: Level-2 PSNPs (sent/rcvd): 2/2
IS-IS: Level-1 DR Elections: 0
IS-IS: Level-2 DR Elections: 0

DeviceB

TwentyFiveGigE1/0/9 is up, line protocol is up
Attached to: isis
Checksums enabled, MTU 1497, Encapsulation SAP
ERPDUs enabled, min. interval 10 msec.
CLNS fast switching disabled
CLNS SSE switching disabled
DEC compatibility mode OFF for this interface
Next ESH/ISH in 20 seconds
Routing Protocol: IS-IS

Circuit Type: level-1-2

Interface number 0x0, local circuit ID 0xB
Neighbor Extended Local Circuit ID: 0x0
P2P retransmit queue size: 0
Level-1 Metric: 10, Priority: 64, Circuit ID: DeviceB.0B
Level-1 IPv6 Metric: 10
Number of active level-1 adjacencies: 0
Level-2 Metric: 10, Priority: 64, Circuit ID: DeviceB.0B
Level-2 IPv6 Metric: 10
Number of active level-2 adjacencies: 0
Next IS-IS Hello in 7 seconds

if state DOWN

CLNS: Time since last clear: 00:29:34
CLNS queue depth: 0/100, drops: 0, highest: 1
CLNS & ISIS Output: 34, Input: 243
Dropped Protocol not enabled on interface: 0
CLNS Local: 0, Forward: 0

```
Interface TwentyFiveGigE1/0/9:
IS-IS: Time since last clear: 00:29:34
IS-IS: Level-1 Hellos (sent/rcvd): 0/0
IS-IS: Level-2 Hellos (sent/rcvd): 0/0

IS-IS: PTP Hellos      (sent/rcvd): 202/202
IS-IS: Level-1 LSPs flooded (sent/rcvd): 2/2
IS-IS: Level-2 LSPs flooded (sent/rcvd): 2/2

IS-IS: Level-1 CSNPs (sent/rcvd): 0/0
IS-IS: Level-2 CSNPs (sent/rcvd): 0/0
IS-IS: Level-1 PSNPs (sent/rcvd): 2/2
IS-IS: Level-2 PSNPs (sent/rcvd): 2/2
IS-IS: Level-1 DR Elections: 0
IS-IS: Level-2 DR Elections: 0
```

De volgende stap is het vergelijken van de debugs en captures.

<#root>

DeviceA

```
Jul 22 19:17:24.929: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 22 19:17:24.929: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496
Jul 22 19:17:31.685: ISIS-Adj: Rec serial IIH from 6c31.0edb.3b5f (TenGigabitEthernet0/0/4)

Jul 22 19:17:31.685: ISIS-Adj: cir type L1L2, cir id 0B, length 1496
Jul 22 19:17:31.685: ISIS-Adj: rcvd state UP, old state UP, new state UP, nbr usable TRUE
Jul 22 19:17:31.685: ISIS-Adj: RCV:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15
Jul 22 19:17:31.685: ISIS-Adj: Nghbr Ckt ID changed: FALSE
Jul 22 19:17:31.685: ISIS-Adj: received Neighbor System-ID (must be our) 0000.0000.000A
Jul 22 19:17:31.685: ISIS-Adj: received Neighbor ext.circuit ID (must be our) 0x5
Jul 22 19:17:31.685: ISIS-Adj: newstate:0, state_changed:0, going_up:0, going_down:0
Jul 22 19:17:31.685: ISIS-Adj: Action = ACCEPT
Jul 22 19:17:31.685: ISIS-Adj: ACTION_ACCEPT:

Jul 22 19:17:33.626: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 22 19:17:33.627: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496
Jul 22 19:17:42.671: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 22 19:17:42.672: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496

Jul 22 19:17:52.008: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 22 19:17:52.008: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496
Jul 22 19:18:01.475: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 22 19:18:01.475: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496

Jul 22 19:18:01.685: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Down, hold
Jul 22 19:18:01.685: ISIS-Adj: L1 adj count 0
Jul 22 19:18:01.685: ISIS-Adj: L2 adj count 0
```

DeviceB

```
Jul 22 19:17:25.693: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15

Jul 22 19:17:25.693: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496
```

Jul 22 19:17:27.882: ISIS-Adj: Rec serial IIH from a84f.b1c3.9484 (TwentyFiveGigE1/0/9)

Jul 22 19:17:27.882: ISIS-Adj: cir type L1L2, cir id 05, length 1496
Jul 22 19:17:27.882: ISIS-Adj: rcvd state UP, old state UP, new state UP, nbr usable TRUE
Jul 22 19:17:27.882: ISIS-Adj: RCV:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0xB Length:15
Jul 22 19:17:27.882: ISIS-Adj: Nghbr Ckt ID changed: FALSE
Jul 22 19:17:27.882: ISIS-Adj: received Neighbor System-ID (must be our) 0000.0000.000B
Jul 22 19:17:27.882: ISIS-Adj: received Neighbor ext.circuit ID (must be our) 0xB
Jul 22 19:17:27.882: ISIS-Adj: newstate:0, state_changed:0, going_up:0, going_down:0
Jul 22 19:17:27.882: ISIS-Adj: Action = ACCEPT
Jul 22 19:17:27.882: ISIS-Adj: ACTION_ACCEPT:

Jul 22 19:17:34.637: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15

Jul 22 19:17:34.637: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496

Jul 22 19:17:36.579: ISIS-Adj: Rec serial IIH from a84f.b1c3.9484 (TwentyFiveGigE1/0/9)

Jul 22 19:17:36.579: ISIS-Adj: cir type L1L2, cir id 05, length 1496
Jul 22 19:17:36.579: ISIS-Adj: rcvd state UP, old state UP, new state UP, nbr usable TRUE
Jul 22 19:17:36.579: ISIS-Adj: RCV:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0xB Length:15
Jul 22 19:17:36.579: ISIS-Adj: Nghbr Ckt ID changed: FALSE
Jul 22 19:17:36.579: ISIS-Adj: received Neighbor System-ID (must be our) 0000.0000.000B
Jul 22 19:17:36.579: ISIS-Adj: received Neighbor ext.circuit ID (must be our) 0xB
Jul 22 19:17:36.579: ISIS-Adj: newstate:0, state_changed:0, going_up:0, going_down:0
Jul 22 19:17:36.579: ISIS-Adj: Action = ACCEPT
Jul 22 19:17:36.579: ISIS-Adj: ACTION_ACCEPT:

Jul 22 19:17:43.270: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15

Jul 22 19:17:43.271: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496

Jul 22 19:17:51.658: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15
Jul 22 19:17:51.658: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496
Jul 22 19:18:00.248: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15
Jul 22 19:18:00.248: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496

Jul 22 19:18:06.579: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Down, hold time

Jul 22 19:18:06.579: ISIS-Adj: L1 adj count 0
Jul 22 19:18:06.579: ISIS-Adj: L2 adj count 0

Analyse van IS-IS debug logs:

- DeviceA verzendt een hello-pakket (22 jul 19:17:24), DeviceB reageert op dit pakket (22 jul 19:17:25), DeviceA ontvangt dit antwoord (22 jul 19:17:31).

Apparaat A

```
Jul 22 19:17:24.929: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 22 19:17:24.929: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496
Jul 22 19:17:31.685: ISIS-Adj: Rec serial IIH from 6c31.0edb.3b5f (TenGigabitEthernet0/0/4)
```

DeviceB

```
Jul 22 19:17:25.693: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15
Jul 22 19:17:25.693: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496
Jul 22 19:17:27.882: ISIS-Adj: Rec serial IIH from a84f.b1c3.9484 (TwentyFiveGigE1/0/9)
```

- DeviceA verzendt nog een hello-pakket (22 jul 19: 17: 33), DeviceB verzendt zijn hello-pakket (22 jul 19: 17: 34), en twee seconden later ontvangt het pakket van zijn peer.

Apparaat A

```
Jul 22 19:17:33.626: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 22 19:17:33.627: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496
```

DeviceB

```
Jul 22 19:17:34.637: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15
Jul 22 19:17:34.637: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496
Jul 22 19:17:36.579: ISIS-Adj: Rec serial IIH from a84f.b1c3.9484 (TwentyFiveGigE1/0/9)
```

- Gedurende de periode dat DeviceA het door DeviceB verzonden pakket niet ontvangt, verklaart het protocol zich na 30 seconden down.

Apparaat A

```
Jul 22 19:17:42.671: ISIS-Adj: SND:3way Adj. Local Ckt ID:0x5 Nghbr Ckt ID:0xB Length:15
Jul 22 19:17:42.672: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496

Jul 22 19:18:01.475: ISIS-Adj: Sending serial IIH on TenGigabitEthernet0/0/4, 3way state:UP, length 1496
Jul 22 19:18:01.685: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceB (TenGigabitEthernet0/0/4) Down, holdt
```

- DeviceB ontvangt geen pakket van zijn peer. Na de standaardwachtijd verklaart dit protocol zichzelf down.

DeviceB

Jul 22 19:17:43.270: ISIS-Adj: SND:3way Adj. Local Ckt ID:0xB Nghbr Ckt ID:0x5 Length:15
Jul 22 19:17:43.271: ISIS-Adj: Sending serial IIH on TwentyFiveGigE1/0/9, 3way state:UP, length 1496

<snip>

Jul 22 19:18:06.579: %CLNS-5-ADJCHANGE: ISIS: Adjacency to DeviceA (TwentyFiveGigE1/0/9) Down, hold tim

Analyse van opnamen:

DeviceA ontvangt pakketten van DeviceB, maar het laatste pakket dat deze router ontvangt van de peer is op minuut 13: 17.31. Vervolgens stuurt DeviceA Hello-pakketten zonder enige reactie van de peer.

eth.dst == 09:00:2b:00:00:05				
Nr	Time	Source	Destination	seq
2023-07-22	13:15:35.638959	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:15:43.516971	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:15:44.531970	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:15:51.320982	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:15:52.786946	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:15:59.511966	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:16:02.646954	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:16:09.329969	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:16:10.505970	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:16:17.169989	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:16:19.943936	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:16:25.480962	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:16:28.851945	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:16:34.616957	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:16:38.643963	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:16:42.579956	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:16:47.501972	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:16:50.839952	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:16:55.382975	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:16:59.049985	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:17:04.634961	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:17:07.215976	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:17:14.446967	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:17:15.226978	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:17:22.740958	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:17:24.928937	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:17:31.684962	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	13:17:33.626966	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:17:42.671962	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:17:52.007995	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	13:18:01.474966	Cisco_c3:94:84	DEC-MAP-(or-OSI?)...	P2P HELLO, System-ID: 0000.0000.000a
> Frame 679: 1513 bytes on wire (12104 bits), 1513 bytes captured (12104 bits)				
> IEEE 802.3 Ethernet				
> Logical-Link Control				
> ISO 10589 ISIS InTRA Domain Routeing Information Exchange Protocol				
> ISIS HELLO				

DeviceB-opname vertoont een vergelijkbare toestand, de switch ontvangt het laatste hello-pakket van zijn peer, maar DeviceB begint zijn hello-pakketten zonder reactie te verzenden.

eth.dst == 09:00:2b:00:00:05				
Nr	Time	Source	Destination	seq
2023-07-22	19:12:55.830021	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:12:57.006588	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:13:03.670751	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:13:06.443750	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:13:11.981159	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:13:15.351570	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:13:21.116502	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:13:25.143430	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:13:29.080123	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:13:34.001185	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:13:37.340177	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:13:41.882512	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:13:45.549749	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:13:51.134064	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:13:53.715223	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:14:00.945408	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:14:01.725783	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:14:09.240033	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:14:11.428283	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:14:18.183708	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:14:20.125427	Cisco_c3:94:84	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000a
2023-07-22	19:14:26.817279	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:14:35.204661	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:14:43.794273	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
2023-07-22	19:14:50.126106	Cisco_db:3b:5f	DEC-MAP-(or-OSI?)--	P2P HELLO, System-ID: 0000.0000.000b
> Frame 1971: 1513 bytes on wire (12104 bits), 1513 bytes captured (12104 bits) on interface \Device\NPF_{D6BBE860-9886-4A6C-BDD5-8E2837C66FB0}, id 0 > IEEE 802.3 Ethernet > Destination: DEC-MAP-(or-OSI?)-Intermediate-System-Hello? (09:00:2b:00:00:05) > Source: Cisco_c3:94:84 (a8:4f:b1:c3:94:84) Length: 1499 > Logical-Link Control > ISO 10589 ISIS InTRA Domain Routing Information Exchange Protocol > ISIS HELLO				

ISIS Instable DeviceB

In de geëxporteerde opnames worden de hello-pakketten niet tussen peers geleverd. Dit probleem lijkt zich voor te doen bij het transport.

Over deze vertaling

Cisco heeft dit document vertaald via een combinatie van machine- en menselijke technologie om onze gebruikers wereldwijd ondersteuningscontent te bieden in hun eigen taal. Houd er rekening mee dat zelfs de beste machinevertaling niet net zo nauwkeurig is als die van een professionele vertaler. Cisco Systems, Inc. is niet aansprakelijk voor de nauwkeurigheid van deze vertalingen en raadt aan altijd het oorspronkelijke Engelstalige document (link) te raadplegen.