

Configuração do Cliente de PPPoE no Cisco 2600 para Conectar-se a um CPE de SDL sem Cisco

Índice

[Introdução](#)

[Pré-requisitos](#)

[Requisitos](#)

[Componentes Utilizados](#)

[Convenções](#)

[Configurar](#)

[Diagrama de Rede](#)

[Configurações](#)

[Verificar](#)

[Troubleshooting](#)

[Comandos para Troubleshooting](#)

[Informações Relacionadas](#)

Introdução

Este documento explica como suportar um Protocolo Ponto a Ponto pelo Cliente Ethernet (PPPoE) em roteadores com Cisco IOS® conectados por uma interface Ethernet a um modem DSL ou ao equipamento das premissas (CPE) DSL de outro fornecedor.

Os ISP fornecem frequentemente seus clientes um modem DSL que tenha uma interface Ethernet a conectar ao segmento de Ethernet do cliente, e uma outra relação para a conectividade de linha DSL. Em tal caso, o modem DSL atua somente como uma ponte se o CPE não é configurável para nenhuma conectividade IP ou recursos aprimorado sobre o DSL. Isto limita sua conectividade para apenas um PC Cliente de PPPoE. Com a adição de um roteador do Cisco IOS conectado aos Ethernet do modem DSL, você pode executar a característica do PPPoE Client IO no roteador Cisco. Isto pode conectar PC múltiplos no segmento de Ethernet conectado ao roteador do Cisco IOS. Com o uso do Cisco IOS roteador, você pode aumentar suas conectividades de DSL e todas as características IO, tais como a Segurança, o Network Address Translation (NAT) e o protocolo de configuração dinâmica host (DHCP) aos host internos.

O recurso PPPoE permite que você inicialize uma sessão PPP em um cliente de Bridging Ethernet simples conectado. As sessões são transportadas pelo enlace ATM por meio de molduras transpostas de Ethernet encapsuladas. Você pode terminar a sessão em um escritório central da portadora de intercâmbio local ou em um Point of Presence ISP.

Pré-requisitos

Requisitos

Não existem requisitos específicos para este documento.

Componentes Utilizados

As informações neste documento são baseadas nestas versões de software e hardware:

- IOS Software release 12.1(1)XB do Cisco 827-4V CPE
- Cisco 2611 Router que executa uma imagem do Cisco IOS Software Release 12.2(2)T1
- Concentrador de acesso universal (UAC) do Cisco 6400 que executa uma imagem do Cisco IOS Software Release 12.1(5)DC1

As informações neste documento foram criadas a partir de dispositivos em um ambiente de laboratório específico. Todos os dispositivos utilizados neste documento foram iniciados com uma configuração (padrão) inicial. Se a sua rede estiver ativa, certifique-se de que entende o impacto potencial de qualquer comando.

Convenções

For more information on document conventions, refer to the [Cisco Technical Tips Conventions](#).


Configurar

Nesta seção, você é apresentado com a informação usada a fim configurar as características descritas neste original.

Nota: Para encontrar informações adicionais sobre os comandos usados neste documento, use a [Command Lookup Tool](#) ([somente clientes registrados](#)).

Diagrama de Rede

Este documento utiliza a configuração de rede mostrada neste diagrama.

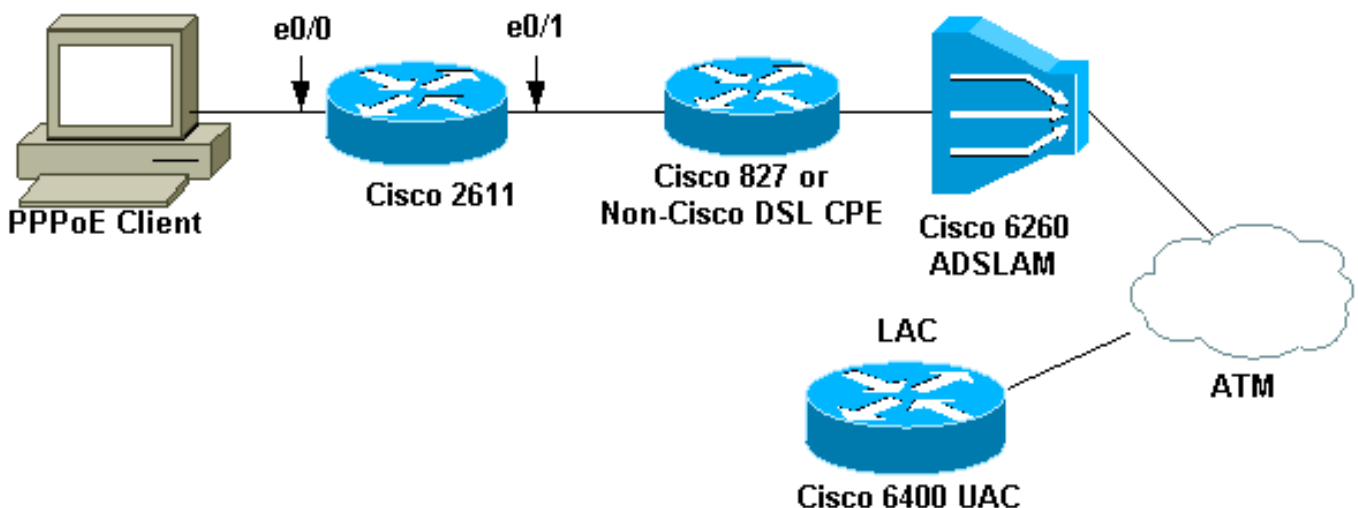

Nota: Neste original, a conexão do PPPoE Client é iniciada do roteador Cisco. Esse é o Cisco 2611 Router nessa configuração. O roteador Cisco 827 no diagrama representa o CPE de DSL

sem Cisco.

Configurações

Este documento utiliza estas configurações.

- [2611 Router](#)
- [Cisco DSL 827 Router](#)
- [Cisco 6400 Router](#)

2611 Router

```
!  
hostname pooh  
ip host rund 172.17.247.195  
!  
ip subnet-zero  
no ip domain-lookup  
!  
vpdn enable  
no vpdn logging  
!  
vpdn-group 1  
request-dialin  
protocol pppoe  
!  
!  
!  
!  
interface Ethernet0/0  
ip address 10.200.56.22 255.255.255.0  
ip nat inside  
no ip mroute-cache  
!  
!  
!  
!  
interface Ethernet0/1  
no ip address  
pppoe enable  
pppoe-client dial-pool-number 1  
!  
interface Dialer1  
ip address negotiated  
ip nat outside  
ip mtu 1492  
encapsulation ppp  
no ip mroute-cache  
dialer pool 1  
dialer-group 1  
ppp authentication pap  
ppp pap sent-username cisco password cisco1  
!  
ip classless  
no ip http server  
!  
dialer-list 1 protocol ip permit  
ip nat inside source list 1 interface Dialer1 overload  
ip route 0.0.0.0 0.0.0.0 dialer1  
access-list 1 permit 10.200.56.0 0.0.0.255
```

```
!  
line con 0  
exec-timeout 0 0  
transport input none  
line vty 0 4  
login  
password ww  
!  
end
```

Cisco DSL 827 Router

```
Building configuration...  
Current configuration : 821 bytes  
!  
version 12.2  
no service pad  
service timestamps debug uptime  
service timestamps log uptime  
no service password-encryption  
!  
hostname Chansey  
!  
!  
ip subnet-zero  
no ip domain-lookup  
!  
!  
!  
interface Ethernet0  
no ip address  
bridge-group 1  
!  
interface ATM0  
no ip address  
no atm ilmi-keepalive  
bundle-enable  
bridge-group 1  
dsl operating-mode auto  
!  
interface ATM0.1 point-to-point  
pvc 53/53  
!--- vpi/vci given by the ISP  
!  
!  
ip classless  
ip http server  
!  
bridge 1 protocol ieee  
!  
line con 0  
exec-timeout 0 0  
stopbits 1  
line vty 0 4  
exec-timeout 0 0  
password ww  
login local  
!  
scheduler max-task-time 5000  
end
```

Cisco 6400 Router

```
Current configuration : 3231 bytes
!
version 12.1
no service single-slot-reload-enable
service timestamps debug uptime
service timestamps log uptime
no service password-encryption
!
hostname alyssa_nrpl
!
logging rate-limit console 10 except errors
aaa new-model
aaa authentication ppp default local
enable password ww
!
username cisco password cisco1
redundancy
main-cpu
auto-sync standard
no secondary console enable
ip subnet-zero
ip cef
vpdn enable
no vpdn logging
!
vpdn-group cisco
accept-dialin
protocol pppoe
virtual-template 2
!
!
!
!
!
!
!
!
!
interface Loopback5
ip address 212.93.195.100 255.255.255.0
!
!
interface ATM0/0/0
no ip address
no ip mroute-cache
load-interval 30
atm pvc 16 0 16 ilmi
no atm ilmi-keepalive
pvc 10/100
!
hold-queue 1000 in
!
interface ATM0/0/0.60 multipoint
pvc 6/60
encapsulation aal5snap
protocol pppoe
!
!
interface Ethernet0/0/1
no ip address
!
interface Ethernet0/0/0
ip address 10.200.56.8 255.255.255.0
!
interface FastEthernet0/0/0
no ip address
```

```

full-duplex
!
!
interface Virtual-Template2
ip unnumbered Loopback5
ip mtu 1492
no ip route-cache cef
peer default ip address pool nrp1
ppp authentication pap
!
ip local pool nrp1 212.93.198.1
ip classless
!
!
line con 0
exec-timeout 0 0
password ww
transport input none
line aux 0
line vty 0 4
exec-timeout 0 0
password ww
!
!
end

```

Verificar

Esta seção fornece informações que você pode usar para confirmar se a sua configuração funciona corretamente.

A [Output Interpreter Tool](#) ([somente clientes registrados](#)) oferece suporte a determinados comandos show, o que permite exibir uma análise da saída do comando show.

- **mostre a sessão toda do vpdn** — Informação de sessão de VPDN dos indicadores. Esta informação inclui a relação, o túnel, o username, os pacotes, o estado, e as estatísticas do indicador.
- **mostre os Ethernet de interface 0/1** — Indica a informação sobre a interface Ethernet no roteador.
- **show interfaces dialer 1** — Indica a informação sobre o discador no roteador.
- **show ip local pool nrp1** - Exibe informações sobre o loop local de IP.
- **mostre a rota IP** — Indica a informação sobre a rota IP no roteador.

Este é o comando **show vpdn session all** output no Cisco 2611.

```

pooh#show vpdn session all
%No active L2TP tunnels
%No active L2F tunnels
%No active PPTP tunnels
PPPoE Session Information Total tunnels 1 sessions 1
session id: 1
!--- Local MAC address. local MAC address: 0030.9424.af21, remote MAC address: 0050.736f.4c37
virtual access interface: Vi1, outgoing interface: Et0/1 599 packets sent, 599 received 9202
bytes sent, 8154 received !--- Verify that the outgoing interface for the PPPoE session !--- is
Ethernet0/1 and the local MAC address that displays is the !--- MAC address of Ethernet0/1. The
remote MAC address that displays !--- is the MAC address of the Aggregator device (6400). !---
You can see it on the 6400 as the local MAC address in the !--- show vpdn session on the 6400.

```

Este é o comando show interface ethernet 0/1 output no Cisco 2611.

```
pooh#show interface ethernet 0/1
Ethernet0/1 is up, line protocol is up
Hardware is AmdP2, address is 0030.9424.af21 (bia 0030.9424.af21
MTU 1500 bytes, BW 10000 Kbit, DLY 1000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation ARPA, loopback not set
Keepalive set (10 sec)
ARP type: ARPA, ARP Timeout 04:00:00
Last input 00:00:40, output 00:00:01, output hang never
Last clearing of "show interface" counters never
Queueing strategy: fifo
Output queue 0/40, 0 drops; input queue 0/75, 0 drops
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
739 packets input, 64127 bytes, 0 no buffer
Received 57 broadcasts, 0 runts, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored
0 input packets with dribble condition detected
1153 packets output, 89766 bytes, 0 underruns(1/0/0)
0 output errors, 1 collisions, 1 interface resets
0 babbles, 0 late collision, 2 deferred
0 lost carrier, 0 no carrier
0 output buffer failures, 0 output buffers swapped out
```

Este é o comando show interfaces dialer 1 output no Cisco 2611.

```
pooh#show interfaces dialer 1
Dialer1 is up, line protocol is up (spoofing)
Hardware is Unknown
Internet address is 212.93.198.1/32
MTU 1500 bytes, BW 56 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation PPP, loopback not set
DTR is pulsed for 1 seconds on reset
Interface is bound to Vi1
Last input never, output never, output hang never
Last clearing of "show interface" counters 01:38:43
Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: weighted fair
Output queue: 0/1000/64/0 (size/max total/threshold/drops)
Conversations 0/0/16 (active/max active/max total)
Reserved Conversations 0/0 (allocated/max allocated)
Available Bandwidth 42 kilobits/sec
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
403 packets input, 6082 bytes
403 packets output, 6978 bytes
Bound to:
Virtual-Access1 is up, line protocol is up
Hardware is Virtual Access interface
MTU 1500 bytes, BW 100000 Kbit, DLY 100000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation PPP, loopback not set
Keepalive set (10 sec)
Interface is bound to Di1 (Encapsulation PPP)
LCP Open
Listen: CDPCP
```

```
Open: IPCP
Last input 00:00:09, output never, output hang never
Last clearing of "show interface" counters 00:35:16
Queueing strategy: fifo
Output queue 0/40, 0 drops; input queue 0/75, 0 drops
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
430 packets input, 6453 bytes, 0 no buffer
Received 0 broadcasts, 0 runts, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
430 packets output, 7400 bytes, 0 underruns
0 output errors, 0 collisions, 0 interface resets
0 output buffer failures, 0 output buffers swapped out
0 carrier transitions
```

Este é o comando `show vpdn session all` output no Cisco 6400.

```
alyssa_nrpl#show vpdn session all
%No active L2TP tunnels
%No active L2F tunnels
%No active PPTP tunnels
PPPoE Session Information Total tunnels 1 sessions 1
session id: 1
local MAC address: 0050.736f.4c37, remote MAC address: 0030.9424.af21
virtual access interface: Vi3, outgoing interface: AT0/0/0, vc: 6/60
495 packets sent, 494 received
7369 bytes sent, 7346 received
```

Este é o comando `show ip local pool nrp1` output no Cisco 6400.

```
alyssa_nrpl#show ip local pool nrp1
Pool          Begin          End          Free   In use
nrp1          212.93.198.1  212.93.198.1  0      1
Available addresses:
None
Inuse addresses:
212.93.198.1    Vi3          nrp1
```

Este é o comando `show ip route` output no Cisco 6400.

```
alyssa_nrpl#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
Gateway of last resort is 0.0.0.0 to network 0.0.0.0
212.93.198.0/32 is subnetted, 1 subnets
C      212.93.198.1 is directly connected, Virtual-Access3
!--- You have to see the installed route for the remote PPPoE session. C 212.93.195.0/24 is
directly connected, Loopback5 10.0.0.0/8 is variably subnetted, 3 subnets, 2 masks C
10.200.56.0/24 is directly connected, Ethernet0/0/0
```

[Troubleshooting](#)

Esta seção fornece informações que podem ser usadas para o troubleshooting da sua configuração.

Comandos para Troubleshooting

A [Output Interpreter Tool \(somente clientes registrados\)](#) oferece suporte a determinados comandos show, o que permite exibir uma análise da saída do comando show.

Nota: [Antes de emitir comandos de depuração, consulte Informações Importantes sobre Comandos de Depuração.](#)

- **eliminação de erros da mostra** — Indica a informação sobre debugging no roteador. Este é o comando show debugging output no Cisco 2611.

```
pooh#show debugging
```

```
PPP:
```

```
PPP protocol negotiation debugging is on
```

```
VPN:
```

```
PPPoE protocol events debugging is on
```

```
PPPoE control packets debugging is on
```

```
01:54:21: Sending PADI: Interface = Ethernet0/1
```

```
01:54:21: pppoe_send_padi:
```

```
FF FF FF FF FF FF 00 30 94 24 AF 21 88 63 11 09
```

```
00 00 00 0C 01 01 00 00 01 03 00 04 82 2E 39 F0
```

```
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 ...
```

```
01:54:21: PPPoE 0: I PADO L:0030.9424.af21 R:0050.736f.4c37 Et0/1
```

```
00 30 94 24 AF 21 00 50 73 6F 4C 37 88 63 11 07
```

```
00 00 00 2F 01 01 00 00 01 03 00 04 82 2E 39 F0
```

```
01 02 00 0B 61 6C 79 73 73 61 5F 6E 72 70 31 ...
```

```
01:54:23: PPPOE: we've got our pado and the pado timer went off
```

```
01:54:23: OUT PADR from PPPoE tunnel
```

```
00 50 73 6F 4C 37 00 30 94 24 AF 21 88 63 11 19
```

```
00 00 00 2F 01 01 00 00 01 03 00 04 82 2E 39 F0
```

```
01 02 00 0B 61 6C 79 73 73 61 5F 6E 72 70 31 ...
```

```
01:54:23: PPPoE 1: I PADS L:0030.9424.af21 R:0050.736f.4c37 Et0/1
```

```
00 30 94 24 AF 21 00 50 73 6F 4C 37 88 63 11 65
```

```
00 01 00 2F 01 01 00 00 01 03 00 04 82 2E 39 F0
```

```
01 02 00 0B 61 6C 79 73 73 61 5F 6E 72 70 31 ...
```

```
01:54:23: IN PADS from PPPoE tunnel
```

```
01:54:23: Vi1 Debug: Condition 1, interface Di1 triggered, count 1
```

```
01:54:23: %DIALER-6-BIND: Interface Vi1 bound to profile Di1
```

```
01:54:23: PPPoE: Virtual Access interface obtained.
```

```
01:54:23: %LINK-3-UPDOWN: Interface Virtual-Access1, changed state to up
```

```
01:54:23: Vi1 PPP: Treating connection as a callout
```

```
01:54:23: Vi1 PPP: Phase is ESTABLISHING, Active Open [0 sess, 0 load]
```

```
01:54:23: Vi1 PPP: No remote authentication for call-out
```

```
01:54:23: Vi1 LCP: O CONFREQ [Closed] id 1 len 10
```

```
01:54:23: Vi1 LCP: MagicNumber 0x30FCDE42 (0x050630FCDE42)
```

```
01:54:23: Vi1 LCP: I CONFACK [REQsent] id 1 len 10
```

```
01:54:23: Vi1 LCP: MagicNumber 0x30FCDE42 (0x050630FCDE42)
```

```
01:54:25: Vi1 LCP: I CONFREQ [ACKRcvd] id 2 len 18
```

```
01:54:25: Vi1 LCP: MRU 1492 (0x010405D4)
```

```
01:54:25: Vi1 LCP: AuthProto PAP (0x0304C023)
```

```
01:54:25: Vi1 LCP: MagicNumber 0x5C799D85 (0x05065C799D85)
```

```
01:54:25: Vi1 LCP: O CONFNAK [ACKRcvd] id 2 len 8
```

```
01:54:25: Vi1 LCP: MRU 1500 (0x010405DC)
```

```
01:54:25: Vi1 LCP: TIMEOUT: State ACKRcvd
```

```
01:54:25: Vi1 LCP: O CONFREQ [ACKRcvd] id 2 len 10
```

```
01:54:25: Vi1 LCP: MagicNumber 0x30FCDE42 (0x050630FCDE42)
```

```
01:54:25: Vi1 LCP: I CONFREQ [REQsent] id 3 len 18
```

```
01:54:25: Vi1 LCP: MRU 1500 (0x010405DC)
```

```
01:54:25: Vi1 LCP: AuthProto PAP (0x0304C023)
```

```

01:54:25: Vi1 LCP: MagicNumber 0x5C799D85 (0x05065C799D85)
01:54:25: Vi1 LCP: O CONFACK [REQsent] id 3 len 18
01:54:25: Vi1 LCP: MRU 1500 (0x010405DC)
01:54:25: Vi1 LCP: AuthProto PAP (0x0304C023)
01:54:25: Vi1 LCP: MagicNumber 0x5C799D85 (0x05065C799D85)
01:54:25: Vi1 LCP: I CONFACK [ACKsent] id 2 len 10
01:54:25: Vi1 LCP: MagicNumber 0x30FCDE42 (0x050630FCDE42)
01:54:25: Vi1 LCP: State is Open
01:54:25: Vi1 PPP: Phase is AUTHENTICATING, by the peer [0 sess, 0 load]
01:54:25: Vi1 PAP: O AUTH-REQ id 4 len 18 from "cisco"
01:54:25: Vi1 PAP: I AUTH-ACK id 4 len 5
01:54:25: Vi1 PPP: Phase is UP [0 sess, 0 load]
01:54:25: Vi1 IPCP: O CONFREQ [Closed] id 1 len 10
01:54:25: Vi1 IPCP: Address 0.0.0.0 (0x030600000000)
01:54:25: Vi1 CDPCP: O CONFREQ [Closed] id 1 len 4
01:54:25: Vi1 IPCP: I CONFREQ [REQsent] id 1 len 10
01:54:25: Vi1 IPCP: Address 212.93.195.100 (0x0306D45DC364)
01:54:25: Vi1 IPCP: O CONFACK [REQsent] id 1 len 10
01:54:25: Vi1 IPCP: Address 212.93.195.100 (0x0306D45DC364)
01:54:25: Vi1 IPCP: I CONFNAK [ACKsent] id 1 len 10
01:54:25: Vi1 IPCP: Address 212.93.198.1 (0x0306D45DC601)
01:54:25: Vi1 IPCP: O CONFREQ [ACKsent] id 2 len 10
01:54:25: Vi1 IPCP: Address 212.93.198.1 (0x0306D45DC601)
01:54:25: Vi1 LCP: I PROTREJ [Open] id 4 len 10 protocol CDPCP
(0x820701010004)
01:54:25: Vi1 CDPCP: State is Closed
01:54:25: Vi1 IPCP: I CONFACK [ACKsent] id 2 len 10
01:54:25: Vi1 IPCP: Address 212.93.198.1 (0x0306D45DC601)
01:54:25: Vi1 IPCP: State is Open
01:54:25: Di1 IPCP: Install negotiated IP interface address 212.93.198.1
01:54:25: Di1 IPCP: Install route to 212.93.195.100
01:54:26: %LINEPROTO-5-UPDOWN: Line protocol on Interface Virtual-Access1,
changed state to up

```

Este é o comando show debugging output no Cisco 6400.

pooh#**show debugging**

```

PPP:
PPP protocol negotiation debugging is on
VPN:
PPPoE protocol events debugging is on
PPPoE control packets debugging is on
01:54:21: Sending PADI: Interface = Ethernet0/1
01:54:21: pppoe_send_padi:
FF FF FF FF FF FF 00 30 94 24 AF 21 88 63 11 09
00 00 00 0C 01 01 00 00 01 03 00 04 82 2E 39 F0
00 00 00 00 00 00 00 00 00 00 00 00 00 00 ...
01:54:21: PPPoE 0: I PADO L:0030.9424.af21 R:0050.736f.4c37 Et0/1
00 30 94 24 AF 21 00 50 73 6F 4C 37 88 63 11 07
00 00 00 2F 01 01 00 00 01 03 00 04 82 2E 39 F0
01 02 00 0B 61 6C 79 73 73 61 5F 6E 72 70 31 ...
01:54:23: PPPOE: we've got our pado and the pado timer went off
01:54:23: OUT PADR from PPPoE tunnel
00 50 73 6F 4C 37 00 30 94 24 AF 21 88 63 11 19
00 00 00 2F 01 01 00 00 01 03 00 04 82 2E 39 F0
01 02 00 0B 61 6C 79 73 73 61 5F 6E 72 70 31 ...
01:54:23: PPPoE 1: I PADS L:0030.9424.af21 R:0050.736f.4c37 Et0/1
00 30 94 24 AF 21 00 50 73 6F 4C 37 88 63 11 65
00 01 00 2F 01 01 00 00 01 03 00 04 82 2E 39 F0
01 02 00 0B 61 6C 79 73 73 61 5F 6E 72 70 31 ...
01:54:23: IN PADS from PPPoE tunnel
01:54:23: Vi1 Debug: Condition 1, interface Di1 triggered, count 1
01:54:23: %DIALER-6-BIND: Interface Vi1 bound to profile Di1

```

```
01:54:23: PPPoE: Virtual Access interface obtained.
01:54:23: %LINK-3-UPDOWN: Interface Virtual-Access1, changed state to up
01:54:23: Vi1 PPP: Treating connection as a callout
01:54:23: Vi1 PPP: Phase is ESTABLISHING, Active Open [0 sess, 0 load]
01:54:23: Vi1 LCP: O CONFREQ [Closed] id 1 len 10
01:54:23: Vi1 LCP:   MagicNumber 0x30FCDE42 (0x050630FCDE42)
01:54:23: Vi1 LCP: I CONFACK [REQsent] id 1 len 10
01:54:23: Vi1 LCP:   MagicNumber 0x30FCDE42 (0x050630FCDE42)
01:54:25: Vi1 LCP: I CONFREQ [ACKrcvd] id 2 len 18
01:54:25: Vi1 LCP:   MRU 1492 (0x010405D4)
01:54:25: Vi1 LCP:   AuthProto PAP (0x0304C023)
01:54:25: Vi1 LCP:   MagicNumber 0x5C799D85 (0x05065C799D85)
01:54:25: Vi1 LCP: O CONFNAK [ACKrcvd] id 2 len 8
01:54:25: Vi1 LCP:   MRU 1500 (0x010405DC)
01:54:25: Vi1 LCP: TIMEOUT: State ACKrcvd
01:54:25: Vi1 LCP: O CONFREQ [ACKrcvd] id 2 len 10
01:54:25: Vi1 LCP:   MagicNumber 0x30FCDE42 (0x050630FCDE42)
01:54:25: Vi1 LCP: I CONFREQ [REQsent] id 3 len 18
01:54:25: Vi1 LCP:   MRU 1500 (0x010405DC)
01:54:25: Vi1 LCP:   AuthProto PAP (0x0304C023)
01:54:25: Vi1 LCP:   MagicNumber 0x5C799D85 (0x05065C799D85)
01:54:25: Vi1 LCP: O CONFACK [REQsent] id 3 len 18
01:54:25: Vi1 LCP:   MRU 1500 (0x010405DC)
01:54:25: Vi1 LCP:   AuthProto PAP (0x0304C023)
01:54:25: Vi1 LCP:   MagicNumber 0x5C799D85 (0x05065C799D85)
01:54:25: Vi1 LCP: I CONFACK [ACKsent] id 2 len 10
01:54:25: Vi1 LCP:   MagicNumber 0x30FCDE42 (0x050630FCDE42)
01:54:25: Vi1 LCP: State is Open
01:54:25: Vi1 PPP: Phase is AUTHENTICATING, by the peer [0 sess, 0 load]
01:54:25: Vi1 PAP: O AUTH-REQ id 4 len 18 from "cisco"
01:54:25: Vi1 PAP: I AUTH-ACK id 4 len 5
01:54:25: Vi1 PPP: Phase is UP [0 sess, 0 load]
01:54:25: Vi1 IPCP: O CONFREQ [Closed] id 1 len 10
01:54:25: Vi1 IPCP:   Address 0.0.0.0 (0x030600000000)
01:54:25: Vi1 CDPCP: O CONFREQ [Closed] id 1 len 4
01:54:25: Vi1 IPCP: I CONFREQ [REQsent] id 1 len 10
01:54:25: Vi1 IPCP:   Address 212.93.195.100 (0x0306D45DC364)
01:54:25: Vi1 IPCP: O CONFACK [REQsent] id 1 len 10
01:54:25: Vi1 IPCP:   Address 212.93.195.100 (0x0306D45DC364)
01:54:25: Vi1 IPCP: I CONFNAK [ACKsent] id 1 len 10
01:54:25: Vi1 IPCP:   Address 212.93.198.1 (0x0306D45DC601)
01:54:25: Vi1 IPCP: O CONFREQ [ACKsent] id 2 len 10
01:54:25: Vi1 IPCP:   Address 212.93.198.1 (0x0306D45DC601)
01:54:25: Vi1 LCP: I PROTREJ [Open] id 4 len 10 protocol CDPCP
(0x820701010004)
01:54:25: Vi1 CDPCP: State is Closed
01:54:25: Vi1 IPCP: I CONFACK [ACKsent] id 2 len 10
01:54:25: Vi1 IPCP:   Address 212.93.198.1 (0x0306D45DC601)
01:54:25: Vi1 IPCP: State is Open
01:54:25: Di1 IPCP: Install negotiated IP interface address 212.93.198.1
01:54:25: Di1 IPCP: Install route to 212.93.195.100
01:54:26: %LINEPROTO-5-UPDOWN: Line protocol on Interface Virtual-Access1,
changed state to up
```

[Informações Relacionadas](#)

- [Configurando o Cisco 827 Router](#)
- [Informação de suporte de tecnologia Cisco DSL](#)
- [Suporte Técnico - Cisco Systems](#)