

Configurando o IPsec entre um roteador e um PIX usando o comando nat 0 access-list

Índice

[Introdução](#)

[Antes de Começar](#)

[Convenções](#)

[Pré-requisitos](#)

[Componentes Utilizados](#)

[Material de Suporte](#)

[Configurar](#)

[Diagrama de Rede](#)

[Configurações](#)

[Verificar](#)

[Troubleshooting](#)

[Comandos para Troubleshooting](#)

[Exemplo de debug](#)

[Informações Relacionadas](#)

[Introdução](#)

Este documento ilustra uma configuração IPsec (Segurança IP) entre um roteador e um firewall Cisco Secure PIX. Queremos usar endereços IP internos particulares ao passar o tráfego entre as matrizes da LAN e as LANs remotas e converter os hosts de LAN em endereços IP que podem ser roteados quando os usuários acessarem a Internet. No entanto, os usuários também podem acessar páginas públicas na Internet sem que o tráfego passe pelo túnel usando o comando route-map.

Refira [ASA/PIX: Ferramenta de segurança a um exemplo de configuração do túnel IPsec de LAN para LAN do IOS Router](#) a fim aprender mais sobre a encenação onde túneis de LAN para LAN entre um roteador e os dispositivos PIX/ASA do Cisco Security.

[Antes de Começar](#)

[Convenções](#)

Para obter mais informações sobre convenções de documento, consulte as [Convenções de dicas técnicas Cisco](#).

[Pré-requisitos](#)

Não existem requisitos específicos para este documento.

Componentes Utilizados

As informações neste documento são baseadas nas versões de software e hardware abaixo.

- Roteador Cisco com Cisco IOS® Software Versão 12.0(7)T
- Versão 5.1(1) do Cisco PIX Firewall

As informações neste documento foram criadas a partir de dispositivos em um ambiente de laboratório específico. Todos os dispositivos utilizados neste documento foram iniciados com uma configuração (padrão) inicial. Se você estiver trabalhando em uma rede ativa, certifique-se de que entende o impacto potencial de qualquer comando antes de utilizá-lo.

Material de Suporte

No PIX, os comandos `access-list` e `nat 0` trabalham juntos. Quando um usuário na rede de 10.1.1.0 vai à rede de 10.2.2.0, nós usamos a lista de acessos para permitir o tráfego de rede de 10.1.1.0 ser cifrado sem Network Address Translation (NAT). No entanto, quando alguns desses usuários vão para algum outro lugar, eles são convertidos no endereço 172.17.63.210 por meio de Conversão de Endereço de Porta (PAT). No roteador, os **comandos `route-map` and `access-list`** são usados para permitir o tráfego de rede de 10.2.2.0 ser cifrado sem NAT. No entanto, quando alguns desses usuários vão para algum outro lugar, eles são convertidos no endereço 172.17.63.210 por meio de Conversão de Endereço de Porta (PAT).

A seguir estão os comandos de configuração necessários no PIX Firewall para que o tráfego não seja executado pelo PAT sobre o túnel, e o tráfego para a Internet seja executado pelo PAT.

```
access-list nonat permit ip 10.1.1.0 255.255.255.0 10.2.2.0 255.255.255.0 nat (inside) 0 access-list nonat nat (inside) 1 10.1.1.0 255.255.255.0 0 0
```


Configurar

Nesta seção, você encontrará informações para configurar os recursos descritos neste documento.

Nota: Para encontrar informações adicionais sobre comandos usados neste documento, utilize a ferramenta IOS Command Lookup

Diagrama de Rede

Este documento utiliza a instalação de rede mostrada no diagrama abaixo.

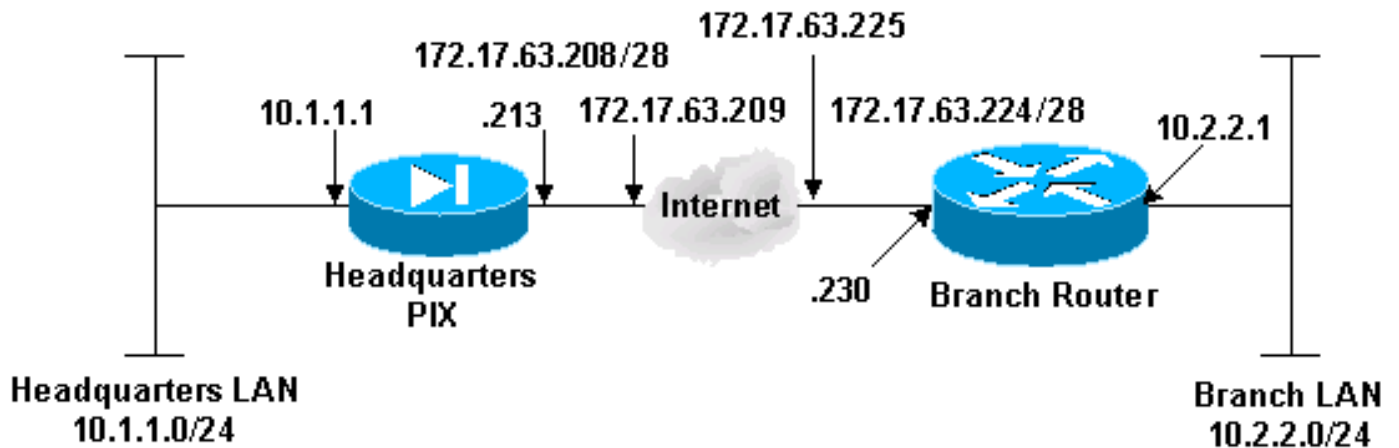

Configurações

Este documento utiliza as configurações mostradas abaixo.

PIX da matriz

```

PIX Version 5.1(1)
nameif ethernet0 outside security0
nameif ethernet1 inside security100
!--- Traffic to the router: access-list ipsec permit ip
10.1.1.0 255.255.255.0 10.2.2.0 255.255.255.0 !--- Do
not Network Address Translate (NAT) traffic to the
router: access-list nonat permit ip 10.1.1.0
255.255.255.0 10.2.2.0 255.255.255.0 enable password
8Ry2YjIyt7RRXU24 encrypted passwd 2KFQnbNIdI.2KYOU
encrypted hostname HQ_PIX fixup protocol ftp 21 fixup
protocol http 80 fixup protocol smtp 25 fixup protocol
h323 1720 fixup protocol rsh 514 fixup protocol sqlnet
1521 names pager lines 24 no logging timestamp no
logging standby no logging console no logging monitor no
logging buffered no logging trap no logging history
logging facility 20 logging queue 512 interface
ethernet0 auto interface ethernet1 auto mtu outside 1500
mtu inside 1500 ip address outside 172.17.63.213
255.255.255.240 ip address inside 10.1.1.1 255.255.255.0
no failover failover timeout 0:00:00 failover ip address
outside 0.0.0.0 failover ip address inside 0.0.0.0 arp
timeout 14400 global (outside) 1 172.17.63.210 !--- Do
not NAT traffic to the router: nat (inside) 0 access-
list nonat nat (inside) 1 10.1.1.0 255.255.255.0 0 0
conduit permit icmp any any route outside 0.0.0.0
0.0.0.0 172.17.63.209 1 timeout xlate 3:00:00 conn
1:00:00 half-closed 0:10:00 udp 0:02:00 timeout rpc
0:10:00 h323 0:05:00 timeout uauth 0:05:00 absolute aaa-
server TACACS+ protocol tacacs+ aaa-server RADIUS
protocol radius aaa-server partner protocol tacacs+ no
snmp-server location no snmp-server contact snmp-server
community public no snmp-server enable traps floodguard
enable !--- IPSec policies: sysopt connection permit-
ipsec crypto ipsec transform-set avalanche esp-des esp-
md5-hmac crypto ipsec security-association lifetime
seconds 3600 crypto map forsberg 21 ipsec-isakmp crypto
map forsberg 21 match address ipsec crypto map forsberg
21 set peer 172.17.63.230 crypto map forsberg 21 set
transform-set avalanche crypto map forsberg interface
outside !--- IKE policies: isakmp enable outside isakmp

```

```
key westernfinal2000 address 172.17.63.230 netmask
255.255.255.255 isakmp identity address isakmp policy 21
authentication pre-share isakmp policy 21 encryption des
isakmp policy 21 hash md5 isakmp policy 21 group 1
telnet timeout 5 terminal width 80
Cryptochecksum:e36245da9428c4c07b489f787c8ccd3b : end
```

Roteador de filial

Current configuration:

```
!
version 12.0
service timestamps debug uptime
service timestamps log uptime
no service password-encryption
!
hostname Branch_Router
!
!
!
!
!
!
ip subnet-zero
!
!
!--- IKE policies: crypto isakmp policy 11 hash md5
authentication pre-share crypto isakmp key
westernfinal2000 address 172.17.63.213 ! ! !--- IPsec
policies: crypto ipsec transform-set sharks esp-des esp-
md5-hmac ! ! crypto map nolan 11 ipsec-isakmp set peer
172.17.63.213 set transform-set sharks !--- Include the
private-network-to-private-network traffic !--- in the
encryption process. match address 120 ! ! ! interface
Ethernet0 ip address 172.17.63.230 255.255.255.240 no ip
directed-broadcast ip nat outside no ip route-cache
crypto map nolan ! interface Ethernet1 ip address
10.2.2.1 255.255.255.0 no ip directed-broadcast ip nat
inside ! interface Serial0 no ip address no ip directed-
broadcast no ip mroute-cache shutdown no fair-queue !
interface Serial1 no ip address no ip directed-broadcast
shutdown ! ip nat pool branch 172.17.63.230
172.17.63.230 netmask 255.255.255.240 !--- Except the
private network from the NAT process: ip nat inside
source route-map nonat pool branch overload ip classless
ip route 0.0.0.0 0.0.0.0 172.17.63.225 no ip http server
!--- Include the private-network-to-private-network
traffic !--- in the encryption process: access-list 120
permit ip 10.2.2.0 0.0.0.255 10.1.1.0 0.0.0.255 !---
Except the private network from the NAT process: access-
list 130 deny ip 10.2.2.0 0.0.0.255 10.1.1.0 0.0.0.255
access-list 130 permit ip 10.2.2.0 0.0.0.255 any !---
Except the private network from the NAT process: route-
map nonat permit 10 match ip address 130 ! ! line con 0
transport input none line 1 16 line aux 0 line vty 0 4 !
end
```

[Verificar](#)

Esta seção fornece informações que você pode usar para confirmar se sua configuração está funcionando adequadamente.

Determinados comandos show são suportados pela Ferramenta Output Interpreter, que permite que você veja uma análise do resultado do comando show.

- **show crypto isakmp sa** - Ver todas as associações de segurança (SAs) IKE atuais no correspondente.
- **mostre IPsec crypto sa** - Mostra os ajustes usados por associações de segurança atuais do [IPSec].
- **show crypto engine connections active** - (Apenas roteador) Exibe as conexões atuais e as informações sobre pacotes codificados e decodificados.

Troubleshooting

Esta seção fornece informações que podem ser usadas para o troubleshooting da sua configuração.

Comandos para Troubleshooting

Determinados comandos show são suportados pela Ferramenta Output Interpreter, que permite que você veja uma análise do resultado do comando show.

Nota: Antes de emitir **comandos debug**, consulte [Informações importantes sobre comandos debug](#).

As depurações a seguir devem ser executadas em ambos os correspondentes de IPSec.

- **isakmp do debug crypto** - (roteador & PIX) indica erros durante a fase 1.
- **IPsec do debug crypto** - (roteador & PIX) indica erros durante a fase 2.
- **debug crypto engine** - (somente roteador) Exibe informações sobre o mecanismo de criptografia

A limpeza de associações de segurança deve ser feita em ambos os correspondentes. Os comandos pix são executados no modo enable; os comandos do roteador são executados no modo não habilitado.

- **clear crypto isakmp sa** - (PIX) Limpa as associações de segurança da Fase 1.
- **clear crypto ipsec sa** - (PIX) Limpa as associações de segurança da Fase 2.
- **clear crypto isakmp** - (Roteador) Limpa as associações de segurança da Fase 1.
- **clear crypto sa** - (Roteador) Limpa as associações de segurança da Fase 2.

Exemplo de debug

- [Depurações de PIX de matriz](#)
- [Depurações do roteador de filial](#)

Depurações de PIX de matriz

```
ISAKMP (0): beginning Main Mode exchange
IPSEC(ipsec_encap): crypto map check deny
```

```
02303: sa_request,
```

(key eng. msg.) src= 172.17.63.213, dest= 172.17.63.230,
src_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
dest_proxy= 10.2.2.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 28800s and 4608000kb,
spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x4004

crypto_isakmp_process_block: src 172.17.63.230,
dest 172.17.63.213

OAK_MM exchange

ISAKMP (0): processing SA payload. message ID = 0

ISAKMP (0): Checking ISAKMP transform 1 against priority
21 policy

ISAKMP: encryption DES-CBC

ISAKMP: hash MD5

ISAKMP: default group 1

ISAKMP: auth pre-share

ISAKMP: life type in seconds

ISAKMP: life duration (basic) of 3600

ISAKMP (0): atts are acceptable. Next payload is 0

ISAKMP (0): SA is doing pre-shared key authentication
using id type ID_IPV4_ADDR

return status is IKMP_NO_ERRORIPSEC(ipsec_encap): crypto
map check deny

crypto_isakmp_process_block: src 172.17.63.230,
dest 172.17.63.213

OAK_MM exchange

ISAKMP (0): processing KE payload. message ID = 0

ISAKMP (0): processing NONCE payload. message ID = 0

ISAKMP (0): processing vendor id payload

ISAKMP (0): speaking to another IOS box!

ISAKMP (0): ID payload

next-payload : 8

type : 1

protocol : 17

port : 500

length : 8

ISAKMP (0): Total payload length: 12

return status is IKMP_NO_ERRORIPSEC(ipsec_encap):
crypto map check deny

crypto_isakmp_process_block: src 172.17.63.230,
dest 172.17.63.213

OAK_MM exchange

ISAKMP (0): processing ID payload. message ID = 0

ISAKMP (0): processing HASH payload. message ID = 0

ISAKMP (0): SA has been authenticated

ISAKMP (0): beginning Quick Mode exchange, M-ID of
-1448244754:a9ad89eeIPSEC(key_engine): got a
queue even

IPSEC(spi_response): getting spi 0x5cfcf6e9(1560082153)
for SA from 172.17.63.230 to
172.17.63.213 for prot 3

```
return status is IKMP_NO_ERROR
crypto_isakmp_process_block: src 172.17.63.230,
    dest 172.17.63.213
OAK_QM exchange
oakley_process_quick_mode:
OAK_QM_IDLE
ISAKMP (0): processing SA payload. message ID =
    -1448244754

ISAKMP : Checking IPsec proposal 1

ISAKMP: transform 1, ESP_DES
ISAKMP:  attributes in transform:
ISAKMP:      encaps is 1
ISAKMP:      SA life type in seconds
ISAKMP:      SA life duration (basic) of 28800
ISAKMP:      SA life type in kilobytes
ISAKMP:      SA life duration (VPI) of  0x0
    0x46 0x50 0x0
ISAKMP:      authenticator is HMAC-MD5
ISAKMP (0): atts are acceptable.IPSEC
(validate_proposal_request):
proposal part #1,
(key eng. msg.) dest= 172.17.63.230,
src= 172.17.63.213,
dest_proxy= 10.2.2.0/255.255.255.0/0/0 (type=4),
src_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x4

ISAKMP (0): processing NONCE payload. message ID =
    -1448244754

ISAKMP (0): processing ID payload. message ID =
    -1448244754
ISAKMP (0): processing ID payload. message ID =
    -1448244754
ISAKMP (0): processing NOTIFY payload 96 protocol 3
    spi 1510339082, message ID = -1448244754
ISAKMP (0): processing responder lifetime
ISAKMP (0): responder lifetime of
    3600sIPSEC(map_alloc_entry):
    allocating entry 3

IPSEC(map_alloc_entry): allocating entry 4

ISAKMP (0): Creating IPsec SAs
    inbound SA from  172.17.63.230 to
    172.17.63.213
    (proxy 10.2.2.0 to 10.1.1.0)
    has spi 1560082153 and conn_id 3 and flags 4
    lifetime of 3600 seconds
    lifetime of 4608000 kilobytes
    outbound SA from  172.17.63.213 to
    172.17.63.230
    (proxy 10.1.1.0 to 10.2.2.0)
    has spi 183633242 and conn_id 4 and flags 4
    lifetime of 3600 seconds
    lifetime of 4608000 kilobytesIPSEC(key_engine):
    got a queue event...
IPSEC(initialize_sas): ,
(key eng. msg.) dest= 172.17.63.213, src=
```

```

172.17.63.230,
dest_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
src_proxy= 10.2.2.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 3600s and 4608000kb,
spi= 0x5cfcf6e9(1560082153), conn_id= 3, keysize= 0,
flags= 0x4
IPSEC(initialize_sas): ,
(key eng. msg.) src= 172.17.63.213, dest=
172.17.63.230,
src_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
dest_proxy= 10.2.2.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 3600s and 4608000kb,
spi= 0xaf2055a(183633242), conn_id= 4, keysize= 0,
flags= 0x4

return status is IKMP_NO_ERROR602301: sa created,
(sa) sa_dest= 172.17.63.213, sa_prot= 50,
sa_spi= 0x5cfcf6e9(1560082153),
sa_trans= esp-des esp-md5-hmac , sa_conn_id= 3
602301: sa created,
(sa) sa_dest= 172.17.63.230, sa_prot= 50,
sa_spi= 0xaf2055a(183633242),
sa_trans= esp-des esp-md5-hmac , sa_conn_id= 4

```

Depurações do roteador de filial

```

Branch_Router#
01:27:08: ISAKMP (0): received packet from 172.17.63.213
(N) NEW SA
01:27:08: ISAKMP (0:1): processing SA payload.
message ID = 0
01:27:08: ISAKMP (0:1): Checking ISAKMP transform 1
against priority 11 policy
01:27:08: ISAKMP: encryption DES-CBC
01:27:08: ISAKMP: hash MD5
01:27:08: ISAKMP: default group 1
01:27:08: ISAKMP: auth pre-share
01:27:08: ISAKMP: life type in seconds
01:27:08: ISAKMP: life duration (basic) of 3600
01:27:08: ISAKMP (0:1): atts are acceptable. Next
payload is 0
01:27:08: CryptoEngine0: generate alg parameter
01:27:10: CRYPTO_ENGINE: Dh phase 1 status: 0
01:27:10: CRYPTO_ENGINE: Dh phase 1 status: 0
01:27:10: ISAKMP (0:1): SA is doing pre-shared key
authentication
01:27:10: ISAKMP (1): SA is doing pre-shared key
authentication using id type ID_IPV4_ADDR
01:27:10: ISAKMP (1): sending packet to 172.17.63.213
(R) MM_SA_SETUP
01:27:10: ISAKMP (1): received packet from 172.17.63.213
(R) MM_SA_SETUP
01:27:10: ISAKMP (0:1): processing KE payload. message
ID = 0
01:27:10: CryptoEngine0: generate alg parameter
01:27:12: ISAKMP (0:1): processing NONCE payload.
message ID = 0
01:27:12: CryptoEngine0: create ISAKMP SKEYID for
conn id 1
01:27:12: ISAKMP (0:1): SKEYID state generated
01:27:12: ISAKMP (0:1): processing vendor id payload
01:27:12: ISAKMP (0:1): speaking to another IOS box!

```


01:27:12: ISAKMP (1): sending packet to 172.17.63.213 (R)
MM_KEY_EXCH
01:27:12: ISAKMP (1): received packet from 172.17.63.213
(R) MM_KEY_EXCH
01:27:12: ISAKMP (0:1): processing ID payload.
message ID = 0
01:27:12: ISAKMP (0:1): processing HASH payload.
message ID = 0
01:27:12: CryptoEngine0: generate hmac context for
conn id 1
01:27:12: ISAKMP (0:1): SA has been authenticated
with 172.17.63.213
01:27:12: ISAKMP (1): ID payload
next-payload : 8
type : 1
protocol : 17
port : 500
length : 8
01:27:12: ISAKMP (1): Total payload length: 12
01:27:12: CryptoEngine0: generate hmac context
for conn id 1
01:27:12: CryptoEngine0: clear dh number for
conn id 1
01:27:12: ISAKMP (1): sending packet to
172.17.63.213 (R) QM_IDLE
01:27:12: ISAKMP (1): received packet from
172.17.63.213 (R) QM_IDLE
01:27:12: CryptoEngine0: generate hmac context for
conn id 1
01:27:12: ISAKMP (0:1): processing SA payload.
message ID = -1448244754
01:27:12: ISAKMP (0:1): Checking IPsec proposal 1
01:27:12: ISAKMP: transform 1, ESP_DES
01:27:12: ISAKMP: attributes in transform:
01:27:12: ISAKMP: encaps is 1
01:27:12: ISAKMP: SA life type in seconds
01:27:12: ISAKMP: SA life duration (basic)
of 28800
01:27:12: ISAKMP: SA life type in kilobytes
01:27:12: ISAKMP: SA life duration (VPI) of
0x0 0x46 0x50 0x0
01:27:12: ISAKMP: authenticator is HMAC-MD5
01:27:12: validate proposal 0
01:27:12: ISAKMP (0:1): atts are acceptable.
01:27:12: IPSEC(validate_proposal_request):
proposal part #1, (key eng. msg.)
dest= 172.17.63.230, src= 172.17.63.213,
dest_proxy= 10.2.2.0/255.255.255.0/0/0 (type=4),
src_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x4
01:27:13: validate proposal request 0
01:27:13: ISAKMP (0:1): processing NONCE payload.
message ID = -1448244754
01:27:13: ISAKMP (0:1): processing ID payload.
message ID = -1448244754
01:27:13: ISAKMP (1): ID_IPV4_ADDR_SUBNET src
10.1.1.0/255.255.255.0 prot 0 port 0
01:27:13: ISAKMP (0:1): processing ID payload.
message ID = -1448244754
01:27:13: ISAKMP (1): ID_IPV4_ADDR_SUBNET dst
10.2.2.0/255.255.255.0 prot 0 port 0
01:27:13: IPSEC(key_engine): got a queue event...

```
01:27:13: IPSEC(spi_response): getting spi 183633242
    for SA
    from 172.17.63.213 to 172.17.63.230 for prot 3
01:27:13: CryptoEngine0: generate hmac context for
    conn id 1
01:27:13: ISAKMP (1): sending packet to 172.17.63.213
    (R) QM_IDLE
01:27:13: ISAKMP (1): received packet from 172.17.63.213
    (R) QM_IDLE
01:27:13: CryptoEngine0: generate hmac context
    for conn id 1
01:27:13: ipsec allocate flow 0
01:27:13: ipsec allocate flow 0
01:27:13: ISAKMP (0:1): Creating IPSec SAs
01:27:13:     inbound SA from 172.17.63.213
    to 172.17.63.230 (proxy 10.1.1.0 to 10.2.2.0)
01:27:13:     has spi 183633242 and conn_id 2000
    and flags 4
01:27:13:     lifetime of 28800 seconds
01:27:13:     lifetime of 4608000 kilobytes
01:27:13:     outbound SA from 172.17.63.230
    to 172.17.63.213 (proxy 10.2.2.0 to 10.1.1.0)
01:27:13:     has spi 1560082153 and conn_id
    2001 and flags 4
01:27:13:     lifetime of 28800 seconds
01:27:13:     lifetime of 4608000 kilobytes
01:27:13: ISAKMP (0:1): deleting node -1448244754
01:27:13: IPSEC(key_engine): got a queue event...
01:27:13: IPSEC(initialize_sas): ,
    (key eng. msg.) dest= 172.17.63.230, src=
    172.17.63.213,
    dest_proxy= 10.2.2.0/255.255.255.0/0/0 (type=4),
    src_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
    protocol= ESP, transform= esp-des esp-md5-hmac ,
    lifedur= 28800s and 4608000kb,
    spi= 0xAF2055A(183633242), conn_id= 2000,
    keysize= 0, flags= 0x4
01:27:13: IPSEC(initialize_sas): ,
    (key eng. msg.) src= 172.17.63.230,
    dest= 172.17.63.213,
    src_proxy= 10.2.2.0/255.255.255.0/0/0 (type=4),
    dest_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
    protocol= ESP, transform= esp-des esp-md5-hmac ,
    lifedur= 28800s and 4608000kb,
    spi= 0x5CFCF6E9(1560082153), conn_id= 2001,
    keysize= 0, flags= 0x4
01:27:13: IPSEC(create_sa): sa created,
    (sa) sa_dest= 172.17.63.230, sa_prot= 50,
    sa_spi= 0xAF2055A(183633242),
    sa_trans= esp-des esp-md5-hmac , sa_conn_id= 2000
01:27:13: IPSEC(create_sa): sa created,
    (sa) sa_dest= 172.17.63.213, sa_prot= 50,
    sa_spi= 0x5CFCF6E9(1560082153),
    sa_trans= esp-des esp-md5-hmac , sa_conn_id= 2001
```

[Informações Relacionadas](#)

- [PIX IPSec](#)
- [Solicitações de Comentários \(RFCs\)](#)
- [Suporte Técnico - Cisco Systems](#)