

# 重新启动和重置对在SG550XG和SG350XG的出厂默认设置

## 目标

重新启动交换机可以是有用为诊断网络问题，或者为重置交换机对出厂默认设置。您能也设置交换机重新启动在一个特定日期，或者在一定数量的时刻。此功能是有用的在期限弱放射性，如果要重新启动交换机，或者，在必需的配置要求重新启动后。


使用图形用户界面(GUI)，本文目标将显示您如何重新启动SG550XG和SG350XG。如果喜欢重置交换机在设备或通过命令行界面(CLI)，请检查[重置交换机手工或通过CLI](#)。

## 可适用的设备|软件版本

- SG350X系列|2.0.0.73 ([新的下载](#))
- Sx550X系列|2.0.0.73 ([新的下载](#))

## 重新启动交换机

步骤1.对Web配置工具的登录。如果需要在此进程的指导，请检查[如何登录交换机的图形用户界面\(GUI\)](#)和选择Administration >重新启动。重新启动页打开。

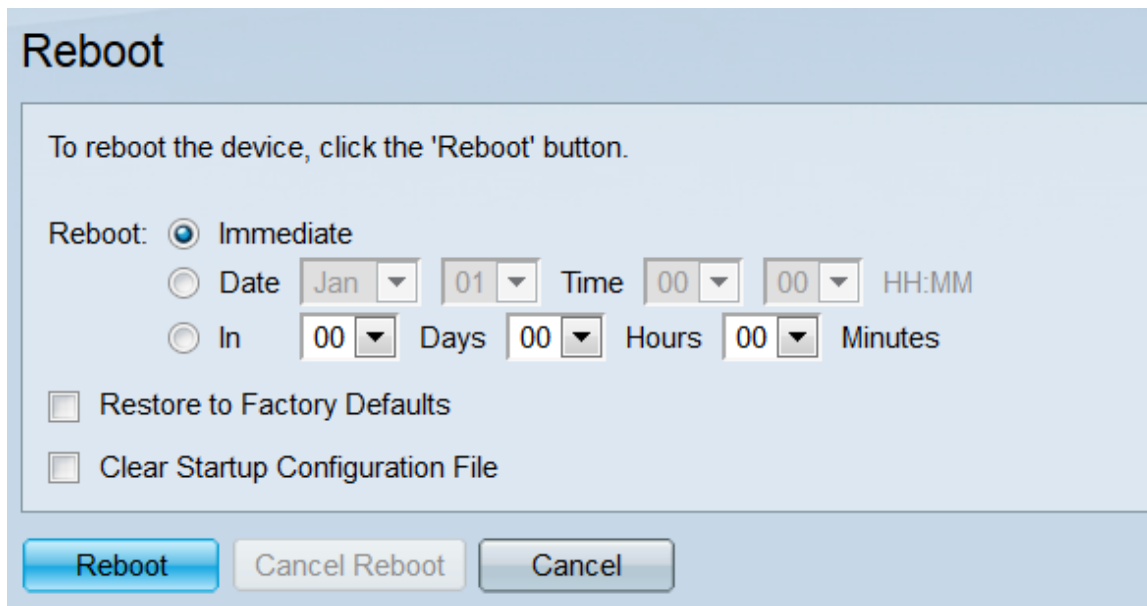

The screenshot shows a web interface titled "Reboot". It contains the following elements:

- A header "Reboot" in a blue bar.
- Text: "To reboot the device, click the 'Reboot' button."
- Radio buttons for "Reboot:" with "Immediate" selected.
- Options for scheduling: "Date" (Month: Jan, Day: 01, Time: 00:00 HH:MM) and "In" (Days: 00, Hours: 00, Minutes).
- Checkboxes for "Restore to Factory Defaults" and "Clear Startup Configuration File".
- Buttons: "Reboot" (highlighted in blue), "Cancel Reboot", and "Cancel".

Step 2.在重新启动字段，当交换机将重新启动，请选择。

## Reboot

To reboot the device, click the 'Reboot' button.

Reboot:  Immediate

Date   Time   HH:MM

In  Days  Hours  Minutes

Restore to Factory Defaults

Clear Startup Configuration File

Reboot

Cancel Reboot

Cancel

选项是：

- 立即-，当**重新启动**按钮按，交换机将立即重新启动。
- 日期-请使用下拉列表指示交换机的特定日期和时间重新启动
- 使用中指示多少的下拉列表时刻在交换机前将消磨(以几天、几小时和分钟)将重新启动。

第 3 步：请检查**恢复对出厂默认设置**复选框，如果希望交换机清除所有其设置和返回到出厂默认设置，当重新启动时。您能只使用此功能交换机是否立即重新启动;当此方框选择，您的选择在**重新启动**字段将自动地换成立即。

## Reboot

To reboot the device, click the 'Reboot' button.

Reboot:  Immediate

Date   Time   HH:MM

In  Days  Hours  Minutes

Restore to Factory Defaults

Clear Startup Configuration File

Reboot

Cancel Reboot

Cancel

**注意：**您不能有**清楚启动配置文件**和**恢复到**同时选择的**出厂默认设置**复选框。

第 4 步：当交换机重新启动时，请检查**file**复选框**清楚的启动配置**清除启动配置文件。您能只使用此功能交换机是否立即重新启动;当此方框选择，您的选择在**重新启动**字段将自动地换成立即。

## Reboot

To reboot the device, click the 'Reboot' button.

Reboot:  Immediate

Date   Time   HH:MM

In  Days  Hours  Minutes

Restore to Factory Defaults

Clear Startup Configuration File

Reboot

Cancel Reboot

Cancel

注意：您不能有清楚启动配置文件和恢复到同时选择的出厂默认设置复选框。

步骤5. 点击重新启动。如果要清除在此页做的设置，请点击取消。

## Reboot

To reboot the device, click the 'Reboot' button.

Reboot:  Immediate

Date   Time   HH:MM

In  Days  Hours  Minutes

Restore to Factory Defaults

Clear Startup Configuration File

Reboot

Cancel Reboot

Cancel

注意：如果不重置交换机对出厂默认设置，请确保您的配置保存到Administration > File Management > 文件操作页的启动配置文件。欲知更多信息，请参考[在SG550XG和SG350XG的条款文件管理](#)。

步骤6. 弹出窗口将出现确认您的设置。单击 Ok。



This command will reboot the device and disconnect your current session. Unsaved changes in the configuration will be lost. Do you want to continue?

OK

Cancel

第 7 步：如果选择日期或从重新启动字段，取消重新启动按钮将变得可用。点击此按钮取消定期重启。

## Reboot



Success.

To reboot the device, click the 'Reboot' button.

Reboot:  Immediate

Date Jul ▼ 23 ▼ Time 19 ▼ 36 ▼ HH:MM

In 00 ▼ Days 00 ▼ Hours 05 ▼ Minutes

Restore to Factory Defaults

Clear Startup Configuration File

Reboot

Cancel Reboot

Cancel

其他链路您也许查找贵重物品：

- [350X系列交换机产品网页](#)
- [550X系列交换机产品网页](#)