

配置和驗證工作組網橋(WGB)配置

目錄

[簡介](#)

[必要條件](#)

[採用元件](#)

[設定](#)

[網路圖表](#)

[組態](#)

[驗證](#)

[疑難排解](#)

簡介

本檔案介紹在思科存取點(AP)上設定工作組橋接器(WGB)和驗證組態的程式。

必要條件

採用元件

本文中的資訊是根據特定實驗室環境內的裝置所建立。文中使用到的所有裝置皆從已清除 (預設) 的組態來啟動。如果您的網路運作中，請確保您瞭解任何指令可能造成的影響。

設定

網路圖表

組態

步驟1.在WLC上配置用於WGB的WLAN。

在WLC上，導覽至Configuration > Tags & Profiles > WLANs > click + Add，如下圖所示。

請為您的WLAN指定一個名稱，並確保它已啟用。

導航到Security頁籤，為建立的WGB SSID選擇所需的安全設定。為了本文檔的目的，建立了一個開放的SSID。不過，還可以建立其他安全選項。



警告：請確保WLC上的SSID和WGB AP SSID配置檔案之間的安全設定匹配（此配置檔案

稍後在WGB AP上的文檔中配置)。

Add WLAN ✕

General **Security** Advanced

Layer2 Layer3 AAA

WPA + WPA2 WPA2 + WPA3 WPA3 Static WEP None

MAC Filtering

OWE Transition Mode Transition Mode WLAN ID*

Lobby Admin Access

轉到Advanced頁籤，確保CCX Aironet IE已啟用。然後按一下Apply to Device。

Add WLAN

General Security **Advanced**

Coverage Hole Detection	<input checked="" type="checkbox"/>	Universal Admin	<input type="checkbox"/>
CCX Aironet IE	<input checked="" type="checkbox"/>	OKC	<input checked="" type="checkbox"/>
Advertise AP Name	<input type="checkbox"/>	Load Balance	<input type="checkbox"/>
P2P Blocking Action	Disabled	Band Select	<input type="checkbox"/>
Multicast Buffer	DISABLED	IP Source Guard	<input type="checkbox"/>
Media Stream Multicast-direct	<input type="checkbox"/>	WMM Policy	Allowed
11ac MU-MIMO	<input checked="" type="checkbox"/>	mDNS Mode	Bridging
Wi-Fi to Cellular Steering	<input type="checkbox"/>	Off Channel Scanning Defer	
Wi-Fi Alliance Agile Multiband	DISABLED	Defer Priority	<input type="checkbox"/> 0 <input type="checkbox"/> 1 <input type="checkbox"/> 2
Fastlane+ (ASR)	<input checked="" type="checkbox"/>		<input type="checkbox"/> 3 <input type="checkbox"/> 4 <input checked="" type="checkbox"/> 5
Deny LAA (RCM) clients	<input type="checkbox"/>		<input checked="" type="checkbox"/> 6 <input type="checkbox"/> 7
6 GHz Client Steering	<input type="checkbox"/>	Scan Defer Time	100
Latency Measurements Announcements	<input type="checkbox"/>	Assisted Roaming (11k)	

Cancel Apply to Device

建立WLAN配置檔案後，為該WLAN建立策略配置檔案。為此，請導航至Configuration > Tags & Profiles > Policy > click + Add。

Cisco Catalyst 9800-L Wireless Controller | Welcome admin

Configuration > Tags & Profiles > Policy

+ Add | Delete | Clone

Selected Rows: 0

Admin Status	Associated Policy Tags	Policy Profile Name	Description
<input checked="" type="checkbox"/>		default-policy-profile	default policy profile

10 items per page | 1 - 1 of 1 Items

在General頁籤中輸入策略配置檔案的名稱，並確保啟用策略配置檔案。

⚠ Disabling a Policy or configuring it in 'Enabled' state, will result in loss of connectivity for clients associated with this Policy profile.

General Access Policies QOS and AVC Mobility Advanced

Name*

WGB_profile

Description

Enter Description

Status

ENABLED

Passive Client

DISABLED

IP MAC Binding

ENABLED

Encrypted Traffic Analytics

DISABLED

CTS Policy

Inline Tagging

SGACL Enforcement

Default SGT

2-65519

WLAN Switching Policy

Central Switching

ENABLED

Central Authentication

ENABLED

Central DHCP

ENABLED

Flex NAT/PAT

DISABLED

↶ Cancel

📄 Apply to Device

導航到Access Policies頁籤，將VLAN分配給您的策略配置檔案。

⚠ Disabling a Policy or configuring it in 'Enabled' state, will result in loss of connectivity for clients associated with this Policy profile.

General

Access Policies

QOS and AVC

Mobility

Advanced

RADIUS Profiling

HTTP TLV Caching

DHCP TLV Caching

WLAN Local Profiling

Global State of Device
Classification

Disabled ⓘ

Local Subscriber Policy
Name

Search or Select ▼ ⓘ

VLAN

VLAN/VLAN Group

BACKBONE-V... ✕ ▼ ⓘ

Multicast VLAN

Enter Multicast VLAN

WLAN ACL

IPv4 ACL

Search or Select ▼ ⓘ

IPv6 ACL

Search or Select ▼ ⓘ

URL Filters ⓘ

Pre Auth

Search or Select ▼ ⓘ

Post Auth

Search or Select ▼ ⓘ

Note : Selecting a VLAN Group is a valid config only for Central Switching SSIDs. Do not use with SSIDs enabled for Flex Local Switching

↶ Cancel

📄 Apply to Device

導覽至Advanced索引標籤，向下滾動至WGB Parameters區段，然後選擇Broadcast Tagging和WGB VLAN選項。然後按一下Apply to Device。

Add Policy Profile ✕

DHCP Server VRF ✕ ↗ DNS Layer Security Parameter Map ✕ ▼

[Show more >>>](#) Flex DHCP Option for DNS **ENABLED**

AAA Policy Flex DNS Traffic Redirect **IGNORE**

Allow AAA Override

NAC State

Policy Name ✕ ↗

Accounting List ▼ ↗

Interim Accounting **ENABLED**

WGB Parameters

Broadcast Tagging

WGB VLAN

Policy Proxy Settings

ARP Proxy **DISABLED**

IPv6 Proxy ▼

WLAN Flex Policy

VLAN Central Switching

Split MAC ACL ▼ ↗

Air Time Fairness Policies

2.4 GHz Policy ▼ ↗

5 GHz Policy ▼ ↗

EoGRE Tunnel Profiles

Tunnel Profile ▼ ↗

然後，將策略配置檔案對映到WLAN配置檔案。導航到Configuration > Tags & Profiles > Tags > Click + Add。

Cisco Catalyst 9800-L Wireless Controller Welcome admin Search APs and Clients Feedback

Configuration > Tags & Profiles > Tags

Policy Site RF AP

Selected Rows : 0

Policy Tag Name	Description
<input type="checkbox"/> default-policy-tag	default policy-tag

10 items per page 1 - 1 of 1 Items

輸入策略標籤的名稱。然後按一下+ Add。

Add Policy Tag ×

Name*

Description

▼ WLAN-POLICY Maps : 0

+ Add × Delete

<input type="checkbox"/>	WLAN Profile	Policy Profile
No records available.		
◀ ▶ 10 items per page 0 - 0 of 0 items		

> RLAN-POLICY Maps : 0

↶ Cancel Apply to Device

向下滾動至Map WLAN and Policy部分，然後選擇先前建立的WLAN策略配置檔案。然後按一下✓。

Add Policy Tag ×

+ Add × Delete

<input type="checkbox"/>	WLAN Profile	Policy Profile
No records available.		
◀ ▶ 10 items per page 0 - 0 of 0 items		

Map WLAN and Policy

WLAN Profile* × ↗

Policy Profile* × ↗

× ✓

> RLAN-POLICY Maps : 0

↶ Cancel Apply to Device

確認對映已新增到表中後，按一下Apply to Device。

Add Policy Tag ×

▼ WLAN-POLICY Maps : 1

+ Add × Delete

<input type="checkbox"/>	WLAN Profile	▼	Policy Profile	▼
<input type="checkbox"/>	WGB		WGB_policy	

◀ ◁ 1 ▷ ▶ 10 items per page 1 - 1 of 1 Items

Map WLAN and Policy

WLAN Profile* ▼ 🔗 Policy Profile* ▼ 🔗

× ✓

↶ Cancel 📄 Apply to Device

步驟2.在WGB模式下配置AP。

將AP從CAPWAP轉換為WGB型別。

```
WGB_AP#ap-type workgroup-bridge
```

配置WGB AP的IP地址。

對於DHCP IP地址：

```
WGB_AP#configure ap address ipv4 dhcp
```

對於靜態IP地址：

```
WGB_AP#configure ap address ipv4 static
```

在WGB AP上配置SSID配置檔案。

```
WGB_AP#configure ssid-profile
```

```
ssid
```

```
authentication
```

將SSID配置檔案連線到無線電介面。

```
WGB_AP#configure dot11Radio
```

```
mode wgb ssid-profile
```


在WGB AP上啟用已配置的無線電。

```
WGB_AP#configure dot11Radio 1 enable
```

之後，WGB AP連線到根AP。可以從WLC驗證組態是否成功。

在WLC上，WGB AP被視為已連線的無線客戶端。在同一表中，還會顯示通過WGB AP連線的有線客戶端。

範例：

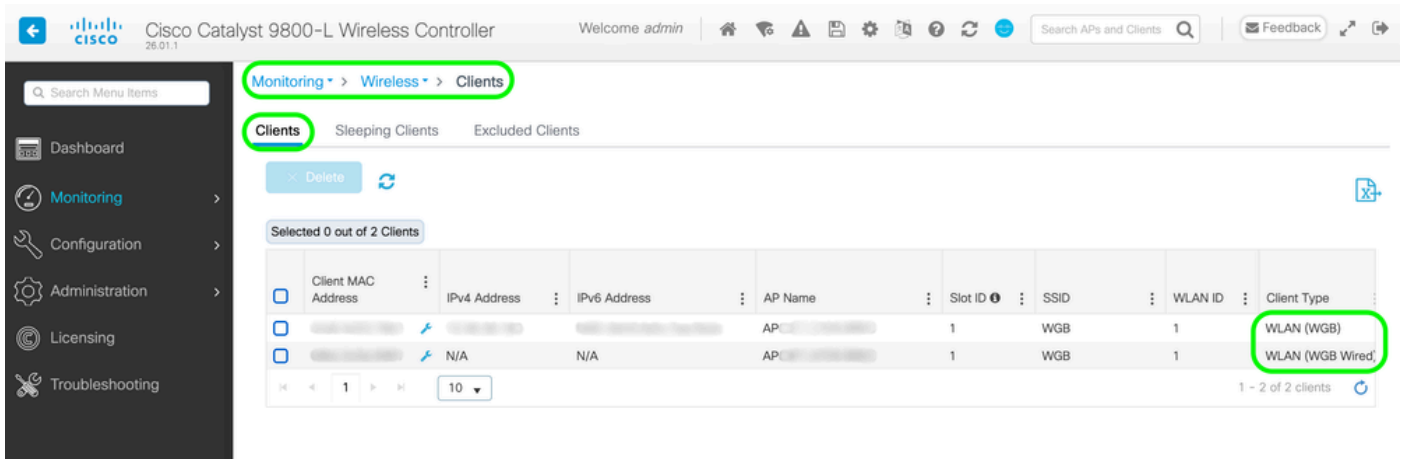

提示：繼續在WGB AP上進行配置之前，請確保AP上配置了國家/地區代碼（可以使用命令「show controllers dot11Radio」進行驗證），例如：

```
WGB_AP#show controllers dot11Radio 1
wifi1 Link encap:Ethernet HWaddr XX:XX:XX:XX:XX:XX
BROADCAST MULTICAST MTU:1500 Metric:1
RX packets:0 errors:0 dropped:0 overruns:0 frame:0
TX packets:0 errors:0 dropped:0 overruns:0 carrier:0
collisions:0 txqueuelen:2699
RX bytes:0 (0.0 B) TX bytes:0 (0.0 B)
```

Radio Info Summary:

```
=====
Radio: 5.0GHz
Carrier Set: (-E) Belgium ( BE)
```



提示：如果未配置國家/地區代碼，請將AP轉換為CAPWAP模式，將其加入WLC並確保已配置國家/地區代碼。之後，將AP轉換為WGB模式並繼續配置。

驗證

您可以使用這些命令驗證當前配置。

在WGB AP上：

```
#show wgb ssid
```

成功的配置輸出示例：

```
Configured SSIDs details:
SSID-Profile          SSID          Authentication          DTIM
=====
WGB_ssid_profile     "WGB"        OPEN                    1
```

#show wgb dot11關聯

成功的配置輸出示例：

```
Uplink Radio ID : 1
Uplink Radio MAC : XX:XX:XX:XX:XX:XX
SSID Name : WGB
Connected Duration : 0 hours, 2 minutes, 14 seconds
Parent AP Name : APXXXX.XXXX.XXXX
Parent AP MAC : XX:XX:XX:XX:XX:XX
Uplink State : CONNECTED
Auth Type : OPEN
Dot11 type : 11ax
Channel : 112
Bandwidth : 40 MHz
Current Datarate (Tx/Rx) : 309/195 Mbps
Max Datarate : 1147 Mbps
RSSI : 65
IP : XX.XX.XX.XXX/24
Default Gateway : XX.XX.XX.XXX
IPV6 : ::/128
Assoc timeout : 5000 Msec
Auth timeout : 5000 Msec
Dhcp timeout : 60 Sec
Country-code : BE
```

#show wgb event all

疑難排解

收集調試

在WGB AP上：

應用配置後，如果WGB AP未連線到根AP，請啟用調試以獲取有關故障原因的更多詳細資訊：

#debug wgb上行鏈路全部

成功連線輸出的示例：

```
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.0356] DOT11_UPLINK_EV: Scan Started ON SLOT 1
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.0357] DOT11_UPLINK_EV: Uplink state changed [DOT11
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.0358] DOT11_UPLINK_EV: Set BH root port(hop 00:00:
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.0358] DOT11_UPLINK_SCAN: Uplink Scan Started in Do
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.0362] DOT11_UPLINK_SCAN: Enable passive scan on ch
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.0632] Radio configuration has been saved successf
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.0633]
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.1492] DOT11_UPLINK_SCAN: Enable passive scan on ch
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.2895] DOT11_UPLINK_SCAN: Enable passive scan on ch
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.4298] DOT11_UPLINK_SCAN: Enable passive scan on ch
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.4933] DOT11_UPLINK_SCAN:[*06/19/2026 13:17:00.6489
[*06/19/2026 13:17:00.6494] DOT11_UPLINK_EV: parent_rssi: -65, configured low rssi: -70
Rcvd Beacon from XX:XX:XX:XX:XX:XX channel 112 Time 36143
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.4934] DOT11_UPLINK_SCAN: Received Beacon and going
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.4934] DOT11_UPLINK_SCAN: Sending probe request on
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.4934] WGB Classifier: Dot11UplinkClassifier: Downs
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.4935] WGB Classifier: Dot11UplinkClassifier: Tx se
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.4952] DOT11_UPLINK_SCAN: Rcvd Probe Response from
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.4952] DOT11_UPLINK_SCAN: WGB_SCAN_STATUS: Received
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.5266] DOT11_UPLINK_SCAN: Enable passive scan on ch
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.6657] DOT11_UPLINK_SCAN: Enable passive scan on ch
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.8046] DOT11_UPLINK_SCAN: Enable passive scan on ch
Jun 19 12:57:39 WGB_AP kernel: [*06/19/2026 12:57:39.9436] DOT11_UPLINK_SCAN: Enable passive scan on ch
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.0827] DOT11_UPLINK_SCAN: Enable passive scan on ch
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.2218] DOT11_UPLINK_SCAN: Enable passive scan on ch
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.3609] DOT11_UPLINK_SCAN: Enable passive scan on ch
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.4983] DOT11_UPLINK_SCAN: End of channel list
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.4984] DOT11_UPLINK_SCAN: An AP responded, try to a
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.4984] DOT11_UPLINK_SCAN: Uplink Scan stopped in Do
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.4984] DOT11_UPLINK_SCAN: Choosing best AP
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.4985] DOT11_UPLINK_SCAN: Selected best AP : XX:XX
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.4985] DOT11_UPLINK_SCAN: Best AP : XX:XX:XX:XX:XX:
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.4985] DOT11_UPLINK_SCAN: HD IE not present!
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.4986] DOT11_UPLINK_SCAN: WME capable 1
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.4986] DOT11_UPLINK_SCAN: Scan done.Starting Authen
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.4987] DOT11_UPLINK_EV: Uplink state changed [DOT11
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.4988] DOT11_UPLINK_EV: Set BH root port(hop 00:00:
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.4995] DOT11_UPLINK_EV: existing channel 140, target
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.5001] DOT11_UPLINK_EV: existing channel 140, target
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.5168] DOT11_UPLINK_CONFIG: get tx_pow_lvl 1 by txp
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.5433] DOT11_UPLINK_EV: Channel event on slot 1 cha
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.5541] DOT11_UPLINK_EV: Channel event on slot 1 cha
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.5655] DOT11_UPLINK_EV: Handling auth delay for cha
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.5718] DOT11_UPLINK_CONFIG: get tx_pow_lvl 1 by txp
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.5719] DOT11_UPLINK_EV: Starting Connection (uplink
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.5719] WGB_UPLINK_SEC: New roamed parent : XX:XX:XX
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.5719] WGB_UPLINK_SEC: WPAS process does not exist
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.5719] DOT11_UPLINK_EV: Uplink state changed [DOT11
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.5721] WGB Classifier: Dot11UplinkClassifier: Downs
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.5721] WGB Classifier: Dot11UplinkClassifier: Tx se
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.5723] DOT11_UPLINK_EV: Auth request sent!
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.5753] DOT11_UPLINK_EV: Channel event on slot 1 cha
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.5753] DOT11_UPLINK_EV: Channel 112 set response fr
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.5764] DOT11_UPLINK_EV: Channel event on slot 1 cha
```

Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.5765] DOT11_UPLINK_EV: Channel 112 set response fr
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6035] WGB Classifier: Dot11UplinkClassifier: Rx se
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6036] DOT11_UPLINK_EV: Auth Response (uplink)addr1
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6036] DOT11_UPLINK_EV: Uplink state changed [DOT11
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6038] DOT11_UPLINK_EV: Assoc. Req. addr1[XX:XX:XX:
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6038] DOT11_UPLINK_EV: set_ht_cap_ie_fields: Addin
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6038] DOT11_UPLINK_EV: set_vht_cap_ie_fields: Addi
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6038] DOT11_UPLINK_EV: VhtCapInfo=865069494
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6039] DOT11_UPLINK_EV: set_he_cap_ie_fields: Addin
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6039] DOT11_UPLINK_EV: set_he_cap_ie_fields: Setti
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6039] DOT11_UPLINK_EV: Added system name : in asso
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6039] DOT11_UPLINK_EV: Added static IP address : X
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6040] WGB Classifier: Dot11UplinkClassifier: Downs
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6040] WGB Classifier: Dot11UplinkClassifier: Tx se
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6041] DOT11_UPLINK_EV: Sent Assoc. Req. (uplink)ad
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6100] WGB Classifier: Dot11UplinkClassifier: Rx se
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6101] DOT11_UPLINK_EV: Assoc Response (uplink)addr
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6102] DOT11_UPLINK_EV: Uplink state changed [DOT11
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6108] DOT11_UPLINK_EV: Set BH root port(hop XX:XX:
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6118] wlan: [10239:I:ANY] ieee80211_ucfg_setparam_
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6124] DOT11_UPLINK_EV: Set BH root port(hop XX:XX:
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6130] DOT11_UPLINK_EV: Static IP address configure
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6131] DOT11_UPLINK_EV: Uplink state changed [DOT11
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6241] route: SIOCADDRT: File exists
Jun 19 12:57:40 WGB_AP odhcp6c[186731]: in timer_init.
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6761] odhcp6c[186731]: in timer_init.
Jun 19 12:57:40 WGB_AP odhcp6c[186735]: (re)starting transaction on srcr2
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6782] DOT11_UPLINK_EV: Odhcp6c process started
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6784] DOT11-UPLINK_ESTABLISHED: Interface Dot11Rad
Jun 19 12:57:40 WGB_AP kernel: [*06/19/2026 12:57:40.6786] DOT11_UPLINK_EV: Peer assoc event received f
Jun 19 12:57:41 WGB_AP odhcp6c[186735]: Starting SOLICIT transaction (timeout 4294967295s, max rc 0)
Jun 19 12:57:41 WGB_AP odhcp6c[186735]: odhcp6c_update_entry state = 16, valid = 1800, preferred = 1800
Jun 19 12:57:41 WGB_AP odhcp6c[186735]: odhcp6c_update_entry state = 16, valid = 2592000, preferred = 6
Jun 19 12:57:41 WGB_AP odhcp6c[186735]: odhcp6c_update_entry state = 17, valid = 2592000, preferred = 6
Jun 19 12:57:43 WGB_AP kernel: [*06/19/2026 12:57:43.6386] ip6_port srcr2, ip6local XXXX:XXXX:XXXX:XXX
Jun 19 12:58:00 WGB_AP kernel: [*06/19/2026 12:58:00.6134] DOT11_UPLINK_EV: Calling RSSI get for XX:XX:
Jun 19 12:58:00 WGB_AP kernel: [*06/19/2026 12:58:00.6138] DOT11_UPLINK_EV: parent_rssi: -63, configure
Jun 19 12:58:20 WGB_AP kernel: [*06/19/2026 12:58:20.6140] DOT11_UPLINK_EV: Calling RSSI get for XX:XX:
Jun 19 12:58:20 WGB_AP kernel: [*06/19/2026 12:58:20.6145] DOT11_UPLINK_EV: parent_rssi: -63, configure
Jun 19 12:58:40 WGB_AP kernel: [*06/19/2026 12:58:40.6147] DOT11_UPLINK_EV: Calling RSSI get for XX:XX:
Jun 19 12:58:40 WGB_AP kernel: [*06/19/2026 12:58:40.6152] DOT11_UPLINK_EV: parent_rssi: -64, configure
Jun 19 12:59:00 WGB_AP kernel: [*06/19/2026 12:59:00.6154] DOT11_UPLINK_EV: Calling RSSI get for XX:XX:
Jun 19 12:59:00 WGB_AP kernel: [*06/19/2026 12:59:00.6158] DOT11_UPLINK_EV: parent_rssi: -64, configure
Jun 19 12:59:20 WGB_AP kernel: [*06/19/2026 12:59:20.6161] DOT11_UPLINK_EV: Calling RSSI get for XX:XX:

關於此翻譯

思科已使用電腦和人工技術翻譯本文件，讓全世界的使用者能夠以自己的語言理解支援內容。請注意，即使是最佳機器翻譯，也不如專業譯者翻譯的內容準確。Cisco Systems, Inc. 對這些翻譯的準確度概不負責，並建議一律查看原始英文文件（提供連結）。