

# 配置IPSec路由器到路由器的全網狀

## 目錄

[簡介](#)

[必要條件](#)

[需求](#)

[採用元件](#)

[慣例](#)

[設定](#)

[網路圖表](#)

[組態](#)

[驗證](#)

[疑難排解](#)

[疑難排解指令](#)

[相關資訊](#)

## 簡介

此組態範例顯示三台路由器之間通過使用一個到兩個對等點後每個網路的加密對應來進行的全網狀加密。

加密的來源為：

- 160.160.160.x網路到170.170.170.x網路
- 160.160.160.x網路到180.180.180.x網路
- 170.170.170.x網路到180.180.180.x網路

## 必要條件

### 需求

本文件沒有特定需求。

### 採用元件

本文中的資訊係根據以下軟體和硬體版本：

- Cisco IOS®軟體版本12.2.7C和12.2.8(T)4
- Cisco 2500和3600路由器

本文中的資訊是根據特定實驗室環境內的裝置所建立。文中使用到的所有裝置皆從已清除（預設）的組態來啟動。如果您的網路正在作用，請確保您已瞭解任何指令可能造成的影響。

## 慣例

如需文件慣例的詳細資訊，請參閱[思科技術提示慣例](#)。


## 設定

本節提供用於設定本文件中所述功能的資訊。

**注意：**要查詢有關本文檔中使用的命令的其他資訊，請使用[命令查詢工具](#)([僅限註冊客戶](#))。

## 網路圖表

本檔案會使用下圖中所示的網路設定。

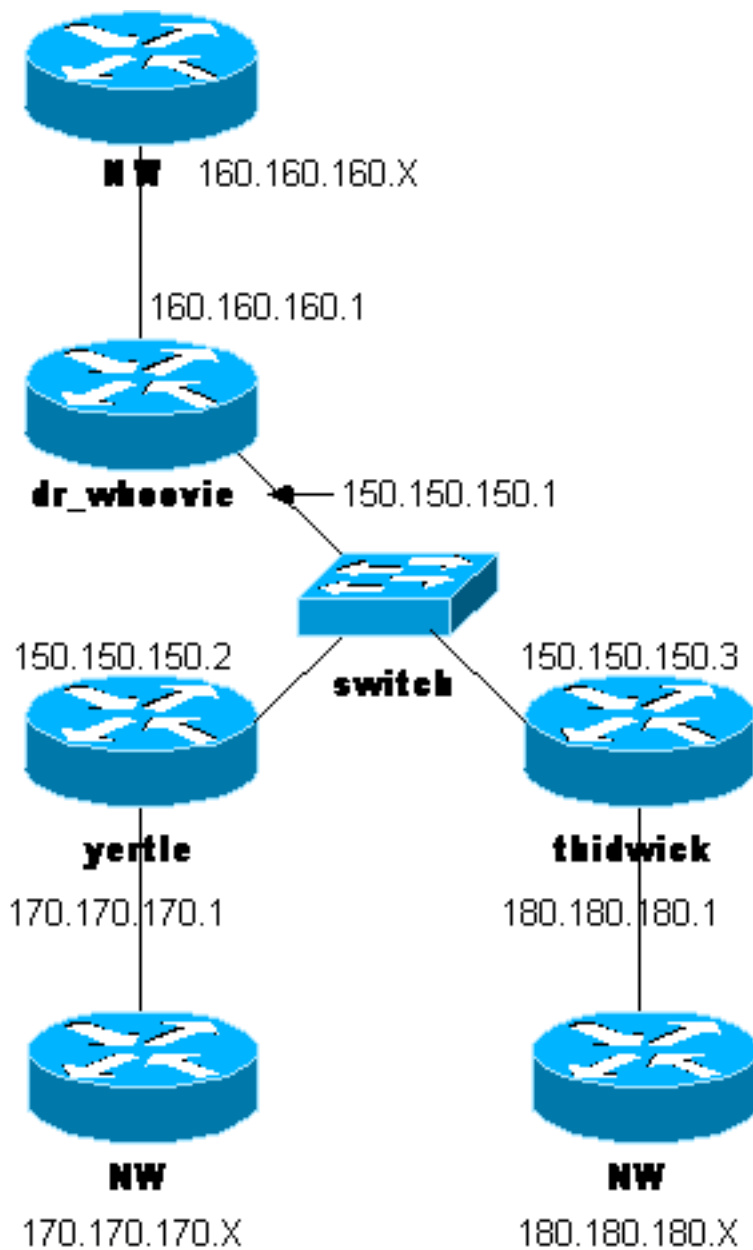

## 組態

本檔案會使用這些設定。

- [Dr\\_Whovie配置](#)
- [Yertle配置](#)
- [Thidwick配置](#)

注意：這些配置最近使用文檔中的當前代碼（2003年11月）進行了測試。

## Dr\_Whovie配置

```

Current configuration:
!
version 12.2
service timestamps debug uptime
service timestamps log uptime
no service password-encryption
!
hostname dr_whoovie
!
enable secret 5 $1$KxKv$cbqKsZtQTLJLGPn.tErFZ1
enable password ww
!
ip subnet-zero
!
cns event-service server
!
!--- Internet Key Exchange (IKE) Policies: crypto isakmp
policy 1
authentication pre-share
crypto isakmp key cisco123 address 150.150.150.3
crypto isakmp key cisco123 address 150.150.150.2
!
!--- IPsec Policies: crypto ipsec transform-set 170cisco
esp-des esp-md5-hmac
crypto ipsec transform-set 180cisco esp-des esp-md5-hmac
!
crypto map ETH0 17 ipsec-isakmp
set peer 150.150.150.2
set transform-set 170cisco
!--- Include the 160.160.160.x to 170.170.170.x network
!--- in the encryption process. match address 170
crypto map ETH0 18 ipsec-isakmp
set peer 150.150.150.3
set transform-set 180cisco
!--- Include the 160.160.160.x to 180.180.180.x network
!--- in the encryption process. match address 180
!
interface Ethernet0
ip address 150.150.150.1 255.255.255.0
no ip directed-broadcast
no ip route-cache
no ip mroute-cache
no mop enabled
crypto map ETH0
!
interface Ethernet1
no ip address
no ip directed-broadcast
shutdown
!
interface Serial0
ip address 160.160.160.1 255.255.255.0
no ip directed-broadcast
no ip mroute-cache

```

```

no fair-queue
!
interface Serial1
no ip address
no ip directed-broadcast
clockrate 4000000
!
ip classless
ip route 170.170.170.0 255.255.255.0 150.150.150.2
ip route 180.180.180.0 255.255.255.0 150.150.150.3
no ip http server
!
!--- Include the 160.160.160.x to 170.170.170.x network
!--- in the encryption process. access-list 170 permit
ip 160.160.160.0 0.0.0.255 170.170.170.0 0.0.0.255
!--- Include the 160.160.160.x to 180.180.180.x network
!--- in the encryption process. access-list 180 permit
ip 160.160.160.0 0.0.0.255 180.180.180.0 0.0.0.255
dialer-list 1 protocol ip permit
dialer-list 1 protocol ipx permit
!
line con 0
transport input none
line aux 0
line vty 0 4
password ww
login
!
end

```

## Yertle配置

```

Current configuration:
!
version 12.2
service timestamps debug uptime
service timestamps log uptime
no service password-encryption
!
hostname yertle
!
enable secret 5 $1$me5Q$2kF5zKlPPTvHEBdGiEZ9m/
enable password ww
!
ip subnet-zero
!
cns event-service server
!
!--- IKE Policies: crypto isakmp policy 1
authentication pre-share
crypto isakmp key cisco123 address 150.150.150.3
crypto isakmp key cisco123 address 150.150.150.1
!
!--- IPsec Policies: crypto ipsec transform-set 160cisco
esp-des esp-md5-hmac
crypto ipsec transform-set 180cisco esp-des esp-md5-hmac
!
crypto map ETH0 16 ipsec-isakmp
set peer 150.150.150.1
set transform-set 160cisco
!--- Include the 170.170.170.x to 160.160.160.x network
!--- in the encryption process. match address 160
crypto map ETH0 18 ipsec-isakmp

```

```

set peer 150.150.150.3
set transform-set 180cisco
!--- Include the 170.170.170.x to 180.180.180.x network
!--- in the encryption process. match address 180
!
interface Ethernet0
ip address 150.150.150.2 255.255.255.0
no ip directed-broadcast
no ip route-cache
no ip mroute-cache
no mop enabled
crypto map ETH0
!
interface Serial0
no ip address
no ip directed-broadcast
no ip mroute-cache
shutdown
no fair-queue
!
interface Serial1
ip address 170.170.170.1 255.255.255.0
no ip directed-broadcast
!
ip classless
ip route 160.160.160.0 255.255.255.0 150.150.150.1
ip route 180.180.180.0 255.255.255.0 150.150.150.3
no ip http server
!
!--- Include the 170.170.170.x to 160.160.160.x network
!--- in the encryption process. access-list 160 permit
ip 170.170.170.0 0.0.0.255 160.160.160.0 0.0.0.255
!--- Include the 170.170.170.x to 180.180.180.x network
!--- in the encryption process. access-list 180 permit
ip 170.170.170.0 0.0.0.255 180.180.180.0 0.0.0.255
dialer-list 1 protocol ip permit
dialer-list 1 protocol ipx permit
!
line con 0
transport input none
line aux 0
line vty 0 4
password ww
login
!
end

```

## Thidwick配置

```

Current configuration:
!
version 12.2
service timestamps debug uptime
service timestamps log uptime
no service password-encryption
!
hostname thidwick
!
enable secret 5 $1$Pcpo$fj4FNS1dEDY9lGg3Ne6FK1
enable password ww
!
ip subnet-zero
!

```

```
isdn switch-type basic-5ess
isdn voice-call-failure 0
cns event-service server
!
!--- IKE Policies: crypto isakmp policy 1
authentication pre-share
crypto isakmp key cisco123 address 150.150.150.1
crypto isakmp key cisco123 address 150.150.150.2
!
!--- IPsec Policies: crypto ipsec transform-set 160cisco
esp-des esp-md5-hmac
crypto ipsec transform-set 170cisco esp-des esp-md5-hmac
!
crypto map ETH0 16 ipsec-isakmp
set peer 150.150.150.1
set transform-set 160cisco
!--- Include the 180.180.180.x to 160.160.160.x network
!--- in the encryption process. match address 160
crypto map ETH0 17 ipsec-isakmp
set peer 150.150.150.2
set transform-set 170cisco
!--- Include the 180.180.180.x to 170.170.170.x network
!--- in the encryption process. match address 170
!
interface Ethernet0
ip address 150.150.150.3 255.255.255.0
no ip directed-broadcast
no ip route-cache
no ip mroute-cache
no mop enabled
crypto map ETH0
!
interface Serial0
no ip address
no ip directed-broadcast
no ip mroute-cache
no fair-queue
clockrate 4000000
!
interface Serial1
ip address 180.180.180.1 255.255.255.0
no ip directed-broadcast
clockrate 4000000
!
interface BRI0
no ip address
no ip directed-broadcast
shutdown
isdn switch-type basic-5ess
!
ip classless
ip route 160.160.160.0 255.255.255.0 150.150.150.1
ip route 170.170.170.0 255.255.255.0 150.150.150.2
no ip http server
!
!--- Include the 180.180.180.x to 160.160.160.x network
!--- in the encryption process. access-list 160 permit
ip 180.180.180.0 0.0.0.255 160.160.160.0 0.0.0.255
!--- Include the 180.180.180.x to 170.170.170.x network
!--- in the encryption process. access-list 170 permit
ip 180.180.180.0 0.0.0.255 170.170.170.0 0.0.0.255
dialer-list 1 protocol ip permit
dialer-list 1 protocol ipx permit
!
```

```
line con 0
transport input none
line aux 0
line vty 0 4
password ww
login
!
end
```

## 驗證

本節提供的資訊可用於確認您的組態是否正常運作。

[輸出直譯器工具](#)(僅供[註冊](#)客戶使用)支援某些show命令，此工具可讓您檢視[show](#)命令輸出的分析。

- [show crypto ipsec sa](#) — 顯示當前[IPSec]安全關聯使用的設定。
- [show crypto isakmp sa](#) — 顯示對等體上的所有當前IKE安全關聯。

## 疑難排解

本節提供的資訊可用於對組態進行疑難排解。

### 疑難排解指令

**注意：**發出debug命令之前，請參閱[有關Debug命令的重要資訊](#)。

- [debug crypto ipsec](#) — 顯示第2階段的IPSec協商。
- [debug crypto isakmp](#) — 顯示第1階段的網際網路安全關聯和金鑰管理協定(ISAKMP)協商。
- [debug crypto engine](#) — 顯示加密的流量。
- [clear crypto isakmp](#) — 清除與第1階段相關的安全關聯。
- [clear crypto sa](#) — 清除與第2階段相關的安全關聯。

## 相關資訊

- [IPSec支援頁面](#)
- [配置IPSec網路安全](#)
- [配置Internet金鑰交換安全協定](#)
- [技術支援 - Cisco Systems](#)