

Table of Contents

<u>How OSPF Injects a Default Route into a Not So Stubby Area</u>	1
<u>Document ID: 47870</u>	1
<u>Introduction</u>	1
<u>Prerequisites</u>	1
<u>Requirements</u>	1
<u>Components Used</u>	1
<u>Conventions</u>	1
<u>Configure</u>	1
<u>Network Diagram</u>	2
<u>Configurations</u>	2
<u>Verify</u>	3
<u>Examine the OSPF Database in a Not So Stubby Area</u>	3
<u>Troubleshoot</u>	4
<u>Related Information</u>	4

How OSPF Injects a Default Route into a Not So Stubby Area

Document ID: 47870

Introduction

Prerequisites

- Requirements

- Components Used

- Conventions

Configure

- Network Diagram

- Configurations

Verify

- Examine the OSPF Database in a Not So Stubby Area

Troubleshoot

Related Information

Introduction

This document shows how Open Shortest Path First (OSPF) injects a default route into a not so stubby area (NSSA). The area border router (ABR) for the NSSA does not, by default, originate a default route into the NSSA. You must use the **area <x> nssa default-information originate** command.

Prerequisites

Requirements

There are no specific requirements for this document.

Components Used

This document is not restricted to specific software and hardware versions.

Conventions

For more information on document conventions, see the Cisco Technical Tips Conventions.


Configure

In this section, you are presented with the information to configure the features described in this document.

Note: To find additional information on the commands used in this document, use the Command Lookup Tool (registered customers only) .

Network Diagram

This document uses the network setup shown in this diagram.

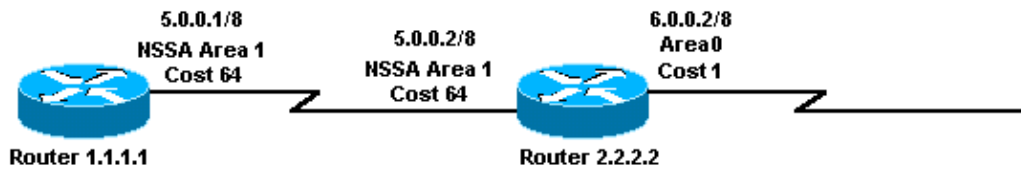

Configurations

This document uses the configurations shown here.

- Router 1.1.1.1
- Router 2.2.2.2

```
Router 1.1.1.1
Current configuration:
hostname r1.1.1.1
interface Loopback0
 ip address 1.1.1.1 255.0.0.0
interface Serial2/1/0
 ip address 5.0.0.1 255.0.0.0
router ospf 2
 network 5.0.0.0 0.255.255.255 area 1
 area 1 nssa
end
```

```
Router 2.2.2.2
Current configuration:
hostname r2.2.2.2
interface Loopback0
 ip address 2.2.2.2 255.0.0.0
interface Serial0/1/0
 ip address 5.0.0.2 255.0.0.0
interface ATM1/0.20
 ip address 6.0.0.2 255.0.0.0
router ospf 2
 network 5.0.0.0 0.255.255.255 area 1
 network 6.0.0.0 0.255.255.255 area 0
 area 1 nssa default-information originate
end
```

Verify

This section provides information you can use to confirm your configuration is working properly.

Certain **show** commands are supported by the Output Interpreter Tool (registered customers only) , which allows you to view an analysis of **show** command output.

- **show ip ospf database** Displays a list of the Link State Advertisements (LSAs) and types them into a link state database. This list shows only the information in the LSA header.
- **show ip ospf database nssa-external** Displays information only about the NSSA external LSAs.
- **show ip route** Displays the current status of the routing table.

Examine the OSPF Database in a Not So Stubby Area

To see how the OSPF Database looks, use the **show ip ospf database** command.

```
r2.2.2.2#show ip ospf database

      OSPF Router with ID (2.2.2.2) (Process ID 2)

      Router Link States (Area 0)

Link ID        ADV Router    Age      Seq#           Checksum      Link count
2.2.2.2        2.2.2.2      600     0x80000001    0x9583        1

      Summary Net Link States (Area 0)

Link ID        ADV Router    Age      Seq#           Checksum
5.0.0.0        2.2.2.2      600     0x80000001    0x8E61

      Router Link States (Area 1)

Link ID        ADV Router    Age      Seq#           Checksum      Link count
1.1.1.1        1.1.1.1      864     0x8000005E    0xD350        2
2.2.2.2        2.2.2.2      584     0x8000001E    0xF667        2

      Summary Net Link States (Area 1)

Link ID        ADV Router    Age      Seq#           Checksum
6.0.0.0        2.2.2.2      585     0x80000004    0xA87C

      Type-7 AS External Link States (Area 1)

Link ID        ADV Router    Age      Seq#           Checksum      Tag
0.0.0.0        2.2.2.2      601     0x80000001    0xD0D8        0
```

The ABR for the NSSA originates a type 7 and an LSA with a link ID of 0.0.0.0. This is a result of the **area 1 nssa default-information-originate** command in its OSPF configuration.

```
r2.2.2.2#show ip ospf database nssa-external 0.0.0.0

      OSPF Router with ID (2.2.2.2) (Process ID 2)

      Type-7 AS External Link States (Area 1)

      LS age: 650
      Options: (No TOS-capability, No Type 7/5 translation, DC)
      LS Type: AS External Link
      Link State ID: 0.0.0.0 (External Network Number )
```

```
Advertising Router: 2.2.2.2
LS Seq Number: 80000001
Checksum: 0xD0D8
Length: 36
Network Mask: /0
    Metric Type: 2 (Larger than any link state path)
    TOS: 0
    Metric: 1
    Forward Address: 0.0.0.0
    External Route Tag: 0
```

The ABR originates the 0.0.0.0 type 7 LSA, even though it does not have a default route.

```
r2.2.2.2#show ip route 0.0.0.0
% Network not in table
```

```
r1.1.1.1#show ip route ospf
O IA 6.0.0.0/8 [110/65] via 5.0.0.2, 00:00:18, Serial2/1/0
O*N2 0.0.0.0/0 [110/1] via 5.0.0.2, 00:00:18, Serial2/1/0
```

Troubleshoot

There is currently no specific troubleshooting information available for this configuration.

Related Information

- [OSPF Database Explanation Guide](#)
 - [OSPF Support Page](#)
 - [IP Routing Support Page](#)
 - [Technical Support – Cisco Systems](#)
-

All contents are Copyright © 1992–2004 Cisco Systems, Inc. All rights reserved. Important Notices and Privacy Statement.

Updated: Oct 21, 2004

Document ID: 47870
