

Restore the IOS GUI

Document ID: 48081

Introduction

Requirements

Prerequisites

Components Used

Conventions

Problem

Solution

Restoration Procedure

Related Information

Introduction

It is easier to configure Cisco Aironet products that run the Cisco IOS operating system through the use of the IOS GUI (graphical user interface.) Web based management through the HTTP interface (the IOS GUI) might sometimes become unavailable due to software corruption or a failed upgrade process. This document explains how to restore the IOS GUI without losing existing configurations.

Note: You can restore the IOS GUI by following the Reloading the Access Point Image Using the MODE Button or Reloading the Bridge Image Using the MODE Button procedures listed in the Configuration Guide; however, any existing configuration in the device are lost.

Requirements

Prerequisites

In addition to the hardware and software listed under Components Used, be sure to have the following:

- Ethernet connectivity to the affected device
- A TFTP server application running on the computer that has Ethernet connectivity to the affected device. The IOS image must be in the *root/selected* directory of the TFTP servers . TFTP server software is available from several websites on the Internet. Cisco recommends the shareware TFTP utility available at <http://tftpd32.jounin.net> .

Components Used

The information in this document is based on these software and hardware versions:

- Cisco Aironet devices running Cisco IOS
- Cisco IOS software versions 12.2(4)JA and later. The latest IOS release is available from the Wireless Software Center.


The information presented in this document was created from devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If you are working in a live network, ensure that you understand the potential impact of any command before using it.

Conventions

For more information on document conventions, refer to the Cisco Technical Tips Conventions.

Problem

When the IOS GUI is unavailable, a Web Console page might be displayed, rather than the usual IOS GUI. An example of the Web Console page follows:

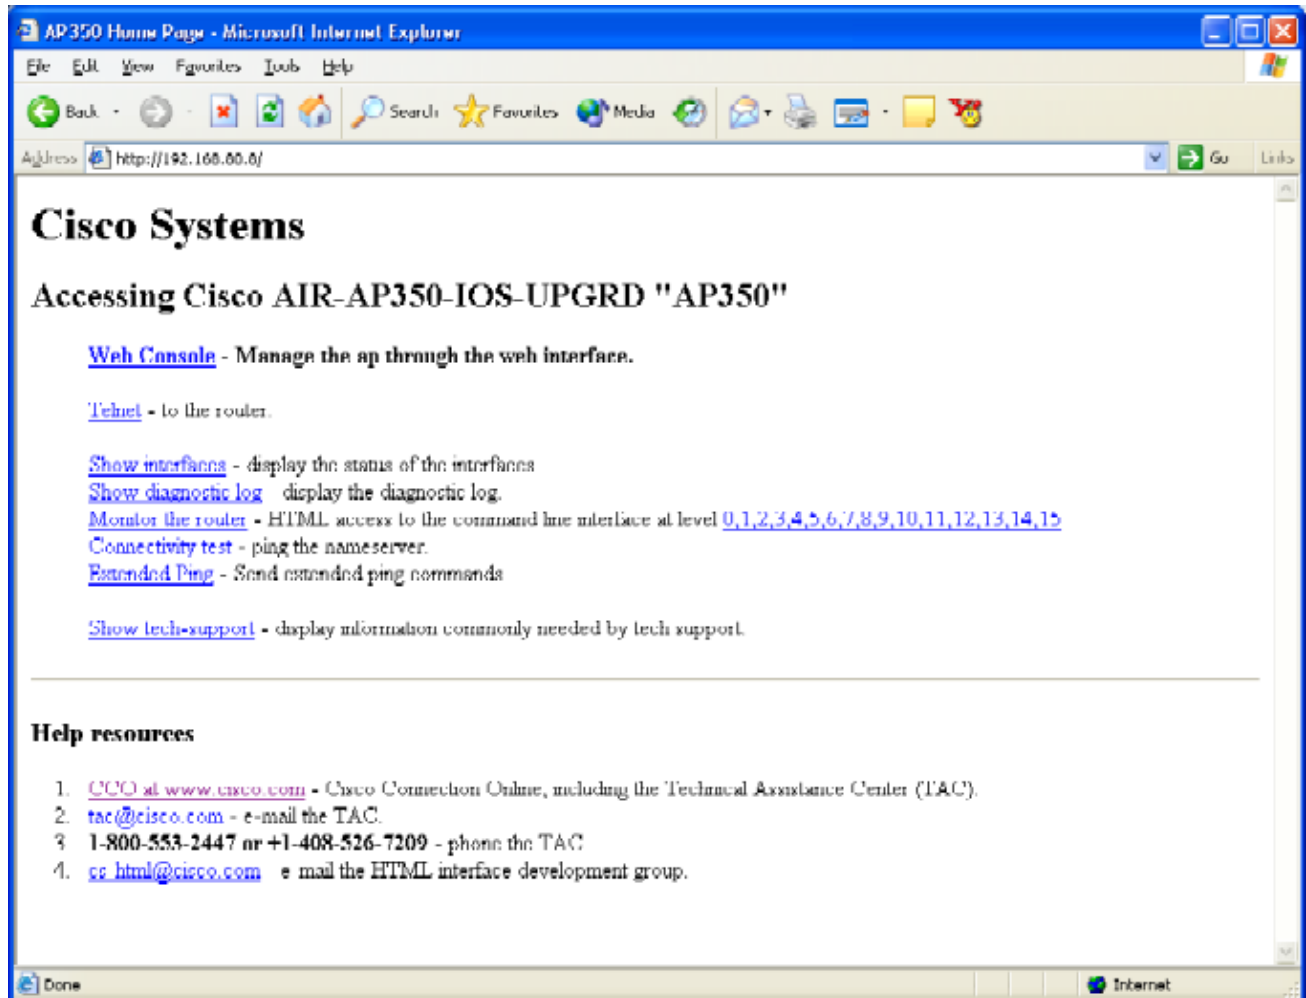

Solution

Restoration Procedure

This procedure explains how to restore the IOS GUI without effecting the configuration of the existing device.

1. Telnet into the affected device. If no username and password are set, the default username and password are both **Cisco** (case-sensitive).
2. Enter the privileged command mode by giving the command **enable**.

```
ap> enable
Password:
ap#
```

3. Use the **archive download** command in the following format to copy a fresh image of the IOS .tar file to the effected device:

archive download /overwrite /force-reload tftp://<ip address of tftp server>/<filename>

```
ap# archive download /overwrite /force-reload tftp://10.0.0.2/c1200-k9w7-tar.122-13
```

4. When the process completes, the IOS GUI is available.

Related Information

- **"Troubleshooting" Chapter of the Access Point Configuration Guide**
 - **"Troubleshooting" Chapter of the Bridge Configuration Guide**
 - **Technical Support – Cisco Systems**
-

[Contacts & Feedback](#) | [Help](#) | [Site Map](#)

© 2008 – 2009 Cisco Systems, Inc. All rights reserved. [Terms & Conditions](#) | [Privacy Statement](#) | [Cookie Policy](#) | [Trademarks of Cisco Systems, Inc.](#)

Updated: Oct 15, 2009

Document ID: 48081
