

Cisco Small Business マネージド スマート スイッチ ファームウェア 1.1 アップグレードについて

本資料は、Cisco Small Business 200 シリーズ(スマート スイッチ)および 300 シリーズ(マネージド スイッチ)のファームウェアアップグレード(1.1)について手順を示しております。なお、アップグレードを行う前に、**下記の注意事項をご確認ください。**

注意事項

- ファームウェア 1.1 は、Cisco Small Business 製品の 200 シリーズ スイッチおよび 300 シリーズ スイッチで使用できます
- Cisco Small Business 200 シリーズ スイッチ：
 - 200 シリーズ スイッチは、ファームウェア 1.1 にアップグレードすると 1.0 にダウングレードすることはできません。アップグレードする前に、ご注意ください
- Cisco Small Business 300 シリーズ スイッチ：
 - 300 シリーズ スイッチは、**2つのバージョン**のファームウェアを持つことができ、1つはアクティブ イメージ、もう1つは非アクティブ イメージとして識別されます
 - スイッチは、アクティブ イメージとして設定したイメージから起動します。起動するファームウェア バージョンを正しく選択してください
 - 詳しくは、アドミニストレーション ガイド「アクティブ イメージの選択」を参照してください

Cisco Small Business マネージドスマートスイッチ ファームウェア 1.1 アップグレード

- 手順 1 – スイッチ用ソフトウェア ダウンロード ページへ
 - www.cisco.com → Support → Downloads → “small business” と入力
 - 200 Series、300 Series が表示されますので、選択してください

The screenshot shows the Cisco Small Business Downloads page. The navigation bar includes links for Products & Services, Support, How to Buy, Training & Events, and Partners. The main content area is divided into three columns: Product Support, Downloads, and Contacts/Support Cases. The Downloads section is highlighted with a red box, and the search filter 'Small Business' is also highlighted with a red box. Green arrows point from the Product Support section to the Downloads section.

Product Support
Troubleshooting, configuration, installation, and technical documentation

Enter Product Name (e.g., 6500 switch) **Find**

Support Community Forums

Product Categories

Routers	Security
Switches	Wireless
Voice and Unified Communications	Cisco IOS and NX-OS Software

Linksys Home, Valet, Flip Video, ūmi telepresence

Small Business Support **All Products**

Downloads
VPN Client drivers, firmware, NOS, and application software

Small Business **Find**

- Cisco Small Business 200 Series Smart Switches
- Cisco Small Business 300 Series Managed Switches
- Cisco Small Business AP500 Series Wireless Access Points
- Cisco Small Business Continuous Data Protection
- Cisco Small Business ESW500 Series Switches
- Cisco Small Business FindIT Network Discovery Utility
- Cisco Small Business Gigabit SP Switches
- Cisco Small Business IP Phones
- Cisco Small Business NSS300 Series Smart Storage
- Cisco Small Business Network

Contacts/Support Cases
Open/View a TAC Support Case

Open a Case

My Support Cases
Ordering and Contract Management
RMA Return Instructions
Warranty Information

Small Business
Support Center Contacts Community

Call or Email Technical Support

Additional Entitlement Required **All Support**

Cisco Small Business マネージドスマートスイッチ ファームウェア 1.1 アップグレード

- 手順 2 – 機種を選択
 - 対象となるスイッチの機種を選択してください

Products > Switches > LAN Switches - Small Business > Cisco Small Business 300 Series Managed Switches

Make a selection to continue

Recently Used Products
My Added Devices
Add Device

Products >
Technology

Cisco Catalyst 2960 Series Switches
Cisco Catalyst Express 520 Series Switches
Cisco Catalyst Express 500 Series Switches
Cisco Small Business 300 Series Managed Switches >
Cisco Small Business 200 Series Smart Switches
Cisco Small Business ESW500 Series Switches
Cisco Small Business Smart Switches
Cisco Small Business Stackable Managed Switches

Cisco SF302-08 8-Port 10/100 Managed Switch with Gigabit Uplinks
Cisco SF302-08MP 8-Port 10/100 Max PoE Managed Switch with Gigabit Uplinks
Cisco SF302-08P 8-Port 10/100 PoE Managed Switch with Gigabit Uplinks
Cisco SF300-48 48-Port 10/100 Managed Switch with Gigabit Uplinks
Cisco SF300-48P 48-Port 10/100 PoE Managed Switch with Gigabit Uplinks
Cisco SF300-24 24-Port 10/100 Managed Switch with Gigabit Uplinks
Cisco SF300-24P 24-Port 10/100 PoE Managed Switch with Gigabit Uplinks
Cisco SF300-08 8-Port 10/100 Managed Switch
Cisco SG300-52 52-Port Gigabit Managed Switch
Cisco SG300-28 28-Port Gigabit Managed Switch
Cisco SG300-28P 28-Port Gigabit PoE Managed Switch

- Switch Firmware を選択してください

Select a Software Type

Products > Switches > LAN Switches - Small Business > Cisco Small Business 300 Series Managed Switches > Cisco SF302-08MP 8-Port 10/100 Max PoE Managed Switch with Gigabit Uplinks

Managed Switch MIB
Switch Firmware

Tools & Resources


Cisco Small Business マネージド スマート スイッチ ファームウェア 1.1 アップグレード

- 手順 3 – ダウンロード ファイルの選択
 - ファームウェアと言語ファイルを両方ダウンロードしてください

The screenshot shows the Cisco Download Software interface for the Cisco SF302-08MP 8-Port 10/100 Max PoE Managed Switch with Gigabit Uplinks. The page is titled "Download Software" and shows the "Release 1.1.0.73" section. The breadcrumb navigation is: Products > Switches > LAN Switches - Small Business > Cisco Small Business 300 Series Managed Switches > Cisco SF302-08MP 8-Port 10/100 Max PoE Managed Switch with Gigabit Uplinks > Switch Firmware-1.1.0.73. The page includes a "Find Release" search bar, a "Find" button, and a "Sort By: File Name" dropdown menu. The "Latest Releases" section shows two files: "Sx300_FW-1.1.0.73.ros" (Release Date: 22/JUN/2011, Size: 6350.23 KB) and "Sx300_LANG_ja_JP_1.1.0.73.lang" (Release Date: 04/AUG/2011, Size: 622.48 KB). Both files have "Add to cart" buttons highlighted with red boxes. A "Download Cart (2 items)" button is also highlighted with a red box. A large purple arrow points from the "Add to cart" buttons to the "Download Cart (2 items)" button. The "Download Cart" button is also highlighted with a red box. The "Download Cart (2 items)" button is also highlighted with a red box.

Cisco Small Business マネージドスマートスイッチ ファームウェア 1.1 アップグレード

- 手順 4 – ダウンロード
 - Proceed With Download をクリック

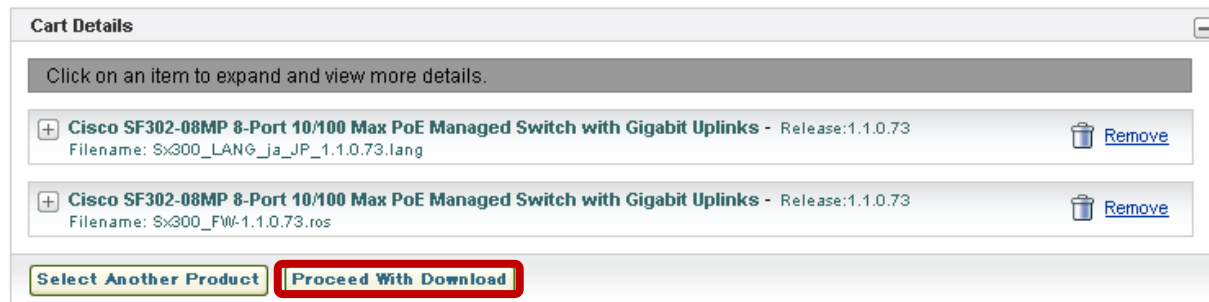

- 通常は Commercial/Civilian entity にチェック
- ハードウェア/ソフトウェア使用条件の了承をチェック

The screenshot shows the 'Download Software' page titled 'Download Cart'. It contains a 'Click Accept - Cisco Systems' form. The form has an 'Instructions' section with four steps, a 'Conditions' section with one condition, and a 'Confirmation' section. The 'Confirmation' section has a checkbox that is checked and highlighted with a red box. Below the form, there are three buttons: 'Accept' (highlighted with a red box), 'Decline', and 'Back to Download Cart'. The 'Accept' button is highlighted with a red box.

Cisco Small Business マネージド スマート スイッチ ファームウェア 1.1 アップグレード

- 手順 5 – エンドユーザ ライセンス契約
 - Agree をクリック

End User License Agreement [-]

Supporting Document(s)

[Cisco's End User Software License Agreement](#) ↗

Document

Software Download Rules - Please Read Carefully

By clicking "Agree" below, you agree to each of the following:

1. That you shall be bound by Cisco's End User Software License Agreement posted at the above URL regarding your use of any Cisco software you download from this web site;
2. That you are only entitled to download Cisco software for the Cisco hardware chassis or device or the particular application software or signature file for which you have paid the applicable software license fees;
3. That you must purchase a Cisco Operating system Software feature set upgrade license if the feature set you intend to download is not included in your initial license;
4. That you have a current and valid service contract that covers either the specific Cisco hardware chassis or device for which you are downloading software and/or the software image or subscription file update (e.g., For Intrusion Detection System) that you are downloading;
5. That Cisco reserves the right to: (a) charge you for, and you agree to pay for, software /signature file downloads to which you are not entitled, and (b) immediately suspend or terminate your access to this web site if you Download software to which you are not so entitled.

- ダウンロードが始まります

Cisco Small Business マネージド スマート スイッチ ファームウェア 1.1 アップグレード

- 手順 6 – ファームウェア アップグレード
 - アドミニストレーション ガイドにしたがってください
 - [Cisco Small Business 300 シリーズ マネージド スイッチ アドミニストレーション ガイド](#)
 - [Cisco Small Business 200 シリーズ スマート スイッチ アドミニストレーション ガイド](#)
 - ファームウェア/ 言語のアップグレード/ バックアップ
 - 「新しいファームウェアまたは言語ファイルのアップロード」参照