

仮想リンクでの OSPF 認証設定

目次

[概要](#)

[前提条件](#)

[要件](#)

[使用するコンポーネント](#)

[表記法](#)

[設定](#)

[ネットワーク図](#)

[設定](#)

[確認](#)

[show コマンドの出力例：プレーン テキスト認証の設定](#)

[show コマンドの出力例：MD5 認証の設定](#)

[トラブルシューティング](#)

[debug コマンドの出力例：プレーン テキスト認証の設定](#)

[debug コマンドの出力例：MD5 認証の設定](#)

[関連情報](#)

概要

Open Shortest Path First (OSPF) の自律システム内のすべてのエリアは、バックボーン エリア (エリア 0) に物理的に接続する必要があります。ただし、これが不可能である場合は、仮想リンクを使用して、非バックボーン エリア経由でバックボーンに接続できます。分割されたバックボーンの 2 箇所を非バックボーン エリア経由で接続するために、仮想リンクを使用することもできます。また、仮想リンクでの OSPF 認証をイネーブルにすることもできます。

このドキュメントでは、OSPF ネットワークの仮想リンクでプレーン テキスト認証および Message Digest 5 (MD5) 認証を有効にする方法を示します。OSPF 認証の設定方法の詳細については、『[OSPF の認証のための設定例](#)』を参照してください。

前提条件

要件

この設定を行う前に、次の要件が満たされていることを確認します。

- OSPF ルーティング プロトコルとその動作の知識
- OSPF 仮想リンクの概念の知識

OSPF ルーティング プロトコルと OSPF の仮想リンクの概念の詳細については、『[OSPF 設計ガイド](#)』を参照してください。

使用するコンポーネント

このドキュメントの情報は、次のソフトウェアとハードウェアのバージョンに基づくものです。

- Cisco 2500 シリーズ ルータ
- Cisco IOS® ソフトウェア リリース 12.2(27)

このドキュメントの情報は、特定のラボ環境にあるデバイスに基づいて作成されたものです。このドキュメントで使用するすべてのデバイスは、クリアな (デフォルト) 設定で作業を開始しています。ネットワークが稼働中の場合は、コマンドが及ぼす潜在的な影響を十分に理解しておく必要があります。

表記法

ドキュメント表記の詳細は、『[シスコテクニカルティップスの表記法](#)』を参照してください。


設定

この項では、このドキュメントで説明する機能の設定に必要な情報を提供します。

注: このドキュメントで使用されているコマンドの詳細を調べるには、[Command Lookup Tool](#) ([登録ユーザ専用](#)) を使用してください。

ネットワーク図

このドキュメントでは、次のネットワーク構成を使用しています。

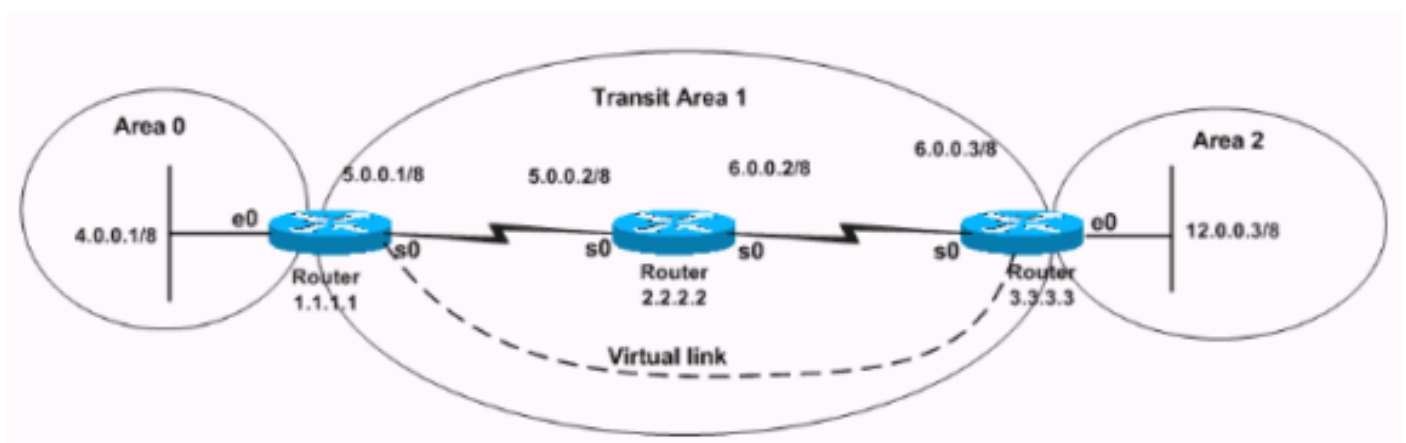

設定

このドキュメントでは、次の設定を使用します。

- [プレーンテキスト認証の設定](#)
- [MD5 認証の設定](#)

プレーンテキスト認証の設定

プレーンテキスト認証では、パスワードがクリアテキストとしてネットワーク上で送信されます。この設定では、エリア 0 にはルータ 3.3.3.3 のインターフェイスがありませんが、このルータ

は仮想的にエリア 0 に接続します。この設定では、ルータ 3.3.3.3 は仮想エリア境界ルータ (ABR) になります。つまり、ルータ 3.3.3.3 でエリア 0 に対して認証を有効にする必要があります。ここでは、仮想リンクシナリオでプレーンテキスト認証を設定するコマンドについて説明します。

注: 設定で使用される認証キーにより、OSPF ヘッダーに直接挿入されるキー (パスワード) が定義されます。このキーは、Cisco IOS ソフトウェアがルーティングプロトコルパケットを送信するときに、ヘッダーに挿入されます。インターフェイス単位で各ネットワークに個別のパスワードを指定できません。同じネットワーク上のすべての隣接ルータには、OSPF 情報を交換するため、同じパスワードを設定する必要があります。

ルータ 1.1.1.1

```
hostname r1.1.1.1

interface Loopback0
 ip address 1.1.1.1 255.0.0.0

interface Ethernet0
 ip address 4.0.0.1 255.0.0.0
 ip ospf authentication-key cisco !--- This command
 configures the authentication key (password) !--- on the
 interface as "cisco". interface Serial0 ip address
 5.0.0.1 255.0.0.0 clockrate 64000 ! router ospf 2
 network 4.0.0.0 0.255.255.255 area 0 network 5.0.0.0
 0.255.255.255 area 1 area 0 authentication !--- This
 command enables plain authentication for area 0 !--- on
 the router. area 1 virtual-link 3.3.3.3 authentication-
 key cisco !--- This command creates the virtual link
 between Router !--- 1.1.1.1 and Router 3.3.3.3 with
 plain text authentication enabled.
```

ルータ 3.3.3.3

```
hostname r3.3.3.3

interface Loopback0
 ip address 3.3.3.3 255.0.0.0

interface Ethernet0
 ip address 12.0.0.3 255.0.0.0

interface Serial0
 ip address 6.0.0.3 255.0.0.0

!

router ospf 2
 network 12.0.0.0 0.255.255.255 area 2
 network 6.0.0.0 0.255.255.255 area 1
 area 0 authentication !--- This command enables plain
 authentication for area 0 !--- on the router. area 1
 virtual-link 1.1.1.1 authentication-key cisco !--- This
 command creates the virtual link to area 0 via !---
 transit area 1 with plain text authentication enabled.
```

MD5 認証の設定

MD5 認証では、プレーンテキスト認証よりも安全度が高いセキュリティが提供されます。この方式では、MD5 アルゴリズムを使用して、OSPF パケットとパスワード (またはキー) の内容からハッシュ値を計算するため、セキュリティが高くなります。このハッシュ値は、キー ID およ

び減少しないシーケンス番号とともにパケットに入れられ、送信されます。同じパスワードを知っている受信側は、独自でハッシュ値を計算します。ここでは、仮想リンクシナリオで MD5 認証を設定するコマンドについて説明します。

ルータ 1.1.1.1

```
hostname r1.1.1.1

interface Loopback0
 ip address 1.1.1.1 255.0.0.0

interface Ethernet0
 ip address 4.0.0.1 255.0.0.0
 ip ospf message-digest-key 1 md5 cisco !--- This
command configures the MD5 authentication key !--- on
the interface as "cisco". interface Serial0 ip address
5.0.0.1 255.0.0.0 clockrate 64000 ! router ospf 2
network 4.0.0.0 0.255.255.255 area 0 network 5.0.0.0
0.255.255.255 area 1 area 0 authentication message-
digest !--- This command enables MD5 authentication for
area 0 !--- on the router. area 1 virtual-link 3.3.3.3
message-digest-key 1 md5 cisco !--- This command creates
the virtual link between Router !--- 1.1.1.1 and Router
3.3.3.3 with MD5 authentication enabled.
```

ルータ 3.3.3.3

```
hostname r3.3.3.3

interface Loopback0
 ip address 3.3.3.3 255.0.0.0

interface Ethernet0
 ip address 12.0.0.3 255.0.0.0

interface Serial0
 ip address 6.0.0.3 255.0.0.0

!

router ospf 2
network 12.0.0.0 0.255.255.255 area 2
network 6.0.0.0 0.255.255.255 area 1
area 0 authentication message-digest !--- This command
enables MD5 authentication for area 0 !--- on the
router. area 1 virtual-link 1.1.1.1 message-digest-key 1
md5 cisco !--- This command creates the virtual link to
area 0 via !--- the transit area 1 with MD5
authentication enabled.
```

確認

ここでは、設定が正常に動作していることを確認します。

[Output Interpreter Tool](#) (OIT) ([登録ユーザ専用](#)) では、特定の **show** コマンドがサポートされています。OIT を使用して、**show** コマンド出力の解析を表示できます。

- **show ip ospf virtual-links** : OSPF 仮想リンクのパラメータと現在の状態を表示します。
- **show ip route** : ルーティング テーブルの現在の状態を表示します。

show コマンドの出力例 : プレーン テキスト 認証の設定

```
r3.3.3.3# show ip ospf virtual-links Virtual Link OSPF_VL0 to router 1.1.1.1 is up !--- The
status of the virtual link displays. Run as demand circuit DoNotAge LSA allowed !--- This
specifies that OSPF runs as a demand circuit over virtual links, !--- and so link-state
advertisements (LSAs) are not refreshed (not aged out). Transit area 1, via interface Serial0,
Cost of using 128 Transmit Delay is 1 sec, State POINT_TO_POINT, Timer intervals configured,
Hello 10, Dead 40, Wait 40, Retransmit 5 Hello due in 00:00:01 Adjacency State FULL (Hello
suppressed) !--- The status of the neighbor adjacency displays. Index 1/2, retransmission queue
length 0, number of retransmission 1 First 0x0(0)/0x0(0) Next 0x0(0)/0x0(0) Last retransmission
scan length is 1, maximum is 1 Last retransmission scan time is 0 msec, maximum is 0 msec Simple
password authentication enabled !--- The type of authentication that is enabled displays. !---
The authentication type is simple password. r3.3.3.3#
```

注: この出力では、OSPF hello が抑止されていることが示されています。つまり、仮想リンクが起動すると、hello は交換されません。OSPF は、仮想リンクをデマンド回線であると見なすために hello を抑止します。通常、OSPF は 10 秒ごとに hello を送信し、30 分ごとに LSA を更新します。ただし、デマンド回線では、この程度の量のトラフィックでも望ましくありません。OSPF デマンド回線のオプションを使用すると、hello および LSA 更新機能が抑制されます。その結果、OSPF 認証に対して行ったすべての変更が反映されるのは、**clear ip ospf process** コマンドを使用して OSPF プロセスをクリアした後になります。たとえば、ルータの認証タイプの変更などです。

```
r3.3.3.3# show ip route Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area N1 - OSPF NSSA external type 1,
N2 - OSPF NSSA external type 2 E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP i -
IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area * - candidate default, U -
per-user static route, o - ODR P - periodic downloaded static route Gateway of last resort is
not set C 3.0.0.0/8 is directly connected, Loopback0 O 4.0.0.0/8 [110/138] via 6.0.0.2,
00:31:08, Serial0 O 5.0.0.0/8 [110/128] via 6.0.0.2, 22:55:44, Serial0 C 6.0.0.0/8 is directly
connected, Serial0 C 12.0.0.0/8 is directly connected, Ethernet0 r3.3.3.3#
```

show コマンドの出力例 : MD5 認証の設定

```
r3.3.3.3# show ip ospf virtual-links Virtual Link OSPF_VL1 to router 1.1.1.1 is up !--- The
status of the virtual link displays. Run as demand circuit DoNotAge LSA allowed !--- This
specifies that OSPF runs as a demand circuit over virtual links, !--- and so LSAs are not
refreshed (not aged out). Transit area 1, via interface Serial0, Cost of using 128 Transmit
Delay is 1 sec, State POINT_TO_POINT, Timer intervals configured, Hello 10, Dead 40, Wait 40,
Retransmit 5 Hello due in 00:00:01 Adjacency State FULL (Hello suppressed) !--- The status of
the neighbor adjacency displays. Index 1/2, retransmission queue length 0, number of
retransmission 0 First 0x0(0)/0x0(0) Next 0x0(0)/0x0(0) Last retransmission scan length is 0,
maximum is 0 Last retransmission scan time is 0 msec, maximum is 0 msec Message digest
authentication enabled !--- The type of authentication that is enabled displays. !--- The
authentication type is MD5. Youngest key id is 1 r3.3.3.3# show ip route Codes: C - connected, S
- static, I - IGRP, R - RIP, M - mobile, B - BGP D - EIGRP, EX - EIGRP external, O - OSPF, IA -
OSPF inter area N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2 E1 - OSPF
external type 1, E2 - OSPF external type 2, E - EGP i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS
level-2, ia - IS-IS inter area * - candidate default, U - per-user static route, o - ODR P -
periodic downloaded static route Gateway of last resort is not set C 3.0.0.0/8 is directly
connected, Loopback0 O 4.0.0.0/8 [110/138] via 6.0.0.2, 00:02:41, Serial0 O 5.0.0.0/8 [110/128]
via 6.0.0.2, 00:02:51, Serial0 C 6.0.0.0/8 is directly connected, Serial0 C 12.0.0.0/8 is
directly connected, Ethernet0
```

トラブルシューティング

ここでは、設定に関するトラブルシューティングについて説明します。

注: [debug](#) コマンドを使用する前に、『[debug コマンドの重要な情報](#)』を参照してください。

- `debug ip ospf adj` : OSPF ネイバー隣接関係確立プロセスをデバッグします。

debug コマンドの出力例 : プレーン テキスト 認証の設定

```
r3.3.3.3# debug ip ospf adj 23:31:41: OSPF: Interface OSPF_VL0 going Up 23:31:41: OSPF: Build
router LSA for area 0, router ID 3.3.3.3, seq 0x8000002E 23:31:41: OSPF: Build router LSA for
area 1, router ID 3.3.3.3, seq 0x8000002E 23:31:41: OSPF: Build router LSA for area 2, router ID
3.3.3.3, seq 0x80000031 23:31:51: OSPF: Rcv DBD from 1.1.1.1 on OSPF_VL0 seq 0x887 opt 0x62 flag
0x7 len 32 mtu 0 state INIT 23:31:51: OSPF: 2 Way Communication to 1.1.1.1 on OSPF_VL0, state
2WAY 23:31:51: OSPF: Send DBD to 1.1.1.1 on OSPF_VL0 seq 0x2102 opt 0x62 flag 0x7 len 32
23:31:51: OSPF: First DBD and we are not SLAVE 23:31:51: OSPF: Rcv DBD from 1.1.1.1 on OSPF_VL0
seq 0x2102 opt 0x62 flag 0x2 len 172 mtu 0 state EXSTART 23:31:51: OSPF: NBR Negotiation Done.
We are the MASTER 23:31:51: OSPF: Send DBD to 1.1.1.1 on OSPF_VL0 seq 0x2103 opt 0x62 flag 0x3
len 172 23:31:51: OSPF: Database request to 1.1.1.1 23:31:51: OSPF: sent LS REQ packet to
5.0.0.1, length 12 23:31:51: OSPF: Rcv DBD from 1.1.1.1 on OSPF_VL0 seq 0x2103 opt 0x62 flag 0x0
len 32 mtu 0 state EXCHANGE 23:31:51: OSPF: Send DBD to 1.1.1.1 on OSPF_VL0 seq 0x2104 opt 0x62
flag 0x1 len 32 23:31:51: OSPF: Rcv DBD from 1.1.1.1 on OSPF_VL0 seq 0x2104 opt 0x62 flag 0x0
len 32 mtu 0 state EXCHANGE 23:31:51: OSPF: Exchange Done with 1.1.1.1 on OSPF_VL0 23:31:51:
OSPF: Synchronized with 1.1.1.1 on OSPF_VL0, state FULL !--- This indicates the establishment of
neighbor adjacency. 23:31:51: %OSPF-5-ADJCHG: Process 2, Nbr 1.1.1.1 on OSPF_VL0 from LOADING to
FULL, Loading Done 23:31:52: OSPF: Build router LSA for area 0, router ID 3.3.3.3, seq
0x8000002F 23:32:23: OSPF: Dead event ignored for 1.1.1.1 on demand circuit OSPF_VL0 r3.3.3.3#
```

debug コマンドの出力例 : MD5 認証の設定

```
r3.3.3.3# debug ip ospf adj 23:48:06: OSPF: Interface OSPF_VL1 going Up 23:48:06: OSPF: Send
with youngest Key 0 23:48:07: OSPF: Build router LSA for area 0, router ID 3.3.3.3, seq
0x80000001 23:48:07: OSPF: Build router LSA for area 2, router ID 3.3.3.3, seq 0x80000033
23:48:07: OSPF: Build router LSA for area 1, router ID 3.3.3.3, seq 0x80000030 23:48:14: OSPF: 2
Way Communication to 1.1.1.1 on OSPF_VL1, state 2WAY 23:48:14: OSPF: Send DBD to 1.1.1.1 on
OSPF_VL1 seq 0x1EA opt 0x62 flag 0x7 len32 23:48:14: OSPF: Send with youngest Key 1 23:48:14:
OSPF: Rcv DBD from 1.1.1.1 on OSPF_VL1 seq 0x3FB opt 0x62 flag 0x7 len 32 mtu 0 state EXSTART
23:48:14: OSPF: First DBD and we are not SLAVE 23:48:16: OSPF: Send with youngest Key 1
23:48:19: OSPF: Send DBD to 1.1.1.1 on OSPF_VL1 seq 0x1EA opt 0x62 flag 0x7 len 32 23:48:19:
OSPF: Send with youngest Key 1 23:48:19: OSPF: Retransmitting DBD to 1.1.1.1 on OSPF_VL1 [1]
23:48:19: OSPF: Rcv DBD from 1.1.1.1 on OSPF_VL1 seq 0x3FB opt 0x62 flag 0x7 len 32 mtu 0 state
EXSTART 23:48:19: OSPF: First DBD and we are not SLAVE 23:48:19: OSPF: Rcv DBD from 1.1.1.1 on
OSPF_VL1 seq 0x1EA opt 0x62 flag 0x2 len 172 mtu 0 state EXSTART 23:48:19: OSPF: NBR Negotiation
Done. We are the MASTER 23:48:19: OSPF: Send DBD to 1.1.1.1 on OSPF_VL1 seq 0x1EB opt 0x62 flag
0x3 len 112 23:48:19: OSPF: Send with youngest Key 1 23:48:19: OSPF: Send with youngest Key 1
23:48:19: OSPF: Database request to 1.1.1.1 23:48:19: OSPF: sent LS REQ packet to 5.0.0.1,
length 48 23:48:19: OSPF: Rcv DBD from 1.1.1.1 on OSPF_VL1 seq 0x1EB opt 0x62 flag 0x0 len 32
mtu 0 state EXCHANGE 23:48:19: OSPF: Send DBD to 1.1.1.1 on OSPF_VL1 seq 0x1EC opt 0x62 flag 0x1
len 32 23:48:19: OSPF: Send with youngest Key 1 23:48:19: OSPF: Build router LSA for area 0,
router ID 3.3.3.3, seq 0x80000030 23:48:19: OSPF: Rcv DBD from 1.1.1.1 on OSPF_VL1 seq 0x1EC opt
0x62 flag 0x0 len 32 mtu 0 state EXCHANGE 23:48:19: OSPF: Exchange Done with 1.1.1.1 on OSPF_VL1
23:48:19: OSPF: Synchronized with 1.1.1.1 on OSPF_VL1, state FULL !--- This indicates the
establishment of neighbor adjacency. 23:48:19: %OSPF-5-ADJCHG: Process 2, Nbr 1.1.1.1 on
OSPF_VL1 from LOADING to FULL, Loading Done
```

関連情報

- [OSPF に関するサポート ページ \(英語 \)](#)
- [OSPF 設計ガイド](#)
- [OSPF 仮想リンク](#)
- [OSPF の認証のための設定例](#)
- [OSPF デマンド回路機能](#)
- [テクニカルサポートとドキュメント - Cisco Systems](#)