



Catalyst 6500 Series and Cisco 7600 Series Supervisor Engine 720 CompactFlash Memory Card Installation Note

This publication describes how to install and remove the CompactFlash memory card on the Supervisor Engine 720.

The CompactFlash memory card for the Supervisor Engine 720 is available in three sizes. (See [Table 1](#).)

Table 1 **Supervisor Engine 720 CompactFlash Memory Cards**

Product Number	Description
MEM-C6K-CPTFL64M=	Cisco CompactFlash Memory Card, 64 MB
MEM-C6K-CPTFL128M=	Cisco CompactFlash Memory Card, 128 MB
MEM-C6K-CPTFL256M=	Cisco CompactFlash Memory Card, 256 MB
MEM-C6K-CPTFL512M=	Cisco CompactFlash Memory Card, 512 MB



Installing and Removing a CompactFlash Memory Card

**Note**

A CompactFlash memory card can be installed in either the DISK 0 or DISK 1 slots on the Supervisor Engine 720 faceplate, except for the 512 MB CompactFlash memory card which must be installed in the DISK 1 slot.

Installing a CompactFlash Memory Card

To install a CompactFlash memory card, follow these steps:

- Step 1** Hold the CompactFlash memory card with the connector end of the card toward the slot. (See [Figure 1](#), view a.)
- Step 2** Slide the CompactFlash memory card into the slot until the device completely seats in the connector at the back of the slot and the ejector button pops out toward you. (See [Figure 1](#), view b.)

**Caution**

Do not attempt to force the CompactFlash memory card fully into the slot or you could damage the connector pins. When correctly inserted, a portion of the device remains outside the slot.

- Step 3** Format the CompactFlash memory card the first time that it is installed in the system. The formatting instructions are located in the software configuration guide for your system.

Removing a CompactFlash Memory Card

**Caution**

Do not remove the CompactFlash memory card while the access LED light is on or when CFRW diagnostics is in progress. It might corrupt the file system.


To verify the integrity of the CompactFlash memory card, run this command:

```
show diagnostic result module X test TestCFRW
```

To remove a CompactFlash memory card, follow these steps:

- Step 1** Make sure that the LED on the slot is off (no operations are in progress).
- Step 2** Press the ejector button to disconnect the CompactFlash memory card from the connector at the back of the slot. (See [Figure 1](#), view c.)
- Step 3** Remove the CompactFlash memory card from the slot and place it in an antistatic bag.

Figure 1 *Installing and Removing a CompactFlash Memory Card*

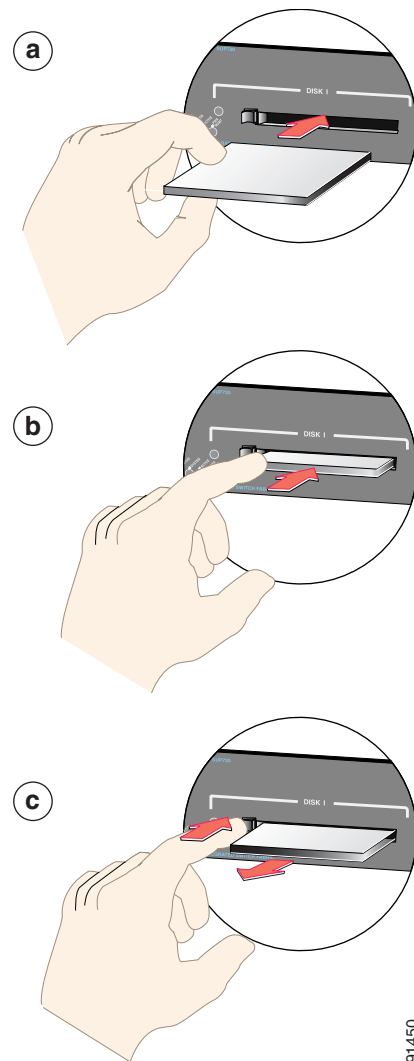

Additional Documentation

Refer to these publications for CompactFlash memory card configuration and usage information:

- *Catalyst 6500 Series Switch Software Configuration Guide*
- *Catalyst 6500 Series Switch Command Reference*
- *Catalyst 6500 Series Switch IOS Software Configuration Guide*
- *Catalyst 6500 Series Switch IOS Command Reference*
- *Cisco 7600 Series Router IOS Software Configuration Guide*
- *Cisco 7600 Series Router IOS Command Reference*

Obtaining Documentation and Submitting a Service Request

For information on obtaining documentation, submitting a service request, and gathering additional information, see the monthly *What's New in Cisco Product Documentation*, which also lists all new and revised Cisco technical documentation, at:

<http://www.cisco.com/en/US/docs/general/whatsnew/whatsnew.html>

Subscribe to the *What's New in Cisco Product Documentation* as a Really Simple Syndication (RSS) feed and set content to be delivered directly to your desktop using a reader application. The RSS feeds are a free service and Cisco currently supports RSS Version 2.0.

CCDE, CCSI, CCENT, Cisco Eos, Cisco HealthPresence, the Cisco logo, Cisco Lumin, Cisco Nexus, Cisco Nurse Connect, Cisco Stackpower, Cisco StadiumVision, Cisco TelePresence, Cisco WebEx, DCE, and Welcome to the Human Network are trademarks; Changing the Way We Work, Live, Play, and Learn and Cisco Store are service marks; and Access Registrar, Aironet, AsyncOS, Bringing the Meeting To You, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, CCVP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Collaboration Without Limitation, EtherFast, EtherSwitch, Event Center, Fast Step, Follow Me Browsing, FormShare, GigaDrive, HomeLink, Internet Quotient, IOS, iPhone, iQuick Study, IronPort, the IronPort logo, LightStream, Linksys, MediaTone, MeetingPlace, MeetingPlace Chime Sound, MGX, Networkers, Networking Academy, Network Registrar, PCNow, PIX, PowerPanels, ProConnect, ScriptShare, SenderBase, SMARTnet, Spectrum Expert, StackWise, The Fastest Way to Increase Your Internet Quotient, TransPath, WebEx, and the WebEx logo are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0903R)

Copyright © 2003–2009 Cisco Systems, Inc. All rights reserved.