

Understanding the 4-Port Sync Serial Network Module (NM-4T)

Document ID: 7264

Introduction

Prerequisites

- Requirements
- Components Used
- Conventions

Product Number

Features


Platform Support

Configuration

Related Information

Introduction

The four-port synchronous (sync) serial network module (NM-4T) has four DB-60 ports and provides a data rate of 8 Mbps on port 0, 4 Mbps each on port 0 and port 2, or 2 Mbps on all four ports simultaneously. The NM-4T network module only supports sync mode. The DB-60 ports on the NM-4T network module support the Cisco 60-pin "5-in-1" cables used on the Cisco 2500 and Cisco 7000 series routers.

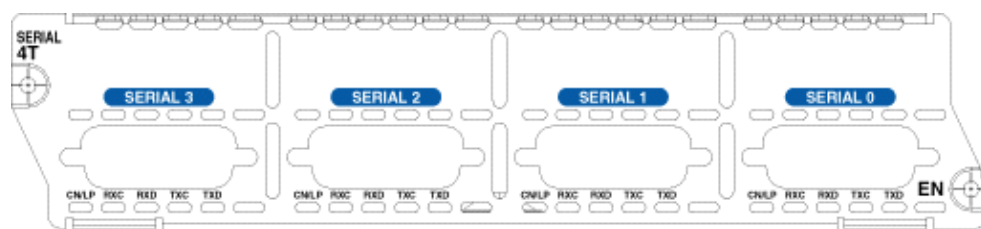

Prerequisites

Requirements

See the Platform Support section of this document.

Components Used

See the Platform Support section of this document.

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

Conventions

For more information on document conventions, refer to the Cisco Technical Tips Conventions.

Product Number

NM-4T – Four-Port Sync Serial Network Module

Features

- Four serial ports.
- Uses Cisco DB-60 connectors (same cabling as Cisco 2500, Cisco 7000, NM-4A/S, and NM-8A/S). For more information, refer to 60-pin "5-in-1".
- Supports sync mode only (async mode is not supported).
- Provides synchronous data rate of 8 Mbps on port 0, 4 Mbps each on port 0 and port 2, or 2 Mbps on all four ports simultaneously.
- Does not support bisync or half-duplex.

Platform Support

Cisco IOS® Software Support	Cisco 2600, 2600XM	Cisco 3620 and 3640 Cisco IOS Software Releases 11.2(4)XA, 11.2P, all 11.3, and all of 12.x	Cisco 3631 Cisco IOS Software Releases 12.2(13)T, 12.3(1), 12.3(2)T and later	Cisco 3660 All Cisco IOS Software releases	Cisco 2691, 3725, 3745 Cisco IOS Software Releases 12.2(13)T, 12.2(11)YT
NM-4T	Not supported				

Note: The Cisco IOS Software releases provided are typically the minimum version required in order to support the platform, module, or feature in question. Use the Software Advisor (registered customers only) to choose appropriate software for your network device, match software features to Cisco IOS Software and CatOS releases, compare Cisco IOS Software releases, or find out which software releases support your hardware.

Configuration

On the NM-4T network module, the interfaces are addressed as **interface serial slot/unit** . The units are numbered from right to left. This output is a sample configuration for the NM-4T network module. Configure the NM-4T as you would any other serial interface on a 2500, 7500, and so forth.

Note: There are no **framing**, **clocking**, or **linecode** parameters or commands used in this configuration. The NM-4T network module does not have an integrated CSU/DSU. You need to use an external CSU/DSU.

```
maui-soho-02(config)# interface Serial 2/0
maui-soho-02(config-if)# ip add 10.0.0.1 255.255.255.0
maui-soho-02(config-if)# encapsulation ppp
maui-soho-02(config-if)# no shutdown
```

For more information on configuring the NM-4T network module, refer to [Configuring Serial Interfaces](#).

Related Information

- [Configuring Serial Interfaces](#)
 - [Cisco Cable Product Numbers, Part Numbers, and Descriptions](#)
 - [Access Product Support Pages](#)
 - [Dial Technology Support Pages](#)
 - [Technical Support – Cisco Systems](#)
-

All contents are Copyright © 2006–2007 Cisco Systems, Inc. All rights reserved. Important Notices and Privacy Statement.

Updated: Aug 08, 2007

Document ID: 7264
