

# وَأَلْفَسْأَلْ ةَهَجْتَمَلَا CPAM تَابَاوَبْ ةَبْقَارْمْ ءَارْجَا ةَفْوَرَعْمْ رِيْغْ ةَلَاَحْ

## تَايَوْتَحْمَلَا

[ةَمْدَقْمَلَا](#)

[ةَيَسْأَسْأَلَا تَابَلَطْتَمَلَا](#)

[تَابَلَطْتَمَلَا](#)

[ةَمْدَخْتَسْمَلَا تَانُوْكْمَلَا](#)

[CPAM مَدَاخْ يَلْعَ SMTP نِيوْكُتْ](#)

[CPAM لِيْمَعْ نَمِيْءَا قَلْتَلَا لِيْغَشْتَلَا ةَدْعَاقْ نِيوْكُتْ](#)

[CPAM لِيْمَعْ نَمِيْءَا قَلْتَلَا لِيْغَشْتَلَا ةَدْعَاقْ نِيوْكُتْ](#)

## ةَمْدَقْمَلَا

مَادَخْتَسَابْ Cisco نَمْ (CPAM) يَدَامَلَا لَوْصُولَا رِيْدَمْ ةَبَاوَبْ ةَبْقَارْمْ ةَيَفِيْكَ دَنْتَسْمَلَا اِذْهْ حِضْوِي رِيْغْ" وَأَلْفَسْأَلْ" يَلْ هَتَلَاَحْ رِيْغْتَبْ ةَبَاوَبَلَا نَمِيْءَا مَاقْ اِذْ. يِيْءَا قَلْتَلَا لِيْغَشْتَلَا ةَدْعَاقْ يَنْوَرْتَكَلَلَا دِيْرَبَلَا رِبْعْ هَمَالْعَا مَتِيْ، "فْوَرَعْمْ

## ةَيَسْأَسْأَلَا تَابَلَطْتَمَلَا

### تَابَلَطْتَمَلَا

ةَيَلَلَاتَلَا عِيْضَاوْمَلَابْ ةَفْرَعْمْ كِيْدَلْ نُوْكُتْ نَأْبْ Cisco يَصُوْتْ:

- CPAM 1.4.x وَأَوْ CPAM 1.5.x
- SMTP ذَفْنَمُوْمَدَاخْ
- يَنْوَرْتَكَلَلَا دِيْرَبَلَا نَاوْنَعْ

### ةَمْدَخْتَسْمَلَا تَانُوْكْمَلَا

ةَنِيْعَمْ ةَيْدَامْ تَانُوْكْمُوْجْمَارْبْ تَارَادِصَا يَلْعَ دَنْتَسْمَلَا اِذْهْ رِصْتَقِيْ اَلْ

ةَصَاخْ ةَيَلْمَعْمْ ةَيِيْبْ يَفْ ةَدُوْجُوْمَلَا ةَزَهْأَلَا نَمْ دَنْتَسْمَلَا اِذْهْ يَفْ ةَدْرَاوَلَا تَامُوْلَعْمَلَا ءَاشْنَا مَتْ تَنَاكْ اِذْ. (يِيْضَارْتَفَا) حُوْسَمْمْ نِيوْكُتَبْ دَنْتَسْمَلَا اِذْهْ يَفْ ةَمْدَخْتَسْمَلَا ةَزَهْأَلَا عِيْمَجْ تَأْدَبْ رَمَا يَلْ لَمْتَحْمَلَا رِيْثَاتَلَلْ كَمَهْفْ نَمْ دَكْأَتَفْ، ةَرَشَابْمْ كَتْكَبْشْ

## CPAM مَدَاخْ يَلْعَ SMTP نِيوْكُتْ

ةَرُوْصَلَا يَفْ حِضْوَمْ وَهْ اَمَكْ، CPAM ةَرَادَا ةَحْفِصْ يَلْ لُوْخَدَلَا لِيْجَسْتْ 1. ةُوْطَخَلَا



[Launch Cisco PAM Client](#)

[Download Cisco EDI Studio](#)

## Cisco PAM Server Administration

1.5.3



Username

Password

[Forgot Password?](#)

Log In

Cancel

© 2008-2016 Cisco Systems, Inc. All Rights Reserved.  
Cisco, Cisco Systems and Cisco Systems logo are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and certain other countries

دېرېر لال لوقن لوكوتورب م داخ ناونع نيوكوتب مقو، نيورتكلل دېرېر > دادع اى لال لوقنا 2. ةوطخال  
ةروصلال ي ف حضوم وه امك، نيورتكللال دېرېر لال ناونعو (SMTP) طيسبال

Cisco PAM Server Administration

Monitoring Setup Commands Launch CPAM Client Downloads

Setup List

- User
- Network
- DNS
- Email
- Data & Time
- License
- Log Level
- Backup
- Event
- Restore
- Upgrade
- Localization

Setup -> Email

SMTP Server Address:

SMTP Email Address from:

10.105.139.40 says:  
E-mail setup test successful

ث. دحت ة ق ط ق ط 3. ةوطخال


ناونع ىل رابتخال ل ينورتكلال ال ديرب ال CPAM م داخ لسري). رابتخا ي ف رقا 4. ةوطخال (ينورتكلال ال ديرب ال).

CPAM ليمع ىل لوخدال ليجست 5. ةوطخال



CPAM ليمع نم يئاقولتال ل يغشتال ةدعاق نيوكت

ةروصلال ي ف حضوم وه امك، ةزهجال اباو بالال ل لقتنا 1. ةوطخال

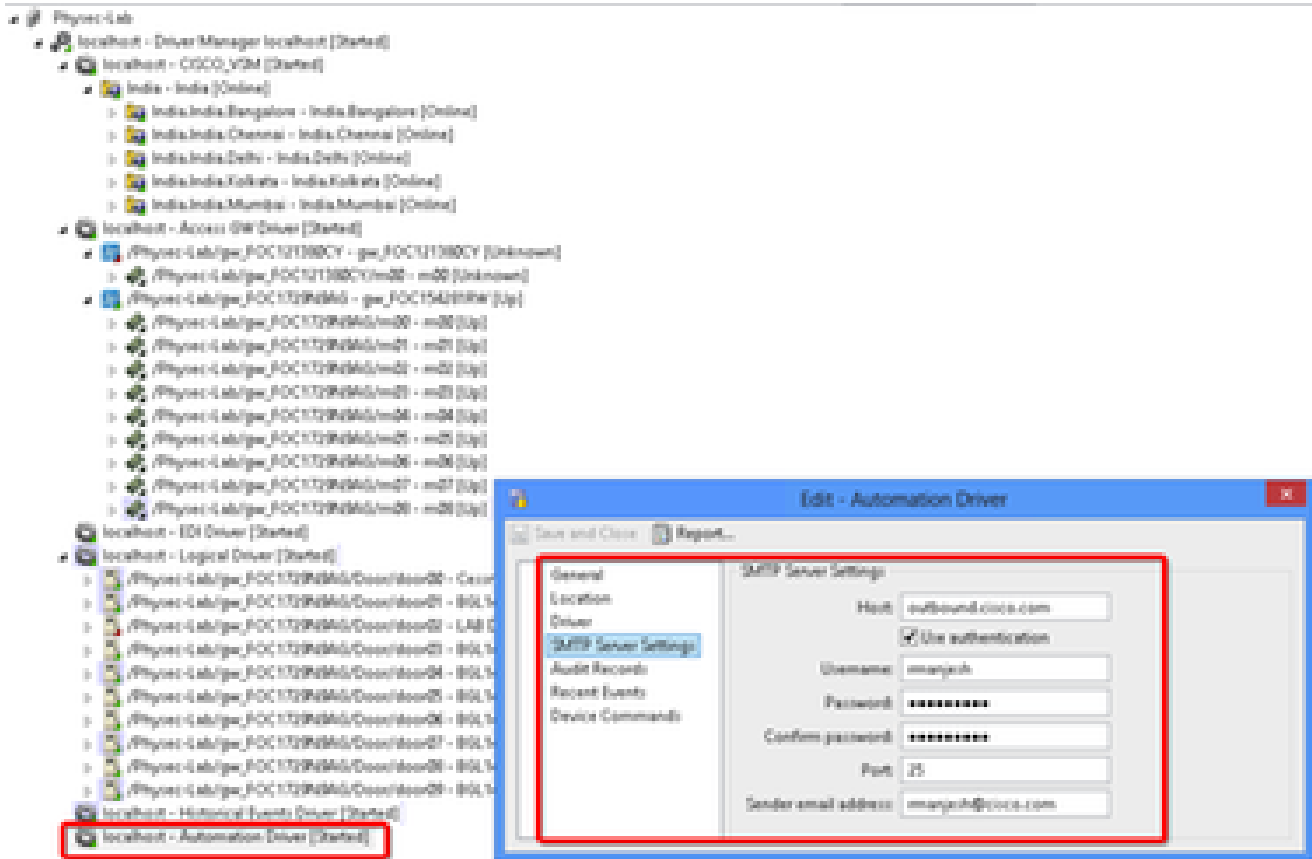


ري رحت دح ، يئاق لئال لي غشت لئال لي غشت چمان رب يلع نم يأل سوام ل رزب رقنا 2. ةوطخل

SMTP لئال صافات عيمج علمب مقو SMTP مداخل تادادعإ يلقنا 3. ةوطخل

- SMTP مداخل ناوع - فيضم الم
- قداصم الم مادختسإ نم ققحت ل
- مدختسم الم فرعم - مدختسم الم مسا
- رورم الم ةملك
- 25 - ذفنم الم
- هالعأ مدختسم لئال نيورت لئال دي رب لئال ناوع - لسرمل لئال نيورت لئال دي رب لئال ناوع

في حضورم وه امك ، يملع الم (IO) جارخ الم او لادعإ لاهي بنت لئال او شادعإ لئال يلقنا 4. ةوطخل  
ةروصل:

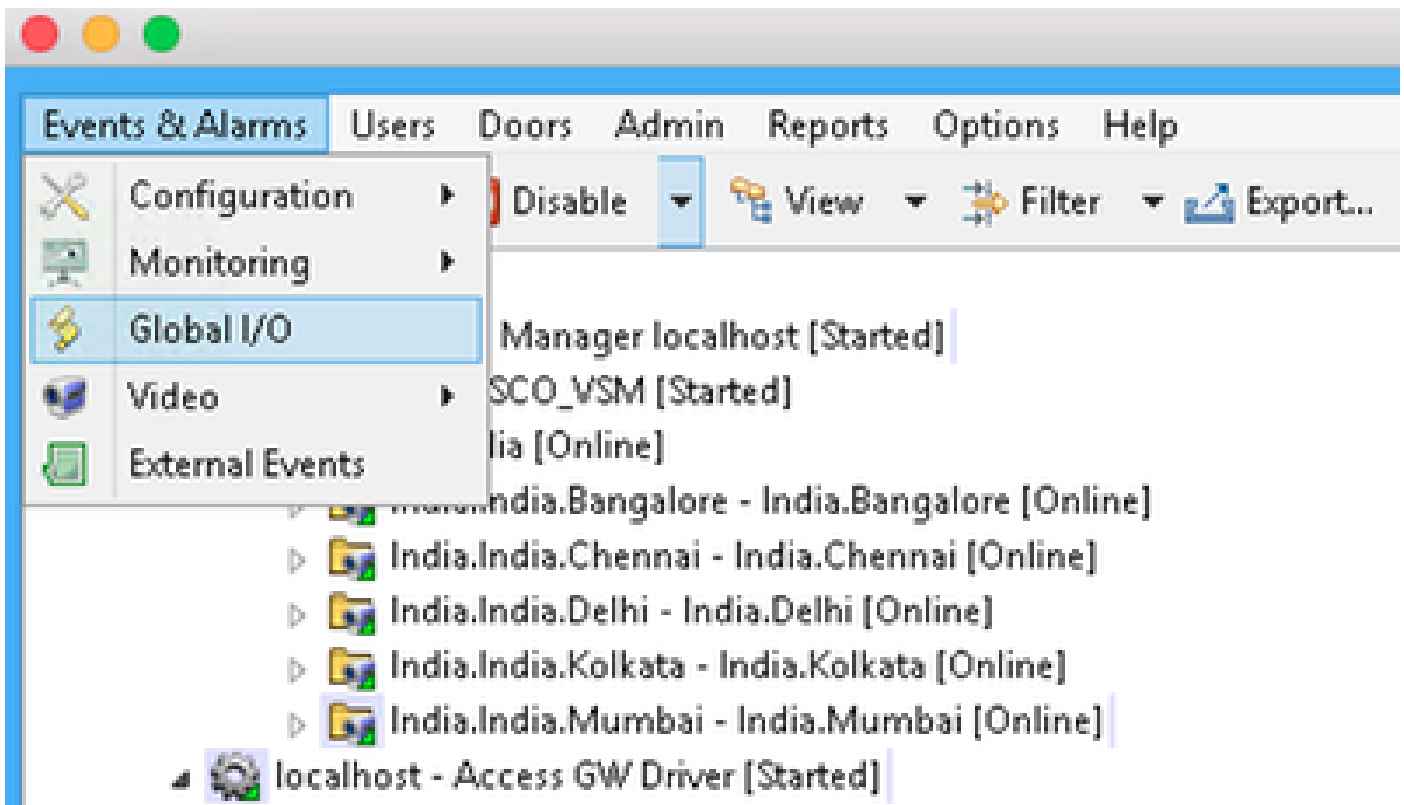

ة. فاضا رقنا، ةروصلال ي ف حضوم وه امك 5. ةوطخلال

The screenshot shows the 'Events & Alarms' table. The 'Add...' button in the toolbar is highlighted with a red box. The table contains the following data:


Name	Enabled	Trigger	Actions	Notification
Event Clean Queue	Yes	Periodic - Daily	Device Command: Historical Events Driven...	
Event Start Copy	Yes	Periodic - Daily	Device Command: Historical Events Driven...	
Event Start Prune	Yes	Periodic - Daily	Device Command: Historical Events Driven...	
Event Stop Copy	Yes	Periodic - Daily	Device Command: Historical Events Driven...	
Event Stop Prune	Yes	Periodic - Daily	Device Command: Historical Events Driven...	
Gateway_Offline	Yes	Event - @logCode.uniqueId IN [WX.DX.DIV...	Report Events - Unknown Gateways... (1 m...	To: manjesh@cisco.com

The screenshot shows the 'Edit - Automation Rule' dialog box. The 'Add...' button in the 'Actions' section is highlighted with a red box. The dialog contains the following fields and options:


- Enabled:**
- Name:** Gateway\_Offline
- Location:** Cisco-Bangalore (with 'Choose...' and 'Clear' buttons)
- Trigger:** Event - @logCode.uniqueId IN [WX.DX.DIV.LPRC, GW.DXC] (with 'Edit...', 'New...' (highlighted), and 'Clear' buttons)
- Actions:**
  - Add... (highlighted)
  - Move Up
  - Move Down
  - Delete
  - Description: Report Events - Unknown Gateways
  - Sanity Report Action
- Notification:** To: manjesh@cisco.com (with 'Edit...', 'New...' (highlighted), and 'Clear' buttons)
- Record event when rule invoked
- Record event when trigger fails
- Record event when action fails
- Record event when notification fails

عق و م ل ة رجش ددح و م س ا ل خ د ا 6. ة و ط خ ل ا

ث د ح ل ا م ث ر ي ح ت د د ح ، ل ي غ ش ت ب م ق 7. ة و ط خ ل ا

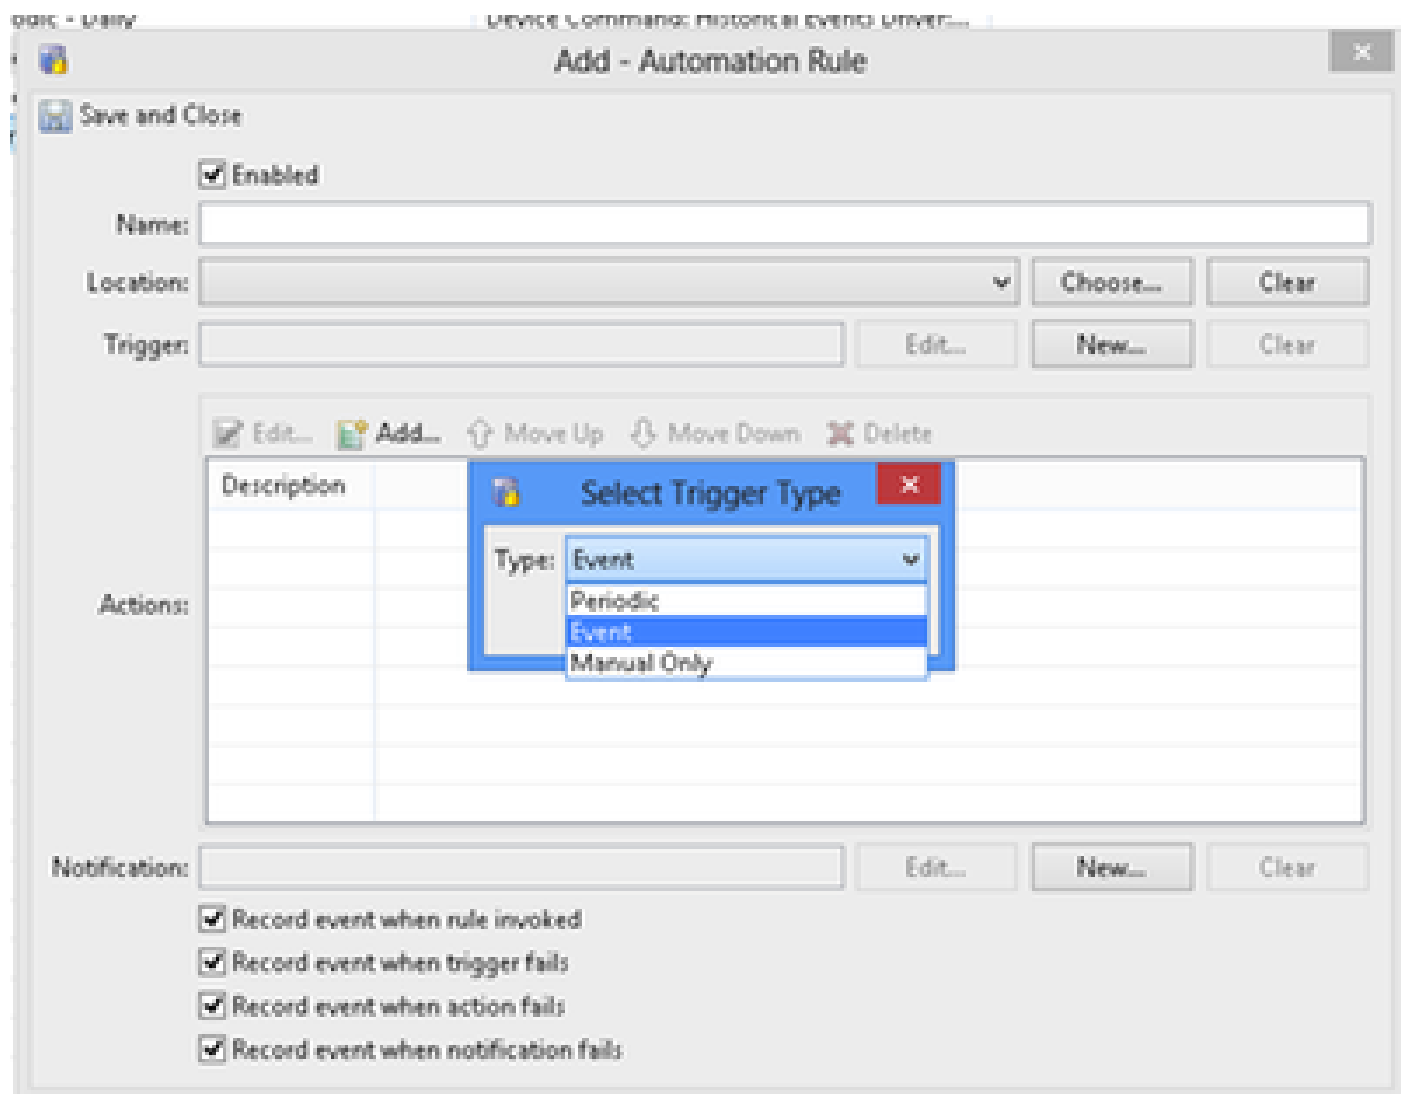


ة ر و ص ل ا ي ف ح ز و م و ه ا م ك ، ر ي ح ت ل ا ح ش ر م ي ف ر ق ن ا 8. ة و ط خ ل ا

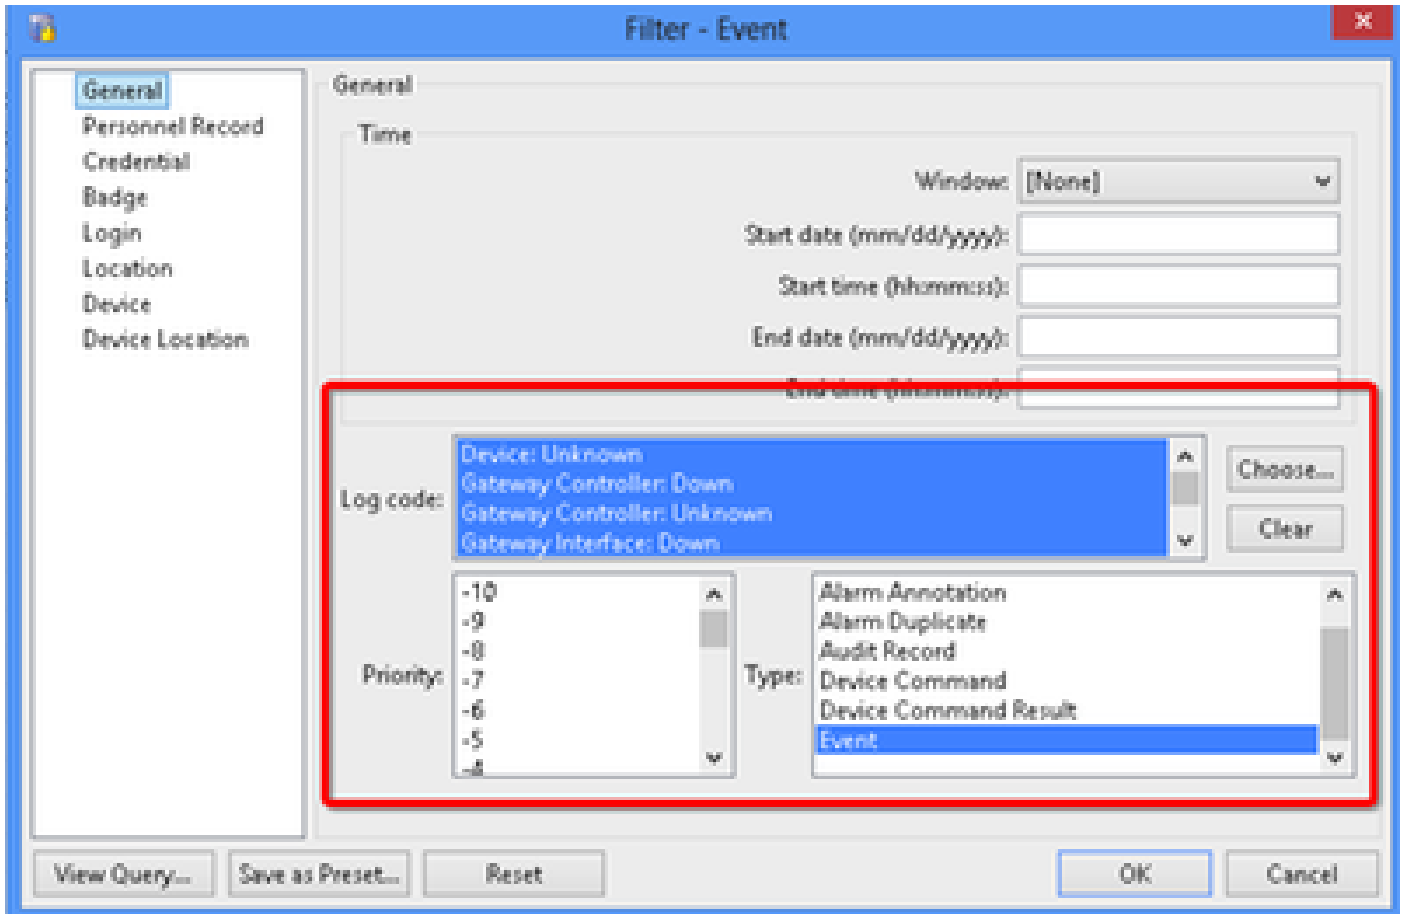

اذه لجسلا زمر راي تخا . لجسلا زمر > ماع ىلا لقتنا

- فورعم ريغ :زاهجلا
- لفسأل :ةباوبلا يف مكحتلا ةدحو
- ةفورعم ريغ :ةباوبلا يف مكحتلا ةدحو
- لفسأ :ةرابعلا ةهجاو
- ةلطم ةيطنملا ةدحو لا
- ةيولوالا نم شح ديحت

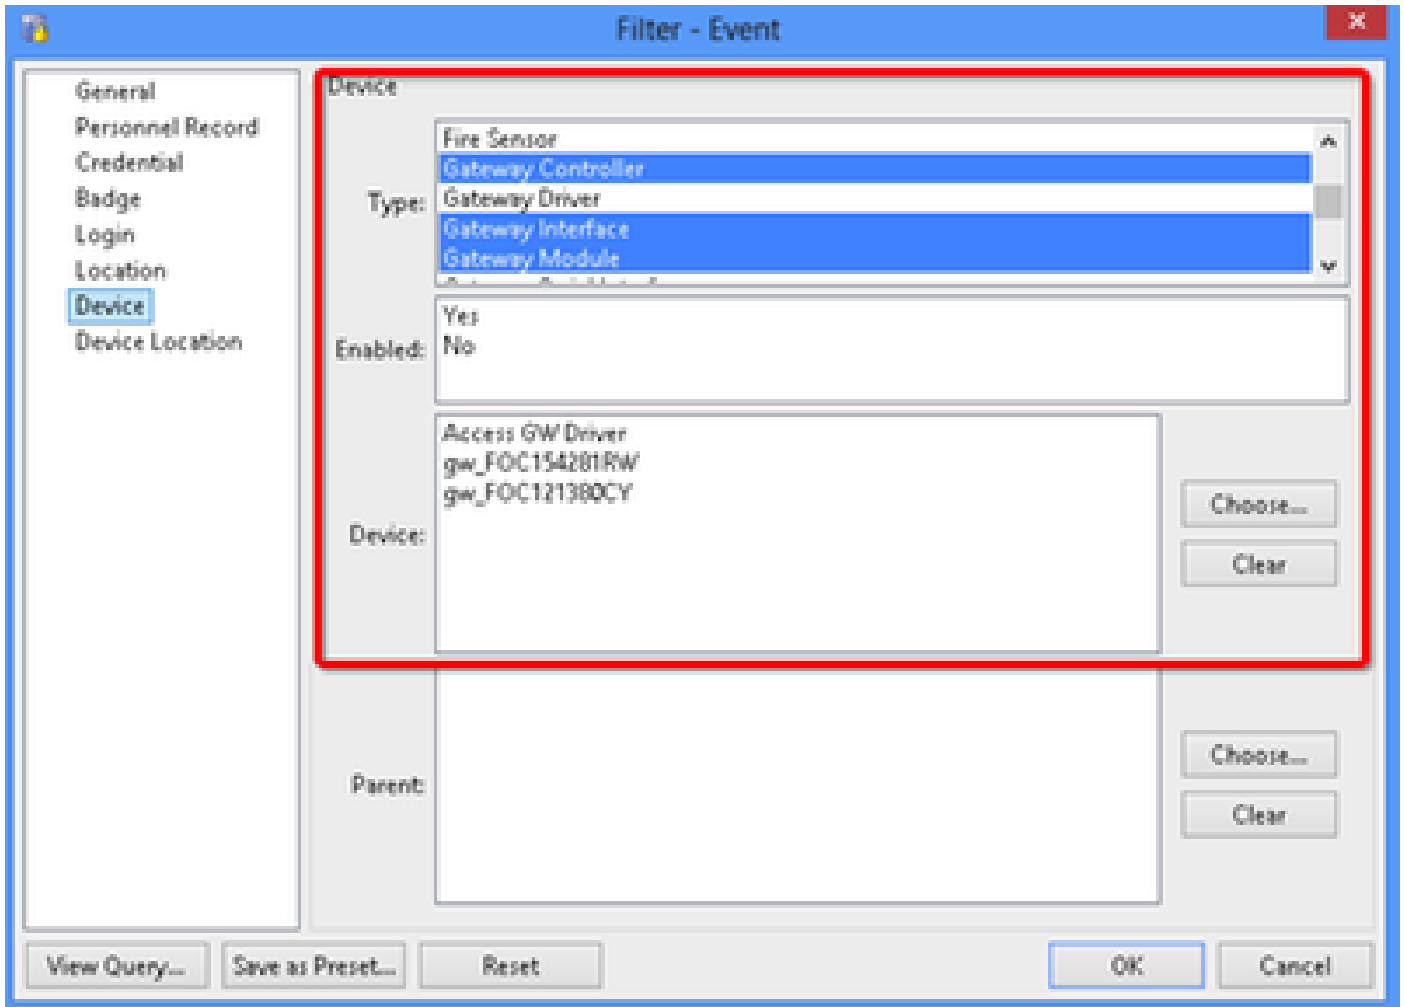

عونلا اذه رتخأ. زاهج ديدحت

- باباولا مكحت ةدحو
- رابعلا ةهجاو
- رابعلل ةيطمنلا ةدحو
- باباولا عيمج رتخاو، زاهجالا للاقنتا.

قفاوم قوف رقنا مث 9. ةوطخلا

ةلصتملا ريغت باباولا > ةمالسلا ريرقت عارجا دح، ةفاضلا قوف رقنا 10. ةوطخلا



**Edit - Automation Rule**

Save and Close

Enabled

Name: Gateway\_Offline

Location: Cisco-Bangalore Choose... Clear

Trigger: Event - ((logCode.uniqueId IN [ VX.SXDEV.UNK, GW.SXC Edit... New... Clear

Actions:

Description	
Report: Events - Unknown G...	
Sanity Report Action	


Notifications: To: manjesh@cisco.com Edit... New... Clear

Record event when rule invoked  
 Record event when trigger fails  
 Record event when action fails  
 Record event when notification fails

**Select Action Type**


Type: Sanity Report Action


OK Cancel

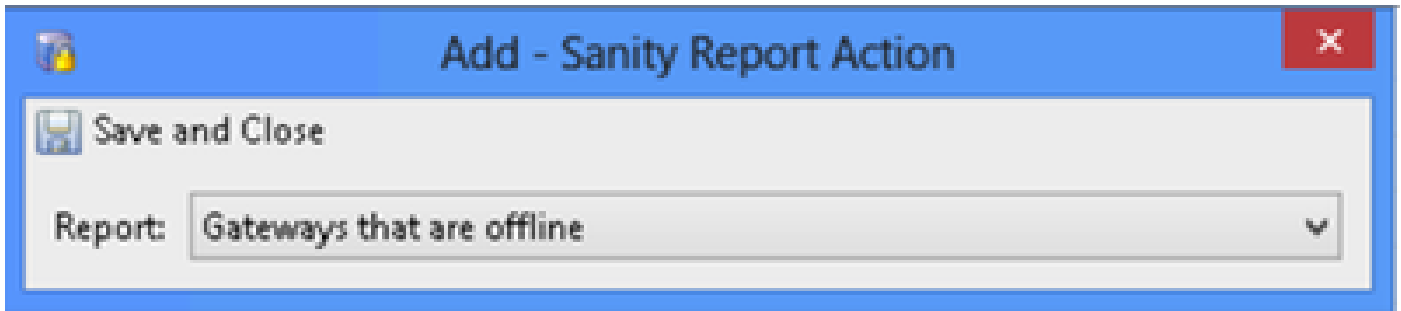

قالغواو ظفح قوف رقنا 11. ةوطخلا

ةروصللا يف حضوم وه امك ،ديج قوف رقنا ،مالعإلا ىلا لقتنا 12. ةوطخلا

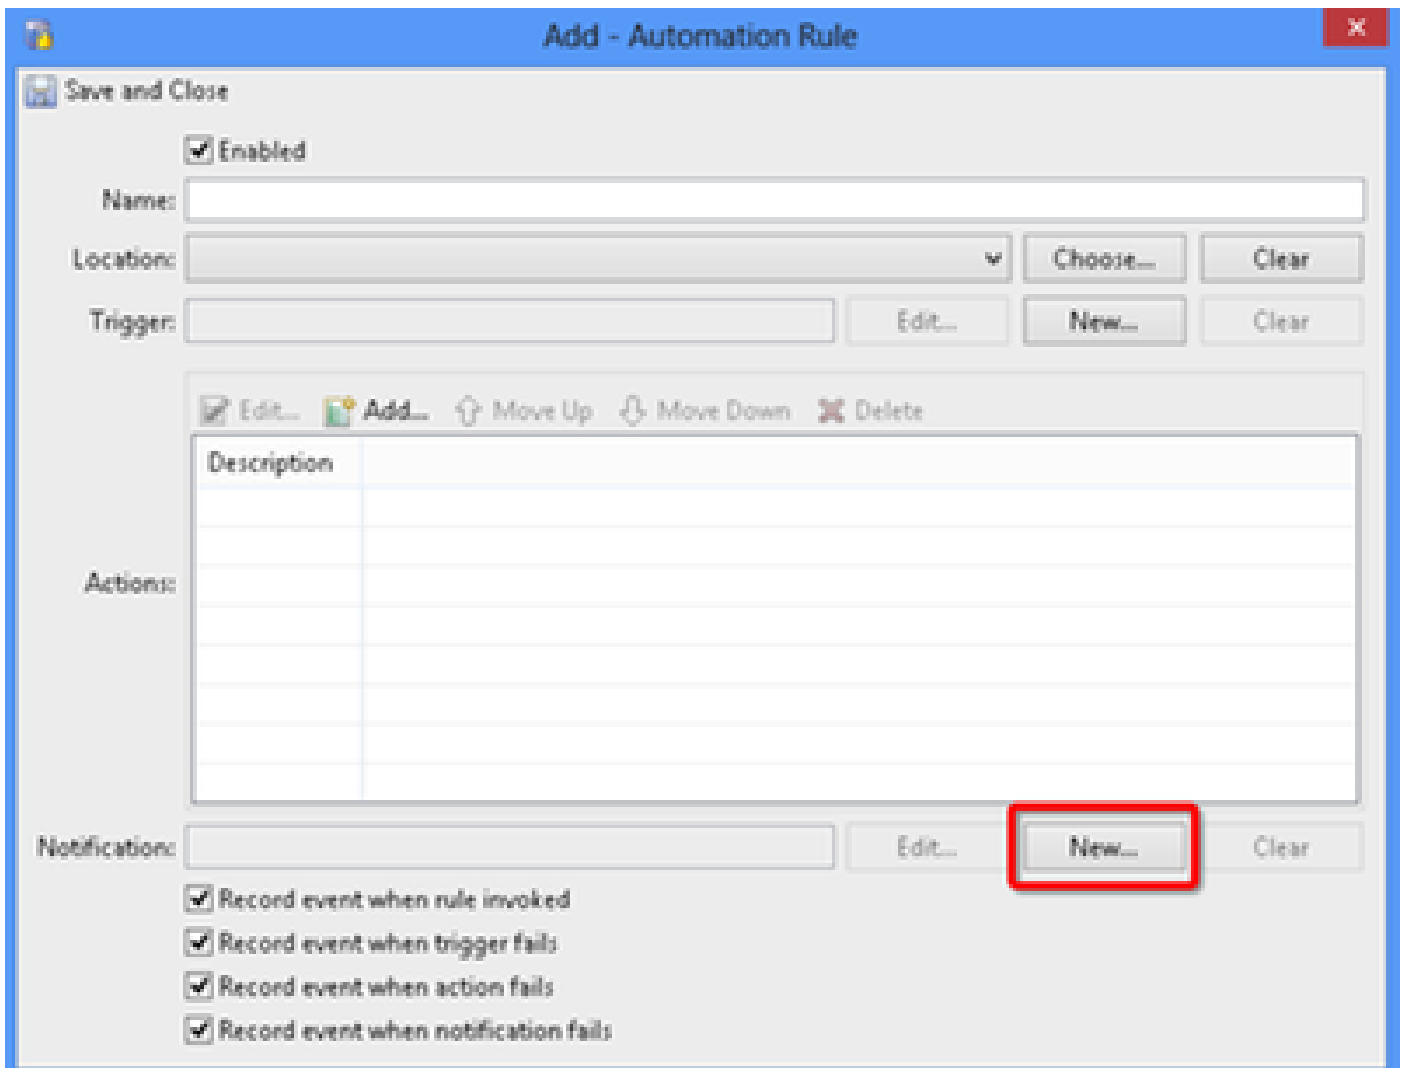

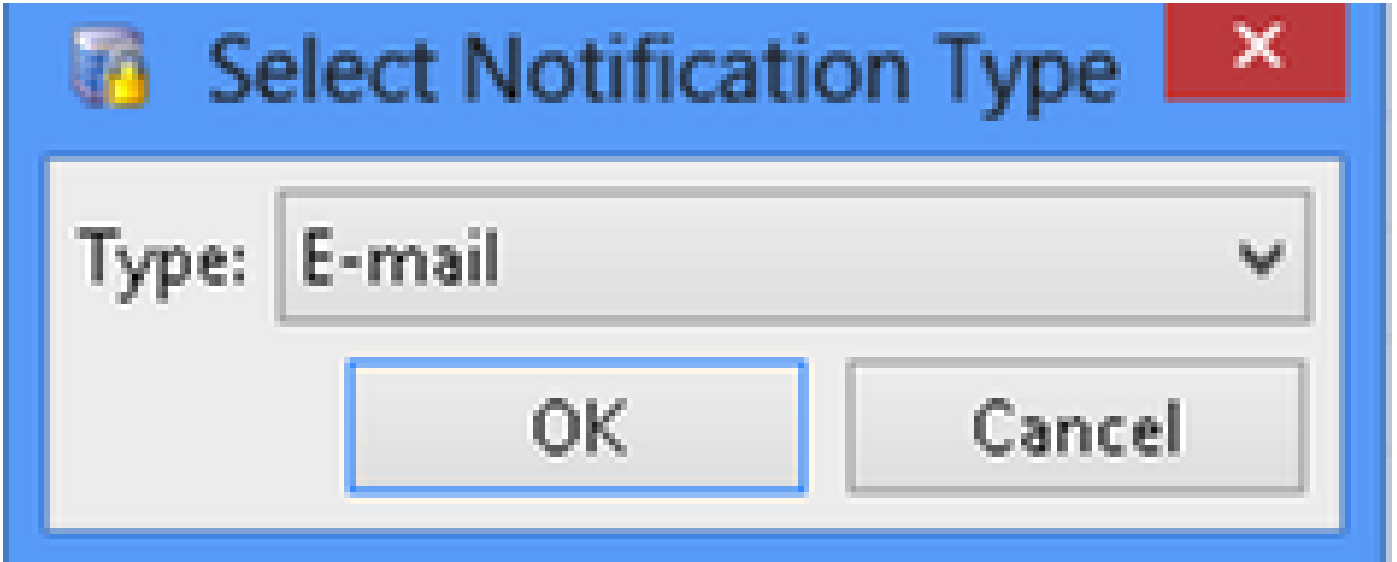

EMAL عون ددح. 13 ةوطخال

ينورتكلال دي ربل ناو نع لخدأو ددح م ينورتكلال دي رب ناو نع ددح، ةفاضل قوف رقنا. 14 ةوطخال  
ةخسن ىل ينورتكلال دي ربل ناو نع ةفاضل نكمي اضيأ) هي ل راطخال لاسرا متيس يذلا  
ةروصلال ي ف حضوم وه امك، (ةيفخم ةخسن و ةيفخم



# E-mail Notification




## To

 Edit...  Add...  Delete



### Value

 **Select E-mail Address Type** 

Type:  

## CC

 Edit...  Add...  Delete

### Value

Value

## BCC

 Edit...  Add...  Delete

### Value

Value

ةمچرتل هذه ل و ح

ةلأل تاي نقتل ن م ة و مچ م ادخت ساب دن تسمل اذ ه Cisco ت مچرت  
ملاعلاء ن أ عي مچ ي ف ن ي م دخت سمل ل معد ي و تح م مي دقت ل ة ي رش ب ل و  
امك ة ق ي قد ن و ك ت ن ل ة ي ل أ ة مچرت ل ض ف أ ن أ ة ظ حال م ي ج ر ي . ة ص ا خ ل م ه ت غ ل ب  
Cisco ي ل خ ت . ف ر ت ح م مچرت م ا ه م د ق ي ي ت ل ا ة ي ف ا ر ت ح ا ل ا ة مچرت ل ا ع م ل ا ح ل ا و ه  
ي ل ا م ئ ا د ع و ج ر ل ا ب ي ص و ت و ت ا مچرت ل ا ه ذ ه ة ق د ن ع ا ه ت ي ل و ئ س م Cisco  
Systems (رف و ت م ط بار ل ا) ي ل ص أ ل ا ي ز ي ل ج ن إ ل ا دن تسمل ا