



Cisco UCS C240 M8 EDSFF E3.S Rack Server

A printed version of this document is only a copy and not necessarily the latest version. Refer to the following link for the latest released version:

<https://www.cisco.com/c/en/us/products/servers-unified-computing/ucs-c-series-rack-servers/datasheet-listing.html>



CISCO SYSTEMS
170 WEST TASMAN DR
SAN JOSE, CA, 95134
WWW.CISCO.COM

PUBLICATION HISTORY

REV A.06 JULY 24, 2025

CONTENTS

OVERVIEW	3
DETAILED VIEWS	4
Chassis Front View	4
Chassis Rear View	5
BASE SERVER STANDARD CAPABILITIES and FEATURES	7
CONFIGURING the SERVER	9
STEP 1 SELECT SERVER SKU	10
STEP 2 SELECT RISER CARDS (REQUIRED)	11
STEP 3 SELECT CPU(s) (REQUIRED)	13
STEP 4 SELECT MEMORY (REQUIRED)	16
Memory configurations and mixing rules	18
STEP 5 SELECT DRIVE CONTROLLERS (OPTIONAL)	19
STEP 6 SELECT DRIVE CABLING OPTIONS (REQUIRED)	20
STEP 7 SELECT DRIVES (OPTIONAL)	21
STEP 8 SELECT OPTION CARD(s) (OPTIONAL)	22
ORDER OPTIONAL PCIe OPTION CARD ACCESSORIES	26
STEP 9 ORDER GPU CARDS (OPTIONAL)	27
STEP 10 ORDER M.2 BOOT RAID CONTROLLER and SATA SSDs (OPTIONAL)	29
STEP 11 ORDER POWER SUPPLY (REQUIRED)	31
STEP 12 SELECT INPUT POWER CORD(s) (REQUIRED)	32
STEP 13 ORDER TOOL-LESS RAIL KIT (REQUIRED) AND REVERSIBLE CABLE MANAGEMENT ARM (OPTIONAL)	36
STEP 14 SELECT MANAGEMENT CONFIGURATION (OPTIONAL)	37
STEP 15 ORDER SECURITY DEVICES (REQUIRED)	38
STEP 16 SELECT LOCKING SECURITY BEZEL (OPTIONAL)	39
STEP 17 SELECT OPERATING SYSTEM AND THIRD PARTY SOFTWARE	40
STEP 18 CISCO INTERSIGHT	48
SUPPLEMENTAL MATERIAL	50
Serial Port Details	50
KVM Cable	50
TECHNICAL SPECIFICATIONS	51
Dimensions and Weight	51
Power Specifications	52
Compliance Requirements	56

CONTENTS

OVERVIEW

The Cisco UCS C240 M8 EDSFF E3.S Rack Server extends the capabilities of Cisco's Unified Computing System portfolio in a 2U form factor with the Intel® Xeon® 6 Scalable Processors, 16 DIMM slots per CPU for DDR5-6400 Memory DIMMs with DIMM capacity points up to 256GB.

The Cisco UCS C240 M8 EDSFF E3.S Rack Server harnesses the power of the latest Intel® Xeon® 6 Scalable Processors and offers the following:

CPU: Up to 2x Intel® Xeon® 6 Scalable Processors with up to 86 cores per processor.

Memory: Up to 8TB with 32 x 256GB DDR5-6400 DIMMs, in a 2-socket configuration with Intel® Xeon® 6 Scalable Processors.

mLOM: The UCS C240 M8 EDSFF E3.S Rack Server has a single integrated 1GbE management port. A modular LAN on motherboard (mLOM)/OCP 3.0 slot provides various connectivity options from 10GbE to 200GbE.

The Cisco UCS C240 M8 EDSFF E3.S Rack Server can be used standalone, or as part of the Cisco Unified Computing System, which unifies computing, networking, management, virtualization, and storage access into a single integrated architecture, enabling end-to-end server visibility, management, and control in both bare metal and virtualized environments.

See [Figure 1 on page 3](#) for front and rear views of the UCS C240 M8 EDSFF E3.S Rack Server.

Figure 1 Cisco UCS C240 M8 EDSFF E3.S Rack Server

Front View (all slots shown unpopulated - see [Figure 2 on page 4](#) for details)



Rear View (all slots shown unpopulated - see [Figure 3 on page 5](#) for details)




DETAILED VIEWS

Chassis Front View

Figure 2 shows the front view of rack server configured with 32 front drives.

Figure 2 Chassis Front View

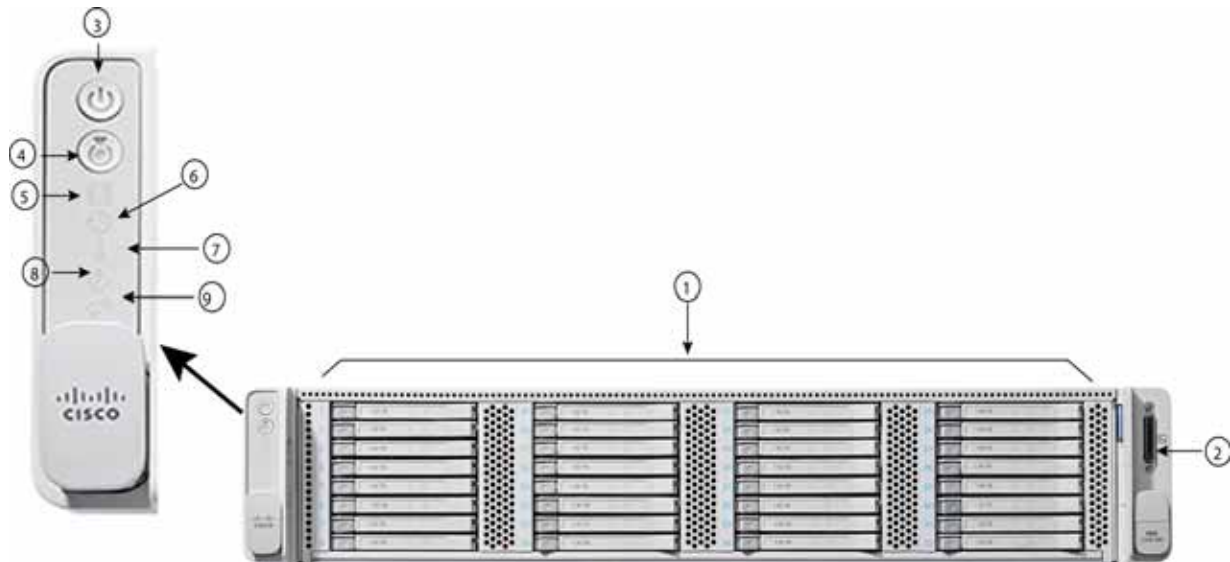


1	Drive bays 1 - 32 support E.3 1T direct attach NVMe	6	Fan status LED
2	KVM connector (used with KVM cable that provides two USB 2.0, one VGA, and one serial connector)	7	Temperature status LED
3	Power button/Power status LED	8	Power supply status LED
4	Unit Identification button/LED	9	Network link activity LED
5	System status LED	-	-

Chassis Rear View

Figure 3 shows the external features of the rear panel.

Figure 3 Chassis Rear View

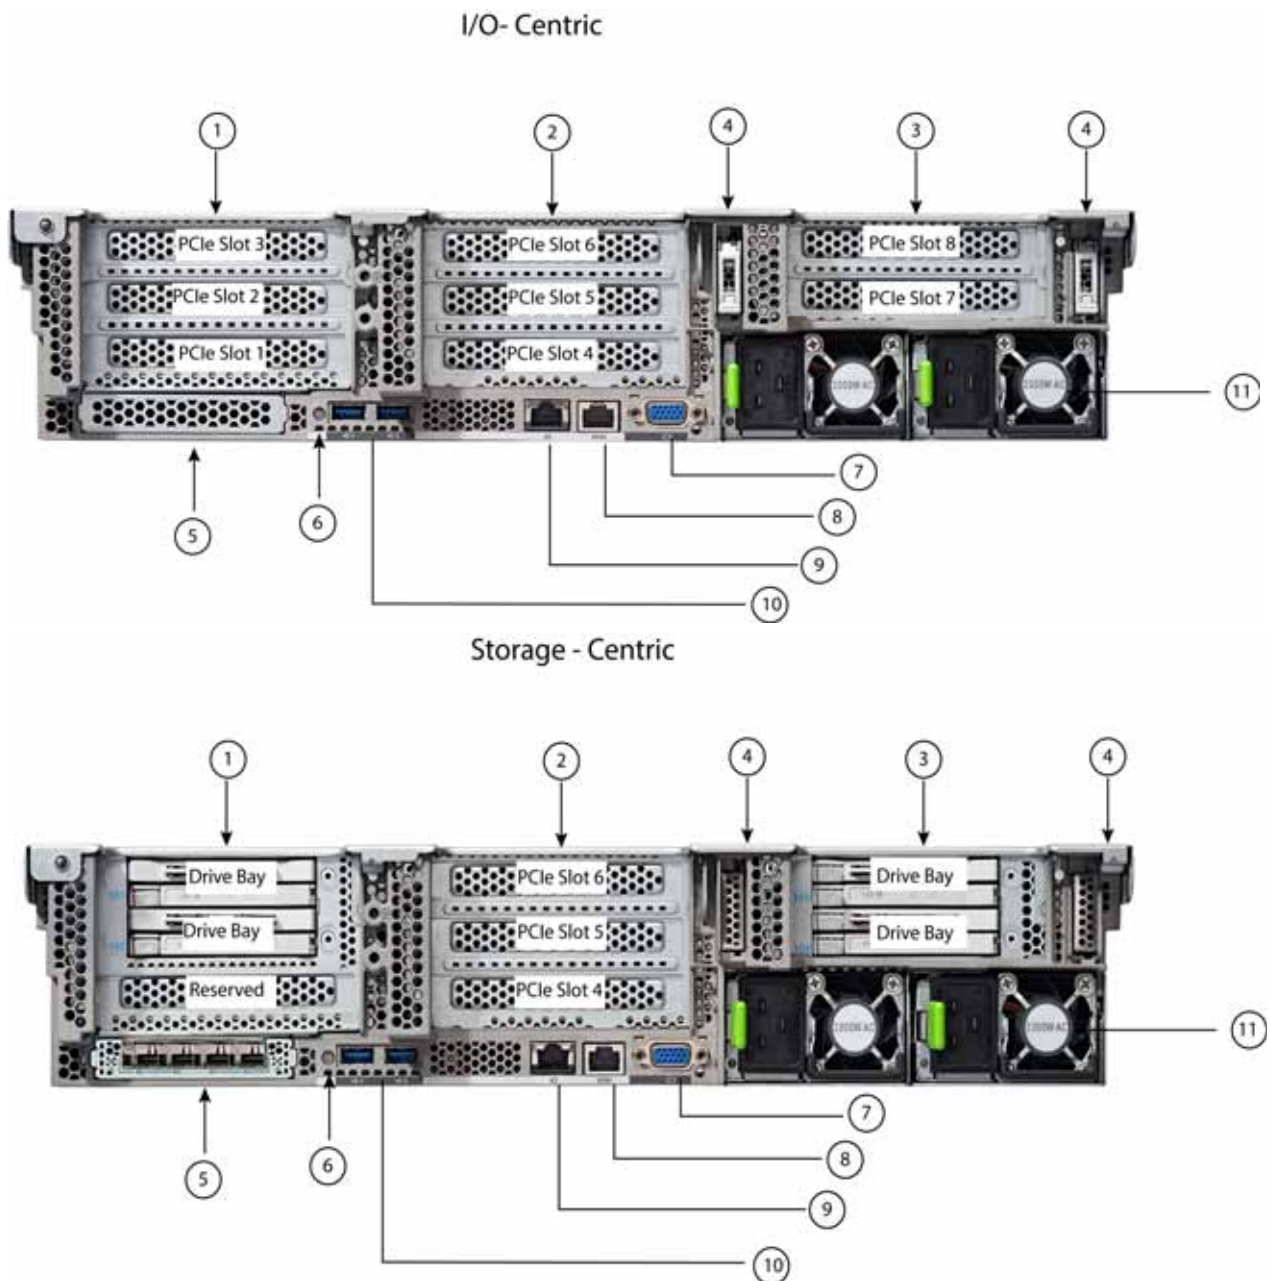

1	<p>There are three Riser 1 options:</p> <p>Riser 1A (I/O-centric, Gen 5, CPU1 control)</p> <p>Supports three Gen 5 PCIe slots:</p> <ul style="list-style-type: none"> ■ Slot 1 is full-height, 3/4 length, x8, NCSI, single wide GPU ■ Slot 2 is full-height, full-length, x16, NCSI, single/double wide GPU ■ Slot 3 is full-height, full-length, x8, no NCSI, single wide GPU <p>Riser 1C (I/O-centric, Gen 5, CPU1 control)</p> <p>Supports two Gen 5 PCIe slots:</p> <ul style="list-style-type: none"> ■ Slot 1 is full-height, 3/4 length, x16, NCSI, single wide GPU ■ Slot 2 is full-height, full-length, x16, no NCSI, single/double wide GPU <p>Riser 1D (Gen 5, CPU1 control)</p> <p>Supports two drive bays:</p> <ul style="list-style-type: none"> ■ Drive bay 101, x4, E3.S 1T NVMe ■ Drive bay 102, x4, E3.S 1T NVMe 	7	VGA display port (DB15 connector)
2	<p>There are two Riser 2 options:</p> <p>Riser 2A (I/O-centric, Gen 5, CPU2 control)</p> <p>Supports three Gen 5 PCIe slots:</p> <ul style="list-style-type: none"> ■ Slot 4 is full-height, 3/4 length, x8, NCSI, single wide GPU ■ Slot 5 is full-height, full-length, x16, NCSI, single/double wide GPU ■ Slot 6 is full-height, full length, x8, no NCSI, single wide GPU <p>Riser 2C (I/O-centric, Gen 5, CPU2 control)</p> <p>Supports two Gen 5 PCIe slots:</p> <ul style="list-style-type: none"> ■ Slot 4 is full-height, 3/4 length, x16, NCSI, single wide GPU ■ Slot 5 is full-height, full-length, x16, no NCSI, single/double wide GPU 	8	COM port (RJ45 connector)
3	<p>There are three Riser 3 options</p> <p>Riser 3A (I/O-centric, CPU2 control)</p> <p>Supports two PCIe slots:</p> <ul style="list-style-type: none"> ■ Slot 7 is full-height, full-length, x8, no NCSI, single wide GPU ■ Slot 8 is full-height, full-length, x8, no NCSI, single wide GPU <p>Riser 3C (for GPU, CPU2 control)</p> <p>Supports one PCIe Slot:</p> <ul style="list-style-type: none"> ■ Slot 7 is one full-height, full-length, x16, no NCSI, double wide GPU ■ Slot 8 is blocked by double wide GPU (not used) <p>Riser 3D (CPU2 control)</p> <p>Supports two drive bays:</p> <ul style="list-style-type: none"> ■ Drive bay 103, x4, E3.S 1T NVMe ■ Drive bay 104, x4, E3.S 1T NVMe 	9	1 GbE dedicated Ethernet management port
4	Drive bays 243 and 244, support SATA M.2 drives or hot-swappable M.2	10	USB 3.0 ports (two)
5	Modular LAN on motherboard (mLOM)/OCP 3.0 slot or hot-swappable M.2 module (drive bays 241 and 242).	11	Power supplies (two)
6	System ID pushbutton/LED	-	-


BASE SERVER STANDARD CAPABILITIES and FEATURES

Table 1 lists the capabilities and features of the base server. Details about how to configure the server for a particular feature or capability (for example, number of processors, disk drives, or amount of memory) are provided in *CONFIGURING the SERVER, page 9*.

Table 1 Capabilities and Features

Capability/Feature	Description
Chassis	Two rack unit (2RU) chassis
CPU	<ul style="list-style-type: none"> ■ One or two Intel® Xeon® 6 Scalable Processors ■ Each CPU has 8 channels with up to 2 DIMMs per channel, for up to 16 DIMMs per CPU ■ UPI Links: Up to 4 at 24GT/s
Memory	<ul style="list-style-type: none"> ■ 32 total DDR5-6400 MT/s DIMM slots with Intel® Xeon® 6 Scalable Processors (16 per CPU) ■ Up to 16x MRDIMM 8000MT/s
Video	<p>The Cisco Integrated Management Controller (CIMC) provides video using the Matrox G200e video/graphics controller:</p> <ul style="list-style-type: none"> ■ Integrated 2D graphics core with hardware acceleration ■ Embedded DDR memory interface supports up to 512 MB of addressable memory (8 MB is allocated by default to video memory) ■ Supports display resolutions up to 1920 x 1200 16bpp @ 60Hz ■ High-speed integrated 24-bit RAMDAC ■ Single lane PCI-Express host interface running at Gen 1 speed
Power subsystem	<p>Up to two of the following hot-swappable power supplies:</p> <ul style="list-style-type: none"> ■ 1050W (DC) ■ 1200W (AC) ■ 1600 W (AC) ■ 2300 W (AC) <p>One power supply is mandatory; one more can be added for 1 + 1 redundancy.</p>
Front Panel	A front panel controller provides status indications and control buttons
ACPI	This server supports the advanced configuration and power interface (ACPI) 6.2 standard.
Fans	Six hot-swappable fans for front-to-rear cooling
Expansion slots	<ul style="list-style-type: none"> ■ Riser 1A (three Gen 5 PCIe slots) ■ Riser 1C (two Gen 5 PCIe slots) ■ Riser 1D (two E3.S drive bays) ■ Riser 2A (three Gen 5 PCIe slots) ■ Riser 2C (two Gen 5 PCIe slots) ■ Riser 3A (two Gen 5 PCIe slots) ■ Riser 3C (one Gen5 PCIe Slot) ■ Riser 3D (two E3.S drive bays)

Table 1 Capabilities and Features *(continued)*

Capability/Feature	Description						
Interfaces	<ul style="list-style-type: none"> ■ Rear panel: <ul style="list-style-type: none"> • One 1Gbase-T RJ-45 management port • One RS-232 serial port (RJ45 connector) • One DB15 VGA connector • Two USB 3.0 port connectors • One flexible modular LAN on motherboard (mLOM)/OCP 3.0 slot that can accommodate various interface cards. ■ Front panel: <ul style="list-style-type: none"> • One KVM console connector (supplies two USB 2.0 connectors, one VGA DB15 video connector, and one serial port (RS232) RJ45 connector) 						
Integrated management processor	<ul style="list-style-type: none"> ■ Baseboard Management Controller (BMC) running Cisco Integrated Management Controller (CIMC) firmware. ■ Depending on your CIMC settings, the CIMC can be accessed through the 1GE dedicated management port. Cisco virtual interface card (VIC). ■ CIMC manages certain components within the server 						
Internal storage devices	<p>Drive storage:</p> <ul style="list-style-type: none"> ■ Up to 32 E.3 NVMe solid state drives (SSDs).  <p>Note: Drives are installed into front-panel drive bays, which provide hot-swappable access for E.3 NVMe drives.</p> <p>Other storage:</p> <ul style="list-style-type: none"> ■ A Boot Optimized RAID Controller supports <ul style="list-style-type: none"> • Up to two internal SATA M.2 SSDs, or • Up to two rear-accessible hot-swappable SATA M.2 SSDs ■ 8GB FlexMMC utility storage for staging of firmware and other user data. 8GB FlexMMC storage is built into the motherboard on M8. 						
Modular LAN on Motherboard (mLOM)/ Open Compute Project (OCP) 3.0 slot	<p>The dedicated mLOM/Open Compute Project (OCP) 3.0 slot on the motherboard can flexibly accommodate the following cards:</p> <ul style="list-style-type: none"> ■ Cisco Virtual Interface Cards ■ Open Compute Project (OCP) 3.0 network interface card 						
Fabric Interconnect	Compatible with the Cisco UCS 6454, 64108 and 6536 fabric interconnects						
CIMC	Cisco Integrated Management Controller 4.3(6) or later						
Intersight	Intersight provides server management capabilities						
Firmware standards	<table> <tr> <td>UEFI Spec</td><td>2.9</td></tr> <tr> <td>ACPI</td><td>6.5</td></tr> <tr> <td>SMBIOS Ver</td><td>3.7</td></tr> </table>	UEFI Spec	2.9	ACPI	6.5	SMBIOS Ver	3.7
UEFI Spec	2.9						
ACPI	6.5						
SMBIOS Ver	3.7						

CONFIGURING the SERVER

Follow these steps to configure the Cisco UCS C240 M8 EDSFF E3.S Rack Server:

- *STEP 1 SELECT SERVER SKU, page 10*
- *STEP 2 SELECT RISER CARDS (REQUIRED), page 11*
- *STEP 3 SELECT CPU(s) (REQUIRED), page 13*
- *STEP 4 SELECT MEMORY (REQUIRED), page 16*
- *STEP 5 SELECT DRIVE CONTROLLERS, page 19*
- *STEP 6 SELECT DRIVE CABLING OPTIONS (REQUIRED), page 20*
- *STEP 8 SELECT OPTION CARD(s) (OPTIONAL), page 22*
- *STEP 9 ORDER GPU CARDS (OPTIONAL), page 27*
- *STEP 10 ORDER M.2 BOOT RAID CONTROLLER and SATA SSDs (OPTIONAL), page 29*
- *STEP 11 ORDER POWER SUPPLY (REQUIRED), page 31*
- *STEP 12 SELECT INPUT POWER CORD(s) (REQUIRED), page 32*
- *STEP 13 ORDER TOOL-LESS RAIL KIT (REQUIRED) AND REVERSIBLE CABLE MANAGEMENT ARM (OPTIONAL), page 36*
- *STEP 14 SELECT MANAGEMENT CONFIGURATION (OPTIONAL), page 37*
- *STEP 15 ORDER SECURITY DEVICES (REQUIRED), page 38*
- *STEP 16 SELECT LOCKING SECURITY BEZEL (OPTIONAL), page 39*
- *STEP 17 SELECT OPERATING SYSTEM AND THIRD PARTY SOFTWARE, page 40*
- *STEP 18 CISCO INTERSIGHT, page 48*
- *SUPPLEMENTAL MATERIAL, page 50*

STEP 1 SELECT SERVER SKU

Top level ordering product ID (PID) is shown in [Table 2](#).

Table 2 Top Level Major Line Bundle ordering PIDs (MLB)

Product ID (PID)	Description
UCS-M8-MLB	<p>UCS M8 RACK MLB</p> <p>This major line bundle (MLB) consists of the Rack Server (UCSC-C240-M8SX, UCSC-C240-M8L or UCSC-C240-M8E3S) with software PIDs. Use this PID to begin a new configuration.</p>

Select one product ID (PID) as shown in [Table 3](#).



CAUTION: This product may not be purchased outside of the approved bundles (must be ordered under the MLB)

Table 3 PID of the Rack Base Server

Product ID (PID)	Description
UCSC-C240-M8E3S	<ul style="list-style-type: none"> ■ E3.S 1T Form Factor drives, with 32-drive backplane. ■ Front facing drive bays 1-32 support E.3 1T direct attached NVMe SSDs

The Cisco UCS C240 M8 EDSFF E3.S Rack Server:

- Includes a 32 drive backplane.
- Does not include power supply, CPU, memory, hard disk drives (HDDs), solid-state drives (SSDs), NVMe drives, SD cards, riser 1, riser 2, riser 3, tool-less rail kit, or PCIe cards.
- Use the steps on the following pages to configure the server with the components that you want to include.

STEP 2 SELECT RISER CARDS (REQUIRED)

Select desired risers from [Table 4](#).

Table 4 PIDs of the Risers

Product ID (PID)	Description
Riser 1 Options	
UCSC-RIS1A-240M8 (I/O riser)	UCS C240 M8 Riser 1A PCIe Gen5 (x8, x16, x8) <ul style="list-style-type: none"> ■ Slot 1 is full-height, 3/4 length, x8, Supports NCSI and single wide GPU ■ Slot 2 is full-height, full-length, x16, Supports NCSI and single/double wide GPU ■ Slot 3 is full-height, full-length, x8, Supports single wide GPU
UCSC-RIS1C-240M8 (I/O riser)	UCS C240 M8 Riser 1C PCIe Gen5 (2x16) FH <ul style="list-style-type: none"> ■ Slot 1 is full-height, 3/4 length, x16, Supports NCSI and single wide GPU ■ Slot 2 is full-height, full-length, x16, supports single/double wide GPU
UCSC-RIS1D-240M8 (storage riser)	UCS C240 M8 Riser 1D support 2x E3.S 1T drives <ul style="list-style-type: none"> ■ Drive bay 102, x4, E3.S 1T NVMe drives ■ Drive bay 101, x4, E3.S 1T NVMe drives
Riser 2 Options (2-CPU must be selected)	
UCSC-RIS2A-240M8 (I/O riser)	UCS C240 M8 Riser 2A PCIe Gen5 (x8, x16, x8) (controlled with CPU2) <ul style="list-style-type: none"> ■ Slot 4 is full-height, 3/4 length, x8, Supports NCSI and single wide GPU ■ Slot 5 is full-height, full-length, x16, Supports NCSI and single/double wide GPU ■ Slot 6 is full-height, full length, x8, Supports single wide GPU
UCSC-RIS2C-240M8 (I/O riser)	UCS C240 M8 Riser 2C PCIe Gen5 (2x16) (controlled with CPU2) <ul style="list-style-type: none"> ■ Slot 4 is full-height, 3/4 length, x16, Supports NCSI and single wide GPU ■ Slot 5 is full-height, full-length, x16, Supports single/double wide GPU
Riser 3 Options (2-CPU must be selected)	
UCSC-RIS3A-240M8 (I/O riser)	UCS C240 M8 Riser 3A PCIe Gen5 (controlled with CPU2) <ul style="list-style-type: none"> ■ Slot 7 is full-height, full-length, x8 ■ Slot 8 is full-height, full-length, x8
UCSC-RIS3C-240M8	UCS C240 M8 Riser 3C PCIe Gen5 (x16) (controlled with CPU2) <ul style="list-style-type: none"> ■ Slot 7 is one full-height, full-length, x16, Supports double wide GPU ■ Slot 8 is blocked by double wide GPU (not used)
UCSC-RIS3D-240M8 (storage riser)	UCS C240 M8 Riser 3D support 2x E3.S 1T drives (CPU2) <ul style="list-style-type: none"> ■ Drive bay 103, x4, E3.S 1T NVMe drives ■ Drive bay 104, x4, E3.S 1T NVMe drives
Accessories/spare included along with selected risers: <ul style="list-style-type: none"> ■ UCSC-FBRS2-C240-D for riser 2 and UCSC-FBRS3-C245 riser filler blank for riser 3 is auto included, if riser 2 or riser 3 are not selected. <p>NOTE: Please note, if you are adding additional risers later, you may need to order the accessories with it.</p>	



NOTE: For GPU support on a particular riser slot, see [Table 12 on page 27](#)

STEP 3 SELECT CPU(s) (REQUIRED)

The standard CPU features are:

- Up to 86 cores
- Cache size of up to 336 MB
- Power: Up to 350 Watts
- UPI Links: Up to 4 at 24GT/s

Select CPUs from [Table 5](#)



CAUTION:

- Normal operating temperature is limited to 35° C [95° F], and is lowered to 28° C [82.4° F], with a fan fault. When rear drives are installed, the normal operating temperature is lowered to 30° C [86° F], and 26° C [78.8° F], respectively with a fan fault.
- With multiple GPU>75W installed, normal operating temperature is 30° C [86° F], lowered to 25° C [77° F], with a fan fault.
- When a GPU>75W is installed, CPUs with TDP greater than 330W are not supported

Table 5 Available Intel® Xeon® 6 Scalable CPUs

Product ID	Segment/ Workload	Maximum Socket	Cores	Clock Freq	Power	Cache Size	Highest DDR5 DIMM Clock	MRDIMM Support
(PID)		(S)	(C)	(GHz)	(W)	(MB)	(MT/s)	
UCS-CPU-I6787P	Performance	2S	86	2.00	350	336	6400	Yes
UCS-CPU-I6781P ¹	Single Socket	1S	80	2.00	350	336	6400	Yes
UCS-CPU-I6767P	Performance	2S	64	2.40	350	336	6400	Yes
UCS-CPU-I6761P ¹	Single Socket	1S	64	2.50	350	336	6400	Yes
UCS-CPU-I6760P	Mainline	2S	64	2.20	330	320	6400	No
UCS-CPU-I6747P	Performance	2S	48	2.70	330	288	6400	Yes
UCS-CPU-I6741P ¹	Single Socket	1S	48	2.50	300	288	6400	No
UCS-CPU-I6740P	Mainline	2S	48	2.10	270	288	6400	No
UCS-CPU-I6736P	Performance	2S	36	2.00	205	144	6400	No
UCS-CPU-I6745P	Performance	2S	32	3.10	300	336	6400	No
UCS-CPU-I6737P	Performance	2S	32	2.90	270	144	6400	No
UCS-CPU-I6731P ¹	Single Socket	1S	32	2.50	245	144	6400	No
UCS-CPU-I6730P	Performance	2S	32	2.50	250	288	6400	No

Table 5 Available Intel® Xeon® 6 Scalable CPUs

Product ID	Segment/ Workload	Maximum Socket	Cores	Clock Freq	Power	Cache Size	Highest DDR5 DIMM Clock	MRDIMM Support
(PID)		(S)	(C)	(GHz)	(W)	(MB)	(MT/s)	
UCS-CPU-I6530P	Mainline	2S	32	2.30	225	144	6400	No
UCS-CPU-I6728P	Socket scalable	4S	24	2.70	210	144	6400	No
UCS-CPU-I6527P	Performance	2S	24	3.00	255	144	6400	No
UCS-CPU-I6521P ¹	Single Socket	1S	24	2.60	225	144	6400	No
UCS-CPU-I6520P	Mainline	2S	24	2.40	210	144	6400	No
UCS-CPU-I6511P ¹	Single Socket	1S	16	2.50	150	72	6400	No
UCS-CPU-I6724P	Performance	4S	16	3.60	210	72	6400	No
UCS-CPU-I6517P	Performance	2S	16	3.20	190	72	6400	No
UCS-CPU-I6515P	Mainline	2S	16	2.40	150	72	6400	No
UCS-CPU-I6505P	Mainline	2S	12	2.20	150	48	6400	No
UCS-CPU-I6714P	Performance	4S	8	4.00	165	48	6400	No
UCS-CPU-I6507P	Performance	2S	8	3.50	150	48	6400	No
Accessories/spare included with CPU configuration: ■ UCSC-HSLP-C240M8 ■ UCSC-HSLP-C220M8 if UCSC-GPUAD-240M8 is selected NOTE: if you are adding a second CPU later, you may need to order accessories spares with it.								

Notes:

1. Single Socket only CPUs

Table 6 CPU PID Decoder

Identifier#1	Identifier#2	Identifier#3	Identifier#4	Identifier#5	Identifier#6	Identifier#7
Cisco Product Family	CPU supplier	CPU Generation	SKU Tier	CPU SKU (2 digits)	Core Architecture	Option/Spare CPU
UCS	I: Intel	6: 6th Generation	5: GNR-SP Mid Tier 7: GNR-SP High Tier	Examples: 20, 34, 48 See detailed SKUs stack from supplier 11, 21, 31, 41, 61, 81: single-socket	P: P-Core	Blank: Option =: Spare

Supported Configurations

- 1-CPU Configuration:
 - Choose one CPU from [Table 5](#)
- 2-CPU Configuration:
 - Choose two identical CPUs from [Table 5](#)

The selection of 1 or 2 CPUs depends on the desired server functionality. See the following sections:

- [STEP 2 SELECT RISER CARDS \(REQUIRED\), page 11](#)
- [STEP 4 SELECT MEMORY \(REQUIRED\), page 16](#)
- [STEP 5 SELECT DRIVE CONTROLLERS, page 19](#)
- [STEP 6 SELECT DRIVE CABLING OPTIONS \(REQUIRED\), page 20](#)
- [STEP 7 SELECT DRIVES \(OPTIONAL\), page 21](#)
- [STEP 8 SELECT OPTION CARD\(s\) \(OPTIONAL\), page 22](#)

STEP 4 SELECT MEMORY (REQUIRED)

The [Table 7](#) below describes the main memory DIMM features supported on the server.



CAUTION: 256GB DIMMs cannot be combined with GPU card


Table 7 Server Main Memory Features

Memory server technologies	Description	
	DIMM	MRDIMM ¹
Intel® Xeon® CPU generation	Intel® Xeon® 6 CPUs	
DDR5 memory clock speed	Up to 6400 MT/s 1DPC; Up to 5200 MT/s 2DPC	Up to 8000 MT/s 1DPC
Operational voltage	1.1 Volts	
DRAM fab density	16Gb, 24Gb and 32Gb	16Gb
Memory type	RDIMM (Registered DDR5 DIMM)	MRDIMM (Multiplexed Rank DDR5 DIMM)
Memory DRAM DIMM/MRDIMM organization	Eight memory DIMM channels per CPU; up to 2 DIMMs Per Channel	Eight MRDIMM channels per CPU; 1 DIMM Per Channel
Maximum number of DRAM DIMM/MRDIMM per server	32 (2-Socket)	16 (2-Socket)
DRAM DIMM/MRDIMM Densities and Ranks	16GB 1Rx8, 32GB 1Rx4, 48GB 1Rx4, 64GB 2Rx4, 96GB 2Rx4, 128GB 2Rx4, 256GB 4Rx4	32GB 2Rx8, 64GB 2Rx4
Maximum system memory capacity	8TB (32x256GB)	1TB (16x64GB)

Notes:

1. Intel® Xeon® 6 SKUs 6787P, 6781P, 6767P, 6761P, and 6747P support MRDIMM, Per Intel® Xeon® 6 documentation.

Figure 4 Memory Organization

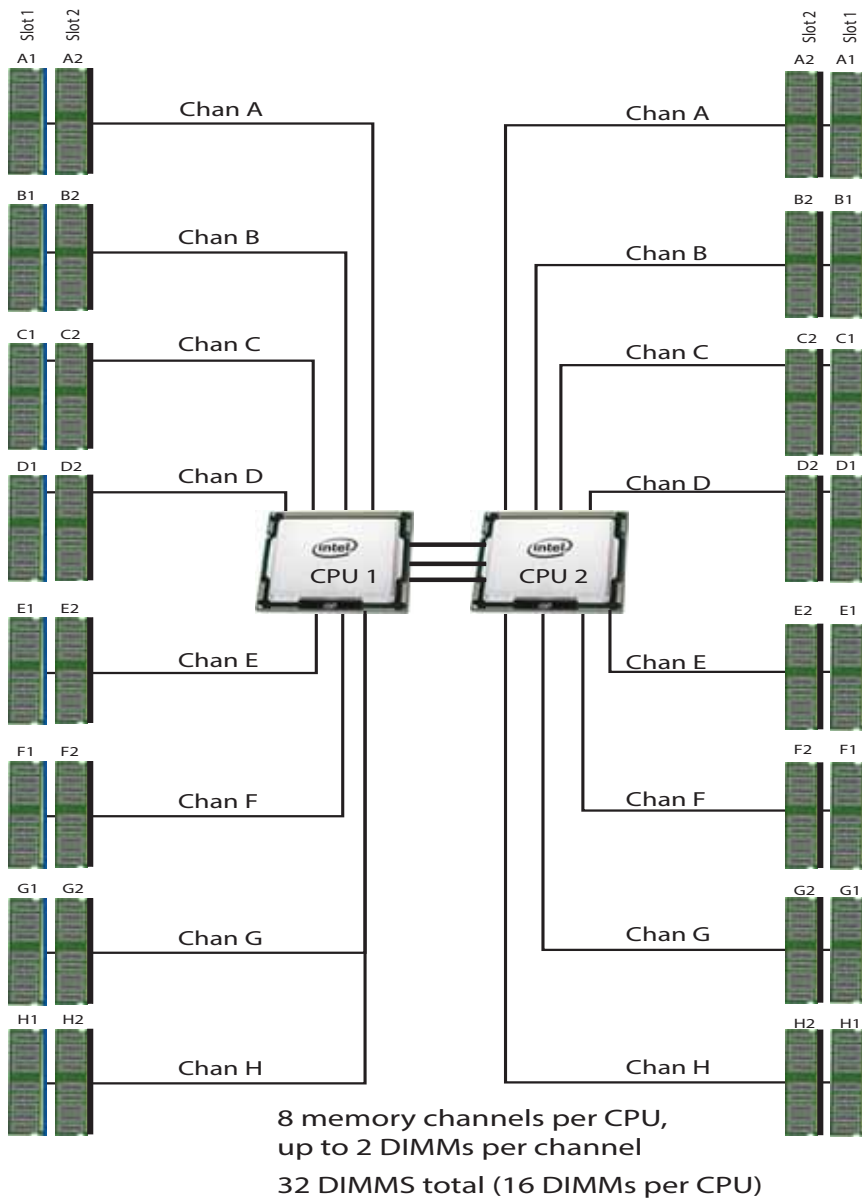

Select DIMMs and Memory Mirroring

Select the memory configuration and whether or not you want the memory mirroring option. The available memory DIMMs and mirroring option are listed in [Table 8](#).



NOTE: When memory mirroring is enabled, the memory subsystem simultaneously writes identical data to two channels. If a memory read from one of the channels returns incorrect data due to an uncorrectable memory error, the system automatically retrieves the data from the other channel. A transient or soft error in one channel does not affect the mirrored data, and operation continues unless there is a simultaneous error in exactly the same location on a DIMM and its mirrored DIMM. Memory mirroring reduces the amount of memory available to the operating system by 50% because only one of the two populated channels provides data.

Table 8 Memory Options for UCS M8 servers with Intel® Xeon® 6th Gen. CPUs

Product ID (PID)	PID Description	Ranks/DIMM
DDR5-6400 MT/s Cisco Memory PIDs list		
UCS-MRX16G1RE5	16GB RDIMM 1Rx8 1.1Volts (16Gb)	1
UCS-MRX32G1RE5	32GB RDIMM 1Rx4 1.1Volts (16Gb)	1
UCS-MRX48G1RF5	48GB RDIMM 1Rx4 1.1Volts (24Gb)	1
UCS-MRX64G2RE5	64GB RDIMM 2Rx4 1.1Volts (16Gb)	2
UCS-MRX96G2RF5	96GB RDIMM 2Rx4 1.1Volts (24Gb)	2
UCS-MR128G2RG5	128GB RDIMM 2Rx4 1.1Volts (32Gb)	2
UCS-MR256G4RG5	256GB RDIMM 4Rx4 1.1Volts (32Gb)	4
DDR5 MRDIMM-8800 MT/s Cisco Memory PIDs list		
UCS-MCX32G2RE11 ¹	32GB DDR5 MRDIMM 8800 2Rx8 (16Gb)	2
UCS-MCX64G2RE11 ¹	64GB DDR5 MRDIMM 8800 2Rx4 (16Gb)	2
Memory Mirroring Option		
N01-MMIRRORD	Memory mirroring option	
Accessories/spare included with Memory configuration:		
■ UCS-DDR5-BLK ¹ is auto included for the unselected DIMMs slots		

Notes:

- Any empty DIMM slot must be populated with a DIMM blank to maintain proper cooling airflow.

Memory configurations and mixing rules

- Golden Rule: Memory on every CPU socket shall be configured identically.
- For full details on supported memory configurations, count rules, population rules and mixing rules see the [Intel M8 Memory guide](#).

STEP 5 SELECT DRIVE CONTROLLERS



NOTE: There is no raid controller support for this Server

STEP 6 SELECT DRIVE CABLING OPTIONS (REQUIRED)

Select desired drive cabling from [Table 9](#)



NOTE: Once configured, drive cabling options are not field upgradable.

Table 9 Available drive cabling options

Product ID (PID)	PID Description	# of drives supported	Per Drive connection	Available PCIe risers	Type
UCSC-240M8E3-32X2	C240M8 E3.S 32 drives (x2 lanes) with riser 1,2&3	32	PCIe Gen5 x2	Riser 1, 2 & 3	Capacity & I/O Optimized
UCSC-240M8E3-16X4	C240M8 E3.S 16 drives (x4 lanes, slots 9-24) with riser 1,2&3	16	PCIe Gen5 x4	Riser 1, 2 & 3	Performance Optimized
UCSC-240M8E3-24X4	C240M8 E3.S 24 drives (x4 lanes) with riser 1 and 3 only	24	PCIe Gen5 x4	Riser 1 & 3 only	Performance Optimized
UCSC-240M8E3-32X4	C240M8 E3.S 32 drives (x4 lanes) with riser 3 only	32	PCIe Gen5 x4	Riser 3 only	Performance Optimized
Accessories/spare included with drives <ul style="list-style-type: none"> ■ CBL-E3SX2-2UM8-P1, CBL-E3SX2-2UM8-P2, CBL-E3SX2-2UM8-P3 (2CPU) and CBL-E3SX2-2UM8-P4 (2CPU) are auto included with UCSC-240M8E3-32X2 ■ CBL-E3SX4-2UM8-P1, CBL-E3SX4-2UM8-P2, CBL-E3SX4-2UM8-P3, CBL-E3SX4-2UM8-P4 are auto included with UCSC-240M8E3-16X4 ■ CBL-RIS2E-240M8, UCSC-RIS2E-240M8, and all above accessories included with UCSC-240M8E3-16X4, are auto included with UCSC-240M8E3-24X4 ■ CBL-RIS1E-240M8, UCSC-RIS1E-240M8, and all above accessories included with UCSC-240M8E3-24X4, are auto included with UCSC-240M8E3-32X4 					

Caveats

- Performance Optimized Cabling Options (UCSC-240M8E3-16X4, UCSC-240M8E3-24X4, UCSC-240M8E3-32X4) are supported with 2 CPU configurations only.
- When Performance Optimized Cabling Options (UCSC-240M8E3-24X4, UCSC-240M8E3-32X4) are selected, rear storage riser 1D and 3D are not supported.
- When UCSC-240M8E3-24X4 is selected, rear riser 2 (2A or 2C) is not supported.
- When UCSC-240M8E3-32X4 is selected, rear riser 1 (1A, 1C or 1D) and 2 (2A or 2C) are not supported.

STEP 7 SELECT DRIVES (OPTIONAL)

The standard disk drive features are:

- E3.S 1T NVMe Drives
- Hot-pluggable
- Drives come mounted in sleds

Select Drives

- The available drives listed [Table 10](#)

Table 10 Available E3.S 1T NVMe Drives

Product ID (PID)	PID Description	Speed	Capacity
UCS-NVE112T8K1P	12.8TB E3.S1T KCD8XPJE HgPerf HgEnd Gen5 3X NVMe (SIE SCEF)	3X	12.8 TB
UCS-NVE115T3K1V	15.3TB E3.S1T KCD8XPJE HgPerf MedEnd Gen5 1X NVMe (SIE SCEF)	1X	15.3 TB
UCS-NVE11T6K1P	1.6TB E3.S1T KCD8XPJE HgPerf HgEnd Gen5 3X NVMe (SIE SCEF)	3X	1.6 TB
UCS-NVE11T9K1V	1.9TB E3.S1T KCD8XPJE HgPerf MedEnd Gen5 1X NVMe (SIE SCEF)	1X	1.9 TB
UCS-NVE13T2K1P	3.2TB E3.S1T KCD8XPJE HgPerf HgEnd Gen5 3X NVMe (SIE SCEF)	3X	3.2 TB
UCS-NVE13T8K1V	3.8TB E3.S1T KCD8XPJE HgPerf MedEnd Gen5 1X NVMe (SIE SCEF)	1X	3.8 TB
UCS-NVE16T4K1P	6.4TB E3.S1T KCD8XPJE HgPerf HgEnd Gen5 3X NVMe (SIE SCEF)	3X	6.4 TB
UCS-NVE17T6K1V	7.6TB E3.S1T KCD8XPJE HgPerf MedEnd Gen5 1X NVMe (SIE SCEF)	1X	7.6 TB
Accessories/spare included with drives			
<ul style="list-style-type: none"> ■ UCSC-E3S1T-F is included for the not selected front storage device. ■ If you are adding drive later as spare, you may need to order cables with it. 			

STEP 8 SELECT OPTION CARD(S) (OPTIONAL)

For up-to-date server compatibility, please check the Hardware and Software compatibility list (HCL) at <https://ucshcltool.cloudapps.cisco.com/public/>.

The standard PCIe card offerings are:

- Modular LAN on Motherboard (mLOM)
- Open Compute Project (OCP) 3.0
- Virtual Interface Cards (VICs)
- Network Interface Cards (NICs)
- Host Bus Adapters (HBAs)

Select Option Cards



NOTE:

- If a double-wide (DW) GPU is selected in Riser 1 Slot 2, it blocks the use of Riser 1 Slot 3; similarly, if a DW GPU is selected in Riser 2 Slot 5, it blocks Riser 2 Slot 6, preventing simultaneous selection of these adjacent PCIe slots
- Refer to [Cisco UCS C240 M8 Installation Guide](#) more info

The available option cards are listed in [Table 11](#)

Table 11 Available PCIe Option Cards

Product ID (PID)	PID Description	Location	Card Size ¹
Modular LAN on Motherboard (mLOM) ²			
UCSC-M-V5Q50GV2-D	Cisco VIC 15427 4x 10/25/50G mLOM C-Series w/Secure Boot	mLOM	HHHL, SS
UCSC-M-V5D200GV2D	Cisco VIC 15237 2x 40/100/200G mLOM C-Series w/Secure Boot	mLOM	HHHL, SS
Open Compute Project (OCP) ³			
UCSC-O-ID10GC-D	Intel X710T2LOCPV3G1L 2x10GbE RJ45 OCP3.0 NIC	OCP	SFF
UCSC-O-N6CD25GFO	NVIDIA OEM MCX631432AC-ADAB CX6Lx 2x25G SFP28 x8 OCP NIC	OCP	SFF
UCSC-O-N6CD100GFO	NVIDIA OEM MCX623436AC-CDAB CX6Dx 2x100G QSFP56 x16 OCP NIC	OCP	SFF
Virtual Interface Cards (VICs) ²			
UCSC-P-V5Q50G-D	Cisco VIC 15425 4x 10/25/50G PCIe C-Series w/Secure Boot	Riser 1 or 3	HHHL, SS
UCSC-P-V5D200G-D	Cisco VIC 15235 2x 40/100/200G PCIe C-Series w/Secure Boot	Riser 1 or 3	HHHL, SS
Network Interface Cards (NICs)			
1GbE NICs			
UCSC-P-IQ1GC	Cisco-Intel I710-T4L 4x1GBASE-T NIC	Riser 1, 2, or 3	HHHL, SS

Table 11 Available PCIe Option Cards (*continued*)

Product ID (PID)	PID Description	Location	Card Size ¹
10GbE NICs			
UCSC-P-ID10GC-D	Cisco-Intel X710T2LG 2x10GBE RJ45 PCIe NIC	Riser 1, 2, or 3	HHHL, SS
UCSC-P-IQ10GC-D	Cisco-Intel X710T4LG 4x10GBE RJ45 PCIe NIC	Riser 1, 2, or 3	HHHL, SS
25GbE NICs			
UCSC-P-I8D25GF-D	Cisco-Intel E810XXVDA2 2x25/10GBE SFP28 PCIe NIC	Riser 1, 2, or 3	HHHL, SS
UCSC-P-N6D25GFO	NVIDIA OEM MCX631102AS-ADAT CX6Lx 2x25GbE SFP28 x8 PCIe NIC	Riser 1, 2, or 3	HHHL, SS
UCSC-P-N7Q25GF	CX713104AS-ADAT: 4x25GbE SFP56 Gen4x16, PCIe NIC	Riser 1, 2, or 3	HHHL, SS
UCSC-P-I8Q25GF-D	Cisco-Intel E810XXVDA4L 4x25/10 GbE SFP28 PCIe NIC	Riser 3	FHHL, SS
100GbE NICs			
UCSC-P-M6CD100GFO	NVIDIA OEM MCX623106AC-CDAT, 2x100 GbE QSFP56 PCIe Crypto	Riser 1, 2, or 3	HHHL, SS
UCSC-P-M6DD100GFO	NVIDIA OEM MCX623106AS-CDAT, 2x100 GbE QSFP56 PCIe No Crypto	Riser 1, 2, or 3	HHHL, SS
UCSC-P-I8D100GF-D	Cisco-Intel E810CQDA2 2x100 GbE QSFP28 PCIe NIC	Riser 1, 2, or 3	HHHL, SS
200GbE NICs			
UCSC-P-N7D200GF	MCX755106AS-HEAT: CX-7 2x200GbE QSFP112 PCIe Gen5x16, VPI NIC	Riser 1, 2, or 3	HHHL, SS
UCSC-P-N7D200GF	MCX755106AS-HEAT: CX-7 2x200GbE QSFP112 PCIe Gen5x16, VPI NIC	Riser 1, 2, or 3	HHHL, SS
UCSC-P-N3220L	Nvidia OEM BlueField-3 B3220L SuperNIC 2x200G	Riser 1, 2, or 3	FHHL, SS
400GbE NICs			
UCSC-P-N7S400GF ⁴	MCX715105AS-WEAT CX-7 1x400GbE QSFP112 PCIe Gen5 x16 VPI NIC	Riser 1, 2, or 3	HHHL, SS
UCSC-P-N7S400GFO ⁴	NVIDIA OEM MCX715105AS-WEAT 1x400GbE QSFP112 PCIe Gen5 NIC	Riser 1, 2, or 3	HHHL, SS
Host Bus Adapters (HBAs)			
UCSC-P-Q6D32GF-D	Cisco-QLogic QLE2772 2x32GFC Gen 6 Enhanced PCIe HBA	Riser 1, 2, or 3	HHHL, SS
UCSC-P-B7D32GF-D	Cisco-Emulex LPe35002-M2-2x32GFC Gen 7 PCIe HBA	Riser 1, 2, or 3	HHHL, SS
UCSC-PCIEBD16GF-D	Emulex LPe31002 dual port 16G FC HBA	Riser 1, 2, or 3	HHHL, SS
UCSC-P-Q7D64GF	Cisco-QLogic QLE2872, 2x64GFC Gen 7 PCIe HBA	Riser 1, 2, or 3	HHHL, SS
Accessories/spare included with PCI Card.			
■ UCSC-OC3-KIT-D is included along with the selection Open Compute Project (OCP) card			

Notes:

1. HHHL = half-height, half-length; FHHL = full-height, half-length; SS = single-slot; DS = double-slot. SFF = small form factor.
2. 50G speed on the 4-port and 200G speed on the 2-port are only supported on standalone servers with supported cables. Please refer to the [VIC 15000 series datasheet](#) for supported switches and cables.
3. For installation in the mLOM slot, you can order either an mLOM VIC, or the OCP NIC - but not both. If ordering the OCP NIC, the OCP Mechanical Kit (UCSC-OC3-KIT) must also be installed in order to mount OCP NIC in the mLOM slot.
4. Available post FCS.
5. This Virtual Interface Cards incorporate VIC Secure Boot technology.

Caveats

- For 1-CPU systems:
 - All the PCIe slots on riser 1A and 1C are supported for the PCIe Cards.
 - Riser 2 and 3 are not supported in 1-CPU system.
 - Only a single plug-in PCIe VIC card may be installed on a 1-CPU system, and it must be installed in slots 1 or 2 of riser 1A or slot 1 of riser 1C.
 - You can order an mLOM VIC card to be installed in the mLOM/OCP 3.0 slot internal to the chassis and thus have two VIC cards in operation at the same time. If you order a double-width GPU, it must be installed in slot 2; then a PCIe VIC can be installed in slot 1. See the [Table 11 on page 22](#) for the selection of plug-in and mLOM/OCP 3.0 VIC cards.
 - For 2-CPU systems:
 - All the PCIe slots on riser 1, 2, and 3 are supported for the PCIe Cards.
 - You can order an mLOM VIC card to be installed in the mLOM slot internal to the chassis. You can also have up to two PCIe VICs.
 - If Riser 1A and 2A are selected, two PCIe VIC can be installed in slot 2 of Riser 1A and slot 5 of Riser 2A. If GPUs are installed in slot 2 of riser 1A or slot 5 of riser 2A, the NCSI capability automatically switches over to slot 1 of riser 1A or slot 4 of Riser 2A. Therefore, Cisco PCIe VICs can be installed in slot 1 of Riser 1A and slot 4 of Riser 2A if GPUs are installed in slots 2 of Riser 1A and slot 5 of Riser 2A.
 - If Riser 1C and 2C are selected, two PCIe VIC and be installed in slot 1 of Riser 1C and slot 4 of Riser 2C.
 - Maximum 1 PCIe VIC per riser
- See [Table 12 on page 27](#) for the selection of plug-in and mLOM VIC cards.
- The server supports up to two PCIe Cisco VICs plus an MLOM VIC. However, single wire management is supported on only one VIC at a time. If multiple VICs are installed on a server, only one slot has NCSI enabled at a time and for single wire management, priority goes to the MLOM slot, then slot 2 of riser 1A/slot 1 of riser 1C, then slot 5 of riser 2A/slot 4 of riser 2C for NCSI management traffic. When multiple cards are installed, connect the single wire management cables in the priority order mentioned above.

- For installation in the mLOM slot, you can order either an mLOM VIC, or the OCP NIC - but not both. If ordering the OCP NIC, the OCP Mechanical Kit (UCSC-OC3-KIT) must also be installed in order to mount OCP NIC in the mLOM slot.

**NOTE:**

- UCSM managed servers are discoverable only if a PCIe VIC is installed or a VIC is installed in the MLOM slot.
 - Select Cisco UCS Virtual Interface Cards incorporate VIC Secure Boot technology to ensure the integrity of the VIC hardware and firmware upon server boot. VIC Secure Boot is independent of server-level secure boot from Cisco, but both technologies contribute to the Cisco trust model ensuring customers' equipment is genuine and running validated firmware.
 - To help ensure that your operating system is compatible with the card you have selected, or to see additional cards that have been qualified to work with the UCS C240 M8 server, but are not sold on the Cisco price list, check the [Hardware Compatibility List](#) link.
-

ORDER OPTIONAL PCIe OPTION CARD ACCESSORIES

- At the time of first launch, the 3rd Party Ethernet adapters were tested for interoperability with an initial selection of Optical Modules and Cables. Please check the Product Briefs for this initial list of interoperable optics and cables at <https://www.cisco.com/c/en/us/products/servers-unified-computing/third-party-adapters-listing.html>.
- For list of supported optics and cables for VIC 15428 and VIC 15238, refer to the VIC 15000 series data sheet at <https://www.cisco.com/c/en/us/products/collateral/interfaces-modules/unified-computing-system-adapters/ucs-vic-15000-series-ds.html>
- Cisco Transceiver Module Group (TMG) conducts tests with Cisco optics and cables and publishes the results in the TMG Compatibility Matrix. The latest compatibility with optical modules and DACs can be found at <https://tmgmatrix.cisco.com/>
- Refer to the these links for additional connectivity options.

Intel:
Product Guide
Speed White Paper

STEP 9 ORDER GPU CARDS (OPTIONAL)

Select GPU Options

The available GPU PCIe options and their riser slot compatibilities are listed in [Table 12](#).



CAUTION:

- 256GB DIMMs cannot be combined with GPU cards, and the ambient temperature shall be limited to a maximum of 28°C.
- With multiple GPU>75W installed, normal operating temperature is 30° C [86° F], lowered to 25° C [77° F], with a fan fault.
- When a GPU>75W is installed, CPUs with TDP greater than 330W are not supported



NOTE:

- GPUs cannot be mixed
- All GPU cards must be procured from Cisco as there is a unique SBIOS ID required by CIMC and UCSM
- If a GPU with TDP equal or greater than 75W is ordered, all the 3 risers are required, and GPU airblocker will be installed in the middle slot of any empty riser in the system.
- If GPUs are installed in slot 2 of riser 1A or slot 5 of riser 2A, the NCSI capability automatically switches over to slot 1 of riser 1A or slot 4 of Riser 2A. Therefore, Cisco PCIe VICs can be installed in slots 1 and 4 on riser 1A and 2A, if GPUs are installed in slots 2 and 5. If you order multiple GPUs, they must be installed as shown in [Table 12 on page 27](#).
- If a double-wide (DW) GPU is selected in Riser 1 Slot 2, it blocks the use of Riser 1 Slot 3; similarly, if a DW GPU is selected in Riser 2 Slot 5, it blocks Riser 2 Slot 6, preventing simultaneous selection of these adjacent PCIe slots
- Refer to [Cisco UCS C240 M8 Installation Guide](#) more info

Table 12 Available PCIe GPU Cards

GPU Product ID (PID)	PID Description	Card Size	Max GPU Per Node	Riser Slot Compatibility			
				Riser 1A/1C	Riser 2A/2C	Riser 3A/3C ¹	Riser 1D/3B
UCSC-GPU-H100-NVL	NVIDIA H100 NVL, 400W, 94GB, 2-slot FHFL GPU	double-wide	3	slot 2	slot 5	slot 7 (3C Only)	n/a
UCSC-GPU-L40S	NVIDIA L40S: 350W, 48GB, 2-slot FHFL GPU	double-wide	3	slot 2	slot 5	slot 7 (3C Only)	n/a
UCSC-GPU-L4 ²	NVIDIA L4:70W, 24GB, 1-slot HHHH GPU	Single-wide	8	All slots	All slots	slot 7 (3C Only)	n/a

Table 12 Available PCIe GPU Cards

GPU Product ID (PID)	PID Description	Card Size	Max GPU Per Node	Riser Slot Compatibility			
UCSC-GPU-A16-D	NVIDIA A16 PCIE 250W 4X16GB	double-wide	3	slot 2	slot 5	slot 7 (3C Only)	n/a
Accessories/spare included with GPU: <ul style="list-style-type: none"> ■ When a GPU ready configuration is ordered, the server comes with low-profile heatsinks PID (UCSC-HSLP-C220M8), and special airblocker PID (UCSC-RISAB-24XM7) for GPUs. ■ Air duct (UCSC-GPUAD-C240M8) is not auto-included with the double wide GPUs, however it is required selection under configuration. For GPU UCSC-GPU-L4 air duct is not required. ■ UCS-P100CBL-240-D is included with the selection of A16 GPUs. ■ CBL-G5GPU-C240M7 power cable included with the selection of L40S and H100-NVL GPUs. NOTE: If you are adding GPUs later to non GPU ready configuration, you need to order the GPU kit (UCSC-GPUKIT-240M8=) along with GPUs, this GPU kit includes 2x low profile heatsinks, 1x GPU airduct, 2x thermal paste and 2x GPU airblockers.							

Notes:

1. The server supports one full-height, full-length, double-wide GPU (PCIe slot 7 only) in Riser 3C.
2. L4 is supported on all slots in PCIe risers. The maximum would be 8 when you have riser 1A+2A+3A and populate all 8 slots with L4

STEP 10 ORDER M.2 BOOT RAID CONTROLLER and SATA SSDs (OPTIONAL)

- Order Cisco boot optimized M.2 RAID controller from [Table 13](#). The boot optimized RAID controller plugs into a connector on the motherboard and holds up to two M.2 SATA drives.



NOTE:

- The Cisco boot optimized M.2 RAID controller supports RAID 1 and JBOD mode
- The Cisco boot optimized M.2 RAID controller is available only with 240GB, 480GB, and 960GB M.2 SSDs.
- CIMC is supported for configuring of volumes and monitoring of the controller and installed SATA M.2 drives
- The SATA M.2 drives can boot in UEFI mode only. Legacy boot mode is not supported
- Up to 1 Boot-Optimized RAID Controller is supported per system

Table 13 Boot-Optimized RAID Controller

Product ID (PID)	PID Description	M.2 Location	Hot- Swappable_M.2
UCS-M2-HWRAID2 ¹	Cisco Boot optimized M.2 Raid controller for SATA drives	Internal	No
UCSC-M2RM-M8 ²	UCS C220/240 M8 Rear Hot-plug M.2 module (MLOM)	MLOM Slot	Yes
UCSC-M2RR-240M8	UCS C240 M8 Rear Hot-plug M.2 module (Riser 3)	By Riser 3	Yes

Notes:

1. UCS-M2-HWRAID2 plugs into a connector on the motherboard and holds up to two M.2 SATA drives. Hot-plug replacement of the M.2 drives is not supported with UCS-M2-HWRAID2. The server must be powered off. UCSC-M2I-240M8 is auto included with UCS-M2-HWRAID2. If you are adding M.2 RAID controller as spare, you may need to order accessories with it.
2. UCSC-M2RM-M8 is installed in the mLOM location. If UCSC-M2RM-M8 is selected, mLOM/OCF card cannot be used. Hot-plug replacement of the M.2 drives is supported with UCSC-M2RM-M8. CBL-M2RM-240M8 is auto included with UCSC-M2RM-M8. If you are adding M.2 RAID controller as spare, you may need to order accessories with it.

- Order one or two matching M.2 SATA SSDs from [Table 14](#) along with a boot-optimized RAID controller (see [Table 13](#)). Each boot-optimized RAID controller can accommodate up to two SATA M.2 SSDs.



NOTE:

- It is recommended that M.2 SATA SSDs be used as boot-only devices.
- Order one or two identical M.2 SATA SSDs for the boot optimized RAID controller
- You cannot mix M.2 SATA SSD capacities.

Table 14 M.2 SATA SSDs

Product ID (PID)	PID Description
UCS-M2-240G-D	240GB M.2 SATA Micron G2 SSD
UCS-M2-480G-D	480GB M.2 SATA SSD
UCS-M2-960G-D	960GB M.2 SATA Micron G2 SSD
UCS-M2240OA1V	240GB M.2 Boot Solidigm S4520 SATA 1X SSD
UCS-M2480OA1V	480GB M.2 Boot Solidigm S4520 SATA 1X SSD

STEP 11 ORDER POWER SUPPLY (REQUIRED)

Power supplies share a common electrical and physical design that allows for hot-plug and tool-less installation into M8 C-series servers. Each power supply is certified for high-efficiency operation and offers multiple power output options. This allows users to “right-size” based on server configuration, which improves power efficiency, lowers overall energy costs and avoids stranded capacity in the data center.

Use the power calculator at the following link to determine the needed power based on the options chosen (CPUs, drives, memory, and so on):

<http://ucspowercalc.cisco.com>



WARNING:

- Starting 1st January 2024, only Titanium rated PSUs are allowed to be shipped to European Union (EU), European Economic Area (EEA), United Kingdom (UK), Switzerland and other countries that adopted Lot 9 Regulation.
- DC PSUs are not impacted by Lot 9 Regulation and are EU/UK Lot 9 compliant

Table 15 Power Supply

Product ID (PID)	PID Description
PSU (Input High Line 210VAC)	
UCSC-PSU1-1200W-D	1200W Titanium power supply for C-Series Servers
UCSC-PSUV21050D-D	Cisco UCS 1050W -48V DC Power Supply for Rack Server
UCSC-PSU1-1600W-D	UCS 1600W AC PSU Platinum (Not EU/UK Lot 9 Compliant)
UCSC-PSU1-2300W-D	Cisco UCS 2300W AC Power Supply for Rack Servers Titanium
PSU (Input Low Line 110VAC)	
UCSC-PSU1-1200W-D	1200W Titanium power supply for C-Series Servers Titanium
UCSC-PSU1-2300W-D	2300W Power supply for C-series servers Titanium



NOTE:

- In a server with two power supplies, both power supplies must be identical.
- Refer to [Power Specifications, page 54](#) section for the full details on the each power supply.

STEP 12 SELECT INPUT POWER CORD(S) (REQUIRED)

Using [Table 16](#) and [Table 17](#), select the appropriate AC power cords. You can select a minimum of no power cords and a maximum of two. If you select the option R2XX-DMYMPWRCORD, no power cord is shipped with the server.



NOTE: [Table 16](#) lists the power cords for servers that use power supplies less than 2300 W. [Table 17](#) lists the power cords for servers that use 2300 W power supplies. Note that the power cords for 2300 W power supplies use a C19 connector so they only fit the 2300 W power supply connector.

Table 16 Available Power Cords (for server PSUs less than 2300 W)

Product ID (PID)	PID Description	Images
NO-POWER-CORD	ECO friendly green option, no power cable will be shipped	
CAB-48DC40A8AWG-D	C-Series -48VDC PSU Power Cord, 3.5M, 3 Wire, 8AWG, 40A	<p>Figure 1-3 CAB-48DC-40A-8AWG, DC Power Cord (3.5 m)</p>
CAB-N5K6A-NA	Power Cord, 200/240V 6A, North America	<p>Plug: NEMA 6-15P Cordset rating: 10 A, 250 V Length: 8.2 ft Connector: IEC60320/C13</p>
CAB-AC-L620-C13-D	AC Power Cord, NEMA L6-20 - C13, 2M/6.5ft	<p>1' From Plug End 70x2</p>
CAB-C13-CBN	CABASY,WIRE,JUMPER CORD, 27" L, C13/C14, 10A/250V	<p>655 MM ± 25 MM 70x2 1' From Plug End 70x2</p>
CAB-C13-C14-2M	CABASY,WIRE,JUMPER CORD, PWR, 2 Meter, C13/C14,10A/250V	<p>655 MM ± 25 MM 70x2 1' From Plug End 70x2</p>

Table 16 Available Power Cords (for server PSUs less than 2300 W)

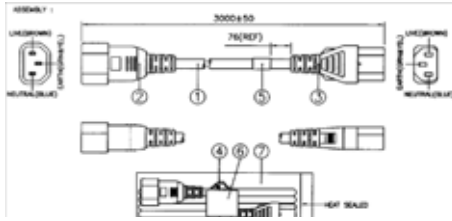
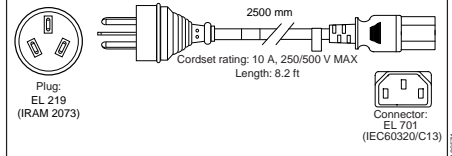
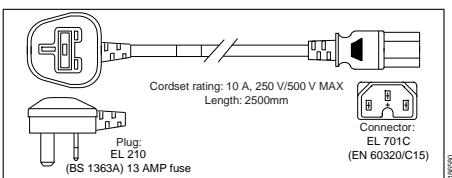
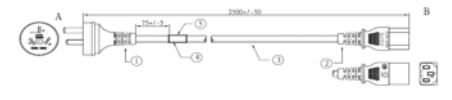
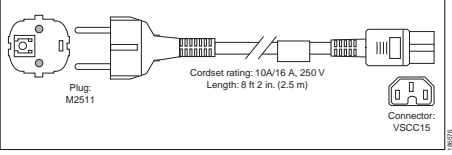
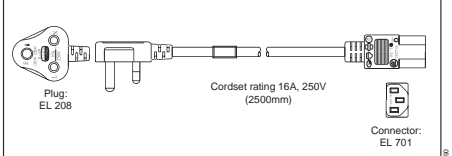
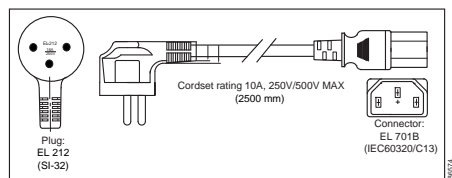
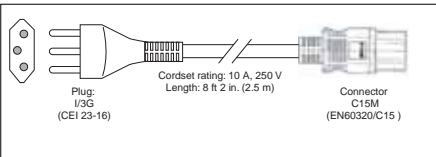
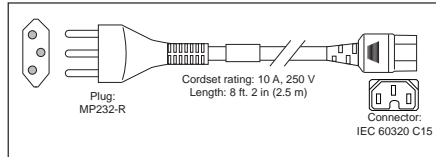
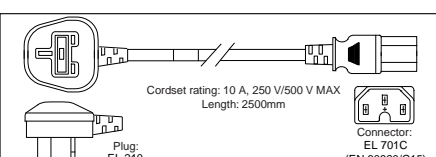
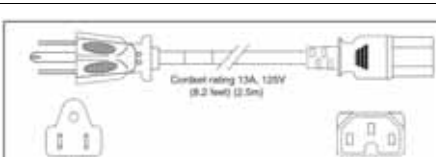
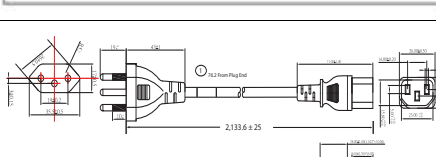
Product ID (PID)	PID Description	Images
CAB-C13-C14-AC	CORD,PWR,JMP,IEC60320/C14,IEC60320/C13, 3.0M	
CAB-250V-10A-AR	Power Cord, 250V, 10A, Argentina	
CAB-9K10A-AU	Power Cord, 250VAC 10A 3112 Plug, Australia	
CAB-250V-10A-CN	AC Power Cord - 250V, 10A - PRC	
CAB-9K10A-EU	Power Cord, 250VAC 10A CEE 7/7 Plug, EU	
CAB-250V-10A-ID	Power Cord, 250V, 10A, India	
CAB-C13-C14-3M-IN	Power Cord Jumper, C13-C14 Connectors, 3 Meter Length, India	Image not available
CAB-C13-C14-IN	Power Cord Jumper,C13-C14 Connectors,1.4 Meter Length, India	Image not available
CAB-250V-10A-IS	Power Cord, SFS, 250V, 10A, Israel	

Table 16 Available Power Cords (for server PSUs less than 2300 W)

Product ID (PID)	PID Description	Images
CAB-9K10A-IT	Power Cord, 250VAC 10A CEI 23-16/VII Plug, Italy	
CAB-9K10A-SW	Power Cord, 250VAC 10A MP232 Plug, Switzerland	
CAB-9K10A-UK	Power Cord, 250VAC 10A BS1363 Plug (13 A fuse), UK	
CAB-9K12A-NA ¹	Power Cord, 125VAC 13A NEMA 5-15 Plug, North America	
CAB-250V-10A-BR	Power Cord - 250V, 10A - Brazil	
CAB-C13C142M-JP-D	Power Cord C13-C14, 2M/6.5ft Japan PSE mark	Image not available
CAB-9K10A-KOR ¹	Power Cord, 125VAC 13A KSC8305 Plug, Korea	Image not available
CAB-ACTW	AC Power Cord (Taiwan), C13, EL 302, 2.3M	Image not available
CAB-JPN-3PIN	Japan, 90-125VAC 12A NEMA 5-15 Plug, 2.4m	Image not available
CAB-48DC40A-INT-D	C-Series -48VDC PSU PWR Cord, 3.5M, 3 Wire, 8AWG, 40A (INT)	Image not available
CAB-48DC-40A-AS-D	C-Series -48VDC PSU PWR Cord, 3.5M, 3Wire, 8AWG, 40A (AS/NZ)	Image not available

Notes:

1. This power cord is rated to 125V and only supported for PSU rated at 1050W or less

Table 17 Available Power Cords (for servers with 2300 W PSUs)

Product ID (PID)	PID Description	Images
CAB-C19-CBN	Cabinet Jumper Power Cord, 250 VAC 16A, C20-C19 Connectors	Not applicable
CAB-S132-C19-ISRL	S132 to IEC-C19 14ft Israeli	Image not available
CAB-IR2073-C19-AR	IRSM 2073 to IEC-C19 14ft Argen	Image not available
CAB-BS1363-C19-UK	BS-1363 to IEC-C19 14ft UK	Image not available
CAB-SABS-C19-IND	SABS 164-1 to IEC-C19 India	Image not available
CAB-C2316-C19-IT	CEI 23-16 to IEC-C19 14ft Italy	Image not available
CAB-US515P-C19-US	NEMA 5-15 to IEC-C19 13ft US	Image not available
CAB-US520-C19-US	NEMA 5-20 to IEC-C19 14ft US	Image not available
CAB-US620P-C19-US	NEMA 6-20 to IEC-C19 13ft US	Image not available
CAB-9K16A-BRZ	Power Cord 250VAC 16A, Brazil, Src Plug EL224-C19	Image not available
CAB-9K16A-KOR	Power Cord 250VAC 16A, Korea, Src Plug	Image not available
CAB-AC-16A-AUS	Power Cord, 250VAC, 16A, Australia C19	Image not available
CAB-AC-2500W-EU	Power Cord, 250Vac 16A, Europe	Image not available
CAB-C14C19-10A-EU	Power Cord C14-C19 10A EU	Image not available
CAB-AC-2500W-INT	Power Cord, 250Vac 16A, INTL	Image not available
CAB-AC-2500W-ISRL	Power Cord, 250VAC, 16A, Israel	Image not available
CAB-AC-C19-TW	Power Cord, 250 V, 16A, C19, Taiwan	Image not available
CAB-AC-C6K-TWLK	Power Cord, 250Vac 16A, twist lock NEMA L6-20 plug, US	Image not available
CAB-AC16A-CH	16A AC Power Cord For China	Image not available
CAB-ACS-16	AC Power Cord (Swiss) 16A	Image not available
CAB-C19-C20-3M-JP	Power Cord C19-C20, 3M/10ft Japan PSE mark	Image not available
CAB-C19-C20-IND	Power Cord C19-C20 India	Image not available
UCSB-CABL-C19-BRZ	NBR 14136 to C19 AC 14FT POWER CORD, BRAZIL	Image not available
NO-POWER-CORD	ECO friendly green option, no power cable will be shipped	Image not available

STEP 13 ORDER TOOL-LESS RAIL KIT (REQUIRED) AND REVERSIBLE CABLE MANAGEMENT ARM (OPTIONAL)

■ Tool-less Rail Kit:

Select a tool-less rail kit (or no rail kit) from [Table 18](#).



NOTE:

- Cisco recommends a minimum quantity of 1 Rail Kit
- If you plan to rackmount your server, you must order a tool-less rail kit.

Table 18 Tool-less Rail Kit Options

Product ID (PID)	PID Description
UCSC-RAIL-D	Ball Bearing Rail Kit for M8 rack servers
UCSC-RAIL-NONE-D	No rail kit option

■ Optional Reversible Cable Management Arm:

The reversible cable management arm mounts on either the right or left slide rails at the rear of the server and is used for cable management. Select an Optional Reversible Cable Management Arm from [Table 19](#).



NOTE: If you plan to rackmount your server, you must order a tool-less rail kit. The same rail kits and CMAs are used for M6 and M7 servers.

Table 19 Cable Management Arm

Product ID (PID)	PID Description
UCSC-CMA-C240-D	Reversible CMA for M8 ball bearing rail kit

For more information about the tool-less rail kit and cable management arm, check the [Cisco UCS C240 M8 Installation Guide](#).

STEP 14 SELECT MANAGEMENT CONFIGURATION (OPTIONAL)

By default, the server NIC mode is configured to be Shared LOM Extended. This NIC mode allows any LOM port or adapter card port to be used to access the Cisco Integrated Management Controller (CIMC). The Cisco VIC card must be installed in a slot with NCSI support.



NOTE:

- There are no LOM ports on the C220 and C240 M8 servers. Servers ordered without a VIC or OCP card will ship in Dedicated network mode, unless otherwise specified by a configurable SW PID (**UCSC-CCARD-01**)
- For full details on all the NIC mode settings, see [Cisco UCS C240 M8 Installation Guide](#)

Table 20 Management Configuration Ordering Information

Product ID (PID)	PID Description
UCSC-DLOM-01-D	Dedicated Mode BIOS setting for C-Series Servers <ul style="list-style-type: none"> ■ To change the default NIC mode to Dedicated NIC mode, select this card. ■ In Dedicated NIC mode, the CIMC can be accessed only through the dedicated management port. ■ See Chassis Rear View, page 5 for the location of the management port
UCSC-CCARD-01-D	Cisco Card Mode BIOS setting for C-Series Servers <ul style="list-style-type: none"> ■ To change the default NIC mode to Cisco Card Mode, select this card. ■ If Cisco card selected, a VIC or MLOM must also be included in the configuration. if OCP card is included in the configuration, a VIC card must be selected. ■ In this mode, you can assign an IP address to the CIMC using DHCP and from there you can fully automate your deployment.

In addition, the optional software PIDs listed in [Table 24 on page 48](#) can be ordered for setting the server to operate in various modes.

STEP 15 ORDER SECURITY DEVICES (REQUIRED)

A Trusted Platform Module (TPM) is a computer chip (microcontroller) that can securely store artifacts used to authenticate the platform (server). These artifacts can include passwords, certificates, or encryption keys. A TPM can also be used to store platform measurements that help ensure that the platform remains trustworthy. Authentication (ensuring that the platform can prove that it is what it claims to be) and attestation (a process helping to prove that a platform is trustworthy and has not been breached) are necessary steps to ensure safer computing in all environments.

A chassis intrusion switch gives a notification of any unauthorized mechanical access into the server.

The security device ordering information is listed in [Table 21](#)



NOTE:

- The TPM module used in this system conforms to TPM 2.0, as defined by the Trusted Computing Group (TCG). It is also SPI-based.
- TPM installation is supported after-factory. However, a TPM installs with a one-way screw and cannot be replaced, upgraded, or moved to another server. If a server with a TPM is returned, the replacement server must be ordered with a new TPM.

Table 21 Security Devices

Product ID (PID)	PID Description
UCS-TPM-002D-D	TPM 2.0 TCG FIPS140-2 CC+ Cert M7 Intel MSW2022 Compliant
UCSX-TPM-OPT-OUT-D	OPT OUT, TPM 2.0, TCG, FIPS140-2, CC EAL4+ Certified ¹
UCSC-INT-SW02-D	C220 and C240 M8 Chassis Intrusion Switch

Notes:

1. Please note that Microsoft certification requires a TPM 2.0 for bare-metal or guest VM deployments. Opt-out of the TPM 2.0 voids the Microsoft certification

STEP 16 SELECT LOCKING SECURITY BEZEL (OPTIONAL)

An optional locking bezel can be mounted to the front of the chassis to prevent unauthorized access to the drives.

Select the locking bezel from [Table 22](#).

Table 22 Locking Bezel Option

Product ID (PID)	Description
UCSC-BZL-C240-D	C240 M8 Security Bezel

STEP 17 SELECT OPERATING SYSTEM AND THIRD PARTY SOFTWARE


NOTE:

- See this link for operating system guidance:
<https://ucshcltool.cloudapps.cisco.com/public/>

Table 23 Operating System

Product ID (PID)	PID Description
Microsoft Windows Server	
MSWS-22-ST16C	Windows Server 2022 Standard (16 Cores/2 VMs)
MSWS-22-ST16C-RM	Windows Server 2022 Stan (16 Cores/2 VMs) Rec Media DVD Only
MSWS-22-STA2C	Windows Server 2022 Standard - Additional 2 Cores
MSWS-22-ST16C-NS	Windows Server 2022 Standard (16 Cores/2 VMs) - No Cisco SVC
MSWS-22-ST16C-RM	Windows Server 2022 Stan (16 Cores/2 VMs) Rec Media DVD Only
MSWS-22-STA2C-NS	Windows Server 2022 Stan - Additional 2 Cores - No Cisco SVC
MSWS-22-DC16C	Windows Server 2022 Data Center (16 Cores/Unlimited VMs)
MSWS-22-DC16C-RM	Windows Server 2022 DC (16Cores/Unlim VM) Rec Media DVD Only
MSWS-22-DCA2C	Windows Server 2022 Data Center - Additional 2 Cores
MSWS-22-DC16C-NS	Windows Server 2022 DC (16 Cores/Unlim VMs) - No Cisco SVC
MSWS-22-DC16C-RM	Windows Server 2022 DC (16Cores/Unlim VM) Rec Media DVD Only
MSWS-22-DCA2C-NS	Windows Server 2022 DC - Additional 2 Cores - No Cisco SVC
MSWS-25-ST16C	Windows Server 2025 Standard (16 Cores/2 VMs)
MSWS-25-ST16C-RM	Windows Server 2025 Stan (16 Cores/2 VMs) Rec Media DVD Only
MSWS-25-STA2C	Windows Server 2025 Standard - Additional 2 Cores
MSWS-25-STA4C	Windows Server 2025 Standard - Additional 4 Cores
MSWS-25-STA16C	Windows Server 2025 Standard - Additional 16 Cores
MSWS-25-ST16C-NS	Windows Server 2025 Standard (16 Cores/2 VMs) - No Cisco SVC
MSWS-25-ST16C-RM	Windows Server 2025 Stan (16 Cores/2 VMs) Rec Media DVD Only
MSWS-25-STA2C-NS	Windows Server 2025 Stan - Additional 2 Cores - No Cisco SVC
MSWS-25-STA4C-NS	Windows Server 2025 Stan - Additional 4 Cores- No Cisco SVC
MSWS-25-STA16C-NS	Windows Server 2025 Stand - Additional 16 Cores- No Cisco SVC
MSWS-25-ST24C	Windows Server 2025 Standard (24 Cores)

Table 23 Operating System (*continued*)

Product ID (PID)	PID Description
MSWS-25-ST16C-RM	Windows Server 2025 Stan (16 Cores/2 VMs) Rec Media DVD Only
MSWS-25-STA2C	Windows Server 2025 Standard - Additional 2 Cores
MSWS-25-STA4C	Windows Server 2025 Standard - Additional 4 Cores
MSWS-25-STA16C	Windows Server 2025 Standard - Additional 16 Cores
MSWS-25-ST24C-NS	Windows Server 2025 Standard (24 Cores) - No Cisco SVC
MSWS-25-ST16C-RM	Windows Server 2025 Stan (16 Cores/2 VMs) Rec Media DVD Only
MSWS-25-STA2C-NS	Windows Server 2025 Stan - Additional 2 Cores - No Cisco SVC
MSWS-25-STA4C-NS	Windows Server 2025 Stan - Additional 4 Cores- No Cisco SVC
MSWS-25-STA16C-NS	Windows Server 2025 Stand - Additional 16 Cores- No Cisco SVC
MSWS-25-DC16C	Windows Server 2025 Data Center (16 Cores/Unlimited VMs)
MSWS-25-DC16C-RM	Windows Server 2025 DC (16Cores/Unlim VM) Rec Media DVD Only
MSWS-25-DCA2C	Windows Server 2025 Data Center - Additional 2 Cores
MSWS-25-DCA4C	Windows Server 2025 Data Center - Additional 4 Cores
MSWS-25-DCA16C	Windows Server 2025 Data Center - Additional 16 Cores
MSWS-25-DC16C-NS	Windows Server 2025 DC (16 Cores/Unlim VMs) - No Cisco SVC
MSWS-25-DC16C-RM	Windows Server 2025 DC (16Cores/Unlim VM) Rec Media DVD Only
MSWS-25-DCA2C-NS	Windows Server 2025 DC - Additional 2 Cores - No Cisco SVC
MSWS-25-DCA4C-NS	Windows Server 2025 DC - Additional 4 Cores- No Cisco SVC
MSWS-25-DCA16C-NS	Windows Server 2025 DC - Additional 16 Cores- No Cisco SVC
MSWS-25-DC24C	Windows Server 2025 Data Center (24 Cores)
MSWS-25-DC16C-RM	Windows Server 2025 DC (16Cores/Unlim VM) Rec Media DVD Only
MSWS-25-DCA2C	Windows Server 2025 Data Center - Additional 2 Cores
MSWS-25-DCA4C	Windows Server 2025 Data Center - Additional 4 Cores
MSWS-25-DCA16C	Windows Server 2025 Data Center - Additional 16 Cores
MSWS-25-DC24C-NS	Windows Server 2025 DC (24 Cores) - No Cisco SVC
MSWS-25-DC16C-RM	Windows Server 2025 DC (16Cores/Unlim VM) Rec Media DVD Only
MSWS-25-DCA2C-NS	Windows Server 2025 DC - Additional 2 Cores - No Cisco SVC
MSWS-25-DCA4C-NS	Windows Server 2025 DC - Additional 4 Cores- No Cisco SVC
MSWS-25-DCA16C-NS	Windows Server 2025 DC - Additional 16 Cores- No Cisco SVC

Table 23 Operating System (*continued*)

Product ID (PID)	PID Description
Red Hat	
RHEL-2S2V-1A	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); 1-Yr Support Req
RHEL-2S-RS-1A	RHEL Resilent Storage (1-2 CPU); 1-Yr Support Reqd
RHEL-2S-HA-1A	RHEL High Availability (1-2 CPU); 1-Yr Support Reqd
RHEL-2S2V-3A	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); 3-Yr Support Req
RHEL-2S-RS-3A	RHEL Resilent Storage (1-2 CPU); 3-Yr Support Reqd
RHEL-2S-HA-3A	RHEL High Availability (1-2 CPU); 3-Yr Support Reqd
RHEL-2S2V-5A	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); 5-Yr Support Req
RHEL-2S-RS-5A	RHEL Resilent Storage (1-2 CPU); 5-Yr Support Reqd
RHEL-2S-HA-5A	RHEL High Availability (1-2 CPU); 5-Yr Support Reqd
RHEL-VDC-2SUV-1A	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 1 Yr Supp Req
RHEL-2S-RS-1A	RHEL Resilent Storage (1-2 CPU); 1-Yr Support Reqd
RHEL-2S-HA-1A	RHEL High Availability (1-2 CPU); 1-Yr Support Reqd
RHEL-VDC-2SUV-3A	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 3 Yr Supp Req
RHEL-2S-RS-3A	RHEL Resilent Storage (1-2 CPU); 3-Yr Support Reqd
RHEL-2S-HA-3A	RHEL High Availability (1-2 CPU); 3-Yr Support Reqd
RHEL-VDC-2SUV-5A	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 5 Yr Supp Req
RHEL-2S-RS-5A	RHEL Resilent Storage (1-2 CPU); 5-Yr Support Reqd
RHEL-2S-HA-5A	RHEL High Availability (1-2 CPU); 5-Yr Support Reqd
Red Hat Ent Linux/ High Avail/ Res Strg/ Scal	
RHEL-2S2V-1S	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); Prem 1-Yr SnS
RHEL-2S2V-1YR	Red Hat Enterprise Linux (1-2 CPU,1-2 VN);Premium 24x7 - 1Yr
RHEL-2S2V-3S	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); Prem 3-Yr SnS
RHEL-2S2V-3YR	Red Hat Enterprise Linux (1-2 CPU,1-2 VN);Premium 24x7 - 3Yr
RHEL-2S-HA-1S	RHEL High Availability (1-2 CPU); Premium 1-yr SnS
RHEL-2S-HA-1YR	RHEL High Availability (1-2 CPU); Premium 24x7 - 1 Year
RHEL-2S-HA-3S	RHEL High Availability (1-2 CPU); Premium 3-yr SnS
RHEL-2S-HA-3YR	RHEL High Availability (1-2 CPU); Premium 24x7 - 3 Year
RHEL-2S-RS-1S	RHEL Resilent Storage (1-2 CPU); Premium 1-yr SnS

Table 23 Operating System (*continued*)

Product ID (PID)	PID Description
RHEL-2S-RS-1YR	RHEL Resilent Storage (1-2 CPU); Premium 24x7 - 1 Year
RHEL-2S-RS-3S	RHEL Resilent Storage (1-2 CPU); Premium 3-yr SnS
RHEL-2S-RS-3YR	RHEL Resilent Storage (1-2 CPU); Premium 24x7 - 3 Year
RHEL-VDC-2SUV-1S	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 1 Yr SnS Req'd
RHEL-VDC-2SUV1YR	RHEL for Virtual Datacenters Premium 24x7 - 1 Yr SnS
RHEL-VDC-2SUV-3S	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 3 Yr SnS Req'd
RHEL-VDC-2SUV3YR	RHEL for Virtual Datacenters Premium 24x7 - 3 Yr SnS
Red Hat SAP	
RHEL-SAP-2S2V-1S	RHEL for SAP Apps (1-2 CPU, 1-2 VN); Prem 1-Yr SnS
RHEL-SAP-2S2V1YR	RHEL for SAP Apps (1-2 CPU, 1-2 VN); Premium 24x7 - 1-Yr
RHEL-SAP-2S2V-3S	RHEL for SAP Apps (1-2 CPU, 1-2 VN); Prem 3-Yr SnS
RHEL-SAP-2S2V3YR	RHEL for SAP Apps (1-2 CPU, 1-2 VN); Premium 24x7 - 3-Yr
RHEL-SAPSP-3S	RHEL SAP Solutions Premium - License with 3 Years of SnS
RHEL-SAPSS-3S	RHEL SAP Solutions Standard - License with 3 Years of SnS
SUSE	
SLES-2S2V-1S	SUSE Linux Enterprise Svr (1-2 CPU,1-2 VM); Prio 1-Yr SnS
SLES-2S2V-1YR	SUSE Linux Entp Svr (1-2 CPU,1-2 VM); Prio SnS 24x7 - 1 Year
SLES-2S2V-3S	SUSE Linux Enterprise Svr (1-2 CPU,1-2 VM); Prio 3-Yr SnS
SLES-2S2V-3YR	SUSE Linux Entp Svr (1-2 CPU,1-2 VM); Prio SnS 24x7 - 3 Year
SLES-2S2V-5S	SUSE Linux Enterprise Svr (1-2 CPU,1-2 VM); Prio 5-Yr SnS
SLES-2S2V-5YR	SUSE Linux Entp Svr (1-2 CPU,1-2 VM); Prio SnS 24x7 - 5 Year
SLES-2S-HA-1S	SUSE Linux High Availability Ext (1-2 CPU); 1Yr SnS
SLES-2S-HA-1YR	SUSE Linux High Avail Ext (1-2 CPU); Inherited SnS - 1 Year
SLES-2S-HA-3S	SUSE Linux High Availability Ext (1-2 CPU); 3Yr SnS
SLES-2S-HA-3YR	SUSE Linux High Avail Ext (1-2 CPU); Inherited SnS - 3 Year
SLES-2S-HA-5S	SUSE Linux High Availability Ext (1-2 CPU); 5Yr SnS
SLES-2S-HA-5YR	SUSE Linux High Avail Ext (1-2 CPU); Inherited SnS - 1 Year
SLES-2S-GC-1S	SUSE Linux GEO Clustering for HA (1-2 CPU); 1Yr Sns
SLES-2S-GC-1YR	SUSE Linux Geo Clustering (1-2 CPU); Inherited SnS - 1 Year

Table 23 Operating System (*continued*)

Product ID (PID)	PID Description
SLES-2S-GC-3S	SUSE Linux GEO Clustering for HA (1-2 CPU); 3Yr SnS
SLES-2S-GC-3YR	SUSE Linux Geo Clustering (1-2 CPU); Inherited SnS - 3 Year
SLES-2S-GC-5S	SUSE Linux GEO Clustering for HA (1-2 CPU); 5Yr SnS
SLES-2S-GC-5YR	SUSE Linux Geo Clustering (1-2 CPU); Inherited SnS - 5 Year
SLES-2S-LP-1S	SUSE Linux Live Patching Add-on (1-2 CPU); 1Yr SnS Required
SLES-2S-LP-1YR	SUSE Linux Live Patching Add-on (1-2 CPU); Inherited SnS 1 Yr
SLES-2S-LP-3S	SUSE Linux Live Patching Add-on (1-2 CPU); 3Yr SnS Required
SLES-2S-LP-3YR	SUSE Linux Live Patching Add-on (1-2 CPU); Inherited SnS 3 Yr
SLES-2SUV-1S	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; Prio 1Y SnS
SLES-2SUV-1YR	SUSE Linux Entp Svr (1-2 CPU,Unl VM) LP; Prio SnS 24x7 - 1Y
SLES-2SUV-3S	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; Prio 3Y SnS
SLES-2SUV-3YR	SUSE Linux Entp Svr (1-2 CPU,Unl VM) LP; Prio SnS 24x7 - 3Y
SLES-2SUV-5S	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; Prio 5Y SnS
SLES-2SUV-5YR	SUSE Linux Entp Svr (1-2 CPU,Unl VM) LP; Prio SnS 24x7 - 5Y
SLES-2S2V-1A	SUSE Linux Enterprise Svr (1-2 CPU,1-2 VM); 1-Yr Support Req'd
SLES-2S2V-3A	SUSE Linux Enterprise Svr (1-2 CPU,1-2 VM); 3-Yr Support Req'd
SLES-2S2V-5A	SUSE Linux Enterprise Svr (1-2 CPU,1-2 VM); 5-Yr Support Req'd
SLES-2S-LP-1A	SUSE Linux Live Patching Add-on (1-2 CPU); 1Yr Support Req
SLES-2S-LP-3A	SUSE Linux Live Patching Add-on (1-2 CPU); 3Yr Support Req
SLES-2SUV-1A	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; D1Y Supp Req
SLES-2SUV-3A	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; D3Y Supp Req
SLES-2SUV-5A	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; D5Y Supp Req
SLES and SAP	
SLES-SAP-2S2V-1S	SLES for SAP Apps (1-2 CPU, 1-2 VM); Priority 1-Yr SnS
SLES-SAP-2S2V1YR	SUSE for SAP Apps; (1-2 CPU,1-2 VM); Prio SnS 24x7 - 1 Year
SLES-SAP-2S2V-3S	SLES for SAP Apps (1-2 CPU, 1-2 VM); Priority 3-Yr SnS
SLES-SAP-2S2V3YR	SUSE for SAP Apps; (1-2 CPU,1-2 VM); Prio SnS 24x7 - 3 Year
SLES-SAP-2S2V-5S	SLES for SAP Apps (1-2 CPU, 1-2 VM); Priority 5-Yr SnS
SLES-SAP-2S2V5YR	SUSE for SAP Apps; (1-2 CPU,1-2 VM); Prio SnS 24x7 - 5 Year

Table 23 Operating System (*continued*)

Product ID (PID)	PID Description
SLES-SAP2SUV-1S	SLES for SAP Apps (1-2 CPU, Unl VM) LP; Priority 3Y SnS
SLES-SAP2SUV-1YR	SUSE for SAP Apps; (1-2 CPU,Unl VM) LP; Prio SnS 24x7 - 1Y
SLES-SAP2SUV-3S	SLES for SAP Apps (1-2 CPU, Unl VM) LP; Priority 3Y SnS
SLES-SAP2SUV-3YR	SUSE for SAP Apps; (1-2 CPU,Unl VM) LP; Prio SnS 24x7 - 3Y
SLES-SAP2SUV-5S	SLES for SAP Apps (1-2 CPU, Unl VM) LP; Priority 3Y SnS
SLES-SAP2SUV-5YR	SUSE for SAP Apps; (1-2 CPU,Unl VM) LP; Prio SnS 24x7 - 5Y
SLES-SAP-2S2V-1A	SLES for SAP Apps (1-2 CPU, 1-2 VM); 1-Yr Support Req
SLES-SAP-2S2V-3A	SLES for SAP Apps (1-2 CPU, 1-2 VM); 3-Yr Support Req
SLES-SAP-2S2V-5A	SLES for SAP Apps (1-2 CPU, 1-2 VM); 5-Yr Support Req
SLES-SAP2SUV-1A	SLES for SAP Apps w/ HA (1-2 CPU, Unl VM) LP; 1Y Supp Req
SLES-SAP2SUV-3A	SLES for SAP Apps w/ HA (1-2 CPU, Unl VM) LP; 3Y Supp Req
SLES-SAP2SUV-5A	SLES for SAP Apps w/ HA (1-2 CPU, Unl VM) LP; 5Y Supp Req
3rd Party Software-RedHat	

Table 24 3rd Party Software-RedHat

Product ID (PID)	PID Description
Red Hat OpenShift	
RH-OKE-B-P1S	OpenShift Kubernetes Eng(BM),Prem 1Y SnS Req(1-2 CPU-64core)
RH-OKE-B-P1Y	OpenShiftKubernetesEngine(BM),Prem1YSnS(1-2 CPUupto64cores)
RH-OKE-B-P3S	OpenShiftKubernetesEngine(BM),Prem 3YSnS Req(1-2 CPU-64core)
RH-OKE-B-P3Y	OpenShiftKubernetesEngine(BM),Prem 3YSnS(1-2CPUupto64cores)
RH-OCP-B-P1S	OpenShiftContainerPlatform(BM),Prem 1YSnS Req(1-2CPU-64core)
RH-OCP-B-P1Y	OpenShiftContainerPlatform(BM),Prem1YrSnS(1-2CPUupto64cores)
RH-OCP-B-P3S	OpenShiftContainerPlatform(BM),Prem 3YSnS Req(1-2CPU-64core)
RH-OCP-B-P3Y	OpenShiftContainerPlatform(BM),Prem3YSnS(1-2CPUupto64cores)
RH-OPP-B-P1S	OpenShift Platform Plus(BM),Prem 1Y SnS Req(1-2 CPU-64cores)
RH-OPP-B-P1Y	OpenShiftPlatformPlus(BM),Prem1YSnS(1-2CPU upto 64cores)
RH-OPP-B-P3S	OpenShift Platform Plus(BM),Prem 3Y SnS Req(1-2 CPU-64cores)
RH-OPP-B-P3Y	OpenShiftPlatformPlus(BM),Prem3YSnS(1-2CPU upto 64cores)

Table 24 3rd Party Software-RedHat

Product ID (PID)	PID Description
RH-OPPDF-B-P1S	OPP and ODF Adv (BM), Prem 1Y SnS Req (1-2CPU upto 64cores)
RH-OPPDF-B-P1Y	OPP and ODF Adv (BM), Prem 1-Yr SnS (1-2CPU upto 64cores)
RH-OPPDF-B-P3S	OPP and ODF Adv (BM), Prem 3Y SnS Req (1-2CPU upto 64cores)
RH-OPPDF-B-P3Y	OPP and ODF Adv (BM), Prem 3-Yr SnS (1-2CPU upto 64cores)
RH-ACM-B-P1S	AdvancedClusterMgmt for OKE(BM),Prem 1YSnSReq(1-2CPU-64core)
RH-ACM-B-P1Y	AdvancedClusterMgmtforOKE(BM),Prem1YSnS(1-2CPU upto 64cores)
RH-ACM-B-P3S	AdvancedClusterMgmt for OKE(BM),Prem 3YSnSReq(1-2CPU-64core)
RH-ACM-B-P3Y	AdvancedClusterMgmtforOKE(BM),Prem3YSnS(1-2CPU upto 64cores)
RH-OAI-B-P1S	OpenShift AI (BM), Prem 1Y SnS Req (1-2 CPU upto 64 cores)
RH-OAI-B-P1Y	OpenShift AI (BM), Prem 1-Yr SnS (1-2 CPU upto 64 cores)
RH-OAI-B-P3S	OpenShift AI (BM), Prem 3Y SnS Req (1-2 CPU upto 64 cores)
RH-OAI-B-P3Y	OpenShift AI (BM), Prem 3-Yr SnS (1-2 CPU upto 64 cores)
RH-OCP-V-P1S	OpenShift Container Platform,Prem 1Y SnS Req(2core or 4vCPU)
RH-OCP-V-P1Y	OpenShiftContainerPlatform,Prem1YSnS(2 cores or 4vCPUs)
RH-OCP-V-P3S	OpenShift Container Platform,Prem 3Y SnS Req(2core or 4vCPU)
RH-OCP-V-P3Y	OpenShiftContainerPlatform,Prem3YSnS(2cores or 4vCPUs)
RH-OPP-V-P1S	OpenShift Platform Plus,Prem 1Y SnS Req(2 cores or 4vCPUs)
RH-OPP-V-P1Y	OpenShift Platform Plus, Prem 1Y SnS (2 cores or 4vCPUs)
RH-OPP-V-P3S	OpenShift Platform Plus,Prem 3Y SnS Req(2 cores or 4vCPUs)
RH-OPP-V-P3Y	OpenShift Platform Plus, Prem 3Y SnS (2 cores or 4vCPUs)
RH-OPPDF-V-P1S	OpenShiftPlatformPlus & ODFAdv,Prem 1YSnSReq(2core or 4vCPU)
RH-OPPDF-V-P1Y	OpenShiftPlatformPlus and ODFAdv,Prem1YSnS(2cores or 4vCPUs)
RH-OPPDF-V-P3S	OpenShiftPlatformPlus & ODFAdv,Prem 3YSnSReq(2core or 4vCPU)
RH-OPPDF-V-P3Y	OpenShiftPlatformPlus and ODFAdv,Prem3YSnS(2cores or 4vCPUs)
RH-OAI-V-P1S	OpenShift AI, Prem 1Y SnS Req (2 cores or 4vCPUs)
RH-OAI-V-P1Y	OpenShift AI, Prem 1-Yr SnS (2 cores or 4vCPUs)
RH-OAI-V-P3S	OpenShift AI, Prem 3Y SnS Req (2 cores or 4vCPUs)
RH-OAI-V-P3Y	OpenShift AI, Prem 3-Yr SnS (2 cores or 4vCPUs)
Red Hat Ansible	

Table 24 3rd Party Software-RedHat

Product ID (PID)	PID Description
RH-AAP-1UCS-P1S	Ansible Automation Platform,Prem 1Y SnS Req(One UCS Server)
RH-AAP-1UCS-P1Y	Ansible Automation Platform, Prem 1Y SnS (One UCS Server)
RH-AAP-1UCS-P3S	Ansible Automation Platform,Prem 3Y SnS Req(One UCS Server)
RH-AAP-1UCS-P3Y	Ansible Automation Platform, Prem 3Y SnS (One UCS Server)
RH-AAP-100EP-P1S	Ansible Automation Platform,Prem 1Y SnS Req(100 End Points)
RH-AAP-100EP-P1Y	Ansible Automation Platform, Prem 1Y Sns (100 End Points)
RH-AAP-100EP-P3S	Ansible Automation Platform,Prem 3Y SnS Req(100 End Points)
RH-AAP-100EP-P3Y	Ansible Automation Platform, Prem 3Y SnS (100 End Points)

STEP 18 CISCO INTERSIGHT

Cisco Intersight™ is a Software-as-a-Service (SaaS) hybrid cloud operations platform which delivers intelligent automation, observability, and optimization to customers for traditional and cloud-native applications and infrastructure.

Product ID (PID)	
DC-MGT-SAAS	Cisco Intersight SaaS

Select Cisco Intersight subscription option as desired from [Table 25](#)

Table 25 Cisco Intersight

Product ID (PID)	PID Description
Cisco Intersight 2.0 Infrastructure Services	
DC-MGT-IS-SAAS-ES ¹	Infrastructure Services SaaS/CVA - Essentials
DC-MGT-IS-SAAS-AD ¹	Infrastructure Services SaaS/CVA - Advantage
DC-MGT-IS-PVAPP-ES ¹	Infrastructure Services PVA - Essentials
DC-MGT-IS-PVAPP-AD ¹	Infrastructure Services PVA - Advantage
Add-Ons	
DC-MGT-IS-UCSD	UCS Director - 1 Server License (includes Network, Storage)
Cisco Intersight Workload Optimizer (IWO) - SaaS	
VM Instance	
DC-MGT-WO-SAAS-ES ¹	Cisco Intersight Workload Optimizer SaaS - Essentials
DC-MGT-WO-SAAS-AD ¹	Cisco Intersight Workload Optimizer SaaS - Advantage
DC-MGT-WO-SAAS-PR ¹	Cisco Intersight Workload Optimizer SaaS - Premier
VDI Instance	
DC-MGT-WOD-SAAS-ES ¹	Cisco Intersight Workload Optimizer SaaS VDI - Essentials
DC-MGT-WOD-SAAS-AD ¹	Cisco Intersight Workload Optimizer SaaS VDI - Advantage
DC-MGT-WOD-SAAS-PR ¹	Cisco Intersight Workload Optimizer SaaS VDI - Premier

Notes:

1. Smart account (SA) required

Select Cisco Intersight support option as desired from [Table 26](#)

Table 26 Cisco Intersight Support

Product ID (PID)	PID Description
Cisco Intersight Support	
SVS-SSTCS-DCMGMT ¹	Solution Support for DC Mgmt
SVS-L1DCS-INTER ¹	CXL1 for INTERSIGHT
SVS-L2DCS-INTER ¹	CXL2 for INTERSIGHT
SVS-DCM-SUPT-BAS	Basic Support for DCM

Notes:

1. Smart account (SA) required



NOTE: An Intersight license is required for every server.

SUPPLEMENTAL MATERIAL

PCIe Port Assignment

- With Gen5 x2 each drive

Slots	CPU1	CPU2
Riser 1A	Slot 1: Gen5 x8 Slot 2: Gen5 x16 Slot 3: Gen5 x8	
Riser 1C	Slot 1: Gen5 x16 Slot 2: Gen5 x16	
Riser 1D	Gen5 x4 each drive	
Riser 2A		Slot 4: Gen5 x8 Slot 5: Gen5 x16 Slot 6: Gen5 x8
Riser 2C		Slot 4: Gen5 x16 Slot 5: Gen5 x16
Riser 3A		Slot 7: Gen5 x8 Slot 8: Gen5 x8
Riser 3C		Slot 7: Gen5 x16
Riser 3D		Gen5 x4 each drive
mLOM / OCP	Gen4 x16	
E3.S NVMe slots 1-16		Gen5 x2 each
E3.S NVMe slots 17-32	Gen5 x2 each	
M.2 Boot RAID	Gen3 x2	

■ With Gen5 x4 each drive




NOTE:

- In x4 config, Riser 1D and 3D are only supported with less than 16 front drives
- In x4 config, Riser 2E is required for more than 16 front drives
- In x4 config, Riser 1E and 2E are required for more than 24 front drive

Slots	CPU1	CPU2
Riser 1A	Slot 1: Gen5 x8 Slot 2: Gen5 x16 Slot 3: Gen5 x8	
Riser 1C	Slot 1: Gen5 x16 Slot 2: Gen5 x16	
Riser 1D	Gen5 x4 each drive	
Riser 1E	2x MCIO Gen5 x16 for retimers to support E3.S slots 25-32	
Riser 2A		Slot 4: Gen5 x8 Slot 5: Gen5 x16 Slot 6: Gen5 x8
Riser 2C		Slot 4: Gen5 x16 Slot 5: Gen5 x16
Riser 2E		2x MCIO Gen5 x16 for retimers to support E3.S slots 1-8
Riser 3A		Slot 7: Gen5 x8 Slot 8: Gen5 x8
Riser 3C		Slot 7: Gen5 x16
Riser 3D		Gen5 x4 each drive
mLOM / OCP	Gen4 x16	
E3.S NVMe slots 1-8		Gen5 x4 each
E3.S NVMe slots 9-16		Gen5 x4 each
E3.S NVMe slots 17-24	Gen5 x4 each	
E3.S NVMe slots 25-32	Gen5 x4 each	
M.2 Boot RAID	Gen3 x2	

Serial Port Details

Figure 5 Serial Port (Female RJ-45 Connector) Pinout
Serial Port (RJ-45 Female Connector)

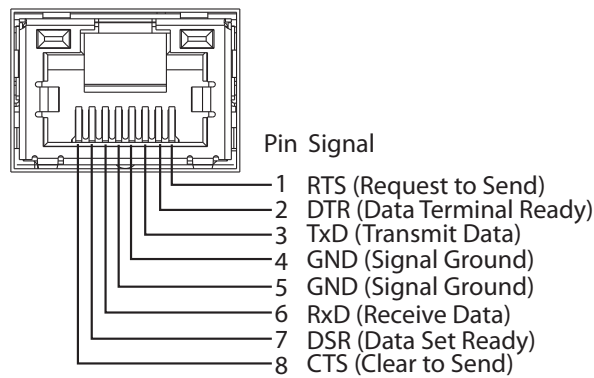


KVM Cable

The KVM cable provides a connection into the server, providing a DB9 serial connector, a VGA connector for a monitor, and dual USB ports for a keyboard and mouse. With this cable, you can create a direct connection to the operating system and the BIOS running on the server.

Table 27 KVM Cable

Product ID (PID)	PID Description
N20-BKVM	KVM cable for UCS Server console port

Figure 6 KVM Cable

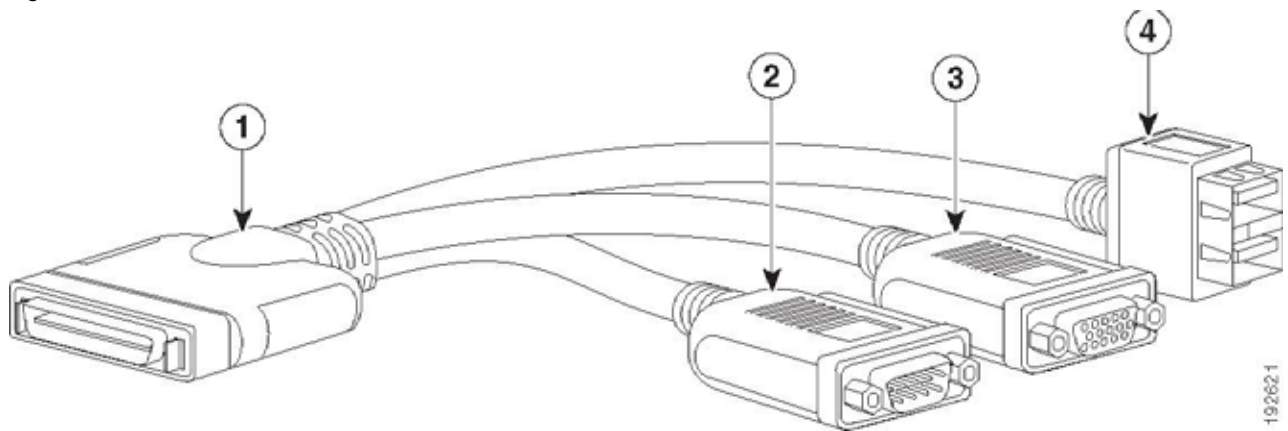

1	Connector (to server front panel)	3	VGA connector (for a monitor)
2	DB-9 serial connector	4	Two-port USB connector (for a mouse and keyboard)

TECHNICAL SPECIFICATIONS

Dimensions and Weight

Table 28 Dimensions and Weight

Parameter	Value
Height	3.42 in. (8.7 cm)
Width (including slam latches)	16.9 in.(42.9 cm)
Depth	30 in. (76.2 cm)
Weight	
0*E3.S HDDs, 0*CPU(w/o HS), 0*DIMM, 1*2300W PSU, mLOM, riser cage 1(w/o PCIe), riser cage 2(w/o PCIe), riser cage 3(w/o PCIe)	19.82 kg = 43.69 lb
0*E3.S HDDs, 0*CPU(w/o HS), 0*DIMM, 1*2300W PSU, mLOM, riser cage 1(w/o PCIe), riser cage 2(w/o PCIe), riser cage 3(w/o PCIe), Rail kit	23.58 kg = 51.99 lb
1*E3.S HDDs, 1*CPU(w/HS), 1*DIMM, 1*2300W PSU, mLOM, riser cage 1(w/o PCIe), riser cage 2(w/o PCIe), riser cage 3(w/o PCIe)	20.50 kg = 45.19 lb
1*E3.S HDDs, 1*CPU(w/HS), 1*DIMM, 1*2300W PSU, mLOM, riser cage 1(w/o PCIe), riser cage 2(w/o PCIe), riser cage 3(w/o PCIe), Rail kit	24.26 kg = 53.48 lb
32*E3.S HDDs, 2*CPU(w/HS), 32*DIMM, 2*2300W PSU, mLOM, riser cage 1(w/o PCIe), riser cage 2(w/o PCIe), riser cage 3(w/o PCIe)	26.47 kg = 58.36 lb
32*E3.S HDDs, 2*CPU(w/HS), 32*DIMM, 2*2300W PSU, mLOM, riser cage 1(w/o PCIe), riser cage 2(w/o PCIe), riser cage 3(w/o PCIe), Rail kit	30.23 kg = 66.65 lb

Power Specifications

The server is available with the following types of power supplies:

- 1050W (DC) power supply (see [Table 29](#))
- 1200 W (AC) power supply (see [Table 30](#))
- 1600 W (AC) power supply (see [Table 31](#))
- 2300 W (AC) power supply (see [Table 32](#))

Table 29 1050W (DC) Power Supply Specifications

Parameter	Specification
Input Connector	Molex 42820
Input Voltage Range (V rms)	-48
Maximum Allowable Input Voltage Range (V rms)	-40 to -72
Frequency Range (Hz)	NA
Maximum Allowable Frequency Range (Hz)	NA
Maximum Rated Output (W)	1050
Maximum Rated Standby Output (W)	36
Nominal Input Voltage (V rms)	-48
Nominal Input Current (A rms)	24
Maximum Input at Nominal Input Voltage (W)	1154
Maximum Input at Nominal Input Voltage (VA)	1154
Minimum Rated Efficiency (%) ¹	91
Minimum Rated Power Factor ¹	NA
Maximum Inrush Current (A peak)	15
Maximum Inrush Current (ms)	0.2
Minimum Ride-Through Time (ms) ²	5

Notes:

1. This is the minimum rating required to achieve 80 PLUS Platinum certification, see test reports published at <http://www.80plus.org/> for certified values
2. Time output voltage remains within regulation limits at 100% load, during input voltage dropout

Table 30 1200 W (AC) Power Supply Specifications

Parameter	Specification			
Input Connector	IEC320 C14			
Input Voltage Range (Vrms)	100 to 240			
Maximum Allowable Input Voltage Range (Vrms)	90 to 264			
Frequency Range (Hz)	50 to 60			
Maximum Allowable Frequency Range (Hz)	47 to 63			
Maximum Rated Output (W) ¹	1100		1200	
Maximum Rated Standby Output (W)	48			
Nominal Input Voltage (Vrms)	100	120	208	230
Nominal Input Current (Arms)	12.97	10.62	6.47	5.84
Maximum Input at Nominal Input Voltage (W)	1300	1264	1343	1340
Maximum Input at Nominal Input Voltage (VA)	1300	1266	1345	1342
Minimum Rated Efficiency (%) ²	90	90	91	91
Minimum Rated Power Factor ²	0.97	0.97	0.97	0.97
Maximum Inrush Current (A peak)	20			
Maximum Inrush Current (ms)	0.2			
Minimum Ride-Through Time (ms) ³	12			

Notes:

1. Maximum rated output is limited to 1100W when operating at low-line input voltage (100-127V)
2. This is the minimum rating required to achieve 80 PLUS Titanium certification, see test reports published at <http://www.80plus.org/> for certified values
3. Time output voltage remains within regulation limits at 100% load, during input voltage dropout

Table 31 1600 W (AC) Power Supply Specifications

Parameter	Specification			
Input Connector	IEC320 C14			
Input Voltage Range (V rms)	200 to 240			
Maximum Allowable Input Voltage Range (V rms)	180 to 264			
Frequency Range (Hz)	50 to 60			
Maximum Allowable Frequency Range (Hz)	47 to 63			
Maximum Rated Output (W)	1600			
Maximum Rated Standby Output (W)	36			
Nominal Input Voltage (V rms)	100	120	208	230
Nominal Input Current (A rms)	NA	NA	8.8	7.9
Maximum Input at Nominal Input Voltage (W)	NA	NA	1778	1758
Maximum Input at Nominal Input Voltage (VA)	NA	NA	1833	1813
Minimum Rated Efficiency (%) ¹	NA	NA	90	91
Minimum Rated Power Factor ²	NA	NA	0.97	0.97
Maximum Inrush Current (A peak)	30			
Maximum Inrush Current (ms)	0.2			
Minimum Ride-Through Time (ms) ²	12			

Notes:

1. This is the minimum rating required to achieve 80 PLUS Platinum certification, see test reports published at <http://www.80plus.org/> for certified values
2. Time output voltage remains within regulation limits at 100% load, during input voltage dropout

Table 32 2300 W (AC) Power Supply Specifications

Parameter	Specification			
Input Connector	IEC320 C20			
Input Voltage Range (Vrms)	100 to 240			
Maximum Allowable Input Voltage Range (Vrms)	90 to 264			
Frequency Range (Hz)	50 to 60			
Maximum Allowable Frequency Range (Hz)	47 to 63			
Maximum Rated Output (W) ¹	2300			
Maximum Rated Standby Output (W)	36			
Nominal Input Voltage (Vrms)	100	120	208	230
Nominal Input Current (Arms)	13	11	12	10.8
Maximum Input at Nominal Input Voltage (W)	1338	1330	2490	2480
Maximum Input at Nominal Input Voltage (VA)	1351	1343	2515	2505
Minimum Rated Efficiency (%) ²	92	92	93	93
Minimum Rated Power Factor ²	0.99	0.99	0.97	0.97
Maximum Inrush Current (A peak)	30			
Maximum Inrush Current (ms)	0.2			
Minimum Ride-Through Time (ms) ³	12			

Notes:

1. Maximum rated output is limited to 1200W when operating at low-line input voltage (100-127V)
2. This is the minimum rating required to achieve 80 PLUS Titanium certification, see test reports published at <http://www.80plus.org/> for certified values
3. Time output voltage remains within regulation limits at 100% load, during input voltage dropout



NOTE: For configuration-specific power specifications, use the Cisco UCS Power Calculator at this URL: <http://ucspowercalc.cisco.com>

Compliance Requirements

The regulatory compliance requirements for C-Series servers are listed in [Table 33](#).

Table 33 UCS C-Series Regulatory Compliance Requirements

Parameter	Description
Regulatory Compliance	Products should comply with CE Markings per directives 2014/30/EU and 2014/35/EU
Safety	UL 60950-1/62368-1 CAN/CSA-C22.2 No. 60950-1/62368-1 IEC/EN 60950-1/62368-1 AS/NZS 62368.1 GB 4943.1-2022 CNS 15598-1:2020
EMC - Emissions	47CFR Part 15 (CFR 47) Class A AS/NZS CISPR32 Class A CISPR32 Class A EN55032 Class A ICES003 Class A VCCI-CISPR32 Class A EN61000-3-2 EN61000-3-3 KS C 9832 Class A EN 300386 Class A
EMC - Immunity	EN55035 EN55024 CISPR24/35 EN300386 KS C 9835 IEC/EN61000-6-1



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Cisco and the Cisco Logo are trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (01/02)