




Disabling Boot Support on CDE220

The following procedure needs to be followed for CDE220 after fresh installation with image $\geq 3.9.1$,

1. Reboot the Server once installation is done and press Ctrl+C when the "MPT SAS BIOS" banner appears during POST

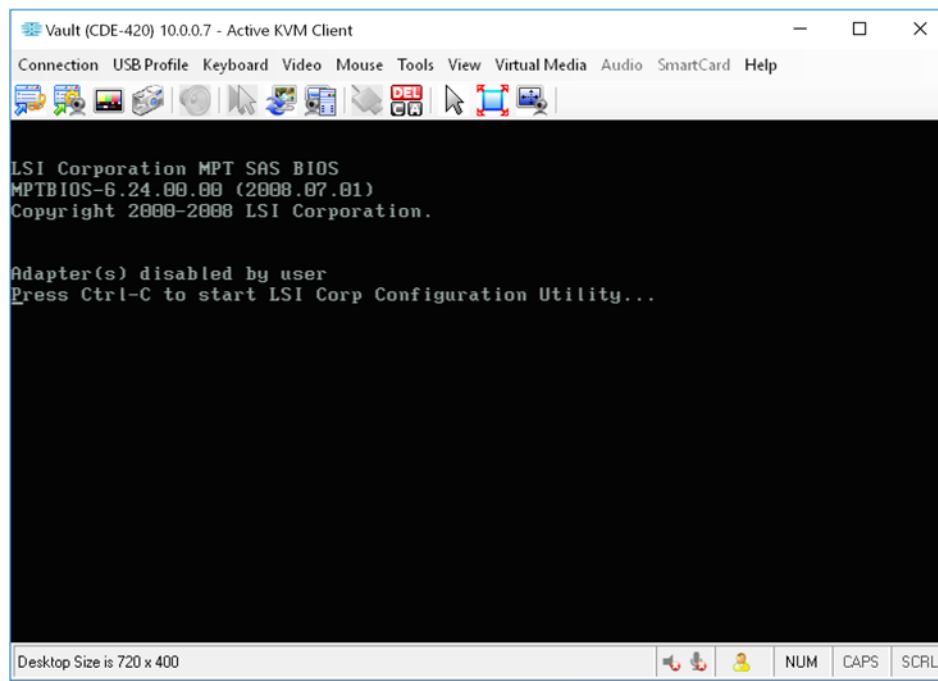

2. When the LSI Configuration Utility starts, select the only SAS controller in the list and check if the value set for "Boot Support" is "Disabled". If not please make set the value to "Disabled" [click on '-' for choosing other options].

```
LSI Corp Config Utility v6.24.00.00 (2008.07.01)
Adapter List Global Properties
Adapter PCI PCI PCI PCI FW Revision Status Boot
        Bus Dev Fnc Slot          Order
USASLP-L8i 02 00 00 07 1.26.00.00-IT Disabled 0

Esc = Exit Menu      F1/Shift+1 = Help
Alt+N = Global Properties -/+ = Alter Boot Order  Ins/Del = Alter Boot List
```

```
LSI Corp Config Utility v6.24.00.00 (2008.07.01)
Adapter Properties -- SAS1068E

Adapter USASLP-L8i
PCI Slot 07
PCI Address(Bus/Dev) 02:00
MPT Firmware Revision 1.26.00.00-IT
SAS Address 50030480:07E90D00
NVDATA Version 2D.03
Status Disabled
Boot Order 0
Boot Support [Disabled]

SAS Topology
Advanced Adapter Properties

Esc = Exit Menu      F1/Shift+1 = Help
Enter = Select Item  -/+ / Enter = Change Item
```

3. Please select the exit and reboot option once the above change is done.
4. Server would come up fine after reboot with the image installed from the DVD.