

# Deployment Guide of RHOSP on UCS for Mobility Workload in Disconnected Mode

## Contents

---

### [Introduction](#)

### [Prerequisites](#)

[Requirements](#)

[Components Used](#)

### [Background Information](#)

### [Understanding RHOSP](#)

[RHOSP Architecture](#)

[Undercloud](#)

[Undercloud Components](#)

[Overcloud](#)

[Controller](#)

[Compute](#)

[Storage](#)

[Local Repository \(REPO Server\)](#)

[RHOSP Networking](#)

[RHOSP Physical Connectivity](#)

[RHOSP Logical Connectivity](#)

### [Hardware Parameter Tuning](#)

### [Hypervisor-KVM Installation and Network Creation](#)

### [REPO and Director VM Creation](#)

[Prerequisites for REPO and Director VM Creation](#)

[REPO VM Creation](#)

[Director VM Creation](#)

### [Local Offline REPO Creation](#)

### [RHOSP Cloud Deployment](#)

[Prerequisites](#)

[Updation of Input Files](#)

[Undercloud Deployment](#)

[Overcloud Deployment](#)

[Accessing the Horizon Dashboard](#)

### [Health Check of RHOSP Cluster](#)

### [Summary](#)

---

## Introduction

This document describes a framework for deploying RHOSP on C220 M6 UCS Servers in order to support

## Prerequisites

### Requirements

Cisco recommends that you have knowledge of Red Hat OpenStack Platform (RHOSP) and possess strong skills in Red Hat Enterprise Linux (RHEL). Additionally, a solid understanding of virtualization and networking concepts is required.

### Components Used

This document is not restricted to specific software and hardware versions.

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, ensure that you understand the potential impact of any command.

## Background Information

This guide outlines the integration of RHOSP with Unified Computing System (UCS) infrastructure, emphasizing on scalability, reliability, and performance optimization.

It details best practices and uses ansible script-based automation for deploying OpenStack TripleO comprising of Undercloud and Overcloud architecture.

By using this deployment guide, organizations can achieve a robust and efficient RHOSP cloud infrastructure tailored to serve Cisco Virtual Packet Core - Distributed Instance (VPC-DI) based Mobility Virtual Network Functions (VNF).

## Understanding RHOSP


RHOSP is an enterprise-grade private cloud solution built on the open-source OpenStack project, integrated and supported by Red Hat. It allows organizations to deploy and manage Infrastructure-as-a-Service (IaaS) for Virtual Machines (VMs), networking, and storage on demand.

It provides features such as High Availability (HA), network functions virtualization, and customizable deployments.

## RHOSP Architecture

The RHOSP is based primarily on the OpenStack TripleO project. Openstack uses Director which acts as a toolset for installing and managing a complete RHOSP environment.

RHOSP is designed to provide a scalable and flexible cloud infrastructure. Its architecture consists of two main components: Undercloud and Overcloud.

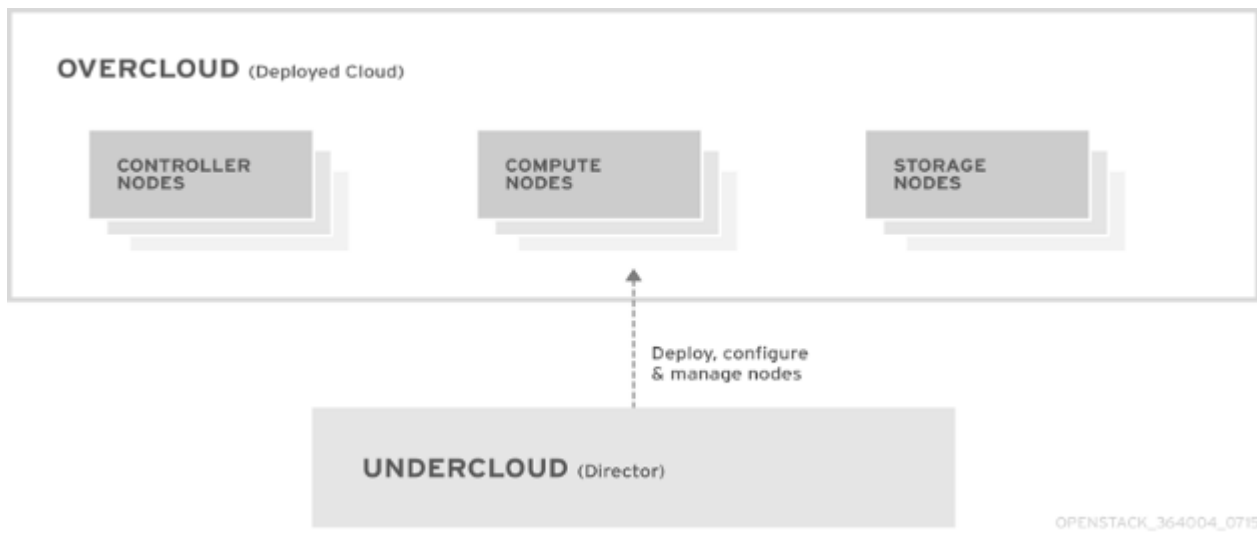

## Undercloud

The undercloud is the main management node that contains the RHOSP director toolset. It is a single-system OpenStack installation that includes components for provisioning and managing the OpenStack nodes that form the OpenStack environment (the overcloud).

## Undercloud Components

The undercloud uses OpenStack components as its base tool set. Each component operates within a separate container on the undercloud:

- OpenStack Identity (keystone) - Provides authentication and authorization for the director components
- OpenStack Bare Metal (ironic) - Manages bare metal nodes
- OpenStack Networking (neutron) and Open vSwitch - Control networking for bare metal nodes
- OpenStack Orchestration (Ephemeral Heat) - Provides the orchestration of nodes after director writes the overcloud image to disk

## Overcloud

The overcloud is the resulting RHOSP environment created using the undercloud. This includes different node roles that are defined based on the OpenStack Platform (OSP) environment the customer aims to

create.

## Controller

Controller nodes provide administration, networking, and HA for the OpenStack environment. A recommended OpenStack environment contains three Controller nodes together in a HA cluster.

## Compute

Compute nodes provide computing resources for the OpenStack environment. Compute nodes can be Scale-In/Scale-Out based on network requirement over time. A default compute node contains these mentioned components:

- OpenStack Compute (nova)
- Kernel-based VM (KVM)/Quick Emulator (QEMU)
- Open vSwitch

## Storage

Storage nodes provide storage for the OpenStack environment.



**Note:** There are multiple approaches for deployment of Undercloud/Director and Offline Repository (REPO) in Customer network - can be deployed directly on baremetal node or as VM on top of KVM hypervisor. In current deployment guide, the Director UCS server hosts KVM (Hypervisor) to deploy multiple VMs on top. The RHOSP Director node and Offline-REPO nodes are deployed as VM on KVM Hypervisor.

---

## Local Repository (REPO Server)

Redhat provides a utility called `reposync` which can be used to download the packages from the [Content Delivery Network](#) (CDN). In order to download all packages from a specific channel, the system must be subscribed to that channel. If the system is not subscribed to the required channel, then `reposync` is unable to download and sync those packages on local system.

Repositories are configured in `/etc/yum.repos.d/` path by files that ending with `.repo` extension. Multiple repositories can be defined in the same file.


## RHOSP Networking

The networking service (neutron) is the software-defined networking (SDN) component of RHOSP. The RHOSP Networking service manages internal and external traffic to and from VM instances and provides core services such as routing, segmentation, DHCP, and metadata. It provides the API for virtual networking capabilities and management of switches, routers, ports, and firewalls.

RHOSP director maps OpenStack services to different isolated networks. The networks that carry each traffic type are: Cisco Integrated Management Controller (CIMC), Provisioning, Internal API, Storage Data, Storage Management, Tenant and External (Secure Shell (SSH) and Operations, Administration, and Maintenance (OAM)).

### RHOSP Physical Connectivity


The RHOSP deployment uses different physical ports of Cisco UCS C220 M6 servers for different connectivity purposes.

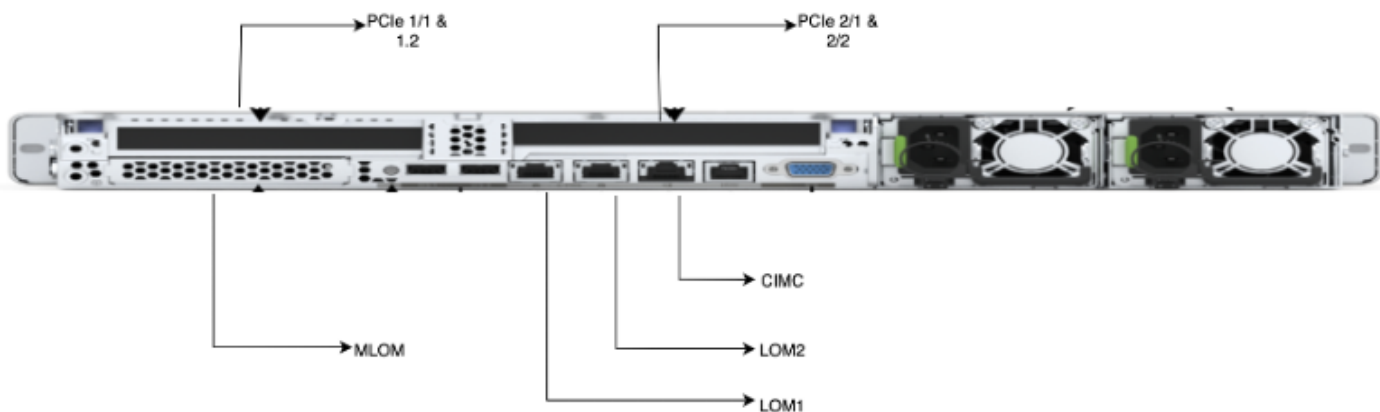

Serial Number	Physical Ports	Details
1.	CIMC	CIMC provides Out-of-Band connectivity for server Provisioning and Management.
2.	Single Root I/O Virtualization (SR-IOV)/Peripheral Component Interconnect Express (PCIe)	The PCIe Network Interface Card (NIC) are used on the compute nodes for the DI-internal and Service networks for the VNF.
3.	Modular Lan on MotherBoard (MLOM)	MLOM Ports are configured as a bonds. osp_external, osp_internal, osp_tenant, osp_external, osp_storage_data, osp_storage_mgmt uses MLOM port for internal communication.
4.	Lan on MotherBoard (LOM)	The director uses LOM1 and LOM2 ports, while


		<p>Computes and Controllers use only LOM1 Port.</p> <p>LOM1 is used to deploy or provision the Openstack on all servers.</p> <p>LOM2 is used as OAM (External Network) on the director.</p>
--	--	---

The diagram shows the physical connectivity with the servers.

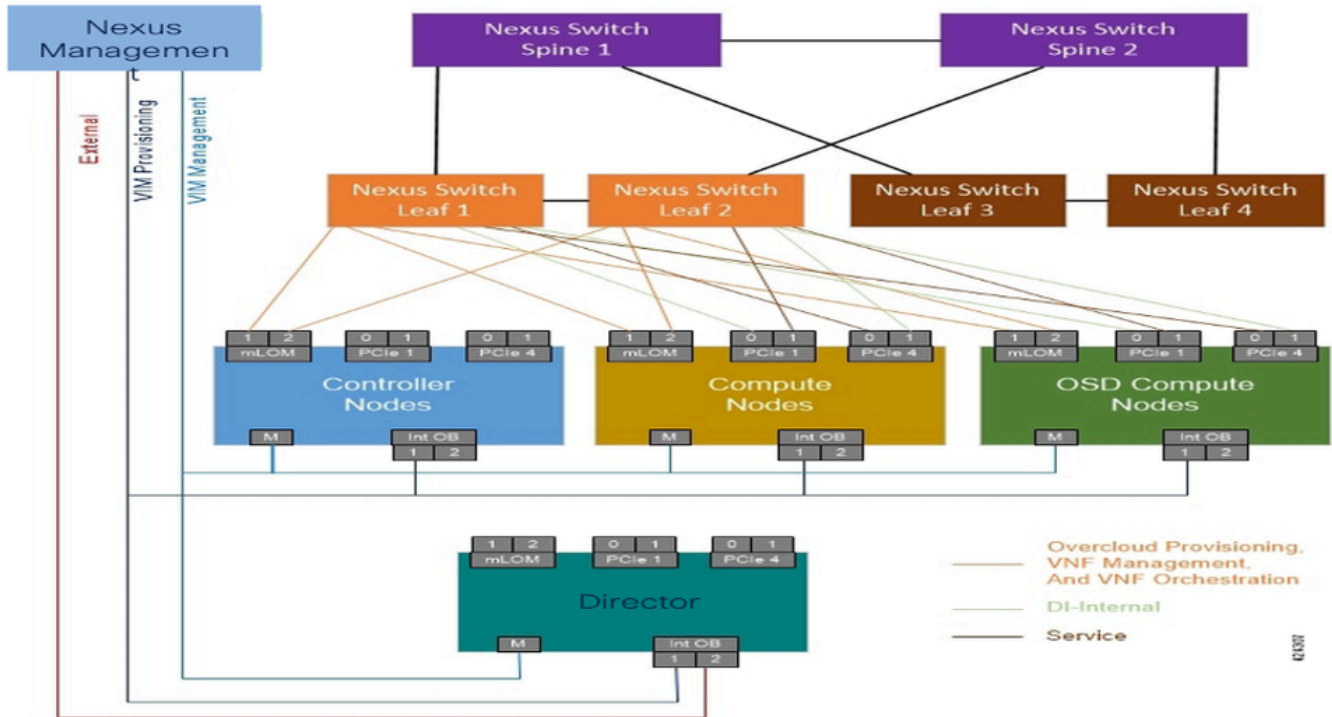

### RHOSP Logical Connectivity

The RHOSP network has multiple subnets catering to different services within the cloud.

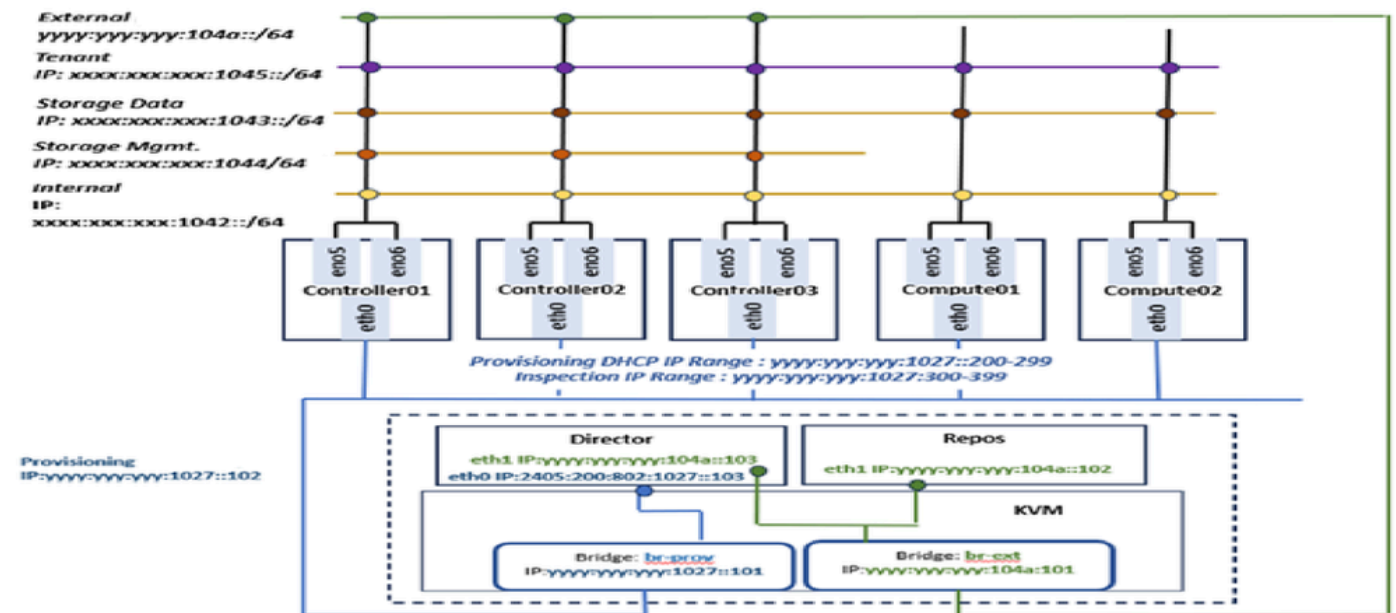

- OSP\_CIMC:

CIMC is the Intelligent Programming Management Interface (IPMI) that controls the management of all UCS servers. This CIMC network is configured on the standalone CIMC Port of all UCS Servers.

- OSP\_Provisioning:

This network is responsible for the provisioning and Preboot Execution Environment (PXE) boot management of the computes and controller servers during Openstack deployment and also to get the DHCP IP. The Provisioning network is configured as Native VLAN on LOM1 Port of all UCS Servers for simplicity and compatibility. This provisioning network is responsible for deployment of the cloud on all servers.

Due to virtualization on the Director Server a bridge network needed to be created on the KVM for the Director VM to communicate with the other servers.

- OSP\_Internal:

The Internal API network is used for communication between the OpenStack services like neutron, nova, keystone, and so on.

The OSP\_Internal network is configured on bonded MLOM Ports on Controller and Compute nodes.

- OSP\_Tenant:

The Tenant network is created by default within cloud projects for VNF management. In current setup, Only Single Openstack Project is created for VNF deployment.

The OSP\_Tenant network is configured on bonded MLOM Ports on Controller and Compute nodes.

- OSP\_External:

The External network is used for all external access (like SSH) and API networks.

The OSP\_External network is configured on LOM2 Port on Director node and on bonded MLOM Ports on Controller and Compute nodes.

- OSP\_Storage\_Data:

The OSP\_Storage network is used for all the operations which are related to access the storage. This is required for communication between CEPH service and VNF that have requirement to access the storage. It is used by Controller, Compute nodes, and CEPH.


The OSP\_Storage\_Data network is configured on bonded MLOM Ports on Controller and Compute nodes.

- OSP\_Storage\_Management:

OpenStack Object Storage uses this network to synchronize data objects between participating replica nodes in storage cluster, formed between controller-Compute nodes.

The OSP\_Storage\_Mgmt network is configured on bonded MLOM Ports on Controller and Compute nodes.

The diagram shows how the undercloud logical networks are connected to each type of nodes in the RHOSP cluster.

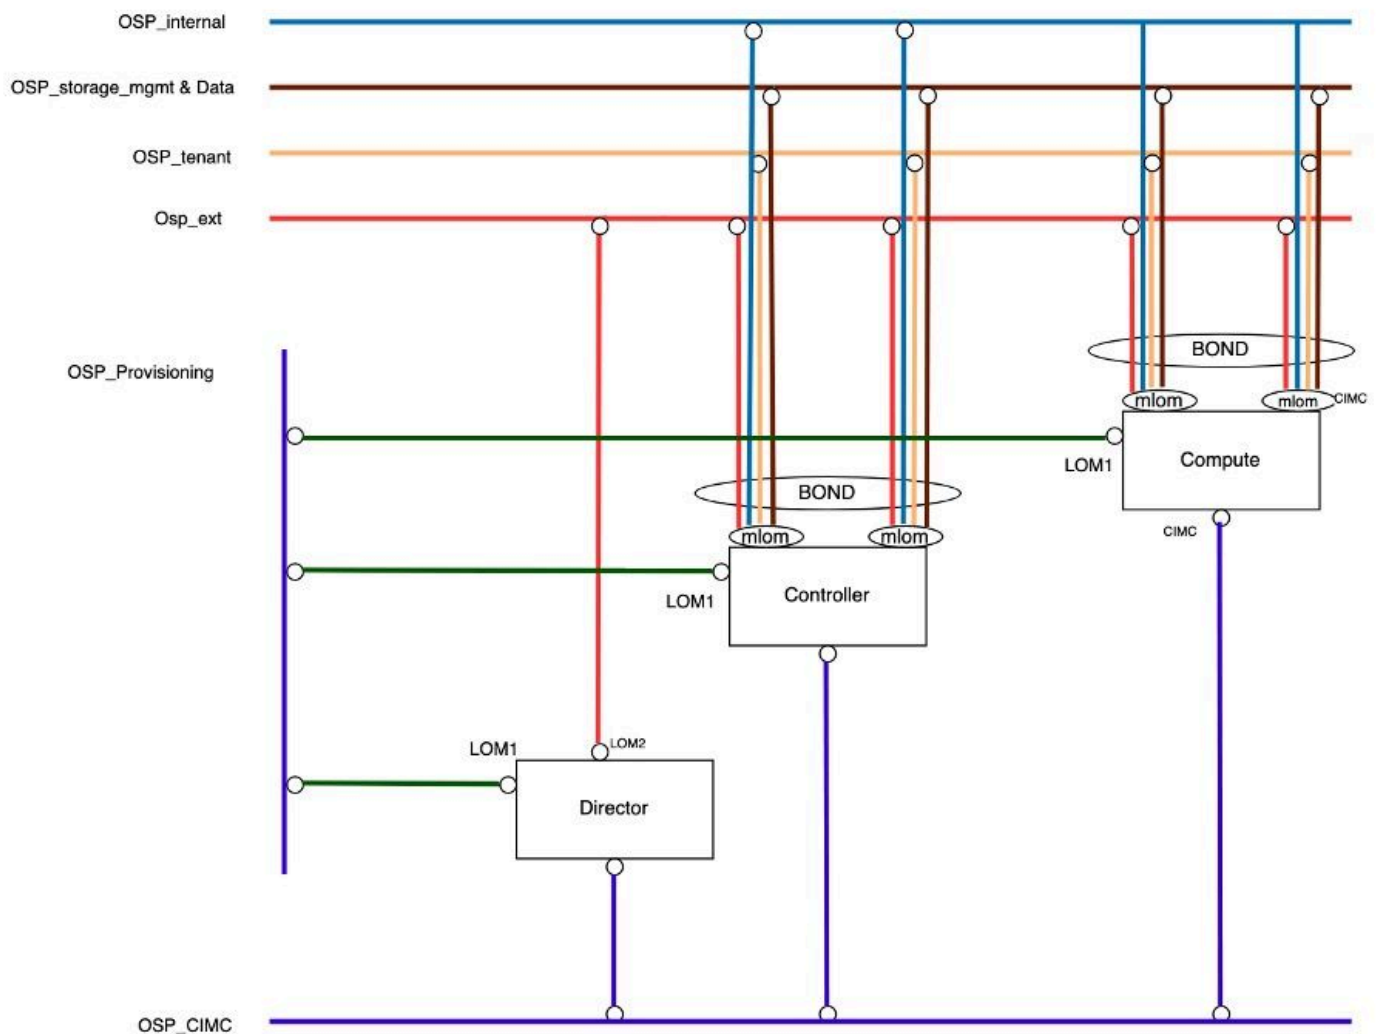

## Hardware Parameter Tuning

- Ensure IP is enabled and configured with correct management address as per the design.
- Ensure admin user and its password must be same for all the CIMC login access.
- Ensure the Bootstrap (Boot) mode set to Unified Extensible Firmware Interface (UEFI).
- Ensure to set the BIOS setting with recommended parameters.
- Set Boot-Order to:
  1. LOM-PXE (eno1)
  2. BOOT-Hard Disk Drive (HDD)
- Set the mac-address of LOM1 (eno1).
- Ensure all the UCS/CIMC Servers are upgraded with latest recommended firmware version.

## Hypervisor-KVM Installation and Network Creation

There are several methods for deploying the Undercloud/Director and Offline REPO in the customer network. These can either be deployed directly on a bare-metal node or as VMs running on a KVM hypervisor.

In the current deployment guide, the Director UCS server is configured to host the KVM hypervisor, which facilitates the creation of multiple VMs. The RHOSP Director node and the Offline REPO node are deployed as VMs on this KVM hypervisor.



**Note:** Standard RHEL KVM installation steps must be observed in order to deploy KVM Hypervisor.

- Once the KVM is up, update the hostname:  
`hostnamectl set-hostname <hostname> --static`
- Configure the external and provisioning bridges and bind the interfaces.

br-prov : eth0

br-ext : eth1

These bridges must be created via Network Manager Text User Interface (NMTUI) GUI.

- By default, eno1 and eno2 ports gets created in KVM for physical LOM1 and LOM2 ports, cross-verify the same using MAC address from CIMC logging.
- Create bridge network and add slave ports in it by mapping correct MAC address.
- Post bridge network creation, ensure that the provisioning and external gateway is reachable from KVM.

## REPO and Director VM Creation

### Prerequisites for REPO and Director VM Creation

```
# dnf install qemu-kvm libvirt virt-install virt-manager virt-viewer libguestfs-tools
```

- Install the required packages in KVM for REPO and Director VM Creation.

```
! command not found...
[root@MUMBKVM01 ~]#
[root@MUMBKVM01 ~]# dnf install qemu-kvm libvirt virt-install virt-manager virt-viewer libguestfs-tools
Updating Subscription Management repositories.
Unable to read consumer identity

This system is not registered to Red Hat Subscription Management. You can use subscription-manager to register.

Red Hat Enterprise Linux 8.4.0 Appstream          | 564 MB/s | 6.8 MB | 00:00
Red Hat Enterprise Linux 8.4.0 BaseOS           | 545 MB/s | 2.3 MB | 00:00
Package qemu-kvm-15:4.2.0-48.module+el8.4.0+10368+630e803b.x86_64 is already installed.
Package libvirt-6.0.0-35.module+el8.4.0+10230+7a9b21e4.x86_64 is already installed.
Package virt-install-2.2.1-4.el8.noarch is already installed.
Package virt-manager-2.2.1-4.el8.noarch is already installed.
Package virt-viewer-9.0-9.el8.x86_64 is already installed.
Dependencies resolved.
=====
Package                               Archite
```

- Create required directories on KVM.

```
# mkdir /data # mkdir /data/offlineRepos # mkdir /data/isoImages # mkdir /data/qcow2Images # mkdir /data/images
```

- Copy the files to the directories.

```
# scp -r root@[remote-IP]:/root/rhel-8.4-x86_64-dvd.iso /data/isoImages/  
# scp -r root@[remote-IP]:/root/offlineRepos/RHEL8.4 /data/offlineRepos/  
# scp -r root@[remote-IP]:/etc/yum.repos.d/offlinedvd.repo /etc/yum.repos.d/  
# scp -r root@[remote-IP]:/root/rhel-8.4-x86_64-kvm.qcow2 /data/qcow2Images/  
# scp -r root@[remote-IP]:/root/OSREPO_RHEL_84.qcow2 /data/images/  
# scp -r root@[remote-IP]:/root/OSREPO_DIRECTOR_84.qcow2 /data/images/
```

- Mount the ISO to **/mnt/iso**.

```
# mount -t iso9660 -o loop /data/isoImages/rhel-8.4-x86_64-dvd.iso /mnt/iso
```

- Create the REPO file at **/etc/yum.repos.d** path.

```
# cat /etc/yum.repos.d/offlinedvd.repo  
  
[RHEL8.4_Appstream]  
name=Red Hat Enterprise Linux 8.4.0 Appstream  
mediaid=None  
metadata_expire=-1  
gpgcheck=0  
enabled=1  
baseurl=file:///data/offlineRepos/RHEL8.4/AppStream/  
  
[RHEL8.4_BaseOS]  
name=Red Hat Enterprise Linux 8.4.0 BaseOS  
mediaid=None  
metadata_expire=-1  
gpgcheck=0  
enabled=1  
baseurl=file:///data/offlineRepos/RHEL8.4/BaseOS/
```

- Check the repolist and ensure the Appstream and Baseos REPOS are mapped.

```
# dnf repolist
```

```
[root@MUMBKVMC01 ~]#
[root@MUMBKVMC01 ~]#
[root@MUMBKVMC01 ~]# dnf repolist
Updating Subscription Management repositories.
Unable to read consumer identity

This system is not registered to Red Hat Subscription Management. You can use subscription-manager to register.

repo id                               repo name
RHEL8.4_Appstream                     Red Hat Enterprise Linux 8.4.0 Appstream
RHEL8.4_BaseOS                         Red Hat Enterprise Linux 8.4.0 BaseOS
[root@MUMBKVMC01 ~]#
[root@MUMBKVMC01 ~]#
[root@MUMBKVMC01 ~]#
```

## REPO VM Creation

```
$ cd /var/lib/libvirt/images/
$ export LIBGUESTFS_BACKEND=direct
$ virt-customize -a /var/lib/libvirt/images/rhel-8.4-x86_64-kvm.qcow2 --root-password password:Cisco@123
```

```
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]# virt-customize -a /var/lib/libvirt/images/rhel-8.4-x86_64-kvm.qcow2 --root-password password:Cisco@123
[ 0.0] Examining the guest ...
[ 6.6] Setting a random seed
[ 6.7] Setting the machine ID in /etc/machine-id
[ 6.7] Setting passwords
[ 7.7] Finishing off
[root@MUMBKVMC01 images]#
```

```
$ virt-filesystems --long -h --all -a /var/lib/libvirt/images/rhel-8.4-x86_64-kvm.qcow2
```

```
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]# virt-filesystems --long -h --all -a /var/lib/libvirt/images/rhel-8.4-x86_64-kvm.qcow2
Name      Type      VFS      Label  MBR  Size  Parent
/dev/sda1 filesystem unknown -      -    1.0M -
/dev/sda2 filesystem vfat    -      -    100M -
/dev/sda3 filesystem xfs     root   -    9.9G -
/dev/sda1 partition -      -      -    1.0M /dev/sda
/dev/sda2 partition -      -      -    100M /dev/sda
/dev/sda3 partition -      -      -    9.9G /dev/sda
/dev/sda  device   -      -      -    10G  -
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]#
```

- Create the image of REPO server.

```
$ qemu-img create -f qcow2 /var/lib/libvirt/images/rhel_84_osprepo.qcow2 500G
```

```
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]# qemu-img create -f qcow2 /var/lib/libvirt/images/rhel_84_osprepo.qcow2 300G
Formatting '/var/lib/libvirt/images/rhel_84_osprepo.qcow2', fmt=qcow2 size=322122547200 cluster_size=65536 lazy_refcounts=off refcount_bits=16
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]#
```

```
$ virt-resize --expand /dev/sda3 /var/lib/libvirt/images/rhel-8.4-x86_64-kvm.qcow2 /var/lib/libvirt/ima
```

```

[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]# qemu-img create -f qcow2 /var/lib/libvirt/images/rhel_84_osprepo.qcow2 300G
Formatting '/var/lib/libvirt/images/rhel_84_osprepo.qcow2': fmt=qcow2 size=322122547200 cluster_size=65536 lazy_refcounts=off refcount_bits=16
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]# virt-resize --expand /dev/sda3 /var/lib/libvirt/images/rhel-8.4-x86_64-kvm.qcow2 /var/lib/libvirt/images/rhel_84_osprepo.qcow2
[ 0.0] Examining /var/lib/libvirt/images/rhel-8.4-x86_64-kvm.qcow2
*****
Summary of changes:
/dev/sda1: This partition will be left alone.
/dev/sda2: This partition will be left alone.
/dev/sda3: This partition will be resized from 9.9G to 299.9G. The
filesystem xfs on /dev/sda3 will be expanded using the 'xfs_growfs'
method.
*****
[ 2.0] Setting up initial partition table on /var/lib/libvirt/images/rhel_84_osprepo.qcow2
[ 12.7] Copying /dev/sda1
[ 12.7] Copying /dev/sda2
[ 12.8] Copying /dev/sda3
100% |
[ 20.8] Expanding /dev/sda3 using the 'xfs_growfs' method
00:00
Resize operation completed with no errors. Before deleting the old disk,
carefully check that the resized disk boots and works correctly.
[root@MUMBKVMC01 images]#

```

\$ qemu-img create -f qcow2 -b /var/lib/libvirt/images/rhel\_84\_osprepo.qcow2 -F qcow2 /data/images/OSP

```

[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]# qemu-img create -f qcow2 -b /var/lib/libvirt/images/rhel_84_osprepo.qcow2 -F qcow2 /data/images/OSP_REPO_RHEL_84.qcow2
Formatting '/data/images/OSP_REPO_RHEL_84.qcow2': fmt=qcow2 size=322122547200 backing_file=/var/lib/libvirt/images/rhel_84_osprepo.qcow2 backing_fmt=qcow2 cluster_size=65536 lazy_re
fcounts=off refcount_bits=16
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]#

```

\$ guestfish -a /data/images/OSP\_REPO\_RHEL\_84.qcow2 -i ln-sf /dev/null /etc/systemd/system/cloud-init.service

```

[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]# guestfish -a /data/images/OSP_REPO_RHEL_84.qcow2 -i ln-sf /dev/null /etc/systemd/system/cloud-init.service
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]#

```

\$ osinfo-query os | grep rhel8

```

[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]# osinfo-query os | grep rhel8
** (osinfo-query:49279): WARNING **: 17:12:33.856: Entity http://pcisig.com/pci/1836/0100 referenced but not defined
rhel8-unknown | Red Hat Enterprise Linux 8 Unknown | 8-unknown | http://redhat.com/rhel/8-unknown
rhel8.0 | Red Hat Enterprise Linux 8.0 | 8.0 | http://redhat.com/rhel/8.0
rhel8.1 | Red Hat Enterprise Linux 8.1 | 8.1 | http://redhat.com/rhel/8.1
rhel8.2 | Red Hat Enterprise Linux 8.2 | 8.2 | http://redhat.com/rhel/8.2
rhel8.3 | Red Hat Enterprise Linux 8.3 | 8.3 | http://redhat.com/rhel/8.3
rhel8.4 | Red Hat Enterprise Linux 8.4 | 8.4 | http://redhat.com/rhel/8.4
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]#

```

\$ virt-install --cpu host --memory 32768 --vcpus 16 --os-variant rhel8.4 --disk path=/data/images/OSP

```

[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]# virt-install --cpu host --memory 32768 --vcpus 16 --os-variant rhel8.4 --disk path=/data/images/OSP_REPO_RHEL_84.qcow2,device=disk,bus=virtio,format=qcow2
--import --noautoconsole --vnc --network bridge:br-ext --name OSP_REPO_RHEL_84
** (process:49296): WARNING **: 17:13:15.813: Entity http://pcisig.com/pci/1836/0100 referenced but not defined
Starting install...
Domain creation completed.
[root@MUMBKVMC01 images]#

```

```
$ virsh list --all
```

```
root@MUMBKVMC01 images]#
root@MUMBKVMC01 images]# virsh list --all
Id      Name                State
-----
 1      OSPREPO_RHEL_84     running

root@MUMBKVMC01 images]#
root@MUMBKVMC01 images]#
root@MUMBKVMC01 images]# virsh list --all
Id      Name                State
-----
 1      OSPREPO_RHEL_84     running

root@MUMBKVMC01 images]#
```

## Director VM Creation

- Create the image of director server.

```
# qemu-img create -f qcow2 /var/lib/libvirt/images/rhel_84_ospdirector.qcow2 500G
```

```
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]# qemu-img create -f qcow2 /var/lib/libvirt/images/rhel_84_ospdirector.qcow2 200G
Formatting '/var/lib/libvirt/images/rhel_84_ospdirector.qcow2': fmt=qcow2 size=214748364800 cluster_size=65536 lazy_refcounts=off refcount_bits=16
[root@MUMBKVMC01 images]#
```

```
# virt-resize --expand /dev/sda3 /var/lib/libvirt/images/rhel-8.4-x86_64-kvm.qcow2 /var/lib/libvirt/ima
```

```
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]# virt-resize --expand /dev/sda3 /var/lib/libvirt/images/rhel-8.4-x86_64-kvm.qcow2 /var/lib/libvirt/images/rhel_84_ospdirector.qcow2
[  0.0] Examining /var/lib/libvirt/images/rhel-8.4-x86_64-kvm.qcow2
*****
Summary of changes:
/dev/sda1: This partition will be left alone.
/dev/sda2: This partition will be left alone.
/dev/sda3: This partition will be resized from 9.9G to 199.9G. The
filesystem xfs on /dev/sda3 will be expanded using the 'xfs_growfs'
method.
*****
[  2.0] Setting up initial partition table on /var/lib/libvirt/images/rhel_84_ospdirector.qcow2
[ 12.7] Copying /dev/sda1
[ 12.7] Copying /dev/sda2
[ 12.7] Copying /dev/sda3
100% |
[ 20.6] Expanding /dev/sda3 using the 'xfs_growfs' method
Resize operation completed with no errors. Before deleting the old disk,
carefully check that the resized disk boots and works correctly.
[root@MUMBKVMC01 images]#
```

```
# qemu-img create -f qcow2 -b /var/lib/libvirt/images/rhel_84_ospdirector.qcow2 -F qcow2 /data/images/0
```

```
root@MUMBKVMC01 images]#
root@MUMBKVMC01 images]# qemu-img create -f qcow2 -b /var/lib/libvirt/images/rhel_84_ospdirector.qcow2 -F qcow2 /data/images/OSPDIRECTOR_RHEL_84.qcow2
Formatting '/data/images/OSPDIRECTOR_RHEL_84.qcow2': fmt=qcow2 size=214748364800 backing_file=/var/lib/libvirt/images/rhel_84_ospdirector.qcow2 backing_fmt=qcow2 cluster_size=65536
lazy_refcounts=off refcount_bits=16
root@MUMBKVMC01 images]#
root@MUMBKVMC01 images]#
```

```
# guestfish -a /data/images/OSPDIRECTOR_RHEL_84.qcow2 -i ln-sf /dev/null /etc/systemd/system/cloud-init
# virt-install --cpu host --memory 131072 --vcpus 32 --os-variant rhel8.4 --disk path=/data/images/OSPD
```

```
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]# virt-install --cpu host --memory 131072 --vcpus 32 --os-variant rhel8.4 --disk path=/data/images/OSPDIRECTOR_RHEL_84.qcow2,device=disk,bus=virtio,format=qcow2 --import --noautoconsole --vnc --network bridge:br-prov --network bridge:br-ext --name OSPDIRECTOR_RHEL_84
** (process:49762): WARNING **: 17:15:52.006: Entity http://pcisig.com/pci/1B36/0100 referenced but not defined
Starting install...
Domain creation completed.
[root@MUMBKVMC01 images]#
```

```
# virsh list --all
```


```
Domain creation completed.
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]# virsh list --all
 Id   Name                               State
-----
  1   OSPREPO_RHEL_84                    running
  2   OSPDIRECTOR_RHEL_84                running
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]#
[root@MUMBKVMC01 images]#
```

```
[root@MAGKVMC02 images]#
[root@MAGKVMC02 images]# virt-install --name OSPDIRECTORCL02_RHEL --description "director" --os-variant rhel8.4 --disk path=/data/images/OSPDIRECTORCL02_RHEL_84.qcow2,size=500,device=disk,bus=virtio,format=qcow2 --cpu host --memory 131072 --vcpus 32 --location /data/isoImages/rhel-8.4-x86_64-dvd.iso --network bridge:br-ext --network bridge:br-prov --extra-args console=ttyS0 --boot uefi
** (process:193050): WARNING **: 15:12:45.915: Entity http://pcisig.com/pci/1B36/0100 referenced but not defined
Starting install...
Retrieving file vmlinuz...
Retrieving file initrd.img...
Allocating 'OSPDIRECTORCL02_RHEL_84.qcow2'
 9.6 MB 00:00:00
 72 MB 00:00:00
500 GB 00:00:00
[virt-viewer:193156]: GLib-GIO-CRITICAL **: 15:12:48.336: g_dbus_proxy_new_sync: assertion 'G_IS_DBUS_CONNECTION (connection)' failed
(virt-viewer:193156): GSpice-WARNING **: 15:12:49.080: PulseAudio context failed Connection refused
(virt-viewer:193156): GSpice-WARNING **: 15:12:49.080: pa_context_connect() failed: Connection refused
(virt-viewer:193156): GSpice-WARNING **: 15:12:49.213: Could not create org.gnome.SessionManager dbus proxy: Could not connect: Connection refused
(virt-viewer:193156): GSpice-WARNING **: 15:12:49.213: Warning no automount-inhibiting implementation available
(virt-viewer:193156): GLib-GObject-WARNING **: 15:13:08.438: value "64" of type 'gint' is invalid or out of range for property 'desktop-width' of type 'gint'
(virt-viewer:193156): GLib-GObject-WARNING **: 15:13:08.438: value "64" of type 'gint' is invalid or out of range for property 'desktop-height' of type 'gint'
```

- Open new window and take console login of the VM.

```
# virsh list --all
# virsh console <domain-id>
```

- Post Director VM deployment, two eth interfaces eth0 and eth1 are created.
  - **eth0** is used for **OSP\_provisioning** networking, in which during **br-ctlplane** network are created during Undercloud deployment.
  - eth1 is used for external connectivity for SSH Access. So, OSP\_external subnet IP address is assigned.

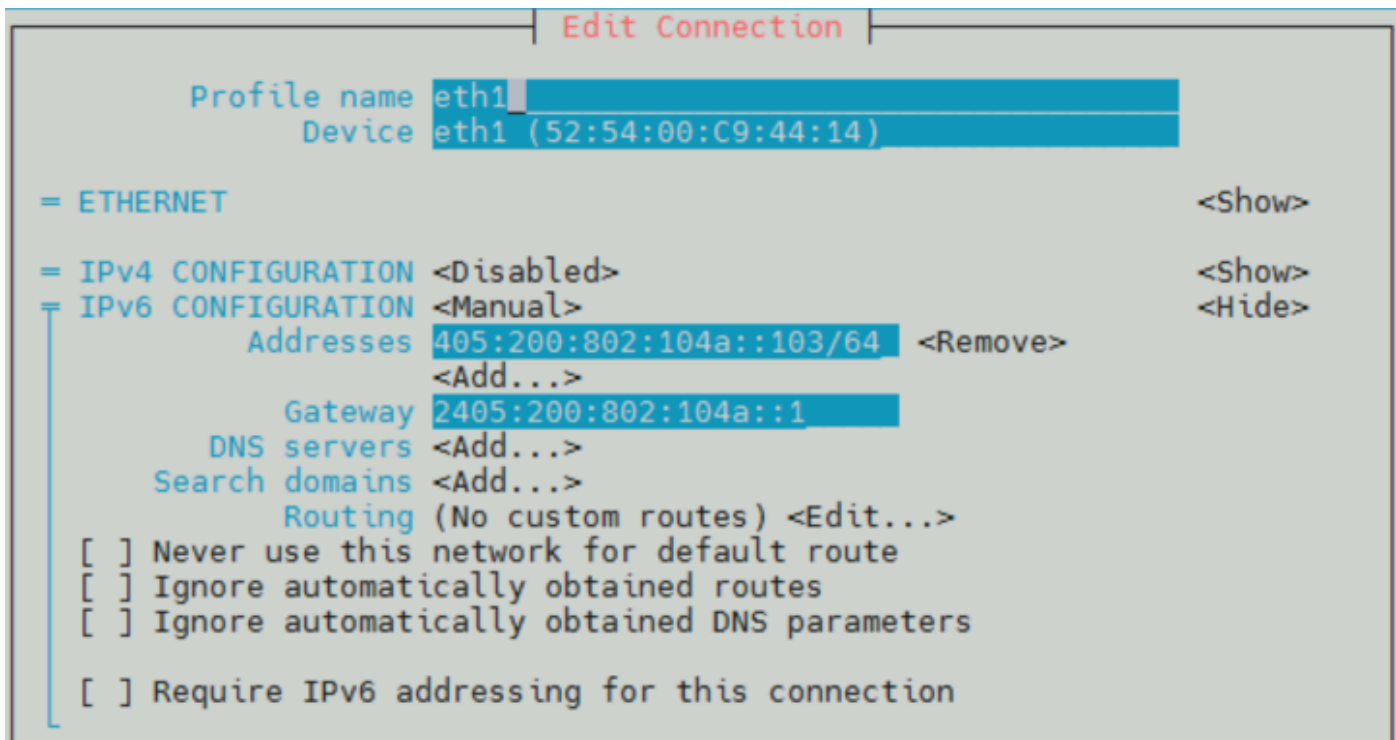

## Local Offline REPO Creation

REPO Server must be registered with Redhat CDN and must have the repository of all available packages of RHOSP 16.2 needed for deployment. RHEL RPM Packages and RHOSP container images must be downloaded to REPO VM using proxy.

## RHOSP Cloud Deployment

RHOSP 16.2 is deployed in customer network through automation. Ansible scripts are used to automate Undercloud and Overcloud deployment.

### Prerequisites

Steps to be followed before starting actual cloud deployment:

1. Ensuring connectivity of KVM node with Local REPO VM and Director VM on OSP\_EXT network.
2. Ensure all the ansible scripts and automation scripts uploaded to KVM host at designated folder.
3. Create folders with names as 'cisco' and 'automation' and put the tarball of ansible scripts.

```
# cd /home
# mkdir cisco
# cd /home/cisco
# mkdir automation
# cd /home/cisco/automation
```

The tarball will consist of three folder directory structures, named as:

- **scripts**: consists of shell scripts used for baremetal node configuration.
- **rpms**: consists of Intel Ethernet Connection (ICE) drivers, intel drivers, and Red-hat Package Manager (RPM) packages.
- **ansible**: consists of Input **vars** file, ansible **yaml** files for deployment, and jinja-templates.

4. Install **sshpass** package. **sshpass** is a command-line utility used to provide passwords to ssh non-interactively. It is primarily used in scripting or automation scenarios where manual password entry is not feasible.

- Download sshpass package **sshpass.tar.gz** from internet/existing server.
- Install GNU Compiler Collection (GCC) package.

```
# yum install gcc
```

- Install make packages.

```
# yum install make
```

- Untar the sshpass package and install SSH pass.

```
# tar -xvzf sshpass.tar.gz
# cd sshpass-1.10/
# ./configure
# sudo make install
# sshpass -V
```

5. The director installation process requires a non-root user to execute commands. 'Stack' user must be created in Director VM with sudo access.

```
# useradd stack
# passwd stack
```

```
Disable password requirements for the 'stack' user when using sudo.
# echo "stack ALL=(root) NOPASSWD:ALL" | tee -a /etc/sudoers.d/stack
# chmod 0440 /etc/sudoers.d/stack
```

6. Copy the **rootCA.crt** file from REPO server to the Director VM and KVM at the given path. Also, update the REPO VM certificate in the trust list.

```
# /etc/pki/ca-trust/source/anchors
# update ca-trust
```

7. Update local REPO-server hostname details in Director VM and KVM in **/etc/hosts** file.

8. On KVM and Director VM, install additional packages like python, ansible, and so on to execute ansible automation scripts.

```
# dnf install python3 python3-devel ansible httpd -y
# update-alternatives --set python /usr/bin/python3
```

9. CIMC Subnet must be reachable from provisioning network of Director in order to enable provisioning during cloud deployment. If required, add static route for same.

```
# ip -6 route add <CIMC Subnet> via <Provisioning Subnet>
```

10. In KVM and Director VM, create a host file under **/ansible** folder and add stack specific details as required.

```
[ospd]
```

```
# <PODNAME> ansible_host=<OSPD IP> ansible_ssh_user=stack ansible_ssh_pass='<STACKPASSWD>' ansible_ssh_
```

<podname> - Stack Name of the Cloud.

<OSPD IP> - Baremetal OSPD Node IP Address

<STACKPASSWD> - OSPD Node password for 'stack' user

11. Ensure all the ansible playbooks and input files must be kept in Director VM under **/home/stack** folder.

## Updation of Input Files

There is an input variable file consisting of customer network specific details that must be prepared for cloud deployment.

Path: /home/cisco/automation/ansible/podvars

Filename: <stack-name>\_vars.yml

Update the highlighted parameters as per the site specific IP plan/low-level design document.



---

**Note:** Dummy IP addresses are used for representation purpose only.

---

```
<#root>

# #####
# XR21 Specific Variables
# #####

# =====
# Common Variables
# =====

# UCS hardware type: 'm4/m5/m6'
hardware: m6

# Platform type: 'epc/pcrf'
platform: epc

# RHEL version
rhel: { version: 84, tag: 8.4 }

# Openstack version
osp: { version: 16, major: 2 }

# Container version
container: { tag: 16.2, tools: 3.0 }

# Overcloud stack name

stack_name: '<stack name>'

# OSPD full hostname

fqdn_hostname: '<stack name>.epdg.ap.hamb.a6.cloud.com'

# OSPD host login
ospd_host: { ip:

'2405:XXXX:089:1054::11'

, username: 'stack', password: '*****' }

# OSPD cimc login
ospd_cimc: { ip:

'2405:XXXX:089:1054::11'

, username: 'admin', password: '*****' }

# CIMC username and password must be same across all Overcloud nodes
cimc: { username: 'admin', password: '*****', ip_pool: '2405:XXXX:089:1055::/64' }
```

```
# Undercloud-Overcloud provision
internal_network: {
  ip_type: 'v6',
  local_interface: 'eth0',

  local_ip: `2405:XXXX:089:1041::103`,

  undercloud_public_host: `2405:XXXX:089:1041::105`,

  undercloud_admin_host: `2405:XXXX:089:1041::104`,

  cidr: `2405:XXXX:089:1041::/64`,

  dhcp_start: `2405:XXXX:089:1041::200`,

  dhcp_end: `2405:XXXX:089:1041::299`,

  gateway: `2405:XXXX:089:1041::199`,

#  nexthop: `2405:XXXX:089:1041::1`,

  inspection_iprange_start: `2405:XXXX:089:1041::300`,

  inspection_iprange_end: `2405:XXXX:089:1041::399`,

}

# DNS
```

```
dns_ips: [ '2405:YYYY:a10:f100::1' ]
dns_search_domains: [ 'cloud.com' ]
```

```
# NTP
```

```
ntp_ips: [ '2405:YYYY:801:700::afa', '2405:YYYY:801:700::afb' ]
```

```
# Deployment type: 'offline/online'
```

```
repos: { rhel: 'offline', container: 'offline' }
```

```
# Offline details if repos is 'offline'
```

```
offline: {
  environment: 'v01_00',
  deliverymedia: '/home/stack/deliverymedia/'
}
```

```
# Satellite details if repos is 'online'
```

```
satellite: {
  fqdn_name: 'rh-satellite2.mitg-bxb300.cisco.com',
  ip: '10.XX.XX.XX',
  org: 'MITG',
  user: 'admin',
  password: '*****',
  environment: 'production',
  activation_key: 'ak-rhel{{rhel.version}}-osp{{osp.version}}{{osp.major}}',
  repos_file: 'rhel{{rhel.version}}osp{{osp.version}}{{osp.major}}.yaml'
}
```

```
# Offline container registry details
```

```
offline_registry: {
  ip: '2405:XXXX:089:1055::100',
  name: '<Cloud-name>.<domain-name>',
  port: '5000',
  container_tag: '16.2.6',
  user: 'ciscoadmin',
  password: '*****'
}
```

```
# Custom cloud domain details
```

```
domain_name: {
  domain: '<domain-name>',
  cloudshortname: 'n1'
}
```

```
# Container images namespace
```

```
container_namespace: 'mitg-{{satellite.environment}}-cv-rhel{{rhel.version}}-osp{{osp.version}}{{osp.ma
```

```
# List of cimc IPs
```

```
ctrl_cimc_ip:
```

```
- 2405:XXXX:YYYY:1036::12
```

```
- 2405:XXXX:YYYY:1036::13
```

- 2405:XXXX:YYYY:1036::14

osdc\_cimc\_ip:

cmpt\_cimc\_ip:

- 2405:XXXX:YYYY:1037::17

- 2405:XXXX:YYYY:1038::18

- 2405:XXXX:YYYY:1038::19

- 2405:XXXX:YYYY:1038::20

mgmt\_cimc\_ip:

- 2405:XXXX:YYYY:1051::15

- 2405:XXXX:YYYY:1051::16

# =====  
# Hardware Specific Variables  
# =====

# Isolcpu for cpu pinning  
isolcpus: { osdc: '4-31,36-63', cmpt: '2-31,34-63', mgmt: '2-31,34-63' }

# Hugepages in 1G Pages  
hugepages: { osdc: 428, cmpt: 448, mgmt: 448 }

# Reserved host memory in MB

```
reserved_host_memory: { osdc: 84000, cmpt: 64000, mgmt: 64000 }

# Number of VFs per SR-IOV port
sriov_vfs_per_port: 16

# List of SR-IOV ports
sriov_port_list: [ens1f0, ens1f1, ens9f0, ens9f1]

# List of OVS bonding interface
ovs_bond_interface: [eno5, eno6]

# Physical networks
physical_network: [phys_pcie1_0, phys_pcie1_1, phys_pcie2_0, phys_pcie2_1]

# Boot disk size
boot_disk_mb_size: { ctrl: 761985, osdc: 761985, cmpt: 761985, mgmt: 1524925 }

# Boot disk PD slot number
boot_disk_pd_slot: { ctrl: [1,2], osdc: [1,2], cmpt: [1,2], mgmt: [1,2] }

# Boot disk VD slot number
boot_disk_vd_slot: { ctrl: 237, osdc: 235, cmpt: 239, mgmt: 239 }

# Storage backend 'swift' or 'ceph'
storage_backend: 'swift'

# Storage disk size
storage_disk_mb_size: { swift: 761985, ceph: 914573, journal: 0 }

# Storage disk PD slot number
storage_disk_pd_slot: { swift: [6,7], ceph: [3,4,5,6], journal: [0] }

# Storage disk VD slot number
storage_disk_vd_slot: { swift: [238,239], ceph: [236,237,238,239], journal: [0] }

# Firmware version 'yes' or 'no' ???
firmware: { check: 'no', bios_version: '4.2.3c', cimc_version: '4.2(3e)' }

# =====
# OSP Specific Variables
# =====

# Timezone for overcloud nodes

timezone: 'Asia/Kolkata'

# Overcloud node count to deploy

node_count: { ctrl: 3, osdc: 0, cmpt: 11, mgmt: 2 }
```

```
local_network: {
  ip_type: 'v6',
  tenant_vlan_id: 1045,
  tenant_net_cidr: '240f:ppp:rr:1045::/64',
  tenant_alloc_pools_start: '240f:ppp:rr:1045::10',
  tenant_alloc_pools_end: '240f:ppp:rr:1045:ffff:ffff:ffff:fffe',

  storage_vlan_id: 1043,
  storage_net_cidr: '240f:ppp:rr:1043::/64',
  storage_alloc_pools_start: '240f:ppp:rr:1043::10',
  storage_alloc_pools_end: '240f:ppp:rr:1043:ffff:ffff:ffff:fffe',

  storage_mgmt_vlan_id: 1044,
  storage_mgmt_net_cidr: '240f:ppp:rr:1044::/64',
  storage_mgmt_alloc_pools_start: '240f:ppp:rr:1044::10',
  storage_mgmt_alloc_pools_end: '240f:ppp:rr:1044:ffff:ffff:ffff:fffe',

  internal_api_vlan_id: 1042,
  internal_api_net_cidr: '240f:ppp:rr:1042::/64',
  internal_api_alloc_pools_start: '240f:ppp:rr:1042::10',
  internal_api_alloc_pools_end: '240f:ppp:rr:1042:ffff:ffff:ffff:fffe'
}
```

# External VLAN and IP configs

```
external_network: {

  ip_type: 'v6',

  vlan_id: 1046,

  default_route: '2405:XXXX:YYYY:1055::1',

  network_cidr: '2405:XXXX:YYYY:1055::/64',

  alloc_pool_start: '2405:XXXX:YYYY:1055::100',

  alloc_pool_end: '2405:XXXX:YYYY:1055::200',

  horizon_ip: '2405:XXXX:YYYY:1055::107'

}
```

```

# Neutron mechanism driver 'ovs' or 'ovn'
neutron: {
  driver: 'ovs',
  dvr: false,
  datacenter_vlan_start: 1050,
  datacenter_vlan_end: 1070
}

# =====
# OS Specific Variables
# =====

# RHEL kernel version

kernelversion: '4.18.0-305.88.1.el8_4.x86_64'

# E810 ICE driver
ice_driver: { check: 'yes', version: 1.12.6, intel_aux_version: 1.0.1 }

# ENIC and FNIC version
nic_version: { enic: '2.3.0.53', fnic: '1.6.0.53' }

# IPMI watchdog timer config
watchdog: { action: enabled, version: '2.0.31-3.el8.x86_64', timer: 250 }

# StorCLI raid management
storcliver: '007.2612.0000.0000-1.noarch'

# =====
# Platform Specific Variables
# =====

# Buffer pool size based on platform type
innodb_buffer_pool_size: 1610
# #####
# END - XR21 Specific Variables
# #####

```

## Undercloud Deployment

Undercloud is deployed using ansible scripts in seven steps. All the steps must be executed from KVM host that acts as jump-host in this case.

Step	Tag	Description	Playbook YAMLS
Step 1.	checkfiles	Verify required playbooks, scripts, and RPMs on Openstack Platform Director (OSPD).	osp16_published_playbooks_verify.yml

Step 2.	genpodvars	Generate POD specific variable files related to hardware, RHEL, and so on, like <b>common_vars.yml</b> (hardware, software, network details), <b>hw_m6_vars.yml</b> (CPU, memory, hugepages, disk, NIC, and so on), <b>rhel_84_vars.yml</b> (RHEL, kernel, ICE driver, NIC version), <b>pf_esc_vars.yml</b> (Elastic Services Controller (ESC) details), <b>osp_16_vars.yml</b> (OSP version, timezone, IP type, VLAN ID, IP, neutron details).	osp16_generate_pod_specific_vars.yml
Step 3.	preucdeploy	Configure Fully Qualified Domain Name (FQDN), Network Time Protocol (NTP), and update all packages on director node.	osp16_pre_undercloud_deploy.yml
Step 4.	firstreboot	Performs first reboot of the Undercloud director node after the earlier configuration and package install.	osp16_undercloud_deploy.yml
Step 5.	ucdeploy	Install Undercloud stack on director	osp16_undercloud_tuning.yml
Step 6.	cstate	Configure BIOS CPU C-state settings on director node.	osp16_cstate.yml
Step 7.	secondreboot	Second reboot on Undercloud director after BIOS changes.	N/A

File with name osp16\_auto\_undercloud\_deploy.yml is main ansible-playbook that can run in single iteration but it is advisable to execute the playbook in step-wise manner using different tags to ease troubleshooting in case of any deployment issues.

```
<#root>
```

```
#
```

```
cd /home/stack/ansible/
```

```
# ansible-playbook -i hosts osp16_auto_undercloud_deploy.yml -e podname=<> --tags=
```

```
TAG
```

For Ex -

```
#  
  
ansible-playbook -i hosts osp16_auto_undercloud_deploy.yml -e podname=<> --tags=checkfiles  
# ansible-playbook -i hosts osp16_auto_undercloud_deploy.yml -e podname=<> --tags=genpodvars  
# ansible-playbook -i hosts osp16_auto_undercloud_deploy.yml -e podname=<> --tags=preucdeploy  
# ansible-playbook -i hosts osp16_auto_undercloud_deploy.yml -e podname=<> --tags=firstreboot  
# ansible-playbook -i hosts osp16_auto_undercloud_deploy.yml -e podname=<> --tags=ucdeploy  
# ansible-playbook -i hosts osp16_auto_undercloud_deploy.yml -e podname=<> --tags=cstate  
# ansible-playbook -i hosts osp16_auto_undercloud_deploy.yml -e podname=<> --tags=secondreboot
```

Note :-

Deployment Logs would be generated in “/home/stack/autologs” in Director-VM.

Post-Checks for Verification of Undercloud Deployment.

“stackrc” & “undercloud.conf” file must be generated in /home/stack folder.

```
# sudo podman ps -a  
# source stackrc  
# openstack stack list  
# openstack stack show <stack-name> --fit  
# openstack server list  
# openstack network list  
# openstack subnet list
```

## Overcloud Deployment

Overcloud is deployed with minimum three controllers in HA-mode and one compute. Overcloud is deployed using ansible scripts in 17 steps. All the steps must be executed from Director-VM that acts as Jump-host in this case.

Step	Tag	Description	Playbook YAMLS
Step 1.	genpodvars	Generate POD specific variable files for Overcloud related to hardware, RHEL, and so on, like <b>common_vars.yml</b> (hardware, software, network details), <b>hw_m6_vars.yml</b> (CPU, memory, hugepages, disk, NIC, and so on), <b>rhel_84_vars.yml</b> (RHEL, kernel, ICE driver, NIC version), <b>pf_esc_vars.yml</b> (ESC details), <b>osp_16_vars.yml</b> (OSP version, timezone, IP type, VLAN ID, IP, neutron details).	osp16_generate_pod_specific_vars.yml

Step 2.	geninstack	<p>Generate Instackenv <b>JSON</b> file from <b>/var/common_vars.yml</b> created in the earlier step.</p> <p>The director requires a node definition template, which is created manually. This file <b>instackenv.json</b> uses JSON format, and contains all the hardware and power management details for the nodes. This step also validates the hardware configuration on the UCS server before generating the file.</p>	osp16_generate_instackenv.yml
Step 3.	cimcvd	<p>Configure CIMC setting and Virtual Disks (VDs) on each servers referring the <b>common_vars.yml</b>, <b>hw_m6_vars.yaml</b>, and <b>rhel_84_vars.yml</b>.</p>	osp16_cimc_vd_configure.yml
Step 4.	preocdeploy	<p>This step performs all prerequisites to deploy the Overcloud. It sets the FQDN, NTP, and update all packages, push image to path for deployment.</p>	osp16_pre_overcloud_deploy.yml
Step 5	importnodes	<p>In this step, the server CPU is introspected, memory, NIC along with the interface, and ports on the network switches. Introspection is performed on the connected network switches for all controllers and computes.</p>	osp16_import_ironic_nodes.yml
Step 6.	gentemplates	<p>Generate custom template files for controllers and computes. In the custom template, define controller and compute roles for all the services running on them. It also does system hardening by applying certificates, routes, and so on.</p>	osp16_generate_custom_templates.yml
Step 7.	ocdeploy	<p>In this step, an Openstack Overcloud deploy is done. Run <b>deploy.sh</b> provided by Red Hat for RHOSP deployment.</p>	osp16_overcloud_deploy.yml
Step 8	geninventory	<p>In this step, an inventory yml file for use by ansible is generated where Provisioning IP, IPMI (CIMC) IP, and credentials are stored and mapped with controller and computes for automation to login in the system and execute the further steps.</p>	osp16_build_inventory_v3.py
Step	offlinerepo	<p>Configure Overcloud Offline REPO in the file</p>	osp16_config_offline_repo.yml

9.		<code>/etc/yum.repo.d/offline.repo</code> point to repo server via the external network.	
Step 10.	fencing	Configure fencing on all controller node with Shoot The Other Node In The Head (a fencing technique in HA clusters) (STONITH).	osp16_config_fencing.yml
Step 11.	raidcache	Configure Raid Cache setting for all controllers and computes also configure SWIFT storage settings.	osp16_raid_cache_tuning.yml
Step 12.	dnfupdate	Run DNF updates for all packages on all nodes.	dnf_update_all_packages.yml
Step 13.	setiplink	In this step, trust mode control for SR-IOV ports is enabled for Evolved Packet Data Gateway (EPDG) internal and data traffic. The support for SR-IOV ports is available in neutron and allows VMs to access network via SR-IOV virtual functions.	osp16_setIpLink.yml
Step 14.	watchdog	In this step, IPMI setting on director node is configured for management task on all server over out-of-band connection.	osp16_config_ipmi_watchdog.yml
Step 15.	icedriver	Update the intel E810 ICE driver for Peripheral Component Interconnect (PCI) cards to the version 1.12.6 for EPDG to use Intel NIC ports as SR-IOV.	osp16_ice_driver_install.yml
Step 16.	reboot	Reboot all Overcloud nodes after execution of the earlier steps.	osp16_reboot_overcloud_hosts.yml
Step 17.	verifyrhosp	Verify RHOSP deployment configuration and health.	osp16_rhosp_verify.yml

For provisioning of Overcloud nodes, Undercloud uses 'overcloud-hardened-uefi-full.qcow2'. So before beginning Overcloud deployment, the image must be stored in designated path in undercloud/director.

Copy the Overcloud **qcow2** file from remote site.

```
<#root>
```

```
# su - stack
# cd /home/stack
```

```
# mkdir deliverymedia
# cd deliverymedia
```

```
### Copy overcloud-hardened-uefi-full.qcow2 to deliverymedia ###
```

```
# scp overcloud-hardened-uefi-full.qcow2 stack@[Director-IP]:/home/stack/deliverymedia
[stack@[stack@ Undercloud ~]$ cd /home/stack/ansible/
[stack@[stack@ Undercloud ansible]$ ansible-playbook osp16_auto_overcloud_deploy.yml -e podname=POD_NAME]
```

For Ex -

```
# ansible-playbook -i hosts osp16_auto_overcloud_deploy.yml -e podname=<> --tags=genpodvars
# ansible-playbook -i hosts osp16_auto_overcloud_deploy.yml -e podname=<> --tags=geninstack
# ansible-playbook -i hosts osp16_auto_overcloud_deploy.yml -e podname=<> --tags=cimcvd
# ansible-playbook -i hosts osp16_auto_overcloud_deploy.yml -e podname=<> --tags=preocdeploy
# ansible-playbook -i hosts osp16_auto_overcloud_deploy.yml -e podname=<> --tags=importnodes
# ansible-playbook -i hosts osp16_auto_overcloud_deploy.yml -e podname=<> --tags=gentemplates
# ansible-playbook -i hosts osp16_auto_overcloud_deploy.yml -e podname=<> --tags=ocdeploy
```

```
#### Push & Update the rootCA.pem in all the Controllers & Computes ####
```

```
# for node in $(nova list | grep -i active | awk '{print $12}' | awk -F "=" '{print $2}'); do scp -o S
```

```
#### Append the Director Entry in "/etc/hosts" file ####
```

```
# for node in $(nova list | grep -i active | awk '{print $12}' | awk -F "=" '{print $2}'); do ssh -o S
```

```
# ansible-playbook -i hosts osp16_auto_overcloud_deploy.yml -e podname=<> --tags=geninventory
# ansible-playbook -i hosts osp16_auto_overcloud_deploy.yml -e podname=<> --tags=offlinerepo
# ansible-playbook -i hosts osp16_auto_overcloud_deploy.yml -e podname=<> --tags=fencing
```

```
### In case of Fencing Failures, please check the reachability of CIMC Subnet from Controllers ####
```

```
## If CIMC Subnet is not pinging, Do add the static Route ##
```

```
# ip -6 route add <CIMC Subnet> via <Provisioning Subnet>
Ex: ip -6 route add 2405:XXXX:YYY:9999::/64 via 2405:XXXX:YYY:9999:1
```

```
# ansible-playbook -i hosts osp16_auto_overcloud_deploy.yml -e podname=<> --tags=raidcache
# ansible-playbook -i hosts osp16_auto_overcloud_deploy.yml -e podname=<> --tags=dnfupdate
# ansible-playbook -i hosts osp16_auto_overcloud_deploy.yml -e podname=<> --tags=setiplink
# ansible-playbook -i hosts osp16_auto_overcloud_deploy.yml -e podname=<> --tags=watchdog
# ansible-playbook -i hosts osp16_auto_overcloud_deploy.yml -e podname=<> --tags=icedriver
```

```
# ansible-playbook -i hosts osp16_auto_overcloud_deploy.yml -e podname=<> --tags=reboot
# ansible-playbook -i hosts osp16_auto_overcloud_deploy.yml -e podname=<> --tags=verifyrhosp
```

In order to monitor the deployment logs, use the latest log file.

```
# tail -F </home/stack/autologs/osp16_auto_overcloud_deploy_*.log>
```

Ensure that all the 17 steps have passed.

Checks failed => The count must be 00.

Logs => /home/stack/autologs/osp16\_rhosp\_verify.yml\_20200703T042257.log

```
#=====
```

```
# STEP | TAG | DESCRIPTION | PLAYBOOK
```

```
#=====
```

```
# step1 | genpodvars | Generate POD Specific Variable Files |
osp16_generate_pod_specific_vars.yml -e podname=

# step2 | geninstack | Generate Instackenv JSON File | osp16_generate_instackenv.yml -
e podname=

# step3 | cimcvd | Configure CIMC VDs | osp16_cimc_vd_configure.yml

# step4 | preocdeploy | Configure Pre Overcloud Deploy |
osp16_pre_overcloud_deploy.yml

# step5 | importnodes | Import Openstack Baremetal Ironic Nodes |
osp16_import_ironic_nodes.yml

# step6 | gentemplates | Generate Custom Templates |
osp16_generate_custom_templates.yml

# step7 | ocdeploy | Openstack Overcloud Deploy | osp16_overcloud_deploy.yml

# step8 | geninventory | Generate Inventory File | osp16_build_inventory_v3.py --
ipmipass
```

```
# step9 | offlinerepo | Configure Overcloud Offline Repo from Offline TAR File |  
osp16_config_offline_repo.yml
```

```
# step10 | fencing | Post Deploy MOP Before Reboot - Configure Fencing |  
osp16_config_fencing.yml
```

```
# step11 | raidcache | Post Deploy MOP Before Reboot - Raid Cache and PR Tuning |  
osp16_raid_cache_tuning.yml
```

```
# step12 | dnfupdate | Post Deploy MOP Before Reboot - Dnf Update Packages |  
dnf_update_all_packages.yml
```

```
# step13 | setiplink | Post Deploy MOP Before Reboot - Set VF IP Link Trust ON | osp16_setIpLink.yml
```

```
# step14 | watchdog | Post Deploy MOP Before Reboot - Config IPMI Watchdog |  
osp16_config_ipmi_watchdog.yml
```

```
# step15 | icedriver | Post Deploy MOP Before Reboot - Update E810 ICE Driver |  
osp16_ice_driver_install.yml
```

```
# step16 | reboot | Reboot All Overcloud Nodes | osp16_reboot_overcloud_hosts.yml
```

```
# step17 | verifyrhosp | Verify RHOSP Deployment Configuration and Health |  
osp16_rhosp_verify.yml -e podname=
```

```
#=====
```

ALL HOSTS REACHABLE

```
=====
```

**CHECKS DONE => 17**

**CHECKS PASSED => 17**

**CHECKS FAILED => 00**

```
=====
```

**OVERALL STATUS => PASSED !!**

Post successful deployment of Overcloud, ensure that the Horizon dashboard is accessible.


## Accessing the Horizon Dashboard

For horizon dashboard URL, use 'OS\_AUTH\_URL' from 'overcloudrc'.

```
[stack@MUMBMUMBTCUDR201C0-ospd ~]$ cat MUMBMUMBTCUCL200C0rc
# Clear any old environment that may conflict.
for key in $( set | awk '{FS="="} /^OS_/ {print $1}' ); do unset $key ; done
export NOVA_VERSION=1.1
export COMPUTE_API_VERSION=1.1
export OS_USERNAME=admin
export OS_PROJECT_NAME=admin
export OS_USER_DOMAIN_NAME=Default
export OS_PROJECT_DOMAIN_NAME=Default
export OS_NO_CACHE=True
export OS_CLOUDNAME=MUMBMUMBTCUCL200C0
export no_proxy='[,.]',[
export PYTHONWARNINGS='ignore:Certificate has no, ignore:A true SSLContext object is not available'
export OS_AUTH_TYPE=password
export OS_PASSWORD=openstack
export OS_AUTH_URL='http://[REDACTED]:5000'
export OS_IDENTITY_API_VERSION=3
export OS_COMPUTE_API_VERSION=2.latest
export OS_IMAGE_API_VERSION=2
export OS_VOLUME_API_VERSION=3
export OS_REGION_NAME=regionOne

# Add OS_CLOUDNAME to PS1
if [ -z "${CLOUDPROMPT_ENABLED:-}" ]; then
  export PS1=${PS1:-""}
  export PS1=\${OS_CLOUDNAME:+"(\${OS_CLOUDNAME})\ } $PS1
  export CLOUDPROMPT_ENABLED=1
fi
```

Horizon Dashboard:

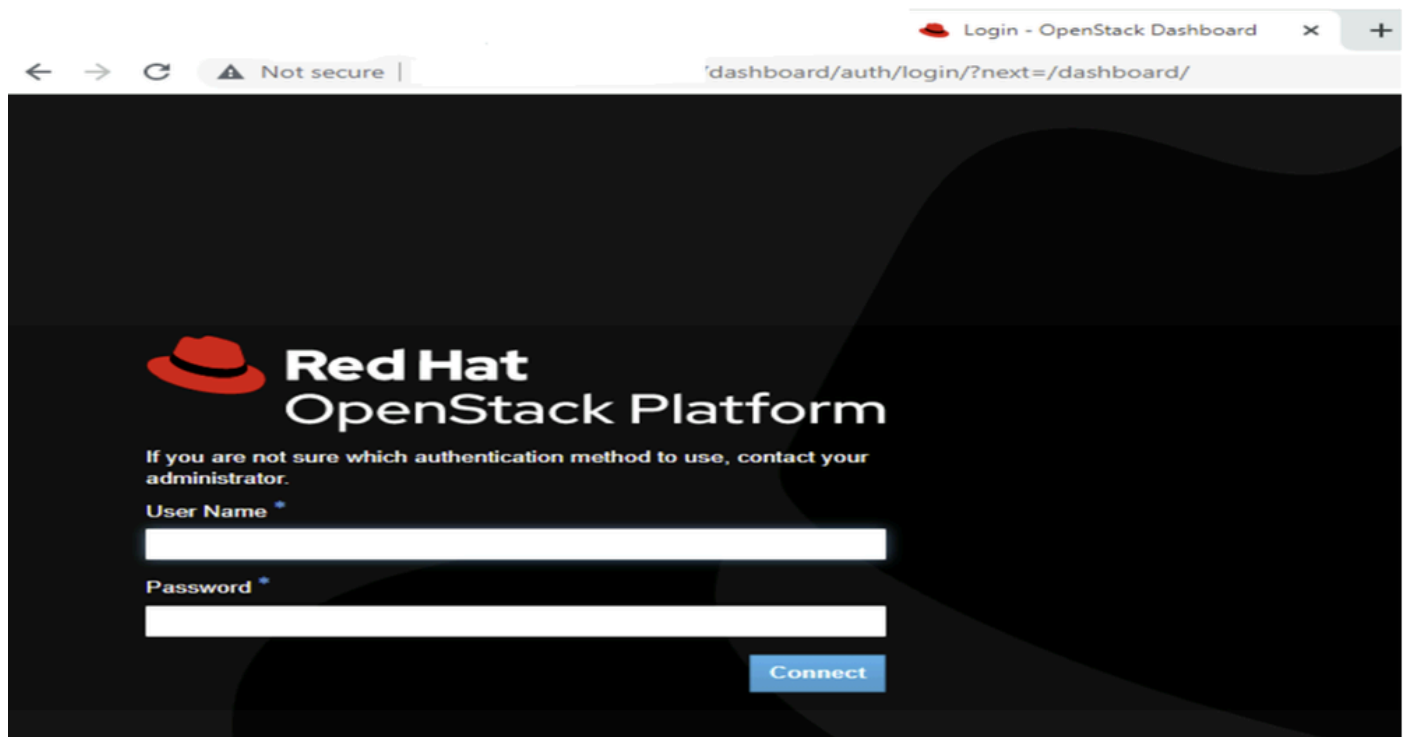

# Health Check of RHOSP Cluster

<#root>

```
### Check OpenStack Services Status ###
```

```
# openstack compute service list
# openstack network agent list
# openstack volume service list
# openstack orchestration service list
# openstack identity service list
# openstack endpoint list
# openstack server list
# openstack image list
```

## Summary

The RHOSP 16.2 deployment guide provides comprehensive, step-by-step instructions for deploying a scalable and production-ready OpenStack cloud environment using the proven tools and methodologies by Red Hat. This guide is tailored for system administrators and cloud architects and focuses on deploying RHOSP 16.2 using the OpenStack director, which is based on TripleO (OpenStack on OpenStack).

The guide covers all critical phases of deployment, including:

- Infrastructure planning and prerequisites
- Environment preparation and network configuration
- Undercloud installation and configuration
- Overcloud deployment and post-deployment steps
- HA, storage, and service scaling options

This guide is essential for teams seeking a reliable, enterprise-grade cloud platform with the ecosystem integration and support of Red Hat.