

Backup and Restore Configuration on RV220W and RV120W

Objectives

Backup of the configuration settings is done to save the current settings and implement the backup after an upgrade. Backup configurations and settings can be restored at any time.

This article explains how to backup the configuration on the RV220W and RV120W.

Applicable Devices


- RV120W
- RV220W

Software Version

- v1.0.4.17

Backup Configuration

Step 1. Log in to the web configuration utility and choose **Administration > Backup / Restore Settings**. The *Backup and Restore* page opens:

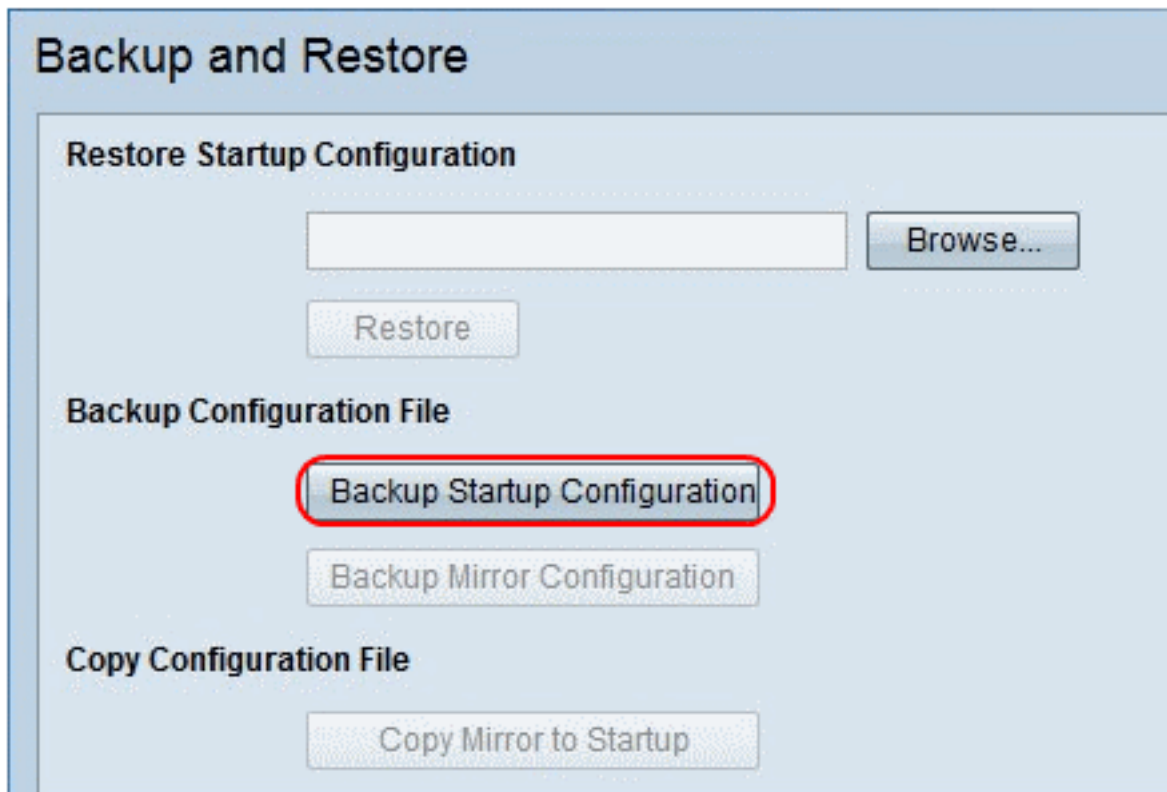


Backup and Restore

Restore Startup Configuration

Backup Configuration File

Copy Configuration File

Step 2. Under the Backup Configuration File area, click **Backup Startup Configuration** to save all the current settings and configuration on the device.

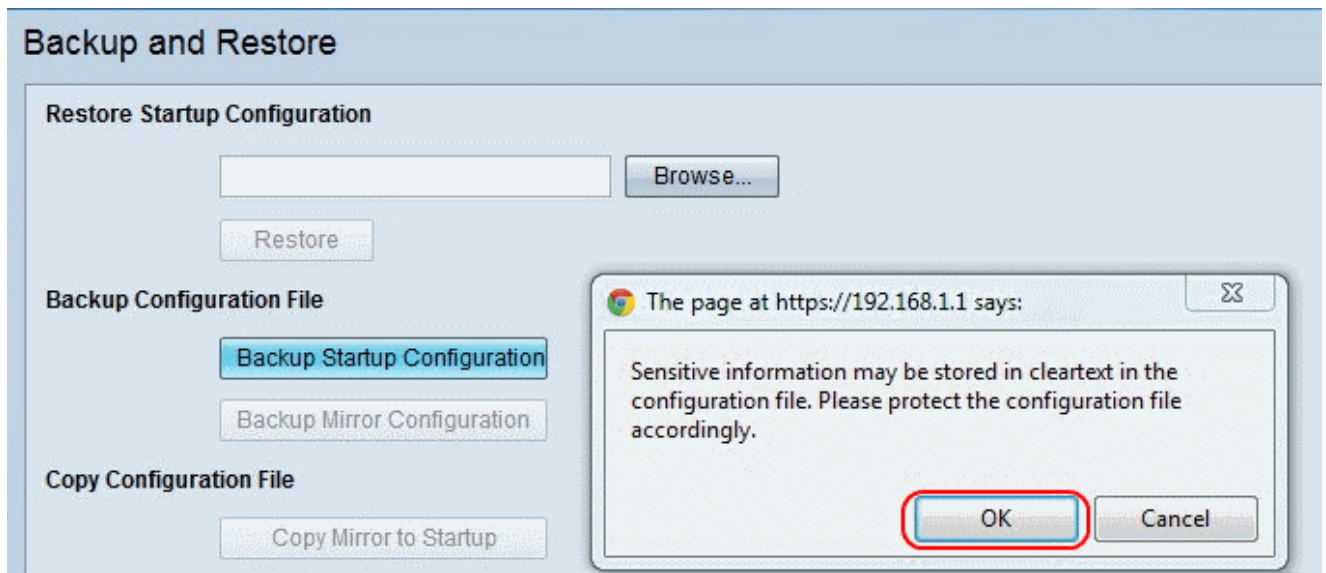


Step 3. A pop up window appears stating that the sensitive data may stored in cleartext which means it will not be encrypted. Click **OK** to save the configuration file.

Note: For security purposes, it is recommended that you save the configuration in a safe location with an encryption.

Restore Configuration

Step 1. Log in to the web configuration utility and choose **Administration > Backup / Restore Settings**. The *Backup and Restore* page opens:

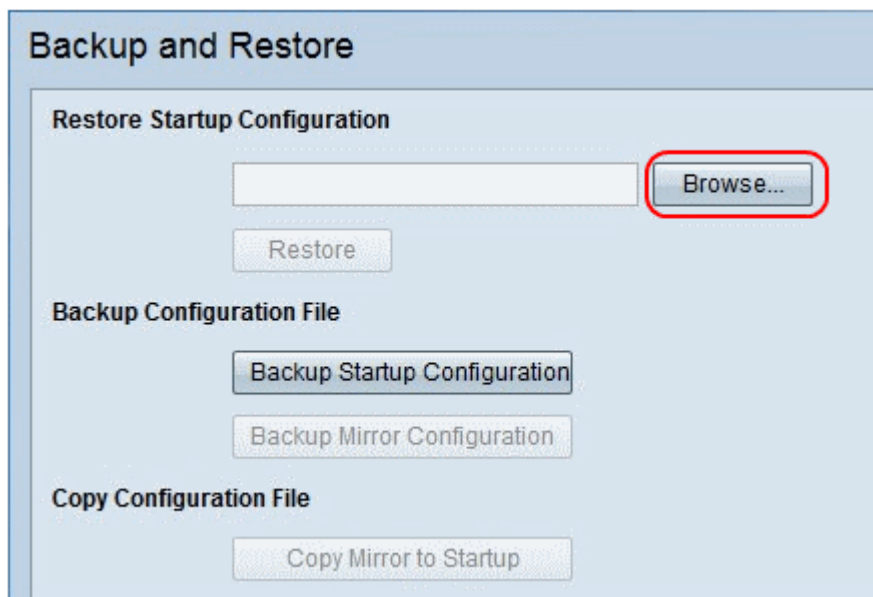

Step 2. Under the Restore Startup Configuration area, click **Browse** to find the configuration file on your computer to apply it on the device.

Backup and Restore

Restore Startup Configuration

C:\Users\Malhi\Desktop\RV220W

Browse...

Restore

Backup Configuration File

Backup Startup Configuration

Backup Mirror Configuration

Copy Configuration File

Copy Mirror to Startup

Step 3. Click **Restore** to start the restore operation. After the operation, the router will be restored with the configuration settings from when the backup was made.