

Configure Simple Network Management Protocol (SNMP) Views on a Switch

Objective

The Simple Network Management Protocol (SNMP) is an Internet-standard protocol used to manage devices on IP networks. The SNMP messages are used to inspect and communicate information about managed objects. SNMP uses Management Information Bases (MIBs) to store available objects in a hierarchical or tree-structured namespace that contains object identifiers (OIDs). An OID identifies the information in the MIB hierarchy that can be read or set via SNMP.

SNMP Views are a subset of MIB objects that can be assigned to an SNMP access group to control write, read, and notification privileges of SNMP users over MIB object information. A view is a user-defined label for a collection of MIB subtrees. Each subtree ID is defined by the OID of the root of the relevant subtrees. Either well-known names can be used to specify the root of the desired subtree or an OID can be entered.

This article provides instructions on how to configure the SNMP Views on your switch.

Applicable Devices

- Sx250 Series
- Sx300 Series
- Sx350 Series
- SG350X Series
- Sx500 Series
- Sx550X Series

Software Version

- 1.4.7.05 — Sx300, Sx500
- 2.2.8.04 — Sx250, Sx350, SG350X, Sx550X

Configure SNMP Views on your Switch

The Views page of the web-based utility of your switch allows you to create and edit SNMP views. The default views (Default and DefaultSuper) cannot be changed.

Views can be attached to groups in the Groups page or to a community which employs basic access mode through the Communities page.


Note: To know how to configure the SNMP Groups on a switch, click [here](#). For instructions on how to configure SNMP Communities on a switch, click [here](#).

View the SNMP Views Table

Step 1. Log in to the web-based utility of your switch then choose **Advanced** in the Display


Mode drop-down list.

Note: In this example, SG350X-48MP switch is used.

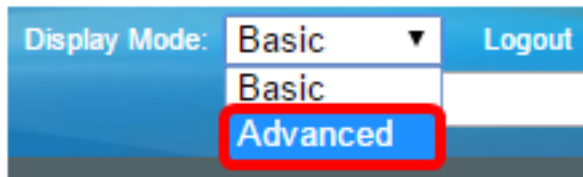

Note: If you have an Sx300 or Sx500 Series switch, skip to [Step 2](#).

[Step 2](#). Choose **SNMP > Views**.

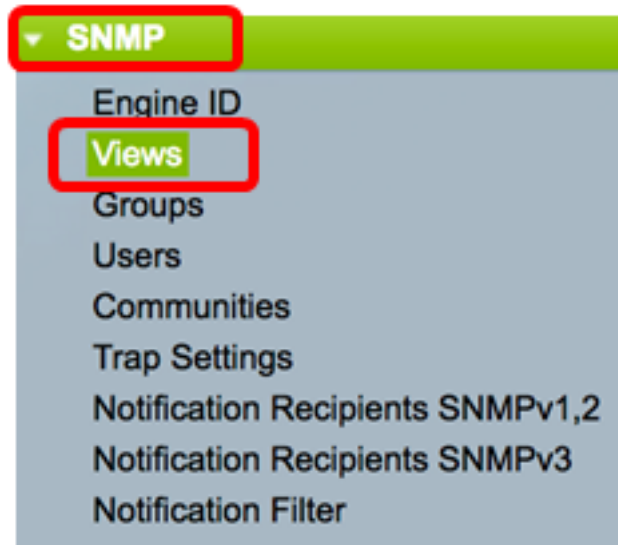

The View Table displays the following information:

Views

View Table

Filter: View Name equals to

<input type="checkbox"/>	View Name	Object ID Subtree	Object ID Subtree View
<input type="checkbox"/>	Default	1	Included
<input type="checkbox"/>	Default	1.3.6.1.6.3.13	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.16	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.18	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.12.1.2	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.12.1.3	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.15.1.2	Excluded
<input type="checkbox"/>	Default	1.3.6.1.4.1.9.6.1.101.98.1	Excluded
<input type="checkbox"/>	Default	1.3.6.1.4.1.9.6.1.101.2.7.2	Excluded
<input type="checkbox"/>	DefaultSuper	1	Included

- View Name — The name of the view.
- Object ID Subtree — The subtree to be included or excluded in the SNMP view.
- Object ID Subtree View — Displays whether the defined subtree is included or excluded in the selected SNMP view.

Step 3. (Optional) Check the **Filter** check box to filter the View Name that you want to be shown on the View Table.

Views

View Table

Filter: View Name equals to

<input type="checkbox"/>	View Name	Object ID Subtree	Object ID Subtree View
--------------------------	-----------	-------------------	------------------------

Step 4. (Optional) Choose a view name from the View Name drop-down list.

View Table

Filter: View Name equals to

<input type="checkbox"/>	View Name	Object ID	Object ID Subtree View
--------------------------	-----------	-----------	------------------------

The following views are created by default:

- Default — Default SNMP view for read and read/write views.
- DefaultSuper — Default SNMP view for administrator views.

Note: In this example, Default is chosen.

Step 5. (Optional) Click **Go**.

View Table

Filter: View Name equals to

Step 6. (Optional) Click **Clear Filter** to clear the filter settings.

View Table

Filter: View Name equals to

<input type="checkbox"/>	View Name	Object ID Subtree	Object ID Subtree View
<input type="checkbox"/>	Default	1	Included
<input type="checkbox"/>	Default	1.3.6.1.6.3.13	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.16	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.18	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.12.1.2	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.12.1.3	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.15.1.2	Excluded
<input type="checkbox"/>	Default	1.3.6.1.4.1.9.6.1.101.98.1	Excluded
<input type="checkbox"/>	Default	1.3.6.1.4.1.9.6.1.101.2.7.2	Excluded

You should now have viewed the SNMP View on your switch.

Add a View in the View Table

Step 1. Click the **Add** button to add a new entry in the View Table.

<input type="checkbox"/>	View Name	Object ID Subtree	Object ID Subtree View
<input type="checkbox"/>	Default	1	Included
<input type="checkbox"/>	Default	1.3.6.1.6.3.13	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.16	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.18	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.12.1.2	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.12.1.3	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.15.1.2	Excluded
<input type="checkbox"/>	Default	1.3.6.1.4.1.9.6.1.101.98.1	Excluded
<input type="checkbox"/>	Default	1.3.6.1.4.1.9.6.1.101.2.7.2	Excluded

Step 2. Enter the name of the new SNMP view in the *View Name* field. The character limit for this field is 30.

View Name: (3/30 characters used)

Note: In this example, TCP is used as view name.

Step 3. In the Object ID Subtree area, click one of the following radio buttons that defines a method to select a node in the MIB tree that is included or excluded in the new SNMP view.

Note: In this example, Select from list is chosen.

Object ID Subtree Select from list:

system
 interfaces
 ip
 icmp
 tcp

 User Defined:

The options are:

- Select from list — Allows you to choose the node in the MIB tree from the available list.
- User Defined — Allows the user to enter the object identifier that is not available in the Select From list. If this option is chosen, enter the OID in the *User Defined* field then skip to [Step 7](#).


Note: For a list of OIDs of the Cisco Small Business Switches, click [here](#).

Step 4. (Optional) Scroll down the list and choose an OID subtree from the list.



Note: In this example, tcp is chosen.

Step 5. (Optional) Use the **Up** arrow to go to the level of the parent and siblings of the chosen node and click the **Down** arrow to descend to the level of the children of the chosen node.

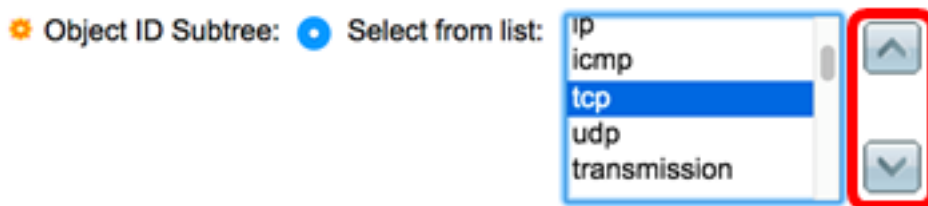


Note: In this example, the Down arrow is clicked.

Step 6. (Optional) Scroll down the list and a child from the list. If the Up button is chosen in Step 5, choose the parent instead.



Note: In this example, tcpAttemptFails is chosen.

[Step 7.](#) Check or uncheck the **Include in view** check box. If this is checked, the chosen MIBs are included in the view, otherwise they are excluded.



Step 8. Click **Apply** then click **Close**.

View Name: (0/30 characters used)

Object ID Subtree: Select from list:

- tcpAttemptFails
- tcpEstabResets
- tcpCurrEstab
- tcpInSegs
- tcpOutSegs

 User Defined:

Include in view

Apply

Step 9. (Optional) Click **Save** to save the settings to the startup configuration file.

cisco

3-Port Gigabit PoE Stackable Managed Switch

Views

View Table

Filter: View Name equals to

<input type="checkbox"/>	View Name	Object ID Subtree	Object ID Subtree View
<input type="checkbox"/>	TCP	1.3.6.1.2.1.6.7	Included
<input type="checkbox"/>	Default	1	Included
<input type="checkbox"/>	Default	1.3.6.1.6.3.13	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.16	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.18	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.12.1.2	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.12.1.3	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.15.1.2	Excluded
<input type="checkbox"/>	Default	1.3.6.1.4.1.9.6.1.101.98.1	Excluded
<input type="checkbox"/>	Default	1.3.6.1.4.1.9.6.1.101.2.7.2	Excluded
<input type="checkbox"/>	DefaultSuper	1	Included

You should now have successfully added a new SNMP view in the View Table of your switch.

Delete an SNMP View

Step 1. In the View Table, check the check box of the view that you want to delete.

View Table			
Filter: <input type="checkbox"/> View Name equals to TCP <input type="button" value="Go"/> <input type="button" value="Clear Filter"/>			
<input checked="" type="checkbox"/>	View Name	Object ID Subtree	Object ID Subtree View
<input checked="" type="checkbox"/>	TCP	1.3.6.1.2.1.6.7	Included
<input type="checkbox"/>	Default	1	Included
<input type="checkbox"/>	Default	1.3.6.1.6.3.13	Excluded

Note: In this example, TCP view is chosen.

Step 2. Click **Delete**.

View Table			
Filter: <input type="checkbox"/> View Name equals to TCP <input type="button" value="Go"/> <input type="button" value="Clear Filter"/>			
<input checked="" type="checkbox"/>	View Name	Object ID Subtree	Object ID Subtree View
<input checked="" type="checkbox"/>	TCP	1.3.6.1.2.1.6.7	Included
<input type="checkbox"/>	Default	1	Included
<input type="checkbox"/>	Default	1.3.6.1.6.3.13	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.16	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.18	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.12.1.2	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.12.1.3	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.15.1.2	Excluded
<input type="checkbox"/>	Default	1.3.6.1.4.1.9.6.1.101.98.1	Excluded
<input type="checkbox"/>	Default	1.3.6.1.4.1.9.6.1.101.2.7.2	Excluded
<input type="checkbox"/>	DefaultSuper	1	Included

Step 3. (Optional) Click **Save** to save the settings to the startup configuration file.

 Save

Views



Success. To permanently save the configuration, go to the [File Operations](#) page or c

View Table

Filter: View Name equals to

<input type="checkbox"/>	View Name	Object ID Subtree	Object ID Subtree View
<input type="checkbox"/>	Default	1	Included
<input type="checkbox"/>	Default	1.3.6.1.6.3.13	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.16	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.18	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.12.1.2	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.12.1.3	Excluded
<input type="checkbox"/>	Default	1.3.6.1.6.3.15.1.2	Excluded
<input type="checkbox"/>	Default	1.3.6.1.4.1.9.6.1.101.98.1	Excluded
<input type="checkbox"/>	Default	1.3.6.1.4.1.9.6.1.101.2.7.2	Excluded
<input type="checkbox"/>	DefaultSuper	1	Included

You should now have successfully deleted an SNMP view from the View Table of your switch.