

System Settings on the Sx500 Series Stackable Switches

Objective

The *System Settings* page is used to customize the display results of the switch. The display can contain a banner message to allow access to only authenticated users. The objective of this document is to help configure the System Administration Settings on the Sx500 Series Stackable Switches.

Applicable Devices


- Sx500 Series Stackable Switches

Software Version

- 1.3.0.62

Step-by-Step Procedure

Step 1. Log in to the web configuration utility, and choose **Administration>System Settings**. The *System Settings* page opens:

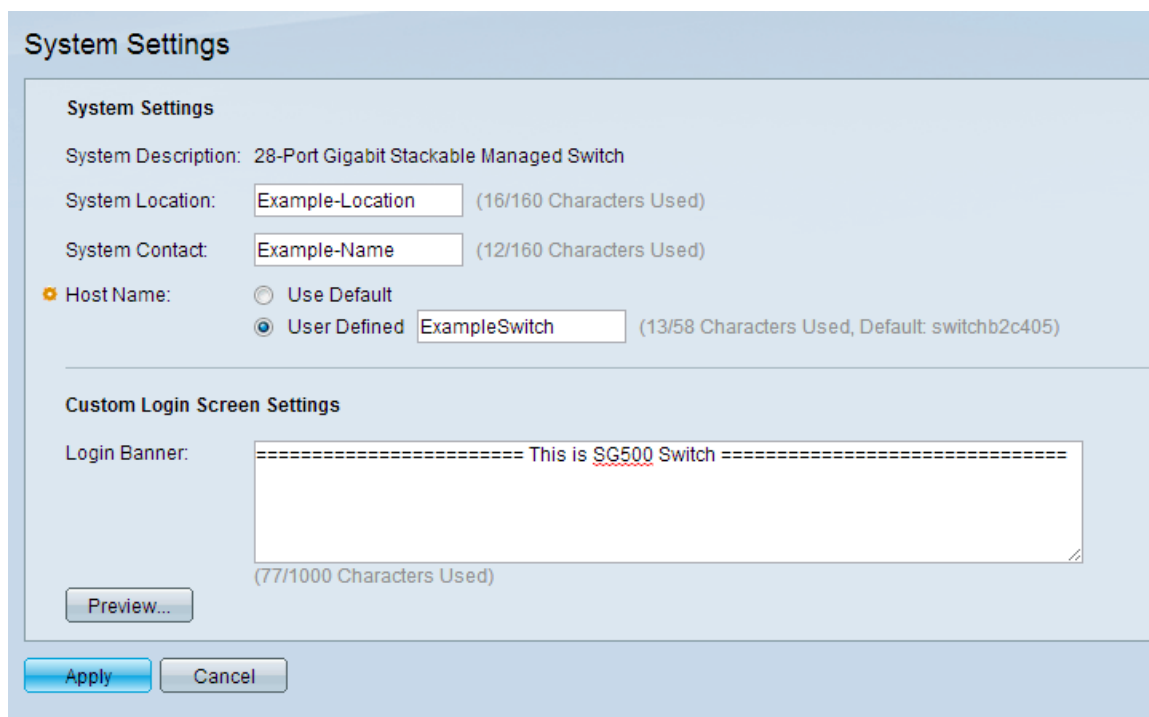

The screenshot shows the 'System Settings' web configuration page. The page has a light blue header with the title 'System Settings'. Below the header, there is a section titled 'System Settings' containing the following fields and options:

- System Description:** 28-Port Gigabit Stackable Managed Switch
- System Location:** Example-Location (16/160 Characters Used)
- System Contact:** Example-Name (12/160 Characters Used)
- Host Name:** Use Default User Defined ExampleSwitch (13/58 Characters Used, Default: switchb2c405)

Below these fields is a section titled 'Custom Login Screen Settings' containing a 'Login Banner' field. The banner text is: ===== This is SG500 Switch =====. Below the text area, it indicates '(77/1000 Characters Used)'. There is a 'Preview...' button below the banner field.

At the bottom of the page, there are two buttons: 'Apply' and 'Cancel'.


Step 2. In the System Location field, enter a character value that corresponds to the physical location of the switch.

Step 3. In the System Contact field, enter a character value that corresponds to the name of the contact person.

Step 4. In the Host Name field choose one of these two options:

- Use Default — Allows you to use the default switch name.
- User Defined — Allows you to enter a name in the field to assign to the switch.

Step 5. In the Login Banner field, enter the text that you wish to display on the *Login* page.

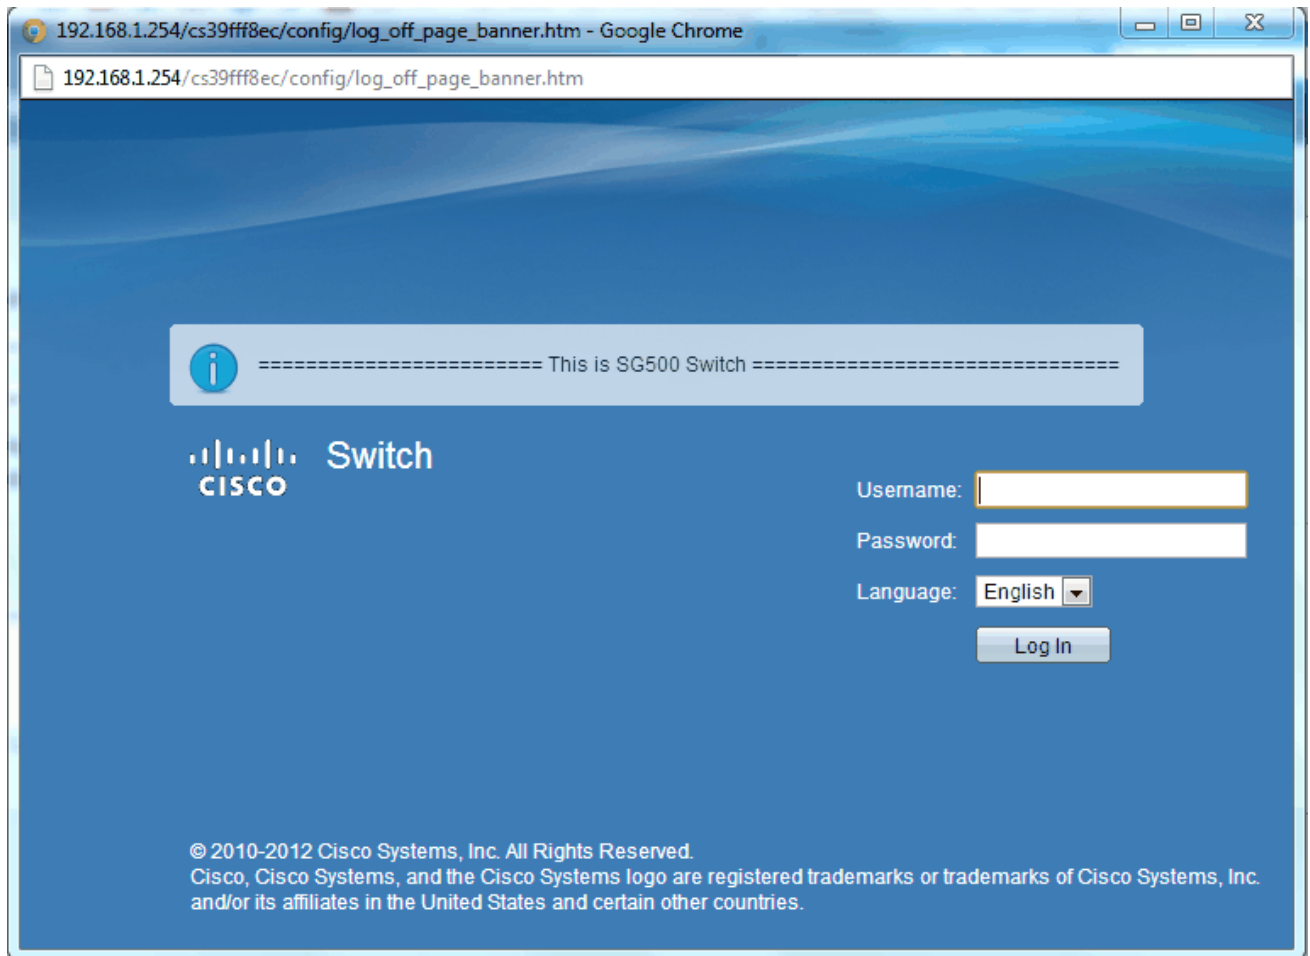

Step 6. (Optional) Click **Preview** to view the typed text. Close the preview window.

Step 7. Click **Apply** in the System Settings page to save the configuration.