

Cisco Compute Hyperconverged X-Series M7 with Nutanix (CCHC + N) Ordering Guide

Introduction

Cisco Compute Hyperconverged X-Series M7 Server with Nutanix Solutions

Cisco Compute Hyperconverged with Nutanix is a hyperconverged infrastructure solution integrating Cisco's best-in-class compute (X-Series Modular System), datacenter networking, and SaaS infrastructure management platform (Cisco Intersight) with Nutanix's market-leading hyperconverged storage software, Nutanix Cloud Platform. The Cisco Compute Hyperconverged with Nutanix family of appliances delivers pre-configured X-Series servers that are ready to be deployed as nodes to form Nutanix clusters in a variety of configurations. Each server appliance contains three software layers: X-Series server firmware, hypervisor (Nutanix AHV), and hyperconverged storage software (Nutanix AOS).

Cisco Compute Hyperconverged X-Series M7 Server with Nutanix Cluster

The Cisco Compute Hyperconverged X-Series Modular System simplifies your data center, adapting to the unpredictable needs of modern applications while also providing for traditional scale-out and enterprise workloads. It reduces the number of server types to maintain, helping to improve operational efficiency and agility as it helps reduce complexity. Powered by the Cisco Intersight™ cloud operations platform, it shifts your thinking from administrative details to business outcomes with hybrid cloud infrastructure that is assembled from the cloud, shaped to your workloads, and continuously optimized.

Purpose, Audience, and Scope

Purpose

This publication provides information about the ordering Cisco Compute Hyperconverged with Nutanix from CCW estimate creation.

Scope


This ordering guide describes the information for:

- Ordering Structure of Cisco Compute Hyperconverged X-Series M7 Server with Nutanix
- Catalog of Product IDs of Cisco Compute Hyperconverged X-Series M7 Server
- Ordering Cisco Compute Hyperconverged X-Series M7 Server Hardware
- Links to additional resources

Audience

Cisco sales teams and partners.

Ordering Structure of Cisco Compute Hyperconverged X-Series M7 Server with Nutanix

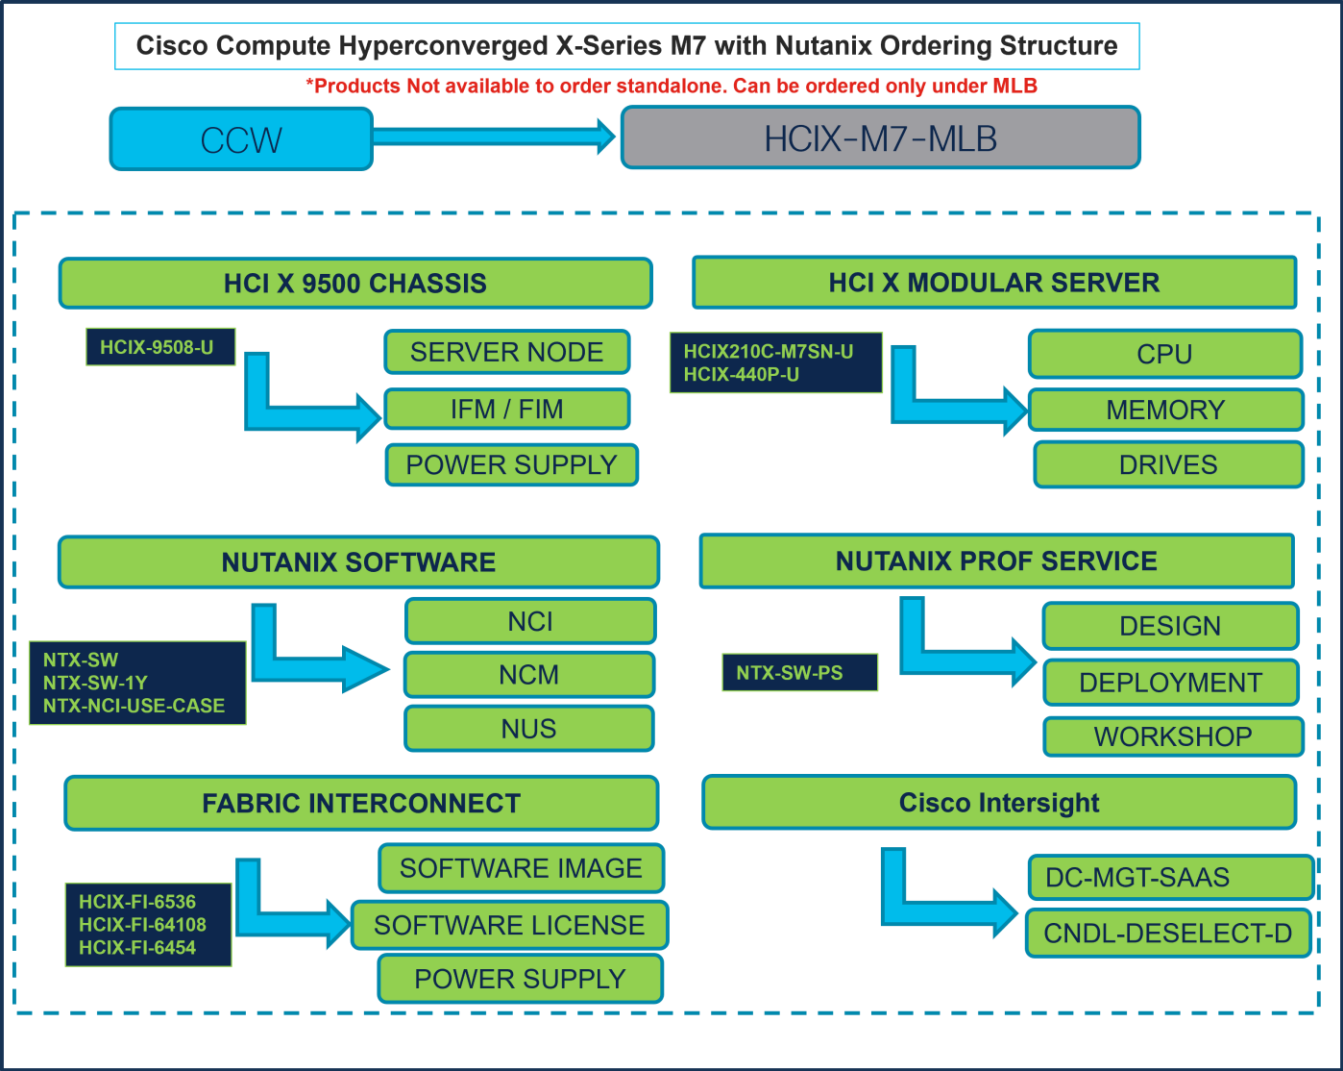

Catalog of Product IDs (PIDs)

Note: For a complete list of part numbers for the see the [Cisco Compute Hyperconverged with Nutanix- HCIX210c M7 All-NVMe Node](#), [Cisco Compute Hyperconverged 9508 Chassis](#) and [Cisco Compute Hyperconverged X440p PCIe Node spec sheets](#)

Note: Hardware orderability will ship Bare Metal Cisco Compute Hyperconverged X-series servers (HCI SKUs) in anticipation of the IMM Software support (see below).

Customers will be able to place orders, ship, and stage equipment but will not be able to deploy the Nutanix cluster until IMM & Prism Central Software support for X-series is available.

Day 0 - Cluster Deployment with Foundation Central (FC)

Day 2 - Cluster Expansion and Integrated Firmware upgrades using LCM is targeted for Q4CY'24

Table 1. PID of Major Line Bundle (MLB)

Product ID (PID)	Description
HCIX-M7-MLB	Cisco Compute Hyperconverged X-Series M7 with Nutanix MLB. Note: This major line bundle (MLB) consists of the Cisco Compute Hyperconverged Server, with Intersight and Nutanix software PIDs

Table 2. Table 3.Cisco Compute Hyperconverged Chassis Major Line PIDs

Product ID (PID)	Description
HCIX-9508-U	Cisco Compute Hyperconverged 9508 Chassis Configured
HCIX-9508=	Cisco Compute Hyperconverged 9508 Chassis

Table 3. Cisco Compute Hyperconverged Server node Major Line PIDs

Product ID (PID)	Description
HCIX210C-M7SN (All NVMe)	210cM7 All NVMe Hyperconverged Node w/o CPU,Memory,Storage
HCIX210C-M7SN-U (All NVMe)	210cM7 All NVMe Hyperconverged Node w/o CPU,Memory,Storage

Table 4. Cisco Compute Hyperconverged PCIe node Major Line PIDs

Product ID (PID)	Description
HCIX-440P	HCI X-Series Gen4 PCIe node
HCIX-440P-U	HCI X-Series Gen4 PCIe node

Table 5. Fabric Interconnect Major Line PIDs

Product ID (PID)	Description
HCIX-FI-6536	Cisco Compute Hyperconverged Fabric Interconnect 6536
HCIX-FI-64108	Cisco Compute Hyperconverged Fabric Interconnect 64108
HCIX-FI-6454	Cisco Compute Hyperconverged Fabric Interconnect 6454

Table 6. Cisco Intersight Major Line PIDs

Product ID (PID)	Description
DC-MGT-SAAS	Cisco Intersight SaaS
CNDL-DESELECT-D	Conditional Deselect

Step By Step Ordering Process

This section provides more information and details related to packages and PIDs specific to Compute Hyperconverged M7 Server with Nutanix. It also provides references to additional buying programs and subscription packages that Compute Hyperconverged M7 Server with Nutanix products may be included in.

- Step 1.** Launch your web browser and navigate to the [Cisco Commerce Estimate Creation page](#).
- Step 2.** Log In to Cisco screen, type your Cisco.com user ID and password.
- Step 3.** In the Estimates page, set preferences for this estimate by entering the SKU, PID, product description or product family (for example, HCIX-M7-MLB) to search for the HCI product you wish to order.

Note:

- For a complete list of part numbers for the see [Cisco Compute Hyperconverged with Nutanix-HCIX210c M7 All-NVMe Node](#), [Cisco Compute Hyperconverged 9508 Chassis](#) and [Cisco Compute Hyperconverged X440p PCle Node Spec Sheets](#).
- Refer to Nutanix Sizer Tool: <https://sizer.nutanix.com/#/home> before you proceed to do the Product Configuration.

Configuring the Hardware Components

Step 4.

CCW → HCIX-M7-MLB

HCIX-M7-MLB 1 Add

Lines View Apply Success Track Manage Groups Remove Selected Lines More Actions ▾ Zero List Price Items Hide Show Search Estimate Line Items

	Hardware, Software and Services	Estimated Lead Time (Days)	Unit List Price (USD)	Qty	Unit Net Price (USD)	Discounts (%)	Extended Net Price (USD)
1.0	HCIX-M7-MLB Cisco Compute Hyperconverged X-Series M7 with Nutanix MLB	Not Applicable	0.00	1	0.00	0.00	0.00

Select Options Validate Recommended Content Add Note Add Subtotal Copy Remove Line

- a. In CCW, search for HCIX-M7-MLB PID and click on “Add”
- b. Click on “Select Options” to enter the configurator.

Step 5.

HCI X 9500 Chassis

HCIX-9508-U → **Server Node**
IFM/FIM
Power Supply

Product Configuration: HCIX-9508-U part of HCIX-M7-MLB | Estimated Lead Time: 21 days | Price: Global Price List in US Dollars (USD) | Total (USD): 10,783.64

Warnings:

- 1: A selection from either **Fabric Interconnect Module** or **Intelligent Fabric Module** is required. Please adjust the selection. (CE200069)
- 2: The quantity of **Power Cable** must be equal to the quantity of **Power Supply** selected. Please adjust the quantity. (CE200050)
- 3: It is recommended that the user purchase Debug Cable: HCIX-C-DEBUGCBL. (CE202155)
- 4: Use Power Calculator to determine the correct power supply. The Power Calculator can be found at <http://ucspowercalc.cisco.com>. (CE200696)

Configuration Summary | View Full Summary

Country/Region Specification: Select Country/Region (Not Required)

Category	Qty	Extended List Price (USD)
Hyperconverged Nodes		
Fabric Interconnect Module		
Intelligent Fabric Module		
X-Fabric Module		
Accessory		
Power Supply		
HCIX-PSU-2800AC	2	2,252.68
Power Cable		
Total		10,783.64
Estimated Lead Time		21 days

Reset Configuration | Cancel | Done

Option Search | Multiple Options Search

HCIX-9508-U > Hyperconverged Nodes

Hyperconverged Nodes

SKU	Estimated Lead Time	Unit List Price (USD)
HCIX210C-M7SN	21 days	6,376.38

210cM7 All NVMe Hyperconverged Node w/o CPU,Memory,Storage

Show Incompatible SKUs

- Configure HCIX-9508-U by selecting Compute Node, Fabric Interconnect Module or Intelligent Fabric Module, Power Supply and Power Cables from category window on the left.
- Follow warning messages to configure the minimum required selections under Chassis.

Step 7.

HCI X 9500 Chassis

HCIX-9508-U → **Server Node**
IFM/FIM
Power Supply

Product Configuration: HCIX-9508-U part of HCIX-M7-MLB | Estimated Lead Time: 21 days | Price: Global Price List in US Dollars (USD) | Total (USD): 17,734.19

Warnings:

- 1: A selection from either **Fabric Interconnect Module** or **Intelligent Fabric Module** is required. Please adjust the selections. (CE200069)
- 2: The quantity of **Power Cable** must be equal to the quantity of **Power Supply** selected. Please adjust the quantity. (CE200050)
- 3: It is recommended that the user purchase Debug Cable: HCIX-C-DEBUGCBL. (CE202155)
- 4: Use Power Calculator to determine the correct power supply. The Power Calculator can be found at <http://ucspowercalc.cisco.com>. (CE200696)

Configuration Summary | View Full Summary

Country/Region Specification: Select Country/Region (Not Required)

Category	Qty	Extended List Price (USD)
Hyperconverged Nodes		
HCIX210C-M7SN	1	6,376.38
HCIX-X10C-PT4F	1	520.94
HCIX-TPM-002C	1	53.23
HCIX-AOSAHV-68SWK9	1	0.00
HCIX-C-SW-LATEST	1	0.00
UCSX-C-M7-HS-F	1	0.00
UCSX-C-M7-HS-R	1	0.00
UCSC-BBLKD-M7	6	0.00
Total		17,734.19
Estimated Lead Time		21 days

Reset Configuration | Cancel | Done

Option Search | Multiple Options Search

HCIX-9508-U > Hyperconverged Nodes

Hyperconverged Nodes

SKU	Estimated Lead Time	Unit List Price (USD)
HCIX210C-M7SN	21 days	6,376.38

210cM7 All NVMe Hyperconverged Node w/o CPU,Memory,Storage

Add New

SKU	Custom Name	Qty
HCIX210C-M7SN (1)	Add Custom Name	1

Clear Selection | Show Incompatible SKUs

- HCIX210C-M7SN is required selection and has further configurable.
- Follow warning messages to configure the minimum required selections under Server.

Step 8.

HCI X 9500 Chassis

Product Configuration: HCIX-9508-U part of HCIX-M7-MLB
Estimated Lead Time: 21 days
Total (USD): 24,684.74

Warning Messages:

- 1: The quantity of Power Cable must be equal to the quantity of Power Supply selected. Please adjust the quantity.
- 2: Please note that with GRID (N+N) Power Redundancy, minimum of 4 QTY of Power Supply is required. (CE202322)
- 3: A selection from either Fabric Interconnect Module or Intelligent Fabric Module is required. Please adjust the selections. (CE200069)
- 4: It is recommended that the user purchase Debug Cable: HCIX-C-DEBUGCBL. (CE202155)
- 5: Use Power Calculator to determine the correct power supply. The Power Calculator can be found at <https://www.cisco.com/c/en/us/products/collateral/power-supply/power-supply-calculator.html> (CE200069)

Configuration Summary

Category	Qty	Extended List Price (USD)
UCSX-M2-HWRD-FPS	1	0.00
UCS-DDR5-BLK	32	0.00
HCIX210C-M7SN (2)	1	6,376.38
HCIX-X10C-PT4F	1	520.94
HCIX-TPM-002C	1	53.23
HCIX-C-SW-LATEST	1	0.00
UCSX-C-M7-HS-F	1	0.00
UCSX-C-M7-HS-R	1	0.00
UCSC-BBLKD-M7	6	0.00
UCSX-M2-HWRD-FPS	1	0.00
Total		24,684.74
Estimated Lead Time		21 days

Hyperconverged Nodes

SKU	Estimated Lead Time	Unit List Price (USD)
HCIX210C-M7SN	21 days	6,376.38
CCHC 210C		

Server Node Configuration

SKU	Custom Name	Qty
HCIX210C-M7SN (1)	Add Custom Name	1
HCIX210C-M7SN (2)	Add Custom Name	1

- Server: HCIX210C-M7SN can be selected in multiple QTY by changing the QTY in the box or you can select same server and configure differently within same chassis by clicking in ADD NEW button.
- Here in this example, we have 2 instances of server selected with 1 QTY each.
- Click on Server PID in the left to configure the particular instance.

Step 9.

HCI X 9500 Chassis

HCIX-9508-U

Server Node

IFM/FIM

Power Supply

Product Configuration: HCIX-9508-U part of HCIX-M7-MLB
Estimated Lead Time: 21 days
Global Price List in US Dollars (USD)
Total (USD): 24,684.74

1: Hyperconverged Nodes quantity 1 allows Processor 4th Gen minimum of 2 and maximum of 2. Please correct the quantity of Processor 4th Gen. (CE100011)
2: A selection of either HCIX-ML-V5D200GV2 or HCIX-ML-V5Q50G from Rear MEZZ - MLOM/PCI is required. Please adjust the selections. (CE200096)
3: The quantity of Power Cable must be equal to the quantity of Power Supply selected. Please adjust the quantity. (CE200050)
4: Please note that with GRID (N+N) Power Redundancy, minimum of 4 QTY of Power Supply is required. (CE202322)
5: A selection from other Fabric Interconnect Models is required. Please adjust the selections. (CE200096)

Configuration Summary View Full Summary

Category	Qty	Extended List Price (USD)
Hyperconverged Nodes		
HCIX210C-M7SN (1)	1	6,376.38
HCIX-X10C-PT4F	1	520.94
HCIX-TPM-002C	1	53.23
HCIX-C-SW-LATEST	1	0.00
UCSX-C-M7-HS-F	1	0.00
UCSX-C-M7-HS-R	1	0.00
UCSC-BBLKD-M7	6	0.00
UCSX-M2-HWRD-FPS	1	0.00
UCS-DDR5-BLK	32	0.00
Total		24,684.74
Estimated Lead Time		21 days

Copy Class

Select target classes for copy

☒ HCIX210C-M7SN (2)

Yes No

Copy

- Configuration of one server Instance can be copied to another instance. Click on Copy Button on the extreme right as shown here.
- Select the particular instance and click "Yes".

Step 10.

HCI X 9500 Chassis

HCIX210C-M7SN

CPU

Memory

Drives

Product Configuration: HCIX-9508-U part of HCIX-M7-MLB
Estimated Lead Time: 42 days
Global Price List in US Dollars (USD)
Total (USD): 55,538.75

1: Please make a selection from Processor. (CE100007)
2: A selection of either HCIX-ML-V5D200GV2 or HCIX-ML-V5Q50G from Rear MEZZ - MLOM/PCI is required. Please adjust the selections. (CE200096)
3: It is recommended that the user purchase Debug Cable: HCIX-C-DEBUCBL. (CE202155)
4: Use Power Calculator to determine the correct power supply. The Power Calculator can be found at <http://ucspowercalc.cisco.com>. (CE200696)
5: UCSX-C-M7-HS-F is the default value. Please adjust the selections. (CE200096)

Configuration Summary View Full Summary

Country/Region Specification

Select Country/Region (Not Required)

Category	Qty	Extended List Price (USD)
Hyperconverged Nodes		
HCIX210C-M7SN	1	6,376.38
HCIX-X10C-PT4F	1	520.94
HCIX-TPM-002C	1	53.23
HCIX-AOSAHV-68SWK9	1	0.00
HCIX-C-SW-LATEST	1	0.00
UCSX-C-M7-HS-F	1	0.00
UCSX-C-M7-HS-R	1	0.00
UCSC-BBLKD-M7	6	0.00
Total		55,538.75
Estimated Lead Time		42 days

Reset Configuration Cancel Done

Option Search **Multiple Options Search**

HCIX-9508-U > Hyperconverged Nodes > Hyperconverged Nodes > HCIX210C-M7SN

4th Gen 8000 Processor | 4th Gen 6000 Processor | 4th Gen 5000 Processor | 4th Gen 4000 Processor | 5th Gen 8000 Processor | 5th Gen 5000 Processor | 5th Gen 4000 Processor | Memory 4800 | Memory 5600 | Rear MEZZ - MLOM/PCI | GPU PCIe Node | Capacity Drives | Boot Drive | Security

SKU	Qty	Estimated Lead Time	Unit List Price (USD)
HCIX-CPU-I8444H Intel I8444H 2.9GHz/270W 16C/45MB DDR5 4800MT/s	Qty	21 days	11,374.59
HCIX-CPU-I8450H Intel I8450H 2GHz/250W 28C/75MB DDR5 4800MT/s	Qty	21 days	12,644.91
HCIX-CPU-I8452Y Intel I8452Y 2GHz/300W 36C/67.5MB DDR5 4800MT/s	Qty	21 days	11,300.22
HCIX-CPU-I8454H Intel I8454H 2.1GHz/270W 32C/82.5MB DDR5 4800MT/s	Qty	21 days	17,571.42
HCIX-CPU-I8458P Intel I8458P 2.7GHz/350W 44C/82.5MB DDR5 4800MT/s	Qty	21 days	18,953.75

- Configure HCIX210C-M7SN by selecting Processor, Memory, Drives and other peripheral devices and PIDs are listed in the window on the right.
- Follow warning messages to configure the minimum required option PIDs.
- Click on “Done” when completed.

Step 11.

Configuration Summary

Category	Qty	Extended List Price (USD)
Hyperconverged Nodes		
HCIX210C-M7SN	1	6,376.38
HCIX-CPU-I6430	2	12,039.90
HCIX-MRX84G2RE1	16	69,722.88
HCIX-X10C-PT4F	1	520.94
HCIX-ML-V5D200GV2	1	1,959.75
HCIX-V4-PCIME	1	826.11
HCIX-440P	1	3,316.50
HCIX-NVME4-3840	2	8,822.84
HCIX-M2-240G	2	1,570.96
Total		153,797.69
Estimated Lead Time		42 days

Option Search

HCIX-9508-U > Hyperconverged Nodes > Hyperconverged Nodes > HCIX210C-M7SN

4th Gen 8000 Processor | 4th Gen 6000 Processor | 4th Gen 5000 Processor | 4th Gen 4000 Processor | 5th Gen 8000 Processor | 5th Gen 6000 Processor | 5th Gen 5000 Processor | 5th Gen 4000 Processor | Memory 4800 | Memory 5600 | Rear MEZZ - MLOM/PCI | **GPU PCIe Node** | Capacity Drives | Boot Drive | Security

SKU	Qty	Estimated Lead Time	Unit List Price (USD)
HCIX-440P	1	21 days	3,316.50

Clear Selection | Show Incompatible SKUs

- Configure GPU PCIe Node: HCIX-440P under Compute Node: HCIX210C-M7SN.
- Click on HCIX-440P to configure it further in Left Window.

Step 12.

HCI X 9500 Chassis

Product Configuration
HCIX-9508-U part of HCIX-M7-MLB

Estimated Lead Time
42 days

HCIX-440P

Price
Glob

Riser

GPU

Total (USD)
153,797.69

⚠️ 1: HCIX-440P quantity 1 requires a minimum quantity of 2 from Riser (CE100012)

2: It is recommended that the user purchase Debug Cable: HCIX-C-DEBUGCBL. (CE202155)

3: Use Power Calculator to determine the correct power supply. The Power Calculator can be found at <http://ucspowercalc.cisco.com>. (CE200696)

4: HCIX-CHASSIS-SW is defaulted under X-Series Chassis SW. (CE100033)

5: HCIX-BLU-000010 is defaulted under Power Supply. (CE100000)

Configuration Summary [View Full Summary](#)

Country/Region Specification ⓘ
Select Country/Region (Not Required) ▼

Category ⓘ	Qty	Extended List Price (USD)
HCIX-440P ⚠️	1	3,316.50
HCIX-NVME4-3840	2	8,822.84
HCIX-M2-240G	2	1,570.96
HCIX-TPM-002C	1	53.23
HCIX-AOSAHV-68SWK9	1	0.00
HCIX-C-SW-LATEST	1	0.00
UCSX-C-M7-HS-F ⓘ	1	0.00
UCSX-C-M7-HS-R ⓘ	1	0.00
UCSC-BBLKD-M7 ⓘ	4	0.00
Total		153,797.69
Estimated Lead Time		42 days

[Reset Configuration](#) Cancel Done

Option Search ⓘ Multiple Options Search ⓘ ▼

HCIX-9508-U > Hyperconverged Nodes > Hyperconverged Nodes > HCIX210C-M7SN > GPU PCIe Node > HCIX-440P

Riser ⚠️ | GPU | Standard License | Education License | NVIDIA Opt Out ⓘ a

SKU	Qty	Estimated Lead Time ⓘ	Unit List Price (USD)
<input type="radio"/> HCIX-RIS-A-440P Riser A for 1x dual slot GPU per riser, 440P PCIe node	<input type="text" value="Qty"/>	21 days	596.37
<input type="radio"/> HCIX-RIS-B-440P Riser B for 2x single slot GPUs per riser, 440P PCIe node	<input type="text" value="Qty"/>	21 days	706.72

[Show Incompatible SKUs](#)

- a. Configure GPU PCIe Node: HCIX-440P by selecting Riser, GPU, and NVIDIA License on the Right Window

Note: Selection of X- Fabric Module: HCIX-F-9416-D under Chassis: HCIX-9508-U is required with HCIX-440P.

Step 13.

HCI X 9500 Chassis

HCIX-9508-U

L

Server Node

IFM/FIM

Power Supply

Bundle Configuration
HCIX-M7-MLB
Estimated Lead Time
42 days
Price List
Global Price List (USD)

76.43

[Set service preferences for this configuration](#)
Cancel Done

1: CISCO INTERSIGHT requires a minimum of 1 component(s). Please add additional quantities as necessary. (CE100010)

2: The category CISCO INTERSIGHT is required. (CE100103)

3: Please refer to the Nutanix Sizer Tool: <https://sizer.nutanix.com/#/home> before you proceed to do the Product Configuration. (CE202322)

4: Please note that if Nutanix Mission Critical Software Support is purchased, it is recommended that Customer upgrade to CX Success Track Level 1 or Level 2 or Solution Support to ensure consistent SLA response time between Hardware and Software. Refer to https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf for more information. (CE202322)

5: It is recommended that the user purchase Nutanix Software SKU: NTX-SW or NTX-SW-1Y. (CE202155)

Available Components Unit List Price (USD)

⊕ HCI X 9508 CHASSIS c

HCIX-9508-U 8,536.43

Cisco Compute Hyperconverged 9508 Chassis Configure

Estimated Lead Time: 21 days

+

⊕ HCI X MODULAR SERVER

⊕ FABRIC INTERCONNECT

⊕ NUTANIX SOFTWARE

⊕ NUTANIX PROF SERVICE

⊕ CISCO INTERSIGHT

HCI X 9508 CHASSIS > 1 Selected (Min 0, Max 9999999)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Extended List Price (USD)
<div style="display: flex; align-items: center;"> <div style="margin-right: 5px;">⊕</div> <div> HCIX-9508-U Valid </div> </div> <div style="font-size: 0.6em;">Cisco Compute Hyperconverged 9508 Chassis Configured</div> <div style="margin-top: 5px;"> Add Custom Name Edit Options Edit Services/Subscriptions Remove Line </div>	58,943.05	<div style="border: 1px solid #ccc; padding: 2px; text-align: center; width: 40px;">1</div> b	157,276.43

Add a HCI X 9508 CHASSIS from the left panel

HCI X MODULAR SERVER > 0 Selected (Min 0, Max 99999)

Add a HCI X MODULAR SERVER from the left panel

FABRIC INTERCONNECT > 0 Selected (Min 0, Max 999999)

Add a FABRIC INTERCONNECT from the left panel

NUTANIX SOFTWARE > 0 Selected (Min 0, Max 2)

Add a NUTANIX SOFTWARE from the left panel

NUTANIX PROF SERVICE > 0 Selected (Min 0, Max 1)

Add a NUTANIX PROF SERVICE from the left panel

CISCO INTERSIGHT > 0 Selected (Min 1, Max 1)

Add a CISCO INTERSIGHT from the left panel

- a. Note Status is now showing as Valid.
- b. Increase the quantity for multiples of same configuration.
- c. Click the “PLUS” to add and configure the same product with different option/quantities or select a different product.

Step 14.

HCI X 9500 Chassis

Bundle Configuration
 HCIX-M7-MLB ⓘ

Estimated Lead Time
 42 days

HCIX-9508-U

Global Price List (USD)

Services/Subscriptions

Set service preferences for this configuration Cancel Done

⚠️ 1: CISCO INTERSIGHT requires a minimum of 1 component(s). Please add additional quantities as necessary. (CE100010)

2: The category CISCO INTERSIGHT is required. (CE100103)

3: Please refer to the Nutanix Sizer Tool: <https://sizer.nutanix.com/#/home> before you proceed to do the Product Configuration. (CE202322)

4: Please note that if Nutanix Mission Critical Software Support is purchased, it is recommended that Customer upgrade to CX Success Track Level 1 or Level 2 or Solution Support to ensure consistent SLA response time between Hardware and Software. Refer to https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf for more information. (CE202322)

5: It is recommended that the user purchase Nutanix Software SKU: NTX-SW or NTX-SW-1Y. (CE202155)

Available Components	Unit List Price (USD)	HCI X 9508 CHASSIS > 1 Selected (Min 0, Max 9999999)										
<div style="background-color: #e8f5e9; padding: 5px; margin-bottom: 5px;"> <div style="display: flex; align-items: center;"> <div style="margin-right: 10px;">⊖</div> <div>HCI X 9508 CHASSIS</div> </div> <div style="margin-top: 5px;"> <div style="display: flex; align-items: center;"> <div style="margin-right: 10px;">⊕</div> <div> HCIX-9508-U Cisco Compute Hyperconverged 9508 Chassis Configure Estimated Lead Time: 21 days </div> <div style="margin-left: 10px; text-align: right;"> 8,530.96 + </div> </div> </div> </div>		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Product</th> <th style="width: 15%;">Unit List Price (USD)</th> <th style="width: 15%;">Adjusted List Price (USD)</th> <th style="width: 10%;">Qty</th> <th style="width: 30%;">Extended List Price (USD)</th> </tr> </thead> <tbody> <tr> <td> <div style="display: flex; align-items: center;"> <div style="margin-right: 10px;">⊕</div> <div> HCIX-9508-U Valid ⓘ⚠️ Cisco Compute Hyperconverged 9508 Chassis Configured </div> </div> <div style="margin-top: 5px;"> Add Custom Name Edit Options Edit Services/Subscriptions Remove Line </div> </td> <td>58,943.05</td> <td></td> <td style="text-align: center;">1</td> <td>157,276.43</td> </tr> </tbody> </table> <div style="margin-top: 5px;"> Add a HCI X 9508 CHASSIS from the left panel </div>	Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	<div style="display: flex; align-items: center;"> <div style="margin-right: 10px;">⊕</div> <div> HCIX-9508-U Valid ⓘ⚠️ Cisco Compute Hyperconverged 9508 Chassis Configured </div> </div> <div style="margin-top: 5px;"> Add Custom Name Edit Options Edit Services/Subscriptions Remove Line </div>	58,943.05		1	157,276.43
Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)								
<div style="display: flex; align-items: center;"> <div style="margin-right: 10px;">⊕</div> <div> HCIX-9508-U Valid ⓘ⚠️ Cisco Compute Hyperconverged 9508 Chassis Configured </div> </div> <div style="margin-top: 5px;"> Add Custom Name Edit Options Edit Services/Subscriptions Remove Line </div>	58,943.05		1	157,276.43								
<div style="background-color: #e8f5e9; padding: 5px; margin-bottom: 5px;"> <div style="display: flex; align-items: center;"> <div style="margin-right: 10px;">⊖</div> <div>HCI X MODULAR SERVER</div> </div> </div>		HCI X MODULAR SERVER > 0 Selected (Min 0, Max 99999) Add a HCI X MODULAR SERVER from the left panel										
<div style="background-color: #e8f5e9; padding: 5px; margin-bottom: 5px;"> <div style="display: flex; align-items: center;"> <div style="margin-right: 10px;">⊖</div> <div>FABRIC INTERCONNECT</div> </div> </div>		FABRIC INTERCONNECT > 0 Selected (Min 0, Max 999999) Add a FABRIC INTERCONNECT from the left panel										
<div style="background-color: #e8f5e9; padding: 5px; margin-bottom: 5px;"> <div style="display: flex; align-items: center;"> <div style="margin-right: 10px;">⊖</div> <div>NUTANIX SOFTWARE</div> </div> </div>		NUTANIX SOFTWARE > 0 Selected (Min 0, Max 2) Add a NUTANIX SOFTWARE from the left panel										
<div style="background-color: #e8f5e9; padding: 5px; margin-bottom: 5px;"> <div style="display: flex; align-items: center;"> <div style="margin-right: 10px;">⊖</div> <div>NUTANIX PROF SERVICE</div> </div> </div>		NUTANIX PROF SERVICE > 0 Selected (Min 0, Max 1) Add a NUTANIX PROF SERVICE from the left panel										
<div style="background-color: #e8f5e9; padding: 5px; margin-bottom: 5px;"> <div style="display: flex; align-items: center;"> <div style="margin-right: 10px;">⊖</div> <div>CISCO INTERSIGHT</div> </div> </div>		CISCO INTERSIGHT > 0 Selected (Min 1, Max 1) Add a CISCO INTERSIGHT from the left panel										

a. Click on “Edit Services/Subscriptions” to edit Term Duration for HW Support.

Note: It is recommended that Term Duration for HW Support must align with Software Subscription Duration.

Step 15.

HCI X 9500 Chassis

Service Subscription: HCIX-9508-U | Price List: Global Price List in US | **HCIX-9508-U** | **Services/Subscriptions**

Service Options

Choose Service Level from: All Service Programs

Time Duration: ☐ Duration (selected) | ☐ Delay service start to | ☐ Co-Term service to

Duration: (Annotation 'a' points here)

Service Table:

Service SKU	Product SKU	Unit List Price (USD)	Qty	Total List Price (USD)
CON-L1NCO-HCIX3A8U SERVICE PROGRAM CX LEVEL 1 8X7XNCDOS CCHC 9508 Chassis Config... SERVICE SKU Change Service Remove Service	HCIX-9508-U Cisco Compute Hyperconverged 9508 Chassis Configu... PRODUCT SKU	2,002.50	1	2,002.50
CON-L1NCO-HCIX2M7S SERVICE PROGRAM CX LEVEL 1 8X7XNCDOS CCHC 210dM7 All NVMe C... SERVICE SKU Change Service Remove Service	HCIX210C-M7BN 210dM7 All NVMe Hyperconverged Node w/o CPU,Me... PRODUCT SKU	4,855.50	1	4,855.50

Configuration Summary | All prices shown in USD

Services: (Annotation 'b' points to the 'Done' button)

- a. Enter the Term Duration
- b. Click on “Apply” and “Done”

Note: If Nutanix Mission Critical Software Support is purchased, it is recommended that Customer upgrade to CX Success Track Level 1 or Level 2 or Solution Support to ensure consistent SLA response time between Hardware and Software. Please refer to https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf for more information.

Step 16.

HCI X Modular Server

HCIX210C-M7SN-U

CPU

Memory

Drives

Bundle Configuration: HCIX-M7-MLB
Estimated Lead Time: 42 days

Set service preferences for this configuration

1: CISCO INTERSIGHT requires a minimum of 1 component(s). Please add additional quantities as necessary. (CE100010)
2: The category CISCO INTERSIGHT is required. (CE100103)
3: Please refer to the Nutanix Sizer Tool: <https://sizer.nutanix.com/#/home> before you proceed to do the Product Configuration. (CE202322)
4: Please note that if Nutanix Mission Critical Software Support is purchased, it is recommended that Customer upgrade to CX Success Track Level 1 or Level 2 or Solution Support to ensure consistent SLA response time between Hardware and Software. Refer to https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf for more information. (CE202322)
5: It is recommended that the user purchase Nutanix Software SKU: NTX-SW or NTX-SW-1Y. (CE202155)

HCIX210C-M7SN-U has been added to the bundle category HCI X MODULAR SERVER.

Available Components

Component	Unit List Price (USD)
HCIX 9508 CHASSIS	
HCIX210C-M7SN-U	6,376.38
HCIX-440P-U	3,316.50

HCIX 9508 CHASSIS > 1 Selected (Min 0, Max 999999)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX-9508-U		63,515.05	1	161,848.43

HCI X MODULAR SERVER > 1 Selected (Min 0, Max 999999)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX210C-M7SN-U		8,569.05	1	8,569.05

FABRIC INTERCONNECT > 0 Selected (Min 0, Max 999999)

NUTANIX SOFTWARE > 0 Selected (Min 0, Max 2)

NUTANIX PROF SERVICE > 0 Selected (Min 0, Max 1)

CISCO INTERSIGHT > 0 Selected (Min 1, Max 1)

- Select HCIX210C-M7SN-U ATO from under MLB by clicking the “PLUS”
- Notice the HCIX210C-M7SN-U ATO Status is “invalid” as further configuration needed.
- Click on “Edit Options” to enter the configurator.

Step 17.

HCI X Modular Server

HCIX210C-M7SN-U

CPU

Memory

Drives

Product Configuration: HCIX210C-M7SN-U part of HCIX-M7-MLB
Estimated Lead Time: 21 days

1: A selection of either HCIX-ML-V5D200GV2 or HCIX-ML-V5Q50G from Rear MEZZ - MLOM/PCI is required. Please adjust the selections. (CE200096)
2: HCIX-X10C-PT4F is defaulted under Front MEZZ - Controller. (CE100033)
3: HCIX-TPM-002C is defaulted under Security. (CE100033)
4: HCIX-C-SW-LATEST is defaulted under X-Series Node SW. (CE100033)
5: HCIX210C-M7SN-U requires a minimum of 2 and allow maximum of 2 from Processor 4th Gen. (CE100015)

Configuration Summary

Category	Qty	Extended List Price (USD)
Processor 4th Gen	1	0.00
Memory 4800	1	0.00
Front MEZZ - Controller	1	0.00
Rear MEZZ - MLOM/PCI	1	0.00
Capacity Drives	1	0.00
Boot Drive	1	0.00
Security	1	0.00
Total		0.00

HCIX210C-M7SN-U > Processor 4th Gen

8000 Processor | 6000 Processor | 5000 Processor | 4000 Processor

SKU	Qty	Estimated Lead Time	Unit List Price (USD)
HCIX-CPU-IB444H	2	21 days	0.00
HCIX-CPU-IB450H	2	21 days	0.00
HCIX-CPU-IB452Y	2	21 days	0.00
HCIX-CPU-IB454H	2	21 days	0.00
HCIX-CPU-IB458P	2	21 days	0.00

- Configure HCIX210C-M7SN-U by selecting peripherals from category window on the left.
- PIDs are listed in the window on the right. Some PIDs like CPUs are grouped according to type or series; select from the grouped options located above SKU window on the right.
- Follow warning messages to configure the minimum required option PIDs.
- Click on “Done” when completed.

Step 18.

Bundle Configuration
HCIX-M7-MLB
Estimate: 42 days

HCIX210C-M7SN-U

Price List
Global Price: \$264,533.81

Total
264,533.81

Set service preferences for this configuration

Available Components

Component	Unit List Price (USD)
HCI X 9508 CHASSIS	
HCI X MODULAR SERVER	
HCIX210C-M7SN-U	6,374.50
HCIX-440P-U	3,316.50
FABRIC INTERCONNECT	
NUTANIX SOFTWARE	
NUTANIX PROF SERVICE	
CISCO INTERSIGHT	

HCIX210C-M7SN-U

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX-9508-U	63,515.05	63,515.05	1	161,848.43
HCIX210C-M7SN-U	26,103.33	26,103.33	1	102,685.38

- Note Status is now showing as “Valid”.
- Increase the quantity for multiples of same configuration.
- Click the “PLUS” to add and configure the same product with different option/quantities or select a different product.

Step 19.

HCI X Modular Server

HCIX210C-M7SN-U

Services/Subscriptions

Bundle Configuration
HCIX-M7-MLB
Estimated
42 days
Price List
Global Price List (USD)
264,533.81

Set service preferences for this configuration
 Cancel Done

1: CISCO INTERSIGHT requires a minimum of 1 component(s). Please add additional quantities as necessary. (CE100010)

2: The category CISCO INTERSIGHT is required. (CE100103)

3: Please refer to the Nutanix Sizer Tool: <https://sizer.nutanix.com/#/home> before you proceed to do the Product Configuration. (CE202322)

4: Please note that if Nutanix Mission Critical Software Support is purchased, it is recommended that Customer upgrade to CX Success Track Level 1 or Level 2 or Solution Support to ensure consistent SLA response time between Hardware and Software. Refer to https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf for more information. (CE202322)

5: It is recommended that the user purchase Nutanix Software SKU: NTX-SW or NTX-SW-1Y. (CE202155)

Available Components

Product	Unit List Price (USD)
HCIX X 9508 CHASSIS	
HCIX X MODULAR SERVER	
HCIX210C-M7SN-U 210cM7 All NVMe Hyperconverged Node w/o CPU,Memory,Storage	6,376.38
HCIX-440P-U HCI X-Series Gen4 PCIe node	3,316.50
Estimated Lead Time: 21 days	
FABRIC INTERCONNECT	
NUTANIX SOFTWARE	
NUTANIX PROF SERVICE	
CISCO INTERSIGHT	

HCIX X 9508 CHASSIS > 1 Selected (Min 0, Max 999999)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX-9508-U Cisco Compute Hyperconverged 9508 Chassis Configured		63,515.05	1	161,848.43

Add Custom Name | Edit Options | Edit Services/Subscriptions | Remove Line

Add a HCIX X 9508 CHASSIS from the left panel

HCIX X MODULAR SERVER > 1 Selected (Min 0, Max 999999)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX210C-M7SN-U 210cM7 All NVMe Hyperconverged Node w/o CPU,Memory,Storage		26,103.33	1	102,685.38

Add Custom Name | Edit Options | Edit Services/Subscriptions | Remove Line

Add a HCIX X MODULAR SERVER from the left panel

FABRIC INTERCONNECT > 0 Selected (Min 0, Max 999999)

Add a FABRIC INTERCONNECT from the left panel

NUTANIX SOFTWARE > 0 Selected (Min 0, Max 2)

Add a NUTANIX SOFTWARE from the left panel

NUTANIX PROF SERVICE > 0 Selected (Min 0, Max 1)

Add a NUTANIX PROF SERVICE from the left panel

CISCO INTERSIGHT > 0 Selected (Min 1, Max 1)

Add a CISCO INTERSIGHT from the left panel

a. Click on “Edit Services/Subscriptions” to edit Term Duration for HW Support.

Note: It is recommended that Term Duration for HW Support must align with Software Subscription Duration.

Step 20.

HCI X Modular Server

HCIX210C-M7SN-U

Services/Subscriptions

Service Subscription
HCIX210C-M7SN-U
Price List
Global Price List in US Dollars (USD)
4,855.50

You may receive additional discounts because you selected two or more years of service. To review your discounts you can go to the Order or Quoting discount pages. (C0124)

Service Non Serviceable Products

The duration that you entered has been successfully applied to all the services. (C0329)

Service Options

Choose Service Level from All Service Programs

Search by Name & Description

Note: Cisco may still install another compatible service if required. Compatible services are the services that come with primary service and are based on products.

Time Duration

☒ Duration

☐ Delay service start to

☐ Co-Term service to

Duration

Reset Apply

Service SKU	Product SKU	Unit List Price (USD)	Qty	Total List Price (USD)
Cisco Customer Experience Level 1 (1 ITEM)	L1NCO (CX LEVEL 1 8X7XNCDOS)			
SUMMARY				
CON-L1NCO-HCIX2M7N		4,855.50	1	4,855.50
CX LEVEL 1 8X7XNCDOS CCHC 210cM7 All NVMe C...	HCIX210C-M7SN-U		1	
SERVICE SKU	210cM7 All NVMe Hyperconverged Node w/o CPU,Me...			
Change Service Remove Service	PRODUCT SKU			

Remove All Services
Remove All Additional Services

Configuration Summary

All prices shown in USD

Services 4,855.50

Cancel Done

- a. Enter the Term Duration
- b. Click on “Apply” and “Done”

Note: If Nutanix Mission Critical Software Support is purchased, it is recommended that Customer upgrade to CX Success Track Level 1 or Level 2 or Solution Support to ensure consistent SLA response time between Hardware and Software. Please refer to https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf for more information.

Step 21.

The screenshot displays the Cisco configuration interface for the HCI X Modular Server. At the top, a green box labeled "HCI X Modular Server" is connected by a blue arrow to another green box labeled "Riser" and "GPU". The interface shows a bundle configuration for HCI X-M7-MLB with an estimated lead time of 42 days. A table of available components is on the left, and a table of selected components is on the right. The selected components table shows two rows: "HCI X 9508 CHASSIS" and "HCI X MODULAR SERVER". The "HCI X MODULAR SERVER" row is highlighted in red and has a red "a" next to it. The "HCI X MODULAR SERVER" row also has a red "b" next to it. The "HCI X MODULAR SERVER" row has a red "c" next to it. The "HCI X MODULAR SERVER" row has a red "d" next to it.

- a. Select HCIX-440P-U ATO from under MLB by clicking the “PLUS”
- b. Notice the HCIX-440P-U ATO Status is “invalid” as further configuration needed.
- c. Click on “Select Options” to enter the configurator.

Step 22.

HCI X Modular Server
HCIX-440P-U

➔

Riser
GPU

Product Configuration
HCIX-440P-U part of HCIX-M7-MLB
Estimated Lead Time
21 days
Price List
Global Price List in US Dollars (USD)
Total (USD)
3,316.50

⚠️ HCIX-440P-U quantity 1 requires a minimum quantity of 2 from Riser (CE100012)

Configuration Summary [View Full Summary](#)

Category ⓘ	Qty	Extended List Price (USD)
Riser ⚠️		
GPU		
NVIDIA License		
Total		3,316.50
Estimated Lead Time		21 days

[Reset Configuration](#)
Cancel
Done

Option Search ⓘ Multiple Options Search ⓘ

HCIX-440P-U > Riser

Riser ⚠️

SKU	Qty	Estimated Lead Time ⓘ	Unit List Price (USD)
<input type="radio"/> HCIX-RIS-A-440P Riser A for 1x dual slot GPU per riser, 440P PCIe node	2	21 days	596.37
<input type="radio"/> HCIX-RIS-B-440P Riser B for 2x single slot GPUs per riser, 440P PCIe node	2	21 days	706.72

[Show Incompatible SKUs](#)

- a. Configure GPU PCIe Node: HCIX-440P-U by selecting Riser and GPU
- b. Click on Done

Note: Must select HCI X Modular Server: HCIX210C-M7SN-U and QTY of HCIX-440P-U must be less than or equal to HCIX210C-M7SN-U.

Step 23.

Fabric Interconnect

- Software Image
- Software License
- Power Supply

Available Components

Component	Unit List Price (USD)
HCIX-FI-6536	22,116.00
HCIX-FI-64108	41,938.65
HCIX-FI-6454	29,034.45

Product Configuration

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX-9508-U	63,515.05		1	161,848.43
HCIX210C-M7SN-U	29,340.33		1	105,922.38
HCIX-440P-U	3,912.87		1	4,509.24
HCIX-FI-6536	35,220.74		2	72,428.96

- Select HCIX-FI-6536 ATO from under MLB by clicking the “PLUS”
- Notice the HCIX-FI-6536 ATO Status is “invalid” as further configuration needed.
- Click on “Edit Options” to enter the configurator.

Step 24.

Fabric Interconnect

- Software Image
- Software License
- Power Supply

Configuration Summary

Category	Qty	Extended List Price (USD)
Software Image	1	0.00
Software License	1	9,045.00
Power Supply	2	1,987.48
Power Cable		

Power Cable

SKU	Qty	Estimated Lead Time	Unit List Price (USD)
CAB-IND-10A	2	7 days	0.00
CAB-250V-10A-ID	2	7 days	0.00
CAB-C13-C14-IN	2	28 days	0.00
CAB-C13-C14-3M-IN	2	28 days	0.00

Done

- Configure HCIX-FI-6536 by selecting peripherals from window on the left. Software Image, Software License and Power Supply are default selection.
- PIDs are listed in the window on the right. Please make selection of Power Cable. Transceiver Cable and QSFP Cables are Optional selection.
- Click on “Done” when completed.

Step 25.

Fabric Interconnect

HCIX-FI-6536

Software Image

Software License

Power Supply

Available Components	Unit List Price (USD)
HCI X 9508 CHASSIS	
HCI X MODULAR SERVER	
FABRIC INTERCONNECT	
HCIX-FI-6536 Cisco Compute Hyperconverged X Fabric Interconnect 6536 Estimated Lead Time: 21 days	22,110.00
HCIX-FI-64108 Cisco Compute Hyperconverged X Fabric Interconnect 64108 Estimated Lead Time: 21 days	41,938.65
HCIX-FI-6454 Cisco Compute Hyperconverged X Fabric Interconnect 6454 Estimated Lead Time: 21 days	29,034.45
NUTANIX SOFTWARE	
NUTANIX PROF SERVICE	
CISCO INTERSIGHT	

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX-9508-U Valid Cisco Compute Hyperconverged 9508 Chassis Configured Add Custom Name Edit Options Edit Services/Subscriptions Remove Line	63,515.05		1	161,848.43

Add a HCI X 9508 CHASSIS from the left panel

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX210C-M7SN-U Valid 210cM7 All NVMe Hyperconverged Node w/o CPU,Memory,Storage Add Custom Name Edit Options Edit Services/Subscriptions Remove Line	29,340.33		1	105,922.38
HCIX-440P-U Valid HCI X-Series Gen4 PCIe node Add Custom Name Edit Options Remove Line	3,912.87		1	4,509.24

Add a HCI X MODULAR SERVER from the left panel

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX-FI-6536 Valid Cisco Compute Hyperconverged X Fabric Interconnect 6536 Add Custom Name Edit Options Edit Services/Subscriptions Remove Line	35,220.74		2	72,428.96

Add a FABRIC INTERCONNECT from the left panel

- Note Status is now showing as “Valid”.
- Increase the quantity for multiples of same configuration.
- Click the “PLUS” to add and configure the same product with different option/quantities or select a different product.

Step 26.

Fabric Interconnect

HCIX-FI-6536
Services/Subscriptions

Available Components

Unit List Price (USD)

[+ HCI X 9508 CHASSIS](#)

[+ HCI X MODULAR SERVER](#)

[- FABRIC INTERCONNECT](#)

HCIX-FI-6536 22,110.00
Cisco Compute Hyperconverged X Fabric Interconnect 6536
Estimated Lead Time: 21 days [+](#)

HCIX-FI-64108 41,938.65
Cisco Compute Hyperconverged X Fabric Interconnect 64108
Estimated Lead Time: 21 days [+](#)

HCIX-FI-6454 29,034.45
Cisco Compute Hyperconverged X Fabric Interconnect 6454
Estimated Lead Time: 21 days [+](#)

[+ NUTANIX SOFTWARE](#)

[+ NUTANIX PROF SERVICE](#)

[+ CISCO INTERSIGHT](#)

HCI X 9508 CHASSIS > 1 Selected (Min 0, Max 999999)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
+ HCIX-9508-U Valid Cisco Compute Hyperconverged 9508 Chassis Configured Add Custom Name Edit Options Edit Services/Subscriptions Remove Line	63,515.05		1	161,848.43

Add a HCI X 9508 CHASSIS from the left panel

HCI X MODULAR SERVER > 2 Selected (Min 0, Max 99999)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
+ HCIX210C-M75N-U Valid 210cM7 All NVMe Hyperconverged Node w/o CPU,Memory,Storage Add Custom Name Edit Options Edit Services/Subscriptions Remove Line	29,340.33		1	105,922.38
+ HCIX-440P-U Valid HCI X-Series Gen4 PCIe node Add Custom Name Edit Options Remove Line	3,912.87		1	4,509.24

Add a HCI X MODULAR SERVER from the left panel

FABRIC INTERCONNECT > 2 Selected (Min 0, Max 99999)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
+ HCIX-FI-6536 Valid a Cisco Compute Hyperconverged X Fabric Interconnect 6536 Add Custom Name Edit Options Edit Services/Subscriptions Remove Line	35,220.74		2	72,428.96

Add a FABRIC INTERCONNECT from the left panel

a. Click on “Edit Services/Subscriptions” to edit Term Duration for HW Support.

Note: It is recommended that Term Duration for HW Support must align with Software Subscription Duration.

Step 27.

Fabric Interconnect

HCIX-FI-6536
Services/Subscriptions

Service Subscription
HCIX-FI-6536

Price List
Global Price List in US Dollars (USD)

Service total
9,216.00

(USD)
0.00

You may receive additional discounts because you selected two or more years of service. To review your discounts you can go to the Order or Quoting discount pages. (C0124)

Service [Non Serviceable Products](#)

The duration that you entered has been successfully applied to all the services. (C0329)

Service Options

Choose Service Level from [All Service Programs](#)

[Search by Name & Description](#)

Note: Cisco may still install another compatible service if required. Compatible services are the services that come with primary service and are based on products.

Time Duration

☒ Duration a

☐ Delay service start to

☐ Co-Term service to

[Reset](#) [Apply](#) b

Service SKU	Product SKU	Unit List Price (USD)	Qty	Total List Price (USD)
Cisco Customer Experience Level 1 (1 ITEM) L1NCO (CX LEVEL 1 8X7XNCDOS) Duration SERVICE PROGRAM SUMMARY 36 Months				
CON-L1NCO-HCIXFI68 CX LEVEL 1 8X7XNCDOS Cisco Compute Hyperconve... SERVICE SKU	HCIX-FI-6536 Cisco Compute Hyperconverged X Fabric Interconnect ... PRODUCT SKU	9,216.00	1	9,216.00

[Change Service](#) [Remove Service](#)

[Remove All Services](#) [Remove All Additional Services](#)

Configuration Summary All prices shown in USD

Services 9,216.00

[Cancel](#) [Done](#) b

- a. Enter the Term Duration
- b. Click on “Apply” and “Done”

Note: If Nutanix Mission Critical Software Support is purchased, it is recommended that Customer upgrade to CX Success Track Level 1 or Level 2 or Solution Support to ensure consistent SLA response time between Hardware and Software. Please refer to https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf for more information.

Configure the Software Subscription

Step 28.

The screenshot shows the Cisco configuration interface for Nutanix Software. The left panel lists available components, including 'NUTANIX SOFTWARE'. The main panel displays a configuration table with columns for Product, Unit List Price (USD), Adjusted List Price (USD), Qty, and Extended List Price (USD). The table is divided into sections for different components: HCI X 9508 CHASSIS, HCI X MODULAR SERVER, FABRIC INTERCONNECT, and NUTANIX SOFTWARE. Annotations 'a' and 'b' highlight specific actions: 'a' points to the 'PLUS' button next to 'NTX-SW' in the 'Available Components' list, and 'b' points to the 'Edit Options' link for the 'NTX-SW' product in the main configuration table.

NUTANIX SOFTWARE

NTX-SW
NTX-SW-1Y

NCI
NCM
NUS

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
Product				
HCIX-9508-U Valid		54,911.24	1	153,138.24
Cisco Compute Hyperconverged 9508 Chassis Configuration				
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line				
Add a HCI X 9508 CHASSIS from the left panel				
HCI X MODULAR SERVER > 2 Selected (Min 0, Max 99999)				
Product				
HCIX210C-M78N-U Valid		25,473.91	1	106,287.54
210cM7 All NVMe Hyperconverged Node w/o CPU/Memory/Storage				
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line				
HCIX-440P-U Valid		3,912.87	1	4,509.24
HCI X-Series Gen4 PCIe node				
Add Custom Name Edit Options Remove Line				
Add a HCI X MODULAR SERVER from the left panel				
FABRIC INTERCONNECT > 2 Selected (Min 0, Max 99999)				
Product				
HCIX-FI-6536 Valid		38,292.74	2	78,572.96
Cisco Compute Hyperconverged X Fabric Interconnect 6536				
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line				
Add a FABRIC INTERCONNECT from the left panel				
NUTANIX SOFTWARE > 1 Selected (Min 0, Max 2)				
Product				
NTX-SW Invalid		--	1	--
Nutanix Software 3Y and above				
Add Custom Name Edit Options Remove Line Dependent Hardware				
Requested Start Date: 16-Jan-2025				
Requested For: 36 Months From 16-Jan-2025 To 15-Jan-2028 No Auto Renewal				
Automatically Renews For: No Auto Renewal				
Billing Frequency: Prepaid Term				
Add a NUTANIX SOFTWARE from the left panel				

- a. NTX-SW or NTX-SW-1Y is a required selection. Please make selection by clicking “PLUS”
- b. Click on “Select Options” to configure the product.

Note: Subscription Term for NTX-SW is 36 to 60 Months and for NTX-SW-1Y is 12 Months.

Nutanix Software Product Scope offering in Cisco

Nutanix Cloud Infrastructure (NCI)	NCI is a complete software stack to unify your hybrid cloud infrastructure including compute, storage and network, hypervisors, and containers, in public or enterprise clouds.
Nutanix Cloud Infrastructure Data (NCI-D)	Delivers rich data and storage services but does not include Nutanix compute and networking capabilities. No support for AHV.
Nutanix Cloud Infrastructure Edge (NCI-E)	Provides a Distributed Infrastructure Platform for small Edge Deployments.
End User Computing (EUC)	On-Prem VDI and Desktop as a Service (DaaS) use cases.
Nutanix Cloud Manager (NCM)	NCM offers intelligent operations, self service and orchestration, visibility and governance of spend, security and teams.
Nutanix Cloud Manager Edge (NCM-E)	Provides NCM Capability for Edge Deployments
Nutanix Cloud Manager End User Computing (NCM-U)	Provides NCM Capability in VDI Use Cases
Nutanix Cloud Platform (NCP)	Bundle for NCI and NCM
Nutanix Unified Storage (NUS)	Software-defined data services platform that consolidates the management and protection of siloed block, file, and object storage into a single, unified platform.
Nutanix Data Lens (NDL)	SaaS-based cyberstorage solution offering ransomware resilience and global data visibility for unstructured data on Nutanix Unified Storage (NUS).
Nutanix Kubernetes Platform (NKP)	Simplifies platform engineering by reducing operational complexity and establishes consistency across any environment.

NUTANIX CLOUD INFRASTRUCTURE (NCI)

NT-NCI-PRO-PR

License Tiers:

- STR (Starter)
- PRO (Professional)
- ULT (Ultimate)

Support Tiers:

- PR (Production)
- MC (Mission Critical)
- AP (ASP Production)
- AM (ASP Mission Critical)
- FP (US Federal Production)
- FM (US Federal Mission Critical)

Available Feature Add-Ons:

- Security
SKU: **NT-A-NCI-SEC-PR**
- Advanced Replication
SKU: **NT-A-NCI-ADR-PR**

Feature Add-on license can only be added to NCI PRO tier licenses

NUTANIX CLOUD INFRASTRUCTURE DATA (NCI-D)

NT-NCI-D-PRO-PR

License Tiers:

- STR (Starter)
- PRO (Professional)
- ULT (Ultimate)

Support Tiers:

- PR (Production)
- MC (Mission Critical)
- AP (ASP Production)
- AM (ASP Mission Critical)
- FP (US Federal Production)
- FM (US Federal Mission Critical)

Available Feature Add-Ons:

- Security
SKU: NT-A-NCI-D-SEC-PR
- Advanced Replication
SKU: NT-A-NCI-D-ADR-PR

Feature Add-on license can only be added to NCI PRO tier licenses

NUTANIX CLOUD INFRASTRUCTURE EDGE (NCI-E)

NT-NCI-E-PRO-PR

License Tiers:

- STR (Starter)
- PRO (Professional)
- ULT (Ultimate)

Support Tiers:

- PR (Production)
- MC (Mission Critical)
- AP (ASP Production)
- AM (ASP Mission Critical)
- FP (US Federal Production)
- FM (US Federal Mission Critical)

- 1 TiB of NUS Pro per NCI-Edge cluster is included at no cost with NCI-Edge.
- NCI-Edge licenses must run on a dedicated licensed cluster with no core-based licensing. Mixing of NCI-Edge licenses with other types of NCI licensing within a cluster is not supported.
- NCI-Edge is limited to a maximum of 25 VMs in a cluster, with each VM being limited to a maximum of 96GB of memory.

Metric - VMs

END USER COMPUTING (EUC)

NT-EUC-PRO-PR

License Tier:

- STR (Starter)
- PRO (Professional)
- ULT (Ultimate)

Support Tier:

- PR (Production)
- MC (Mission Critical)
- AP (ASP Production)
- AM (ASP Mission Critical)
- FP (US Federal Production)
- FM (US Federal Mission Critical)

- *All users on EUC cluster must be licensed*
- *There are no add-ons on top of Pro license for EUC. If add-ons required, use EUC Ultimate.*

Note:

- *Meter = Users*

NUTANIX CLOUD MANAGER (NCM)

NT-NCM-PRO-PR

License Tiers:

- STR (Starter)
- PRO (Professional)
- ULT (Ultimate)

Support Tiers:

- PR (Production)
- MC (Mission Critical)
- AP (ASP Production)
- AM (ASP Mission Critical)
- FP (US Federal Production)
- FM (US Federal Mission Critical)

Available Feature Add-Ons:

- Self-Service & Orchestration
SKU: **NT-NCM-SS-PR**
- Security Central
SKU: **NT-NCM-SC-PR**
- Cost Governance
SKU: **NT-NCM-CM-PR**

These add-ons give access to respective feature sets for the public cloud

Note:

- Meter = VM (Virtual Machine)
- Subscription is created on My Nitrogen portal for each product

NUTANIX CLOUD MANAGER EDGE (NME)

NT-NME-PRO-PR

License Tiers:

- STR (Starter)
- PRO (Professional)
- ULT (Ultimate)

Support Tiers:

- PR (Production)
- MC (Mission Critical)
- AP (ASP Production)
- AM (ASP Mission Critical)
- FP (US Federal Production)
- FM (US Federal Mission Critical)

- **NCM EDGE License are metered per VM and to be used only for NCI-EDGE clusters.**
- **To apply such Licenses, customers need minimum PC 2024.2**
- **Edge Cluster maximums are:**
 - 25 VMs per cluster
 - Memory maximum is 96GB (per VM)
 - Maximum no. of nodes not to exceed 5

Metric - VMs

NUTANIX CLOUD MANAGER EUC (NCM-U)

NT-NCM-U-PRO-PR

License Tiers:

- STR (Starter)
- PRO (Professional)
- ULT (Ultimate)

Support Tiers:

- PR (Production)
- MC (Mission Critical)
- AP (ASP Production)
- AM (ASP Mission Critical)
- FP (US Federal Production)
- FM (US Federal Mission Critical)

- **NCM EUC License are metered per user and to be used only for NCI-EUC clusters.**
- **To apply such Licenses, customers need minimum PC 2024.2**

Metric - User

NCP (NUTANIX Cloud Platform) Bundle

NT-NCP-PRO-PR

License Tier:

- STR (Starter)
- PRO (Professional)
- ULT (Ultimate)

Support Tier:

- PR (Production)
- MC (Mission Critical)
- AP (ASP Production)
- AM (ASP Mission Critical)
- FP (US Federal Production)
- FM (US Federal Mission Critical)

Product Tier	Offering Combination
NCP ULT	NCI ULT + NCM ULT
NCP PRO	NCI ULT + NCM PRO
NCP STR	NCI PRO + NCM PRO

NCP Quoting and Licensing rules

Quoting Rules

- NCP has three bundled offerings, and each bundle has fixed NCI and NCM license tiers.
- Meter is 'Core'. Same for both NCI and NCM constituent products.
- Quantity, Term, Discount offered to be selected at the top-level 'parent' SKU, and all the 'children' components inherit.
- Both the NCI and NCM components display their Quantity.
- Top-level SKU should display Unit List Price, Discount, Total List Price, Quantity and Total Net Price

Licensing Rules

- The constituent NCI and NCM licenses are applied individually.
- NCI add-ons can be quoted if required for the NCI license in the bundle.
- NCM add-ons can be quoted for the NCM license in the bundle.

NUTANIX UNIFIED STORAGE (NUS) & NUTANIX DATA LENS (NDL)

NT-NUS-PRO-PR

NT-NDL-PR/FP

License Tier:

- PRO (Professional)

Support Tier:

- PR (Production)
- MC (Mission Critical)
- AP (ASP Production)
- AM (ASP Mission Critical)
- FP (US Federal Production)
- FM (US Federal Mission Critical)

- **Available Feature Add-Ons:**
- **Security**
 - SKU: NT-A-NUS-SEC-PR
- **Advanced Replication**
 - SKU: NT-A-NUS-ADR-PR
- **Feature Add-on license can only be added to NCI PRO tier licenses**
- **Note:**
 - **Meter = Used TiB**
 - **Tiered pricing**

NUTANIX KUBERNETES PLATFORM (NKP)

NT-NKP-PRO-PR
NT-NKP-FS-PRO-PR

Full Stack

License Tier:

- PRO (Professional)

Support Tier:

- PR (Production)
- MC (Mission Critical)
- AP (ASP Production)
- AM (ASP Mission Critical)
- FP (US Federal Production)
- FM (US Federal Mission Critical)

- **Built to Solve the Toughest Kubernetes Management Challenges**
- **Nutanix Kubernetes Platform has 2 ordering options**
 - **NKP Full Stack (Meter: Core)**
 - **NKP (Meter: vCPU)**

Step 29.

NUTANIX SOFTWARE

NTX-SW
NTX-SW-1Y

➔

NCI

NCM

NUS

Offer Configuration NTX-SW(Part of HCI-M6-MLB)	Estimated Lead Time NA	Price List Global Price List (USD)	Total (USD) 0.00
Requested Terms and Billing			
Requested Start Date 29-Sep-2023	Requested For 36 Months From 29-Sep-2023 To 28-Sep-2026	Automatically Renews For ⓘ No Auto Renewal	Billing Frequency Prepaid Term

ⓘ Cisco will apply a standard lead time to your requested start date based on the selected product. Cisco may not be able to honor the requested start date (RSD). In some cases, our systems may require additional lead-time to provision your services. Submitting a RSD that is too early could cause customer subscription billing issues. Verify the requested start date with your implementation team that aligns with customer deployment readiness. (C0742)

REQUESTED FOR

36 Months From: 29-Sep-2023 To: 28-Sep-2026

Requested Start Date

Day: 29

Month: Sep

Year: 2023

Enter any date up between 26-Sep-2023 and 24-Dec-2023

End Date

☒ Effective For: 36 Months
Enter any whole month value from 36-60

☐ Co-Term to an End Date ⓘ

Day: 28

Month: Sep

Year: 2026

Enter any date up between 28-Sep-2026 and 28-Sep-2028

Automatically Renews On ⓘ No Auto Renewal

Auto Renewal ⓘ

☐ Off

Billing Frequency ⓘ Prepaid Term

☒ Prepaid Term

Cancel
Save Changes

- a. **Requested Start Date (RSD)** is now dependent on HW Ship Date and will automatically starts when the HW ships. If you change the **RSD**, the Software will start either on the **RSD** you picked or the HW Ship Date whichever is later.
- b. **End Date** (duration in months) is defaulted to **36 Months**, **Auto Renewal (on/off)** is defaulted to **Off** and **Billing Frequency** is defaulted to **Prepaid Term**. You can still change the setting accordingly.

Step 30.

NUTANIX SOFTWARE

NTX-SW
NTX-SW-1Y

NCI

NCM

NUS

Offer Configuration
NTX-SW(Part of HCI-M6-MLB)

Estimated Lead Time
NA

Total (USD)
0.00

Requested Terms and Billing

Requested Start Date
29-Sep-2023

Requested For
36 Months From 29-Sep-2023 To 28-Sep-2026

Automatically Renews For
No Auto Renewal

Billing Frequency
Prepaid Term

⚠ The items marked with "-" do not have a List Price available. Enter a different Quantity, Initial Term or Prepay Term. (C0808)

Configuration Summary

[Nutanix Cloud Infrastructure \(NCI\)](#)

[Nutanix Cloud Infrastructure Data \(NCI-D\)](#)

[Nutanix Cloud Manager \(NCM\)](#)

[Nutanix Cloud Platform \(NCP\)](#)

[End User Computing \(EUC\)](#)

[Nutanix Support](#)

SKU	Qty	List Price
SVS-NT-SUP	1 Each	\$0.00 Per Each/Month
Total		\$0.00

Restore Configuration
Cancel
Review Changes

NTX-SW > Nutanix Cloud Infrastructure (NCI)

Nutanix Cloud Infrastructure (NCI)

STR

Core	SKU	Description	Unit List Price (USD)	Action
<input type="text" value="Qty"/>	NT-NCI-STR-PR	NCI Starter SW LIC & Production SW Supp per Core	Enter Qty to see List Price Per Core/Month	
<input type="text" value="Qty"/>	NT-NCI-STR-MC	NCI Starter SW LIC & Mission Critical SW Supp per Core	Enter Qty to see List Price Per Core/Month	
<input type="text" value="Qty"/>	NT-NCI-STR-FP	NCI Starter SW LIC & Fed Production SW Supp per Core	Enter Qty to see List Price Per Core/Month	
<input type="text" value="Qty"/>	NT-NCI-STR-FM	NCI Starter SW LIC & Fed Mission Critical SW Supp per Core	Enter Qty to see List Price Per Core/Month	

PRO

Core	SKU	Description	Unit List Price (USD)	Action
<input type="text" value="Qty"/>	NT-NCI-PRO-PR	NCI Pro SW LIC & Production SW Supp per Core	Enter Qty to see List Price Per Core/Month	
<input type="text" value="Qty"/>	NT-NCI-PRO-MC	NCI Pro SW LIC & Mission Critical SW Supp per Core	Enter Qty to see List Price Per Core/Month	
<input type="text" value="Qty"/>	NT-NCI-PRO-FP	NCI Pro SW LIC & Fed Production SW Supp per Core	Enter Qty to see List Price Per Core/Month	
<input type="text" value="Qty"/>	NT-NCI-PRO-FM	NCI Pro SW LIC & Fed Mission Critical SW Supp per Core	Enter Qty to see List Price Per Core/Month	

- a. The Quantity of NCI or NCI-D or NCM or (NCI and NCM under NCP) License must match with the QTY of Processor Core selected under Servers. The Quantity of NCI-E, EUC, NUS and NDL License can be selected per recommended system requirement.

Step 31.

NUTANIX SOFTWARE

NTX-SW

NCI

NCM

NUS

Offer Configuration
NTX-SW(Part of HCI-M7-MLB)

Estimated Lead Time
NA

Total (USD)
166,446.49

Requested Terms and Billing

Requested Start Date
16-Jan-2025

Requested For
36 Months From 16-Jan-2025 To 15-Jan-2028

Automatically Renews For
No Auto Renewal

Billing Frequency
Prepaid Term

1: To complete your order, please review product terms and acknowledge checkbox under EULA category from Configuration Summary (left-hand side). (CE202343)

2: It is recommended that the user purchase Nutanix Professional Services: NCI Design Workshop + NCI Cluster Deployment or Expansion from NTX-SW-PS. (CE202155)

3: The items marked with "-" do not have a List Price available. Enter a different Quantity, Initial Term or Prepay Term. (C0808)

Your subscription will start and be eligible to be invoiced: i) 30 days or less (7 days for A-FLEX/A-FLEX-3/A-WHOLESALE) after Cisco notifies you that any portion of the subscription is ready for you to provision OR, ii) the day any portion of the subscription is provisioned by Cisco, whichever of the two events happens first. (C01007)

Configuration Summary

[Nutanix Cloud Manager EUC \(NCM-U\)](#)

[Nutanix Cloud Platform \(NCP\)](#)

[Nutanix Unified Storage \(NUS\)](#)

[Nutanix Data Lens \(NDL\)](#)

[Nutanix Kubernetes Platform \(NKP\)](#)

[EULA](#)

[Nutanix Support](#)

SKU	Qty	List Price
SVS-NT-SUP	1 Each	\$0.00 Per Each/Month
Total		\$166,446.49

Restore Configuration
Cancel
Review Changes

NTX-SW > EULA

EULA

To complete your order, please check the box to the right to acknowledge and agree to the EULA Terms:

☐ By checking this box or otherwise placing an order for a Nutanix product or service, you agree that: (1) use of Nutanix products and receipt of Nutanix services is governed solely by the Nutanix License and Services Agreement located at <https://www.nutanix.com/legal/eula>; (2) if you are a partner or distributor, or are otherwise placing an order on behalf of another person (a "Customer"), you have included a statement in your written order with the Customer that use of Nutanix products is governed solely by the Nutanix License and Services Agreement located at <https://www.nutanix.com/legal/eula>, and have obtained an acknowledgment from the Customer accepting the foregoing terms, and you agree to provide reasonable evidence of the Customer's acceptance of such terms to Nutanix upon the direct request of Nutanix; (3) Cisco makes no warranty regarding Nutanix products and services and Nutanix makes no warranty regarding Cisco products and services; (4) Cisco does not provide support for Nutanix products and services and Nutanix does not provide support for Cisco products and services; and (5) Cisco may provide the Customer's name, address, and other order details to Nutanix (and the customer has provided all necessary consents to permit the same).

- a. To complete the order, please check the box to the right to acknowledge and agree to the EULA Terms
- b. Click on “Review Changes” and “Done”

Step 32.

Available Components

Component	Unit List Price (USD)
HCI X 9508 CHASSIS	
HCI X MODULAR SERVER	
FABRIC INTERCONNECT	
NUTANIX SOFTWARE	
NTX-SW Nutanix Software 3Y and above	0.00
NTX-NCI-USE-CASE Nutanix NCI Software License Use case Estimated Lead Time: 7 days	0.00
NTX-SW-1Y Nutanix Software 1Y	--
NUTANIX PROF SERVICE	
CISCO INTERSIGHT	

NUTANIX SOFTWARE

HCI X 9508 CHASSIS > 1 Selected (Min 0, Max 99999)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX-9508-U Valid Cisco Compute Hyperconverged 9508 Chassis Configured Add Custom Name Edit Options Edit Services/Subscriptions Remove Line			1	153,138.24

HCI X MODULAR SERVER > 2 Selected (Min 0, Max 99999)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX210C-M78N-U Valid 210cM7 All NVMe Hyperconverged Node w/o CPU,Memory,Storage Add Custom Name Edit Options Edit Services/Subscriptions Remove Line		25,473.91	1	106,287.54
HCIX-440P-U Valid HCI X-Series Gen4 PCIe node Add Custom Name Edit Options Remove Line		3,912.87	1	4,509.24

FABRIC INTERCONNECT > 2 Selected (Min 0, Max 999999)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX-FI-6536 Valid Cisco Compute Hyperconverged X Fabric Interconnect 6536 Add Custom Name Edit Options Edit Services/Subscriptions Remove Line		38,292.74	2	78,572.96

NUTANIX SOFTWARE > 2 Selected (Min 0, Max 2)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
NTX-SW Valid Nutanix Software 3Y and above Add Custom Name Edit Options Remove Line Dependent Hardware		36.12	1	166,446.49
NTX-NCI-USE-CASE Invalid Nutanix NCI Software License Use case Add Custom Name Select Options Remove Line		0.00	1	0.00

- a. NTX-NCI-USE-CASE needs to be selected when NCI/NCI-D/ NCI-E License are selected under Nutanix Software ATO.

Step 33.

NUTANIX SOFTWARE

Available Components

Component	Unit List Price (USD)
HCI X 9508 CHASSIS	
HCI X MODULAR SERVER	
FABRIC INTERCONNECT	
NUTANIX SOFTWARE	
NTX-SW Nutanix Software 3Y and above	0.00
NTX-NCI-USE-CASE Nutanix NCI Software License Use case Estimated Lead Time: 7 days	0.00
NTX-SW-1Y Nutanix Software 1Y	--
NUTANIX PROF SERVICE	
CISCO INTERSIGHT	

Configuration Summary:

- HCI X 9508 CHASSIS > 1 Selected (Min 0, Max 999999)**

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX-9508-U Valid			1	153,138.24
- HCI X MODULAR SERVER > 2 Selected (Min 0, Max 999999)**

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX210C-M78N-U Valid		25,473.91	1	106,287.54
HCIX-440P-U Valid		3,912.87	1	4,509.24
- FABRIC INTERCONNECT > 2 Selected (Min 0, Max 999999)**

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX-FI-6536 Valid		38,292.74	2	78,572.96
- NUTANIX SOFTWARE > 2 Selected (Min 0, Max 2)**

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
NTX-SW Valid		36.12	1	166,446.49
NTX-NCI-USE-CASE Invalid		0.00	1	0.00

Requested Start Date: 16-Jan-2025
Requested For: 36 Months From 16-Jan-2025 To 15-Jan-2028
Automatically Renews For: No Auto Renewal
Billing Frequency: Prepaid Term

a. Please select appropriate Use Case.

Nutanix Professional Services SKU

Step 34.

NUTANIX SOFTWARE

Available Components

Component	Unit List Price (USD)
HCI X 9508 CHASSIS	
HCI X MODULAR SERVER	
FABRIC INTERCONNECT	
NUTANIX SOFTWARE	
NTX-SW Nutanix Software 3Y and above	0.00
NTX-NCI-USE-CASE Nutanix NCI Software License Use case Estimated Lead Time: --	0.00
NTX-SW-1Y Nutanix Software 1Y	--
NUTANIX PROF SERVICE	
CISCO INTERSIGHT	

Configuration Summary:

- HCI X 9508 CHASSIS > 1 Selected (Min 0, Max 999999)**

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX-9508-U Valid		54,911.24	1	153,138.24
- HCI X MODULAR SERVER > 2 Selected (Min 0, Max 999999)**

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX210C-M78N-U Valid		25,473.91	1	106,287.54
HCIX-440P-U Valid		3,912.87	1	4,509.24
- FABRIC INTERCONNECT > 2 Selected (Min 0, Max 999999)**

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX-FI-6536 Valid		38,292.74	2	78,572.96
- NUTANIX SOFTWARE > 1 Selected (Min 0, Max 2)**

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
NTX-SW Invalid		--	1	--

Requested Start Date: 16-Jan-2025
Requested For: 36 Months From 16-Jan-2025 To 15-Jan-2028
Automatically Renews For: No Auto Renewal
Billing Frequency: Prepaid Term

- a. It is recommended that User Purchase NTX-SW-PS. Please make selection by clicking .
- b. Click on Edit Options to configure the Product.

Note: Nutanix Professional Service is mandatory for NTX-SW-1Y or when NCM PRO or NCM ULT is selected under NTX-SW. For other Licenses under NTX-SW, its recommended.

- Each professional SKU is 1-Year Term.
- The professional services needs to consumed within 1-Year period

Product	Stage	Professional Services Offerings
NCI	Design	NCI Design Workshop
	Deploy	NCI Cluster Deployment or Expansion
	Migrate	Virtual Machine Migration Workshop
	Migrate	Virtual Machine Migration
NCM	Design	NCM Intelligent Operations Design Workshop
	Design	NCM Self-Service Design Workshop
	Deploy	NCM Intelligent Operations Deployment
	Deploy	FastTrack for NCM Self-Service
	Deploy	FastTrack for NCM Cost Governance

Nutanix Professional Service (PS) ordering rules

- 1- year Terms:** Mandatory professional services attach for NCI, NCM, NCP and EUC.
 - Select 1 from Design AND 1 from Deployment
 - PS Tiers match (or greater) the software license Tier is recommended
- 3- year Terms:** Mandatory professional services attach for NCM Pro and NCM Ultimate only
 - Select 2 from Design (Intelligent Ops + SS) AND 3 from Deployment (Intelligent Ops +SS +CG)
 - PS Tiers match (or greater) the software license Tier is recommended
 - PS for NCI license is recommended
- Exceptions on (1) and (2)**
 - Existing Nutanix customers
 - Cisco Partners who are Nutanix authorized partners offering their own professional services SKUs
- Any expand opportunity should not require mandatory services.**

Step 35.

NUTANIX PROF SERVICE

Offer Configuration
NTX-SW-PS(Part of HCIX-M7-MLB)

Requested Terms and Billing

Requested Start Date 13-Jan-2025

Estimated Lead Time
NA

NTX-SW-PS

Requested For
1 Months From 13-Jan-2025 To 14-Jan-2025

Price List
Global Price List (USD)

Unit List Price (USD)

Subscription Frequency
Billed Term

DESIGN

DEPLOYMENT

WORKSHOP

1: To complete your order, please review product terms and acknowledge checkbox under EULA category from Configuration Summary (left-hand side). (CE202343)

2: Before placing the order, it is highly recommended user review corresponding [Ordering Guide](#) (CE606525)

3: Before placing the order, it is highly recommended user review corresponding [Ordering Guide](#) (CE606519)

4: The Requested Start Date 16-Jan-2025 is not in the valid date range. The date has been updated to a valid date. You can provide a Requested Start Date between 13-Jan-2025 and 15-Jan-2025. (C0917)

Your subscription will start and be eligible to be invoiced: i) 30 days or less (7 days for A-FLEX/A-FLEX-3/A-WHOLESALE) after Cisco notifies you that any portion of the subscription is ready for you to provision OR, ii) the day any portion of the subscription is provisioned by Cisco, whichever of the two events happens first. (C01007)

Configuration Summary

[Nutanix Cloud Infrastructure \(NCI\) Services](#)

[Nutanix Cloud Management \(NCM\) Services](#)

[Nutanix Services Flexible Credits](#)

[EULA](#)

[Nutanix Support](#)

SKU	Qty	List Price
SVS-NT-SUP	1 Each	\$0.00 Per Each/Month

Total \$0.00

[Restore Configuration](#) [Cancel](#) [Review Changes](#)

NTX-SW-PS > Nutanix Cloud Infrastructure (NCI) Services

Nutanix Cloud Infrastructure (NCI) Services

NCI Design Workshop

Units	SKU	Description	Unit List Price (USD)	Action
Qty	NT-W-DS-STR	NCI Design Workshop - Starter - Workshop Only	Enter Qty to see List Price Per Units/Month	
Qty	NT-W-DS-STR-SD	NCI Design Workshop - Starter - Standard Doc	Enter Qty to see List Price Per Licenses/Month	
Qty	NT-W-DS-STR-ED	NCI Design Workshop - Starter - Enhanced Doc	Enter Qty to see List Price Per Licenses/Month	
Qty	NT-W-DS-PRO	NCI Design Workshop - Pro - Workshop Only	Enter Qty to see List Price Per Licenses/Month	
Qty	NT-W-DS-PRO-SD	NCI Design Workshop - Pro - Standard Doc	Enter Qty to see List Price Per Licenses/Month	
Qty	NT-W-DS-PRO-ED	NCI Design Workshop - Pro - Enhanced Doc	Enter Qty to see List Price Per Licenses/Month	
Qty	NT-W-DS-ULT-SD	NCI Design Workshop - Ultimate - Standard Doc	Enter Qty to see List Price Per Licenses/Month	
Qty	NT-W-DS-ULT-ED	NCI Design Workshop - Ultimate - Enhanced Doc	Enter Qty to see List Price Per Licenses/Month	

NCI Cluster Deployment or Expansion

Units	SKU	Description	Unit List Price (USD)	Action
Qty	NT-S-CP-STR-AVB	NCI Cluster Deployment or Expansion - Starter - AHV - Base	Enter Qty to see List Price Per Units/Month	
Qty	NT-S-CP-STR-AVV	NCI Cluster Deployment or Expansion - Starter - AHV - Var	Enter Qty to see List Price Per Units/Month	

- a. We have NCI License selected under NTX-SW and hence, it is recommended that we select Nutanix Professional Services: NCI Design Workshop + NCI Cluster Deployment or Expansion SKUs
- b. QTY of NCI Cluster Deployment or Expansion Variable SKU must match with Server QTY.

Step 36.

NUTANIX PROF SERVICE

Offer Configuration NTX-SW-PS(Part of HCIX-M7-MLB)	Estimated Lead Time NA	Price List Global Price	<div style="background-color: #4CAF50; color: white; padding: 5px; text-align: center; margin-bottom: 5px;">DESIGN</div> <div style="background-color: #4CAF50; color: white; padding: 5px; text-align: center; margin-bottom: 5px;">DEPLOYMENT</div> <div style="background-color: #4CAF50; color: white; padding: 5px; text-align: center;">WORKSHOP</div>	Total (USD) 50,775.34
Requested Terms and Billing				
Requested Start Date 13-Jan-2025	Requested For 1 Months From 13-Jan-2025 To 12-Feb-2025	Automatic Renewal No Auto Renewal	Billing Frequency Prepaid Term	

1: To complete your order, please review product terms and acknowledge checkbox under EULA category from Configuration Summary (left-hand side). (CE202343)

2: Before placing the order, it is highly recommended user review corresponding [Ordering Guide \(CE606525\)](#)

3: Before placing the order, it is highly recommended user review corresponding [Ordering Guide \(CE606519\)](#)

Your subscription will start and be eligible to be invoiced: i) 30 days or less (7 days for A-FLEX/A-FLEX-3/A-WHOLESALE) after Cisco notifies you that any portion of the subscription is ready for you to provision OR, ii) the day any portion of the subscription is provisioned by Cisco, whichever of the two events happens first. (C01007)

Configuration Summary

NT-S-DP-STR-AVB	1 <small>Units</small>	\$7,975.0000 <small>Per Units/Month</small>
NT-S-DP-STR-AVV	2 <small>Node</small>	\$775.1700 <small>Per Node/Month</small>

Nutanix Cloud Management (NCM) Services

Nutanix Services Flexible Credits

EULA ← a

Nutanix Support

SKU	Qty	List Price
SVS-NT-SUP	1 <small>Each</small>	\$0.00 <small>Per Each/Month</small>

Total \$50,775.34

Restore Configuration
Cancel
Review Changes ← b

NTX-SW-PS > EULA

EULA

To complete your order, please check the box to the right to acknowledge and agree to the EULA Terms: ← a

☐ By checking this box or otherwise placing an order for a Nutanix product or service, you agree that: (1) use of Nutanix products and receipt of Nutanix services is governed solely by the Nutanix License and Services Agreement located at <https://www.nutanix.com/legal/eula>; (2) if you are a partner or distributor, or are otherwise placing an order on behalf of another person (a "Customer"), you have included a statement in your written order with the Customer that use of Nutanix products is governed solely by the Nutanix License and Services Agreement located at <https://www.nutanix.com/legal/eula>, and have obtained an acknowledgment from the Customer accepting the foregoing terms, and you agree to provide reasonable evidence of the Customer's acceptance of such terms to Nutanix upon the direct request of Nutanix; (3) Cisco makes no warranty regarding Nutanix products and services and Nutanix makes no warranty regarding Cisco products and services; (4) Cisco does not provide support for Nutanix products and services and Nutanix does not provide support for Cisco products and services; and (5) Cisco may provide the Customer's name, address, and other order details to Nutanix (and the customer has provided all necessary consents to permit the same).

- a. To complete the order, please check the box to the right to acknowledge and agree to the EULA Terms
- b. Click on "Review Changes" and "Done"

Step 37.

Cisco Intersight

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

DC-MGT-SAAS

HCIX 9500 CHASSIS - 1 Selected (Min 0, Max 999999)					
Product HCIX 9500-01 VMS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Clear Complete Hyperconverged 9500 Chassis Configured Add Custom Name Edit Options Edit Services/Subscriptions Remove Line			1	153,139.24	

Add a HCIX 9500 CHASSIS from the left panel

HCIX 9500 CHASSIS - 2 Selected (Min 0, Max 999999)

Product HCIX 9500-01 VMS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Clear Complete Hyperconverged 9500 Chassis Configured Add Custom Name Edit Options Edit Services/Subscriptions Remove Line			1	153,139.24	

Add a HCIX 9500 CHASSIS from the left panel

FABRIC INTERCONNECT - 2 Selected (Min 0, Max 999999)

Product HCIX 9500-01 VMS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Clear Complete Hyperconverged X-Fabric Interconnect 9500 Add Custom Name Edit Options Edit Services/Subscriptions Remove Line			2	76,579.56	

Add a FABRIC INTERCONNECT from the left panel

NUTANIX SOFTWARE - 2 Selected (Min 0, Max 2)

Product NTX-SW-PS VMS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Nutanix Software 3Y and above Add Custom Name Edit Options Remove Line Dependent Hardware			1	150,449.49	

Add a NUTANIX SOFTWARE from the left panel

NUTANIX PROF SERVICE - 1 Selected (Min 0, Max 1)

Product NTX-SW-PS VMS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Nutanix Professional Service Add Custom Name Edit Options Remove Line			1	50,775.34	

Add a NUTANIX PROF SERVICE from the left panel

CISCO INTERSIGHT - 1 Selected (Min 1, Max 1)

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)	
Cisco Intersight SaaS Add Custom Name Edit Options Remove Line Download Hardware			1	-	

Add a CISCO INTERSIGHT from the left panel

Available Components

- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- HCIX 9500 CHASSIS
- FABRIC INTERCONNECT
- NUTANIX SOFTWARE
- NUTANIX PROF SERVICE
- CISCO INTERSIGHT

Product DC-MGT-SAAS	Unit List Price (USD)	Adjusted List Price (USD)
-------------------------------	-----------------------	---------------------------

- a. It is recommended that Term Duration for HW Support align with Software Subscription Duration.
- b. Intersight is a required selection, if you have not previously purchased Cisco Intersight Software. Please make selection by clicking “PLUS” and click on “Edit Options” to configure.

Step 38.

Cisco Intersight

DC-MGT-SAAS

Offer Configuration
DC-MGT-SAAS(Part of HCIX-M7-MLB)

Estimated Lead Time
NA

Price List
Global Price List (USD)

Total (USD)
0.00

Requested Terms and Billing

Requested Start Date ⓘ
11-May-2024

Requested For
36 Months From 11-May-2024 To 10-May-2027

Automatically Renews For ⓘ
12 Months On 11-May-2027

Billing Frequency
Prepaid Term

1: Cisco will apply a standard lead time to your requested start date based on the selected product. Cisco may not be able to honor the requested start date (RSD). In some cases, our systems may require additional lead-time to provision your services. Submitting a RSD that is too early could cause customer subscription billing issues. Verify the requested start date with your implementation team that aligns with customer deployment readiness. (C0742)

2: Your subscription will start and be eligible to be invoiced: i) 30 days or less (7 days for A-FLEX/A-FLEX-3) after Cisco notifies you that any portion of the subscription is ready for you to provision OR, ii) the day any portion of the subscription is provisioned by Cisco, whichever of the two events happens first. (C01007)

REQUESTED FOR 36 Months From 11-May-2024 To 10-May-2027

Requested Start Date

Day Month Year
11 May 2024

Enter any date up between 08-May-2024 and 05-Aug-2024

End Date

Effective For 36 Months
Enter any whole month value from 1-96

Co-Term to an End Date ⓘ

Day Month Year
10 May 2027

Enter any date up between 08-Aug-2024 and 10-May-2032

Automatically Renews For 12 Months On 11-May-2027

Auto Renewal On

12 Months

Billing Frequency Prepaid Term

Prepaid Term

Annual Billing

Quarterly Billing

Monthly Billing

Cancel Save Changes

- a. **Requested Start Date (RSD)** is now dependent on HW Ship Date and will automatically starts when the HW ships. If you change the **RSD**, the Software will start either on the **RSD** you picked or the HW Ship Date whichever is later.
- b. **End Date** (duration in months) is defaulted to **36 Months**, **Auto Renewal (on/off)** is defaulted to **Off** and **Billing Frequency** is defaulted to **Prepaid Term**. You can still change the setting accordingly.

Step 39.

Cisco Intersight

DC-MGT-SAAS

Offer Configuration DC-MGT-SAAS(Part of HCIX-M7-MLB)	Estimated Lead Time NA	Price List Global Price List (USD)	Total (USD) 2,520.00
--	---------------------------	---------------------------------------	-------------------------

Requested Terms and Billing

Requested Start Date 11-May-2024	Requested For 36 Months From 11-May-2024 To 10-May-2027	Automatically Renews For 12 Months On 11-May-2027	Billing Frequency Prepaid Term
-------------------------------------	--	--	-----------------------------------

Please note that Cisco recommends Solution Support with Intersight which solves complex issues on average 44% faster than product support. For complete details, please refer to the following URL: https://www.cisco.com/c/m/en_us/customer-experience/support/solution-support.html (CE202322)

Your subscription will start and be eligible to be invoiced: i) 30 days or less (7 days for A-FLEX/A-FLEX-3) after Cisco notifies you that any portion of the subscription is ready for you to provision OR, ii) the day any portion of the subscription is provisioned by Cisco, whichever of the two events happens first. (C01007)

Configuration Summary

Cisco Intersight 2.0 Infrastructure Services

SKU	Qty	List Price
DC-MGT-IS-SAAS-ES	2 Device	\$35.00 Per Device/Month

Cisco Intersight Workload Optimizer (IWO) - SaaS

Cisco Intersight Support

SKU	Qty	List Price
SVS-DCM-SUPT-BAS	1 Each	\$0.00 Per Each/Month

Auto Expansion

Total \$2,520.00

[Restore Configuration](#) [Cancel](#) [Review Changes](#)

DC-MGT-SAAS > Cisco Intersight 2.0 Infrastructure Services

Cisco Intersight 2.0 Infrastructure Services

Device	SKU	Description	Unit List Price (USD)	Action
2	DC-MGT-IS-SAAS-ES	Infrastructure Services SaaS/CVA - Essentials	\$35.00 Per Device/Month	Delete
Qty	DC-MGT-IS-SAAS-AD	Infrastructure Services SaaS/CVA - Advantage	Enter Qty to see List Price Per Device/Month	Delete
Qty	DC-MGT-IS-PVAPP-ES	Infrastructure Services PVA - Essentials	Enter Qty to see List Price Per Device/Month	Delete
Qty	DC-MGT-IS-PVAPP-AD	Infrastructure Services PVA - Advantage	Enter Qty to see List Price Per Device/Month	Delete

Add-Ons

Device	SKU	Description	Unit List Price (USD)	Action
Qty	DC-MGT-IS-UCSD	UCS Director - 1 Server License (includes Network, Storage)	Enter Qty to see List Price Per Device/Month	Delete

- a. The quantity of Cisco Intersight 2.0 Infrastructure Services License under Offer: DC-MGT-SAAS should be equal to the quantity of Server selected. Enter the quantity.

Step 40.

Cisco Intersight

DC-MGT-SAAS

Offer Configuration DC-MGT-SAAS(Part of HCIX-M7-MLB)	Estimated Lead Time NA	Price List Global Price List (USD)	Total (USD) 2,520.00
--	---------------------------	---------------------------------------	-------------------------

Requested Terms and Billing

Requested Start Date 11-May-2024	Requested For 36 Months From 11-May-2024 To 10-May-2027	Automatically Renews For 12 Months On 11-May-2027	Billing Frequency Prepaid Term
-------------------------------------	--	--	-----------------------------------

Please note that Cisco recommends Solution Support with Intersight which solves complex issues on average 44% faster than product support. For complete details, please refer to the following URL: https://www.cisco.com/c/m/en_us/customer-experience/support/solution-support.html (CE202322)

Your subscription will start and be eligible to be invoiced: i) 30 days or less (7 days for A-FLEX/A-FLEX-3) after Cisco notifies you that any portion of the subscription is ready for you to provision OR, ii) the day any portion of the subscription is provisioned by Cisco, whichever of the two events happens first. (C01007)

Configuration Summary

Cisco Intersight Support

SKU	Qty	List Price
SVS-DCM-SUPT-BAS	1 Each	\$0.00 Per Each/Month

Auto Expansion

SKU	Qty	List Price
DC-MGT-UCSC-1S	2 Device	\$0.00 Per Device/Month
DC-MGT-ADOPT-BAS	1 License	\$0.00 Per License/Month

Total \$2,520.00

[Restore Configuration](#) [Cancel](#) [Review Changes](#)

DC-MGT-SAAS > Cisco Intersight Support

Cisco Intersight Support

Each	SKU	Description	Unit List Price (USD)	Action
Qty	SVS-SSTCS-DCMGMT	Solution Support for DC Mgmt	Enter Qty to see List Price Per Each/Month	Delete
Qty	SVS-L1DCS-INTER	CXL1 for INTERSIGHT	Enter Qty to see List Price Per Each/Month	Delete
Qty	SVS-L2DCS-INTER	CXL2 for INTERSIGHT	Enter Qty to see List Price Per Each/Month	Delete
1	SVS-DCM-SUPT-BAS	Basic Support for DCM	\$0.00 Per Each/Month	Delete

- a. The Cisco Intersight License comes with separate Support. Basic Embedded Support is the default selection. Customer may upgrade to Solution Support, CX Success Track L1 and L2 (supported only with SAAS) if needed.

Step 41.

Bundle Configuration: H2K4M7-MLB

Estimated Lead Time: 21 days

Price List: Global Price List (USD)

Total: 22,817.00

Set service preferences for this configuration

1: Please refer to the Nutanix Sizer Tool: <https://sizer.nutanix.com/home> before you proceed to do the Product Configuration. (CE202322)

2: Please note that if Nutanix Mission Critical Software Support is purchased, it is recommended that Customer upgrade to CX Success Track Level 1 or Level 2 or Solution Support to ensure consistent SLA response time between Hardware and Software. Refer to https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf for more information. (CE202322)

Available Components

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
H2K X 9608 CHASSIS	0.00		1	0.00
H2K X MODULAR SERVER			1	
FABRIC INTERCONNECT			2	
CISCO INTERSIGHT			1	

Requested Start Date: 11-May-2024

Requested For: 36 Months From 11-May-2024 To 10-May-2027

Automatically Renews For: 12 Months On 11-May-2027

Billing Frequency: Prepaid Term

- a. Configuration for MLB is completed when status of each Product is Valid and warning messages are cleared.
- b. Click on the “PLUS” to expand and view the selections made for each Product.
- c. Click on “Done” to complete MLB configuration.

Step 42.

Cisco Intersight
➔
CNDL-DESELECT-D

Available Components

Component	Unit List Price (USD)
HCI X 9508 CHASSIS	
HCI X MODULAR SERVER	
FABRIC INTERCONNECT	
CISCO INTERSIGHT	
DC-MGT-SaaS	0.00
Cisco Intersight SaaS	
CNDL-DESELECT-D	
Conditional Deselect	
Estimated Lead Time: 7 days	

HCI X 9508 CHASSIS > 1 Selected (Min 0, Max 999999)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCI9-9508-U Valid		4,572.00	1	4,572.00
CCHC 9508 Chassis Configured				
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line				
Add a HCI X 9508 CHASSIS from the left panel				

HCI X MODULAR SERVER > 2 Selected (Min 0, Max 999999)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX210C-M7SN-U Valid		3,237.00	1	3,237.00
CCHC 210cM7 All NVMe ComputeNode w/o CPU,Memory,Storage,Mezz				
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line				
HCIX-440P-U Valid		0.00	1	0.00
HCI X-Series Gen4 PCIe node				
Add Custom Name Edit Options Remove Line				
Add a HCI X MODULAR SERVER from the left panel				

FABRIC INTERCONNECT > 2 Selected (Min 0, Max 999999)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
HCIX-FI-6536 Valid		6,144.00	2	12,288.00
Cisco Compute Hyperconverged X Fabric Interconnect 6536				
Add Custom Name Edit Options Edit Services/Subscriptions Remove Line				
Add a FABRIC INTERCONNECT from the left panel				

CISCO INTERSIGHT > 1 Selected (Min 1, Max 1)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
CNDL-DESELECT-D Invalid		0.00	1	0.00
Conditional Deselect				
Add Custom Name Select Options Remove Line				

- a. CNDL-DESELECT-D is meant to select only if Customer has already purchased Cisco Intersight License via EA Contract or order is for Disti Fulfillment.

Step 43.

Cisco Intersight
➔
CNDL-DESELECT-D

Product Configuration
CNDL-DESELECT-D part of HCIX-M7-MLB

Estimated Lead Time
7 days

Price List
Global Price List in US Dollars (USD)

Total (USD)
0.00

Warning: CNDL-DESELECT-D quantity 1 requires a minimum quantity of 1 from Reason Codes (CE100012)

Configuration Summary [View Full Summary](#)

Category	Qty	Extended List Price (USD)
CNDL-DESELECT-D		

Reason Codes

SKU	Qty	Estimated Lead Time	Unit List Price (USD)
<input type="radio"/> OPTOUT-DISTI-ONLY For Disti when ordering mandatory licenses separately	1	3 days	0.00
<input type="radio"/> OPTOUT-EA-ONLY License not needed: Customer already owns Licenses in an EA	1	3 days	0.00
<input type="radio"/> OPTOUT-ENTL-SWAP License not needed: Entitlements updated in SmartAccount. More	1	3 days	0.00

[Show Incompatible SKUs](#)

Total 0.00
Estimated Lead Time 7 days

[Reset Configuration](#) [Cancel](#) [Done](#)

- a. Please select appropriate Reason Code

Step 44.

Bundle Configuration

HCIX-M7-MLB

Estimated Lead Time

21 days

Price List

Global Price List (USD)

Total

20,097.00

Get service preferences for this configuration

Cancel Done

1: Please refer to the Nutanix Sizer Tool: <https://sizer.nutanix.com/#/home> before you proceed to do the Product Configuration. (CE202322)

2: Please note that if Nutanix Mission Critical Software Support is purchased, it is recommended that Customer upgrade to CX Success Track Level 1 or Level 2 or Solution Support to ensure consistent SLA response time between Hardware and Software. Refer to https://www.cisco.com/c/dam/en_us/about/doing_business/legal/service_descriptions/docs/cisco-success-tracks.pdf for more information. (CE202322)

3: Please note that Intersight is required selection, if you have not previously purchased Intersight please make selection. (CE202322)

Available Components

Unit List Price (USD)

HCIX-9508-U

0.00

+

HCIX-9508-U

CCHC 9508 Chassis Configured

Estimated Lead Time: --

HCIX-440P-U

0.00

+

HCIX-440P-U

HCIX-Series Gen4 PCIe node

FABRIC INTERCONNECT

0.00

+

CISCO INTERSIGHT

0.00

+

9508 CHASSIS > 1 Selected (Min 0, Max 9999999)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
<div>HCIX-9508-U Valid</div> <div>CCHC 9508 Chassis Configured</div> <div>Add Custom Name Edit Options Edit Services/Subscriptions Remove Line</div>		4,572.00	1	4,572.00

Add a HCI X 9508 CHASSIS from the left panel

HCIX-440P-U Valid

HCIX-Series Gen4 PCIe node

Add Custom Name | Edit Options | Edit Services/Subscriptions | Remove Line

 | 0.00 | 1 | 0.00 |

Add a HCI X MODULAR SERVER from the left panel

FABRIC INTERCONNECT > 2 Selected (Min 0, Max 9999999)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
<div>HCIX-FI-6536 Valid</div> <div>Cisco Compute Hyperconverged X Fabric Interconnect 6536</div> <div>Add Custom Name Edit Options Edit Services/Subscriptions Remove Line</div>		6,144.00	2	12,288.00

Add a FABRIC INTERCONNECT from the left panel

CISCO INTERSIGHT > 1 Selected (Min 1, Max 1)

Product	Unit List Price (USD)	Adjusted List Price (USD)	Qty	Extended List Price (USD)
<div>CNDL-DESELECT-D Valid</div> <div>Conditional Deselect</div> <div>Add Custom Name Edit Options Remove Line</div>		0.00	1	0.00

- Configuration for MLB is completed when status of each Product is Valid and warning messages are cleared.
- Click on the “PLUS” to expand and view the selections made for each Product.
- Click on “Done” to complete MLB configuration.

© 2023 Cisco and/or its affiliates. All rights reserved.

Page 41 of 41
Cisco Confidential