



QoS Preservation Across IPN for ACI Fabrics, 4.2.1

Table of Contents

New and changed information	1
QoS and global DSCP policy	2
DSCP policy guidelines and limitations	3
Configure global DSCP policy	4
Set QoS level for EPGs and contracts	6
Copyright	9

New and changed information

The following table provides an overview of the significant changes up to this current release. The table does not provide an exhaustive list of all changes or of the new features up to this release.

Release Version	Feature	Description
Nexus Dashboard 4.2.1		There were no major changes from the previous release.

QoS and global DSCP policy

Cisco ACI Quality of Service (QoS) feature allows you to classify the network traffic in your fabric and then to prioritize and police the traffic flow to help avoid congestion in your network. When traffic is classified within the fabric, it is assigned a QoS Priority Level, which is then used throughout the fabric to provide the most desirable flow of packets through the network.

Nexus Dashboard supports configuration of QoS level based on source EPG or a specific Contract. Additional options are available in each fabric directly. You can find detailed information on ACI QoS in [Cisco APIC and QoS](#).

When traffic is sent and received within the Cisco ACI fabric, the QoS Level is determined based on the CoS value of the VXLAN packet's outer header. In certain use cases, such as multi-pod or remote leaf topologies, the traffic must transit an inter-fabric network, where devices that are not under Cisco APIC's management may modify the CoS values in the packets. In these cases you can preserve the ACI QoS Level between parts of the same fabric or different fabrics by creating a mapping between the Cisco ACI QoS level and the DSCP value within the packet.

DSCP policy guidelines and limitations

When configuring the global DSCP translation policy, the following guidelines apply.

- Global DSCP policy is supported for on-premises fabrics only.
- When defining the global DSCP policy, you must pick a unique value for each QoS Level.
- When assigning QoS level, you can choose to assign it to a specific Contract or an entire EPG.

If multiple QoS levels could apply for any given traffic, only one is applied using the following precedence:

- Contract QoS level: If QoS is enabled in the Contract, the QoS level specified in the contract is used.
- Source EPG QoS level: If QoS level is not specified for the Contract, the QoS level set for the source EPG is used.
- Default QoS level: If no QoS level is specified, the traffic is assigned Level 3 QoS class by default.

Configure global DSCP policy

Before you begin:

- You should be familiar with Quality of Service (QoS) functionality within ACI fabrics.

QoS is described in more detail in [Cisco APIC and QoS](#).

When traffic is sent and received within a Cisco ACI fabric, it is prioritized based on the ACI QoS Level, which is determined based on the CoS value of the VXLAN packet's outer header. When traffic exits the ACI fabric toward an inter-fabric network, for example in multipod and remote leaf switch topologies, the QoS level is translated into a DSCP value which is included in the outer header of the VXLAN-encapsulated packet.

This section describes how to define the DSCP translation policy for traffic entering or exiting ACI fabric. This is required when traffic must transit through non-ACI networks, where devices that are not under Cisco APIC's management may modify the CoS values in the transiting packets.

1. Navigate to the **Orchestration** window.

Manage > Orchestration

2. Create a new tenant policy.
 - a. Choose **Tenant Templates > Tenant Policies**.
 - b. On the **Tenant Policy Templates** page, click **Create Tenant Policy Template**.
 - c. In the **Tenant Policies** page's right properties sidebar, provide the **Name** for the template.
 - d. From the **Select a Tenant** drop-down, choose the tenant with which you want to associate this template.

All the policies that you create in this template as described in the following steps will be associated with the selected tenant and deployed to it when you push the template to a specific fabric.

By default, the new template is empty, so you must add one or more tenant policies as described in the following steps. You don't have to create every policy available in the template - you can define one or more policies of each type to deploy along with this template. If you don't want to create a specific policy, simply skip the step that describes it.

3. Create a QoS DSCP policy.
 - a. From the **+Create Object** drop-down, select **QoS DSCP**.
 - b. In the right properties sidebar, provide the **Name** for the policy.
 - c. (Optional) Click **Add Description** and provide a description for the policy.
 - d. Provide policy details.
 - **Admin State** - Enables or disables the policy.
 - **Advanced Settings** - Click the arrow next to this section to expand.
Choose the DSCP value for each ACI QoS level. Each drop-down contains the default list of available DSCP values. You must choose a unique DSCP value for each level.
 - e. Repeat this step to create any additional QoS DSCP policies.

Typically, we recommend applying this policy consistently across all fabrics that are part of your Multi-Fabric domain.

4. Assign the policy to one or more fabrics.
 - a. In the Fabric Policies template view, select **Actions > Add/Remove Fabrics**.
 - b. In the **Add Fabrics to <tempalte>** dialog, select one or more fabrics for this policy template and click **Ok**.
 - c. In the Fabric Policies template view, click **Deploy**.

After you save and deploy, the DSCP policy settings will be pushed to each fabric. You can verify the configuration by signing in to the fabric's APIC and navigating to **Tenants > infra > Policies > Protocol > DSCP class-CoS translation policy for L3 traffic**.

What to do next:

After you have defined the global DSCP policy, you can assign the ACI QoS Levels to EPGs or Contracts as described in [Set QoS level for EPGs and contracts](#).

Set QoS level for EPGs and contracts

Before you begin:

- You must have defined the global DSCP policy, as described in [Configure global DSCP policy](#).
- You should be familiar with Quality of Service (QoS) functionality within ACI fabrics.

QoS is described in more detail in [Cisco APIC and QoS](#).

This section describes how to choose an ACI QoS level for traffic in your fabrics. You can choose to specify QoS for individual Contracts or entire EPGs.

1. Navigate to the **Orchestration** page.

Manage > Orchestration

2. Choose the Schema that you want to edit.
 - a. Choose **Tenant Templates > Applications**.
 - b. Click the name of the schema that you want to edit or **Add Schema** to create a new one.

The **Edit policy** page opens.

3. Pick a QoS Level for an EPG.

Configure / Tenant Templates [Application] / Any PBR

Any PBR

View t1 ▾

Template Properties ● Site1

Template Summary

Type	Tenant	Template Status
Application	common	In Sync

Filter

Application Profile Any-PBR

EPGs ▾

EPG App **a** EPG Web

Contracts ▾

Web-App

VRFs ▾

VRF1

EPG Web [View Relationship](#)

Name

+ Add Contract

Properties ^

On-Premises Properties Cloud Properties

Bridge Domain *

BD-Web x ▾

Subnets

Gateway IP

+ Add Subnet

USeg EPG

Intra EPG Isolation

Enforced

Unenforced

Intersite Multicast Source ⓘ

Include in Preferred Group

Advanced Settings ^

QoS Level

Level 1 **b** ▾


QoS Policy

Select... ▾

Ok

Edit policy

- a. In the main pane, scroll down to the **EPG** area and select an EPG or click **Create EPG** to create a new one.
 - b. In the right sidebar, scroll down to the **QoS Level** drop-down and choose the QoS Level you want to assign to the EPG.
4. (Optional) Pick a QoS Level for an External EPG.
- a. In the main pane, scroll down to the **External EPG** area and select an EPG or click **Create External EPG** to create a new one.
 - b. In the right sidebar, scroll down to the **QoS Level** drop-down and choose the QoS Level you want to assign to the External EPG.
5. Pick a QoS Level for a Contract.

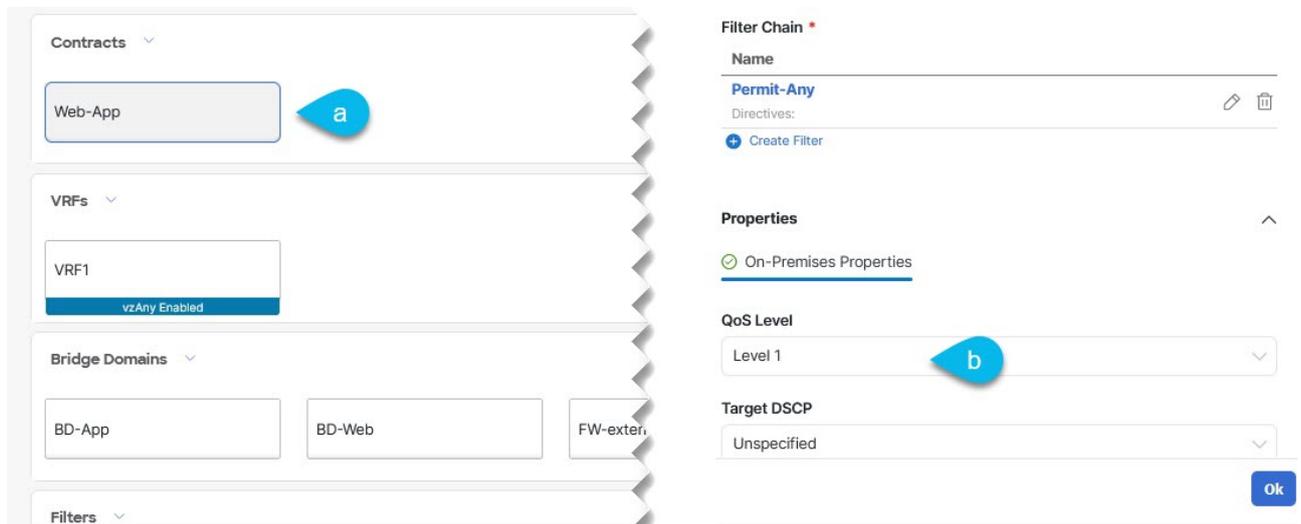

Pick a QoS Level

- a. In the main pane, scroll down to the **Contract** area and select a Contract or click **Create Contract** to create a new one.
 - b. In the right sidebar, scroll down to the **QoS Level** drop-down and choose the QoS Level you want to assign to the Contract.
6. Click **Ok** to save.

Copyright

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

The documentation set for this product strives to use bias-free language. For the purposes of this documentation set, bias-free is defined as language that does not imply discrimination based on age, disability, gender, racial identity, ethnic identity, sexual orientation, socioeconomic status, and intersectionality. Exceptions may be present in the documentation due to language that is hardcoded in the user interfaces of the product software, language used based on RFP documentation, or language that is used by a referenced third-party product.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

© 2017–2026 Cisco Systems, Inc. All rights reserved.

Americas Headquarters

Cisco Systems, Inc.

170 West Tasman Drive

San Jose, CA 95134-1706

USA

<https://www.cisco.com>

Tel: 408 526-4000

800 553-NETS (6387)

Fax: 408 527-0883