



Replication

- [Configuring Replication, on page 1](#)
- [Configuring Replication VLAN in Cisco UCS Manager, on page 1](#)

Configuring Replication

To configure replication on a HyperFlex Controller VM in a Stretch Cluster, you complete the necessary VLAN configuration on the fabric interconnects using UCS Manager manually. Ensure to use the same VLAN configuration on the UCSM fabric interconnects, on both the sites in a Stretch Cluster.



Attention For configuring the replication network in a Stretch Cluster deployment, see the [Cisco HyperFlex Administration Guide](#) for your release.

Configuring Replication VLAN in Cisco UCS Manager

To configure the replication VLAN using UCS Manager, complete the following steps in Site-A and Site-B:

1. Create a replication VLAN.
2. Associate the replication VLAN to the HX service profile of the HyperFlex cluster.

Creating Replication VLAN




Attention It is best practice to delete unnecessary and stale VLANs. If the VLANs already exist on your fabric interconnect, you do not have to recreate it.

Create the following replication VLANs, if you do not see them in your HyperFlex cluster. Strictly follow the naming conventions that are specified in the table.

VLAN ID	Specify Name	Name Displayed in UCSM
<VLAN ID>	<hx-inband-repl-VLAN ID>	hx-inband-repl-VLAN ID (VLAN ID)

Step 1 Log into Cisco UCS Manager. In the Navigation pane, click **LAN**.

Step 2 On the **LAN** tab, right-click **VLANs** and click **Create VLANs**.

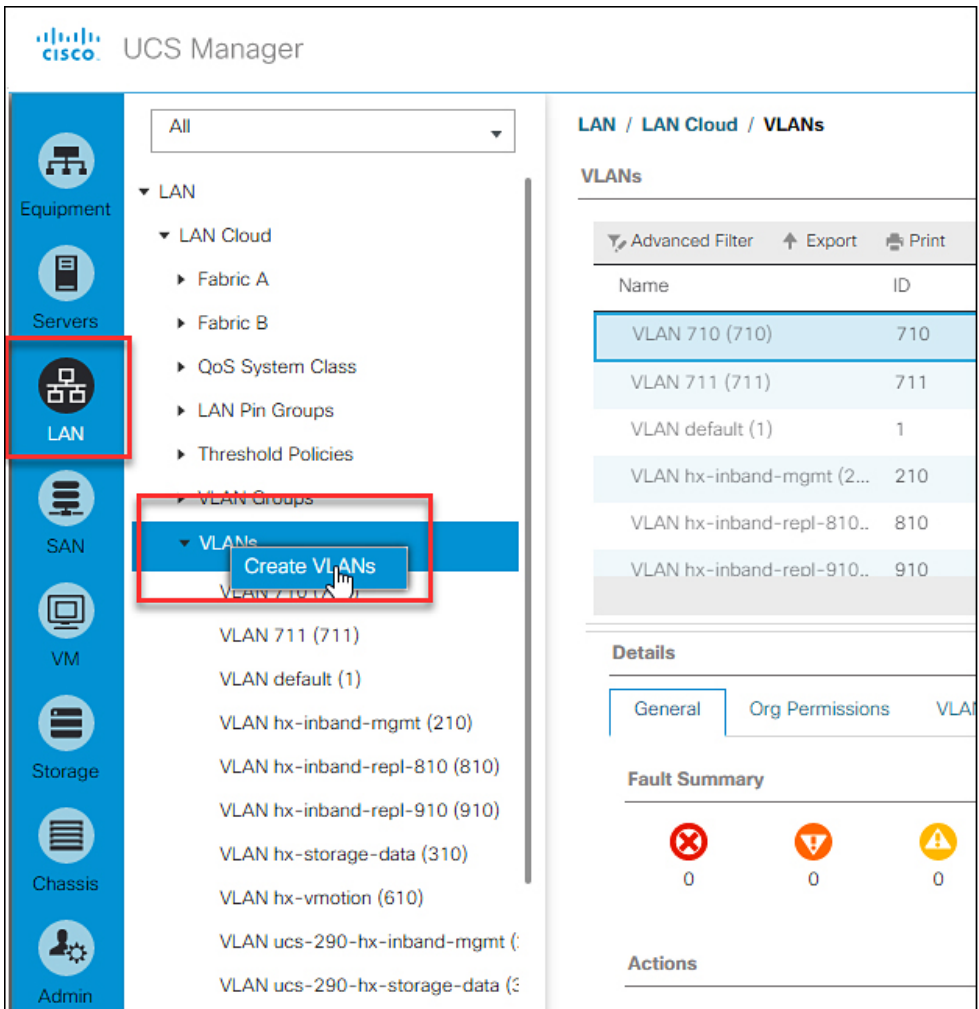

Step 3 In the **Create VLANs** dialog box, complete the following fields for all the VLANs that must be supported on the fabric interconnect:

UI Element	Essential Information
VLAN Name/Prefix field	Enter the VLAN name prefix. For example, hx-inband-repl-810.
Multicast Policy Name field	<not set>
Common/Global check box Fabric A check box Fabric B check box Both Fabric Configured Differently check box	Choose the fabric configuration option.
VLAN IDs field	Enter the VLAN ID, to create a global VLAN that maps to the same VLAN IDs in all available fabrics. For example, 810.
Sharing Type check box	Choose the sharing type: None Primary Isolated Community

Step 4 Click **OK**.

Associating Replication VLAN to a HyperFlex Cluster

To associate the replication VLANs to the HX service profile of the HyperFlex cluster, complete the following steps.

The screenshot shows the Cisco UCS Manager interface. The breadcrumb trail at the top reads: LAN / Policies / root / Sub-Organizations / ORG-282-285-HXCL / vNIC Templates / vNIC Template hv-mgmt-a. The navigation pane on the left shows the following structure:

- Equipment
 - Policies (2)
 - Appliances
 - LAN Cloud
 - root (3)
 - Default vNIC Behavior
 - Flow Control Policies
 - Dynamic vNIC Connection Policies
 - LACP Policies
 - LAN Connectivity Policies
 - Link Protocol Policy
 - Multicast Policies
 - Network Control Policies
 - QoS Policies
 - Threshold Policies
 - VMQ Connection Policies
 - usNIC Connection Policies
 - vNIC Templates (5)
 - Sub-Organizations (4)
 - hx-cluster
 - hx-cluster-301
 - ORG-282-285-HXCL
 - Flow Control Policies
 - Dynamic vNIC Connection Policies
 - LAN Connectivity Policies
 - Network Control Policies
 - QoS Policies
 - Threshold Policies
 - VMQ Connection Policies
 - usNIC Connection Policies
 - vNIC Templates (6)
 - vNIC Template hv-mgmt-a (7)
 - vNIC Template hv-mgmt-b
 - vNIC Template hv-vmotion-
 - vNIC Template hv-vmotion-
 - vNIC Template storage-dat-
 - vNIC Template storage-dat-

The 'Modify VLANs' dialog box is open, showing a table of VLANs:

Select	Name	Native VLAN
<input type="checkbox"/>	710	<input type="radio"/>
<input type="checkbox"/>	711	<input type="radio"/>
<input type="checkbox"/>	default	<input type="radio"/>
<input checked="" type="checkbox"/>	hx-inband-mgmt	<input type="radio"/>
<input checked="" type="checkbox"/>	hx-inband-repl-810 (8)	<input type="radio"/>
<input type="checkbox"/>	hx-inband-repl-910	<input type="radio"/>

The dialog box also includes an 'OK' button (9) and a 'Cancel' button.

Before you begin

Create VLANs for replication in UCS Manager.

- Step 1** Log into Cisco UCS Manager. In the Navigation pane, click **LAN**.
- Step 2** Navigate to **Policies > root > Sub-Organizations > hx-cluster > vNIC Templates > vNIC Template hv-mgmt**.
- Step 3** Select **Modify VLANs** on the work pane.
- Step 4** Select the VLANs to associate with the HyperFlex cluster.

Step 5 Click **OK**.
