




# Convert CSR1000v PAK Licenses to Smart Licenses

- Step 1** Log in to the CSSM portal using the username and password that you obtained from Cisco.
- Step 2** Click **Convert to Smart Licensing > Convert Licenses > License Conversion Wizard**.
- Step 3** From the **Product Family** drop-down list, select the product family.
- Step 4** Specify the **Device Identifier**, and click **Search**.

## Convert to Smart Software Licenses




Convert traditional licenses installed on a device to Smart Software Licenses. Begin by selecting the product family and licenses in the Product License Registration Portal.

\* Product Family:

\* Device Identifiers:


367958

- Step 5** Select the device that has been added, and select **Convert Licenses to Smart Licensing**.

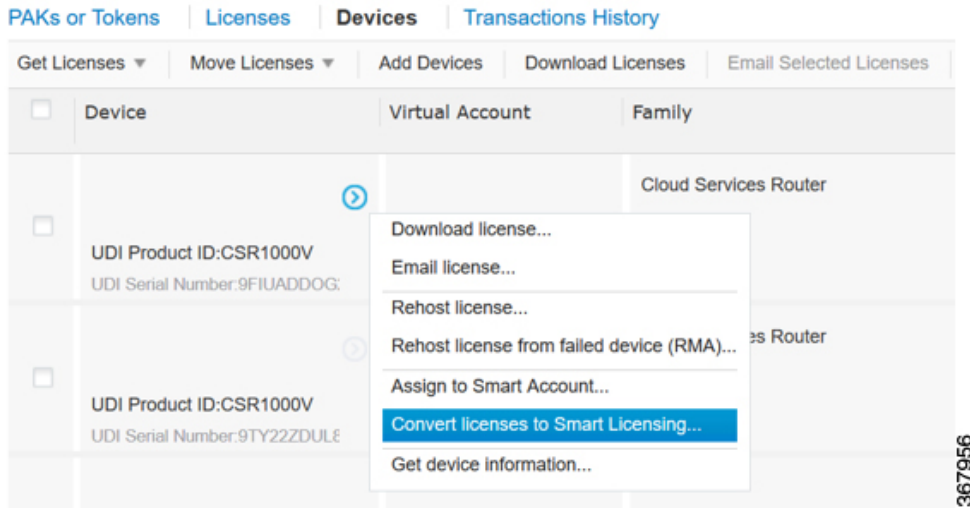

**Step 6** Assign the licenses to a Virtual Account by choosing the corresponding option from the **Virtual Account** drop-down list.

**Step 7** Specify the number of licenses that you want to convert in the **Quantity to Convert** field.

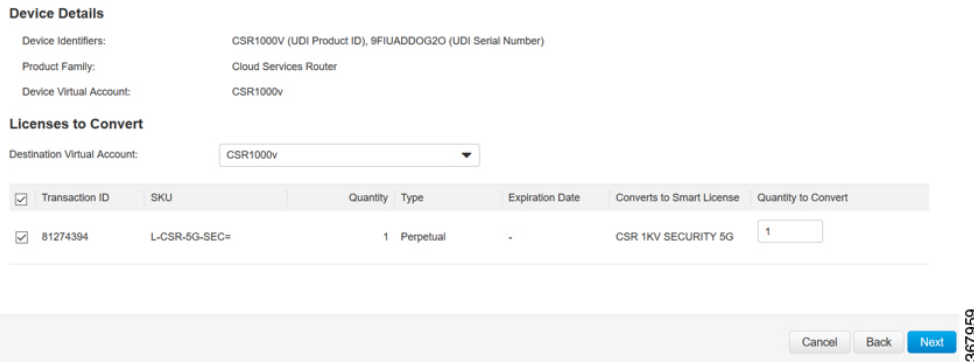

**Step 8** On the Convert to Smart Entitlements page, click **Submit**.

X

**Convert to Smart Entitlements**

**Device ID:** UDI Product ID:CSR1000V,UDI Serial Number:9FIUADDOG2O

**Product Family:** Cloud Services Router

**Smart Account:** InternalTestDemoAccount7.cisco.com

**Virtual Account:**

<input type="checkbox"/> SKU	Type	Term Date	Quantity Available	Quantity to Convert
<input checked="" type="checkbox"/> L-CSR-5G-SEC=	Perpetual	--	1	<input type="text" value="1"/>

i Once these entitlements have been converted they will no longer appear in this portal.

367957

- [Convert PAK Licenses in License Registration Portal, on page 3](#)

## Convert PAK Licenses in License Registration Portal

- Step 1** Log in to the License Registration Portal using the credentials that you obtained from Cisco.
- Step 2** Click the **Devices** tab, and click **Add Devices**.
- Step 3** On the Add Device pop-up screen, select the appropriate **Product Family**, and **UDI**.

**PAKs or Tokens** | **Licenses** | **Devices** | **Trans**

Get Licenses ▾ | Move Licenses ▾ | Add Devices

Device	Virtual Account
<input type="checkbox"/> UDI Product ID:CSR1000V UDI Serial Number:9FIUADDOG2O	CSR1000v
<input type="checkbox"/> UDI Product ID:CSR1000V UDI Serial Number:9TYZZDULE	CSR1000v

**Add Device** X

Virtual Account:  Required with Smart Account

Product Family:

Device Identifier:  ?

UDI PID:

UDI SN:

367955

- Step 4** Click **OK**.

