Telemetry Configuration Guide for Cisco ASR 9000 Series Routers, IOS XR Release 6.6.x

First Published: 2018-12-21

Last Modified: 2019-04-30

Americas Headquarters
Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
http://www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

- To receive timely, relevant information from Cisco, sign up at Cisco Profile Manager.
- To get the business impact you're looking for with the technologies that matter, visit Cisco Services.
- To submit a service request, visit Cisco Support.
- To discover and browse secure, validated enterprise-class apps, products, solutions and services, visit Cisco Marketplace.
- To obtain general networking, training, and certification titles, visit Cisco Press.
- To find warranty information for a specific product or product family, access Cisco Warranty Finder.

Cisco Bug Search Tool

Cisco Bug Search Tool (BST) is a web-based tool that acts as a gateway to the Cisco bug tracking system that maintains a comprehensive list of defects and vulnerabilities in Cisco products and software. BST provides you with detailed defect information about your products and software.

CONTENTS

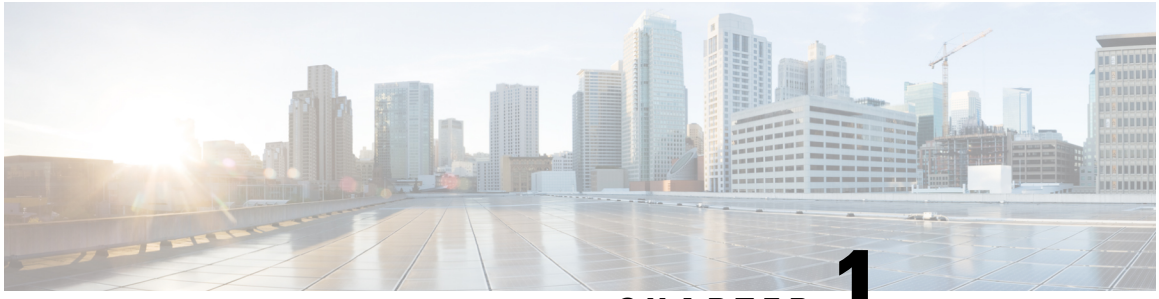

CHAPTER 1

New and Changed Feature Information

This section lists all the new and changed features for the *Telemetry Configuration Guide for Cisco ASR 9000 Series Routers*.

New and Changed Telemetry Features

Feature	Description	Changed in Release	Where Documented
Telemetry support for OC-LACP	Telemetry support for OpenConfig-Link Aggregation Control Protocol (OC-LACP) is provided only for LACP state data at global, bundle and member level.	Release 6.6.1	*Use Cases on Using Telemetry* chapter Example: Create and Delete LACP Bundle or Member, on page 27

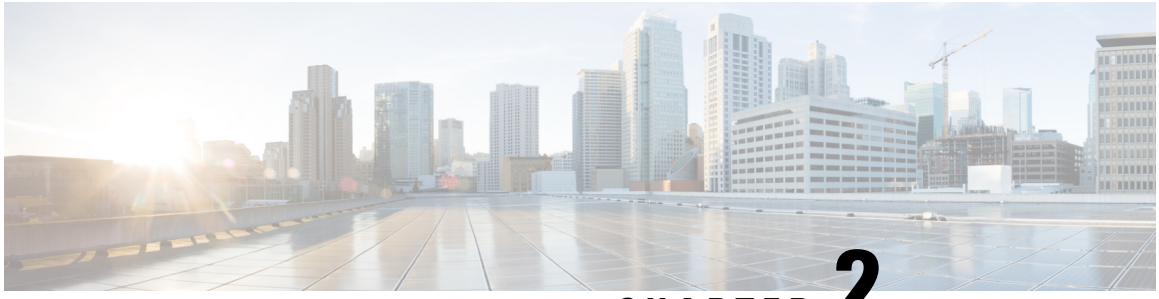

CHAPTER 2

Stream Telemetry Data

This document will help you understand the process of streaming telemetry data and its core components.

Video: Telemetry in Cisco IOS XR

Scope

Streaming telemetry lets users direct data to a configured receiver. This data can be used for analysis and troubleshooting purposes to maintain the health of the network. This is achieved by leveraging the capabilities of machine-to-machine communication.

The data is used by development and operations (DevOps) personnel who plan to optimize networks by collecting analytics of the network in real-time, locate where problems occur, and investigate issues in a collaborative manner.

Need

Collecting data for analyzing and troubleshooting has always been an important aspect in monitoring the health of a network.

IOS XR provides several mechanisms such as SNMP, CLI and Syslog to collect data from a network. These mechanisms have limitations that restrict automation and scale. One limitation is the use of the pull model, where the initial request for data from network elements originates from the client. The pull model does not scale when there is more than one network management station (NMS) in the network. With this model, the server sends data only when clients request it. To initiate such requests, continual manual intervention is required. This continual manual intervention makes the pull model inefficient.

Network state indicators, network statistics, and critical infrastructure information are exposed to the application layer, where they are used to enhance operational performance and to reduce troubleshooting time. A push

model uses this capability to continuously stream data out of the network and notify the client. Telemetry enables the push model, which provides near-real-time access to monitoring data.

Streaming telemetry provides a mechanism to select data of interest from IOS XR routers and to transmit it in a structured format to remote management stations for monitoring. This mechanism enables automatic tuning of the network based on real-time data, which is crucial for its seamless operation. The finer granularity and higher frequency of data available through telemetry enables better performance monitoring and therefore, better troubleshooting. It helps a more service-efficient bandwidth utilization, link utilization, risk assessment and control, remote monitoring and scalability. Streaming telemetry, thus, converts the monitoring process into a Big Data proposition that enables the rapid extraction and analysis of massive data sets to improve decision-making.

Benefits

Streamed real-time telemetry data is useful in:

- **Traffic optimization:** When link utilization and packet drops in a network are monitored frequently, it is easier to add or remove links, re-direct traffic, modify policing, and so on. With technologies like fast reroute, the network can switch to a new path and re-route faster than the SNMP poll interval mechanism. Streaming telemetry data helps in providing quick response time for faster traffic.
- **Preventive troubleshooting:** Helps to quickly detect and avert failure situations that result after a problematic condition exists for a certain duration.

Methods of Telemetry

Telemetry data can be streamed using these methods:

- **Model-driven telemetry:** provides a mechanism to stream data from an MDT-capable device to a destination. The data to be streamed is driven through subscription. There are two methods of configuration:
  - **Cadence-based telemetry:** Cadence-based Telemetry (CDT) continuously streams data (operational statistics and state transitions) at a configured cadence. The streamed data helps users closely identify patterns in the networks. For example, streaming data about interface counters and so on.
  - **Event-based telemetry:** Event-driven Telemetry (EDT) optimizes data collected at the receiver by streaming data only when a state transition occurs. For example, stream data only when an interface state transitions, IP route updates and so on.

Note EDT is supported only for Interface events, Routing state (RIB events) and Syslog events.

- **Policy-based telemetry:** streams telemetry data to a destination using a policy file. A policy file defines the data to be streamed and the frequency at which the data is to be streamed.

Note Model-driven telemetry supersedes policy-based telemetry.

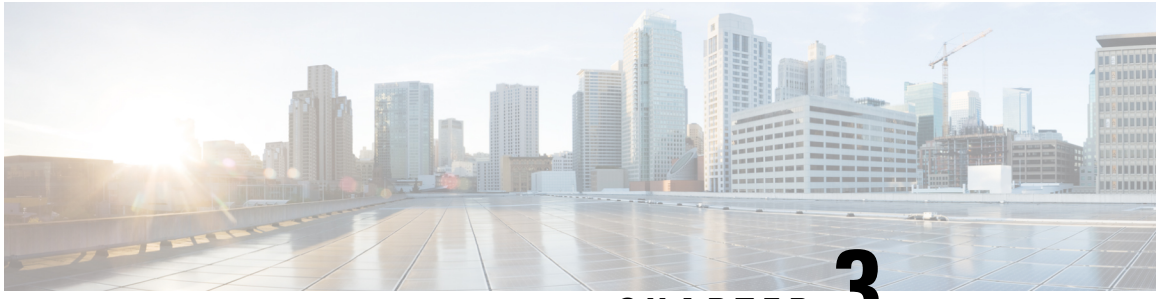

CHAPTER 3

Configure Model-based Telemetry

Streaming model-based telemetry data to the intended receiver involves:

- Configure Dial-out Mode, on page 7
- Configure Dial-in Mode, on page 16

Configure Dial-out Mode

In a dial-out mode, the router initiates a session to the destinations based on the subscription.

All 64-bit IOS XR platforms (except for NCS 6000 series routers) support gRPC and TCP protocols. All 32-bit IOS XR platforms support only TCP.

MDT supports sourcing from virtual routing and forwarding (VRF) interface for TCP and gRPC protocols. Source interface and VRF can be configured in dial-out mode. If both VRF and source interface are configured, the source interface must be in the same VRF as the one specified under destination group for the session to be established.

For more information about the dial-out mode, see Dial-out Mode, on page 22.

The process to configure a dial-out mode involves:

Create a Destination Group

The destination group specifies the destination address, port, encoding and transport that the router uses to send out telemetry data.

A VRF in the destination group implies that the connection to the destination must be created in the specified VRF.

1. Identify the destination address, port, transport, and encoding format.
2. Create a destination group.

```
Router(config)#telemetry model-driven
Router(config-model-driven)#destination-group <group-name>
Router(config-model-driven-dest)#vrf <vrf-name>
Router(config-model-driven-dest)#address family ipv4 <IP-address> port <port-number>
Router(config-model-driven-dest-addr)#encoding <encoding-format>
Router(config-model-driven-dest-addr)#protocol <transport>
Router(config-model-driven-dest-addr)#commit
```

Example: Destination Group for TCP Dial-out

The following example shows a destination group `DGroup1` created for TCP dial-out configuration with key-value Google Protocol Buffers (also called self-describing-gpb) encoding:

```
Router(config)#telemetry model-driven
Router(config-model-driven)#destination-group DGroup1
Router(config-model-driven-dest)#address family ipv4 172.0.0.0 port 5432
Router(config-model-driven-dest-addr)#encoding self-describing-gpb
Router(config-model-driven-dest-addr)#protocol tcp
Router(config-model-driven-dest-addr)#commit
```

Example: Destination Group for UDP Dial-out

The following example shows a destination group `DGroup1` created for UDP dial-out configuration with key-value Google Protocol Buffers (also called self-describing-gpb) encoding:

```
Router(config)#telemetry model-driven
Router(config-model-driven)#destination-group DGroup1
Router(config-model-driven-dest)#address family ipv4 172.0.0.0 port 5432
Router(config-model-driven-dest-addr)#encoding self-describing-gpb
Router(config-model-driven-dest-addr)#protocol udp
Router(config-model-driven-dest-addr)#commit
```

The UDP destination is shown as `Active` irrespective of the state of the collector because UDP is connectionless.

Model-driven Telemetry with UDP is not suitable for a busy network. There is no retry if a message is dropped by the network before it reaches the collector.

Example: Destination Group for gRPC Dial-out

Note gRPC is supported in only 64-bit platforms.

gRPC protocol supports TLS and model-driven telemetry uses TLS to dial-out by default. The certificate must be copied to `/misc/config/grpc/dialout/`. To by-pass the TLS option, use `protocol grpc no-tls`.

The following is an example of a certificate to which the server certificate is connected:

```
RP/0/RP0/CPU0:ios#run

Wed Aug 24 05:05:46.206 UTC
[xr-vm_node0_RP0_CPU0:~]$ls -l /misc/config/grpc/dialout/
total 4
-rw-r--r-- 1 root root 4017 Aug 19 19:17 dialout.pem
[xr-vm_node0_RP0_CPU0:~]$
```

The CN (CommonName) used in the certificate must be configured as `protocol grpc tls-hostname <>`.

The following example shows a destination group `DGroup2` created for gRPC dial-out configuration with key-value GPB encoding, and with tls disabled:

```
Router(config)#telemetry model-driven
Router(config-model-driven)#destination-group DGroup2
Router(config-model-driven-dest)#address family ipv4 172.0.0.0 port 57500
Router(config-model-driven-dest-addr)#encoding self-describing-gpb
```

```
Router(config-model-driven-dest-addr)#protocol grpc no-tls
Router(config-model-driven-dest-addr)#commit
```

The following example shows a destination group `DGroup2` created for gRPC dial-out configuration with key-value GPB encoding, and with tls hostname:

```
Configuration with tls-hostname:
Router(config)#telemetry model-driven
Router(config-model-driven)#destination-group DGroup2
Router(config-model-driven-dest)#address family ipv4 172.0.0.0 port 57500
Router(config-model-driven-dest-addr)#encoding self-describing-gpb
Router(config-model-driven-dest-addr)#protocol grpc tls-hostname hostname.com
Router(config-model-driven-dest-addr)#commit
```

Note If only the **protocol grpc** is configured without tls option, tls is enabled by default and tls-hostname defaults to the IP address of the destination.

What to Do Next:

Create a sensor group.

Create a Sensor Group

The sensor-group specifies a list of YANG models that are to be streamed.

1. Identify the sensor path for XR YANG model.
2. Create a sensor group.

```
Router(config)#telemetry model-driven
Router(config-model-driven)#sensor-group <group-name>
Router(config-model-driven-snsr-grp)# sensor-path <XR YANG model>
Router(config-model-driven-snsr-grp)# commit
```

Example: Sensor Group for Dial-out

Note gRPC is supported in only 64-bit platforms.

The following example shows a sensor group `SGroup1` created for dial-out configuration with the YANG model for interface statistics:

```
Router(config)#telemetry model-driven
Router(config-model-driven)#sensor-group SGroup1
Router(config-model-driven-snsr-grp)# sensor-path
Cisco-IOS-XR-infra-statsd-oper:infra-statistics/interfaces/interface/latest/generic-counters
Router(config-model-driven-snsr-grp)# commit
```

What to Do Next:

Create a subscription.

Create a Subscription

The subscription associates a destination-group with a sensor-group and sets the streaming method - cadence-based or event-based telemetry.

A source interface in the subscription group specifies the interface that will be used for establishing the session to stream data to the destination. If both VRF and source interface are configured, the source interface must be in the same VRF as the one specified under destination group for the session to be established.

```
Router(config)#telemetry model-driven
Router(config-model-driven)#subscription <subscription-name>
Router(config-model-driven-subs)#sensor-group-id <sensor-group> sample-interval <interval>

Router(config-model-driven-subs)#destination-id <destination-group>
Router(config-model-driven-subs)#source-interface <source-interface>
Router(config-mdt-subscription)#commit
```

Example: Subscription for Cadence-based Dial-out Configuration

The following example shows a subscription `Sub1` that is created to associate the sensor-group and destination-group, and configure an interval of 30 seconds to stream data:

```
Router(config)#telemetry model-driven
Router(config-model-driven)#subscription Sub1
Router(config-model-driven-subs)#sensor-group-id SGroup1 sample-interval 30000
Router(config-model-driven-subs)#destination-id DGroup1
Router(config-mdt-subscription)# commit
```

Example: Subscription for Event-based Dial-out Configuration

The following example shows a subscription `Sub1` that is created to associate the sensor-group and destination-group, and configure event-based method to stream data:

```
Router(config)#telemetry model-driven
Router(config-model-driven)#subscription Sub1
Router(config-model-driven-subs)#sensor-group-id SGroup1 sample-interval 0
Router(config-model-driven-subs)#destination-id DGroup1
Router(config-mdt-subscription)# commit
```

Example: Configure Event-driven Telemetry for Interface Path

```
telemetry model-driven
 destination-group 1
  address family ipv4 <ip-address> port <port-number>
   encoding self-describing-gpb
   protocol grpc no-tls
  !
 !
 sensor-group 1
  sensor-path
Cisco-IOS-XR-ipv6-ma-oper:ipv6-network/nodes/node/interface-data/vrfs/vrf/global-briefs/global-brief

 !
 sensor-group 2
  sensor-path Cisco-IOS-XR-pfi-im-cmd-oper:interfaces/interface-xr/interface
 !
 subscription 1
  sensor-group-id 1 sample-interval 0
```

```
  sensor-group-id 2 sample-interval 0
  destination-id 1
!
```

What to Do Next:

Validate the configuration.

Validate Dial-out Configuration

Use the following command to verify that you have correctly configured the router for dial-out.

```
Router#show telemetry model-driven subscription <subscription-group-name>
```

Example: Validation for TCP Dial-out

```
Router#show telemetry model-driven subscription Sub1
Thu Jul 21 15:42:27.751 UTC
Subscription:  Sub1                     State: ACTIVE
-------------
  Sensor groups:
  Id                Interval(ms)        State
  SGroup1           30000               Resolved

  Destination Groups:
  Id                Encoding            Transport   State   Port    IP
  DGroup1           self-describing-gpb tcp         Active  5432    172.0.0.0
```

Example: Validation for gRPC Dial-out

Note gRPC is supported in only 64-bit platforms.

```
Router#show telemetry model-driven subscription Sub2
Thu Jul 21 21:14:08.636 UTC
Subscription:  Sub2                     State: ACTIVE
-------------
  Sensor groups:
  Id                Interval(ms)        State
  SGroup2           30000               Resolved

  Destination Groups:
  Id                Encoding            Transport   State   Port    IP
  DGroup2           self-describing-gpb grpc        ACTIVE      57500   172.0.0.0
```

The telemetry data starts steaming out of the router to the destination.

Example: Configure model-driven telemetry with different sensor groups

```
RP/0/RP0/CPU0:ios#sh run telemetry model-driven

Wed Aug 24 04:49:19.309 UTC

telemetry model-driven
 destination-group 1
```

```
  address family ipv4 1.1.1.1 port 1111
   protocol grpc
  !
 !

 destination-group 2
  address family ipv4 2.2.2.2 port 2222
  !
 !

 destination-group test
  address family ipv4 172.0.0.0 port 8801
   encoding self-describing-gpb
   protocol grpc no-tls
  !
  address family ipv4 172.0.0.0 port 8901
   encoding self-describing-gpb
   protocol grpc tls-hostname chkpt1.com
  !
 !

 sensor-group 1
  sensor-path Cisco-IOS-XR-plat-chas-invmgr-oper:platform-inventory/racks/rack
 !

 sensor-group mdt
  sensor-path Cisco-IOS-XR-telemetry-model-driven-oper:telemetry-model-driven
 !

 sensor-group generic
  sensor-path
Cisco-IOS-XR-infra-statsd-oper:infra-statistics/interfaces/interface/latest/generic-counters

 !

 sensor-group if-oper
  sensor-path Cisco-IOS-XR-pfi-im-cmd-oper:interfaces/interface-xr/interface
 !

 subscription mdt
  sensor-group-id mdt sample-interval 10000
 !

 subscription generic
  sensor-group-id generic sample-interval 10000
 !

 subscription if-oper
  sensor-group-id if-oper sample-interval 10000
  destination-id test
 !
!
```

A sample output from the destination with TLS certificate `chkpt1.com`:

```
RP/0/RP0/CPU0:ios#sh telemetry model-driven dest

Wed Aug 24 04:49:25.030 UTC
  Group Id        IP              Port    Encoding            Transport   State

  ---------------------------------------------------------------------------
  1               1.1.1.1         1111    none                grpc        ACTIVE
      TLS:1.1.1.1
  2               2.2.2.2         2222    none                grpc        ACTIVE
      TLS:2.2.2.2
```

```
  test            172.0.0.0   8801    self-describing-gpb grpc        Active
  test            172.0.0.0   8901    self-describing-gpb grpc        Active
      TLS:chkpt1.com
```

A sample output from the subscription:

```
RP/0/RP0/CPU0:ios#sh telemetry model-driven subscription

Wed Aug 24 04:49:48.002 UTC
Subscription:  mdt                      State: ACTIVE
-------------
  Sensor groups:
  Id                Interval(ms)        State
  mdt               10000               Resolved

Subscription:  generic                  State: ACTIVE

-------------
  Sensor groups:
  Id                Interval(ms)        State
  generic           10000               Resolved

Subscription:  if-oper                  State: ACTIVE
-------------
  Sensor groups:
  Id                Interval(ms)        State
  if-oper           10000               Resolved

  Destination Groups:
  Id                Encoding            Transport   State   Port    IP
  test              self-describing-gpb grpc        ACTIVE  8801    172.0.0.0

    No TLS :

  test              self-describing-gpb grpc        Active  8901    172.0.0.0
    TLS :             chkpt1.com


RP/0/RP0/CPU0:ios#sh telemetry model-driven subscription if-oper

Wed Aug 24 04:50:02.295 UTC
Subscription:  if-oper
-------------
  State:       ACTIVE
  Sensor groups:
  Id: if-oper
    Sample Interval:      10000 ms
    Sensor Path:          Cisco-IOS-XR-pfi-im-cmd-oper:interfaces/interface-xr/interface
    Sensor Path State:    Resolved

  Destination Groups:
  Group Id: test
    Destination IP:       172.0.0.0
    Destination Port:     8801
    Encoding:             self-describing-gpb
    Transport:            grpc
    State:                ACTIVE
    No TLS
    Destination IP:       172.0.0.0
    Destination Port:     8901
    Encoding:             self-describing-gpb
    Transport:            grpc
    State:                ACTIVE
    TLS :                 chkpt1.com
```

```
    Total bytes sent:     120703
    Total packets sent:   11
    Last Sent time:       2016-08-24 04:49:53.52169253 +0000

  Collection Groups:
  ------------------
    Id: 1
    Sample Interval:      10000 ms
    Encoding:             self-describing-gpb
    Num of collection:    11
    Collection time:      Min:    69 ms Max:    82 ms
    Total time:           Min:    69 ms Avg:    76 ms Max:    83 ms
    Total Deferred:       0
    Total Send Errors:    0
    Total Send Drops:     0
    Total Other Errors:   0
    Last Collection Start:2016-08-24 04:49:53.52086253 +0000
    Last Collection End:  2016-08-24 04:49:53.52169253 +0000
    Sensor Path:          Cisco-IOS-XR-pfi-im-cmd-oper:interfaces/interface-xr/interface
```

Example: Configure Event-driven Telemetry for LLDP

Telemetry supports NETCONF event notifications where the NETCONF client is configured to receive event notifications from a NETCONF server through a subscription. The NETCONF client must subscribe using a `create-subscription` request. Currently, only the events from Link Layer Discovery Protocol (LLDP) is supported. These event notifications are sent until either the NETCONF session or the subscription is terminated.

Note Configuring a sensor group and a subscription is not required for receiving NETCONF notifications. While sensor path and subscription configurations are required for receiving telemetry events, NETCONF `create-subscription` is required for receiving NETCONF notifications.

To generate NETCONF notifications:

1. Enable NETCONF agent and SSH sub system.

```
ssh server netconf
netconf-yang agent ssh
```

2. Enable model-driven telemetry.

```
telemetry model-driven
```

3. Enable LLDP.

```
lldp
```

This example shows event-driven telemetry fo LLDP configuration data.

1. Create a destination group.

```
grpc
port 56782
address-family ipv4
!
telemetry model-driven
destination-group <destination-udp>
  address-family ipv4 <client-ip>1 port <udp port num>
```

```
   encoding self-describing-gpb
   protocol udp
  !
!
destination-group <destination-tcp>
  address-family ipv4 <client-ip> port <tcp port num>
   encoding gpb
   protocol tcp
  !
destination-group <destination-grpc>
  address-family ipv4 <grpc client ip>port <grpc port num>
   encoding self-describing-gpb
   protocol grpc no-tls
```

2. Create a sensor group.

```
sensor-group <sensor-group-name>
  sensor-path Cisco-IOS-XR-ethernet-lldp-oper:lldp/global-lldp/lldp-info
  sensor-path Cisco-IOS-XR-ethernet-lldp-oper:lldp/nodes/node/interfaces/interface
  sensor-path Cisco-IOS-XR-ethernet-lldp-oper:lldp/nodes/node/neighbors/details/detail

 !
```

3. Create a subscription.

```
subscription udp-out
  sensor-group-id <sensor-group-name> sample-interval 0
  destination-id <destination-udp>
!

subscription <subscription-name>
  sensor-group-id <sensor-group-name> sample-interval 0
  destination-id <destination-tcp>

subscription <subscription-name>
  sensor-group-id <sensor-group-name> sample-interval 0
!
netconf-yang agent
ssh
!
```

4. Set the notification to stream data when an event occurs.

```
Router(config-lldp)#timer 12
Router(config-lldp)#commit

Router(config-lldp)#holdtime 150
Router (config-lldp)#commit

Router (config-lldp)#exit
#506
<?xml version="1.0"?>
<notification xmlns="urn:ietf:params:xml:ns:netconf:notification:1.0">
 <eventTime>Date-and-Time</eventTime>
 <lldp xmlns="http://cisco.com/ns/yang/Cisco-IOS-XR-ethernet-lldp-oper">
  <global-lldp>
   <lldp-info>
    <chassis-id>000b.1bc9.e700</chassis-id>
    <chassis-id-sub-type>4</chassis-id-sub-type>
    <system-name>ios</system-name>
    <timer>12</timer>
    <hold-time>120</hold-time>
    <re-init>2</re-init>
```

```
    </lldp-info>
   </global-lldp>
  </lldp>
</notification>
Ready to send a request.
Paste your request or enter 'get', 'get-config', 'create-sub', or 'bye' to quit):
```

5. Validate response received from NETCONF agent.

```
#506
<?xml version="1.0"?>
<notification xmlns="urn:ietf:params:xml:ns:netconf:notification:1.0">
 <eventTime>Date-and-Time</eventTime>
 <lldp xmlns="http://cisco.com/ns/yang/Cisco-IOS-XR-ethernet-lldp-oper">
  <global-lldp>
   <lldp-info>
    <chassis-id>000b.1bc9.e700</chassis-id>
    <chassis-id-sub-type>4</chassis-id-sub-type>
    <system-name>ios</system-name>
    <timer>12</timer>
    <hold-time>150</hold-time>
    <re-init>2</re-init>
   </lldp-info>
  </global-lldp>
 </lldp>
</notification>
```

Configure Dial-in Mode

In a dial-in mode, the destination initiates a session to the router and subscribes to data to be streamed.

Note Dial-in mode is supported over gRPC in only 64-bit platforms.

For more information about dial-in mode, see *Dial-in Mode*.

The process to configure a dial-in mode involves these tasks:

- Enable gRPC
- Create a sensor group
- Create a subscription
- Validate the configuration

Enable gRPC

Configure the gRPC server on the router to accept incoming connections from the collector.

1. Enable gRPC over an HTTP/2 connection.

```
Router# configure
Router (config)# grpc
```

2. Enable access to a specified port number.

```
Router (config-grpc)# port <port-number>
```

The <port-number> range is from 57344 to 57999. If a port number is unavailable, an error is displayed.

Note When the gRPC server is configured, support for Google network management interface (gNMI) client to request subscriptions to the router is activated. The user can subscribe to oper paths of interest to stream data.

3. In the configuration mode, set the session parameters.

```
Router (config)# grpc{ address-family | dscp | max-request-per-user | max-request-total
 | max-streams | max-streams-per-user | no-tls | service-layer | tls-cipher | tls-mutual
 | tls-trustpoint | vrf }
```

where:

- **address-family:** set the address family identifier type
- **dscp:** set QoS marking DSCP on transmitted gRPC
- **max-request-per-user:** set the maximum concurrent requests per user
- **max-request-total:** set the maximum concurrent requests in total
- **max-streams:** set the maximum number of concurrent gRPC requests. The maximum subscription limit is 128 requests. The default is 32 requests
- **max-streams-per-user:** set the maximum concurrent gRPC requests for each user. The maximum subscription limit is 128 requests. The default is 32 requests
- **no-tls:** disable transport layer security (TLS). The TLS is enabled by default.
- **service-layer:** enable the grpc service layer configuration
- **tls-cipher:** enable the gRPC TLS cipher suites
- **tls-mutual:** set the mutual authentication
- **tls-trustpoint:** configure trustpoint
- **server-vrf:** enable server vrf

4. Configure the TLS ciphers.

```
Router(config-grpc)#tls-cipher default <enable | disable>
Router(config-grpc)#tls-cipher disable <cipher1, cipher2, ...>
Router(config-grpc)#tls-cipher enable <cipher1, cipher2, ...>
```

5. Commit the configuration.

```
Router(config-grpc)#commit
```

Note

- If **`tls-cipher default enable`** and **`tls-cipher disable <all the ciphers>`** are configured, all the ciphers are enabled, not one.
- If **`tls-cipher default disable`** and **`tls-cipher enable <>`** is not configured, all the ciphers are enabled, not one.
- A change in the tls-cipher configuration may cause the gRPC server to stop and restart.

Example: gRPC and TLS enabled on the router

The following example shows the output of `show grpc` command. The sample output displays the gRPC configuration when TLS is enabled on the router.

```
Router#show grpc

Address family              : ipv4
Port                        : 57300
VRF                         : global-vrf
TLS                         : enabled
TLS mutual                  : disabled
Trustpoint                  : none
Maximum requests            : 128
Maximum requests per user   : 10
Maximum streams             : 32
Maximum streams per user    : 32

TLS cipher suites
  Default                   : none
  Enable                    : none
  Disable                   : none

  Operational enable        : ecdhe-rsa-chacha20-poly1305
                            : ecdhe-ecdsa-chacha20-poly1305
                            : ecdhe-rsa-aes128-gcm-sha256
                            : ecdhe-ecdsa-aes128-gcm-sha256
                            : ecdhe-rsa-aes256-gcm-sha384
                            : ecdhe-ecdsa-aes256-gcm-sha384
                            : ecdhe-rsa-aes128-sha
                            : ecdhe-ecdsa-aes128-sha
                            : ecdhe-rsa-aes256-sha
                            : ecdhe-ecdsa-aes256-sha
                            : aes128-gcm-sha256
                            : aes256-gcm-sha384
                            : aes128-sha
                            : aes256-sha
  Operational disable       : none
```

What to Do Next:

Create a sensor group.

Create a Sensor Group

The sensor group specifies a list of YANG models that are to be streamed.

1. Identify the sensor path for XR YANG model.
2. Create a sensor group.

```
Router(config)#telemetry model-driven
Router(config-model-driven)#sensor-group <group-name>
Router(config-model-driven-snsr-grp)# sensor-path <XR YANG model>
Router(config-model-driven-snsr-grp)# commit
```

Example: Sensor Group for gRPC Dial-in

The following example shows a sensor group `SGroup3` created for gRPC dial-in configuration with the YANG model for interfaces:

```
Router(config)#telemetry model-driven
Router(config-model-driven)#sensor-group SGroup3
Router(config-model-driven-snsr-grp)# sensor-path openconfig-interfaces:interfaces/interface

Router(config-model-driven-snsr-grp)# commit
```

What to Do Next:

Create a subscription.

Create a Subscription

The subscription associates a sensor-group with a streaming interval. The collector requests the subscription to the sensor paths when it establishes a connection with the router.

```
Router(config)#telemetry model-driven
Router(config-model-driven)#subscription <subscription-name>
Router(config-model-driven-subs)#sensor-group-id <sensor-group> sample-interval <interval>

Router(config-model-driven-subs)#destination-id <destination-group>
Router(config-mdt-subscription)#commit
```

Example: Subscription for gRPC Dial-in

The following example shows a subscription `Sub3` that is created to associate the sensor-group with an interval of 30 seconds to stream data:

```
Router(config)telemetry model-driven
Router(config-model-driven)#subscription Sub3
Router(config-model-driven-subs)#sensor-group-id SGroup3 sample-interval 30000
Router(config-mdt-subscription)#commit
```

What to Do Next:

Validate the configuration.

Validate Dial-in Configuration

Use the following command to verify that you have correctly configured the router for gRPC dial-in.

```
Router#show telemetry model-driven subscription
```

Example: Validation for gRPC Dial-in

```
RP/0/RP0/CPU0:SunC#show telemetry model-driven subscription Sub3
Thu Jul 21 21:32:45.365 UTC
Subscription:  Sub3
-------------
  State:       ACTIVE
  Sensor groups:
  Id: SGroup3
    Sample Interval:      30000 ms
    Sensor Path:          openconfig-interfaces:interfaces/interface
    Sensor Path State:    Resolved

  Destination Groups:
  Group Id: DialIn_1002
    Destination IP:       172.30.8.4
    Destination Port:     44841
    Encoding:             self-describing-gpb
    Transport:            dialin
    State:                Active
    Total bytes sent:     13909
    Total packets sent:   14
    Last Sent time:       2016-07-21 21:32:25.231964501 +0000

  Collection Groups:
  ------------------
    Id: 2
    Sample Interval:      30000 ms
    Encoding:             self-describing-gpb
    Num of collection:    7
    Collection time:      Min:    32 ms Max:    39 ms
    Total time:           Min:    34 ms Avg:    37 ms Max:    40 ms
    Total Deferred:       0
    Total Send Errors:    0
    Total Send Drops:     0
    Total Other Errors:   0
    Last Collection Start:2016-07-21 21:32:25.231930501 +0000
    Last Collection End:  2016-07-21 21:32:25.231969501 +0000
    Sensor Path:          openconfig-interfaces:interfaces/interface
```

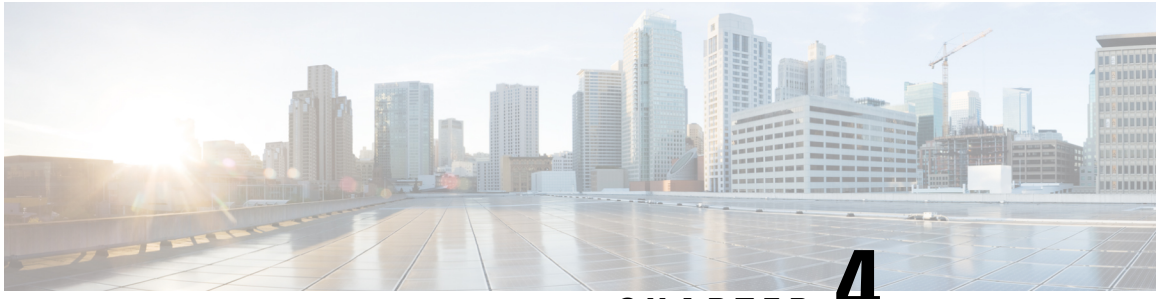

CHAPTER 4

Core Components of Model-driven Telemetry Streaming

The core components used in streaming model-driven telemetry data are:

Session

A telemetry session can be initiated using:

Dial-in Mode

In a dial-in mode, an MDT receiver dials in to the router, and subscribes dynamically to one or more sensor paths or subscriptions. The router acts as the server and the receiver is the client. The router streams telemetry data through the same session. The dial-in mode of subscriptions is dynamic. This dynamic subscription terminates when the receiver cancels the subscription or when the session terminates.

There are two methods to request sensor-paths in a dynamic subscription:

- **OpenConfig RPC model:** The `subscribe RPC` defined in the model is used to specify sensor-paths and frequency. In this method, the subscription is not associated with an existing configured subscription. A subsequent `cancel` RPC defined in the model removes an existing dynamic subscription.

  Cisco IOS XR supports Google network management interface (gNMI) protocol. gNMI is a unified mangement protocol for streaming telemetry data using gRPC framework. This framework and protocol do not need explicit configuration, but simplifies telemetry configuration on the router by starting only the gRPC server.

  The RPC is defined in the gNMI proto file. The gNMI specification is published at Github.

- **IOS XR MDT RPC:** IOS XR defines RPCs to subscribe and to cancel one or more configured subscriptions. The sensor-paths and frequency are part of the telemetry configuration on the router. A subscription is identified by its configured subscription name in the RPCs.

Dial-out Mode

In a dial-out mode, the router dials out to the receiver. This is the default mode of operation. The router acts as a client and receiver acts as a server. In this mode, sensor-paths and destinations are configured and bound together into one or more subscriptions. The router continually attempts to establish a session with each destination in the subscription, and streams data to the receiver. The dial-out mode of subscriptions is persistent. When a session terminates, the router continually attempts to re-establish a new session with the receiver every 30 seconds.

Sensor Path

The sensor path describes a YANG path or a subset of data definitions in a YANG model with a container. In a YANG model, the sensor path can be specified to end at any level in the container hierarchy.

An MDT-capable device, such as a router, associates the sensor path to the nearest container path in the model. The router encodes and streams the container path within a single telemetry message. A receiver receives data about all the containers and leaf nodes at and below this container path.

The router streams telemetry data for one or more sensor-paths, at the configured frequency (cadence-based streaming) or when the sensor-path content changes (event-based streaming), to one or more receivers through subscribed sessions.

Subscription

A subscription binds one or more sensor paths and destinations. An MDT-capable device streams data for each sensor path at the configured frequency (cadence-based streaming) or when the sensor-path content changes (event-based streaming) to the destination.

The following example shows subscription `SUB1` that associates a sensor-group, sample interval and destination group.

```
Router(config)#telemetry model-driven
Router(config-model-driven)#subscription SUB1
Router(config-model-driven-subs)#sensor-group-id SGROUP1 sample-interval 10000
Router(config-model-driven-subs)#strict-timer
```

Note With a `strict-timer` configured for the sample interval, the data collection starts exactly at the configured time interval allowing a more deterministic behavior to stream data.

In 32-bit platforms, `strict-timer` can be configured only under the subscription. Whereas, 64-bit platforms support configurtion at global level in addition to the subscription level. However, configuring at the global level will affect all configured subscriptions.

```
Router(config)#telemetry model-driven
Router(config-model-driven)#strict-timer
```

Transport and Encoding

The router streams telemetry data using a transport mechanism. The generated data is encapsulated into the desired format using encoders.

Model-Driven Telemetry (MDT) data is streamed through :

- **Transmission Control Protocol (TCP):** used for only dial-out mode.
- **User Datagram Protocol (UDP):** used for only dial-out mode.

The data to be streamed can be encoded into Google Protocol Buffers (GPB) or JavaScript Object Notation (JSON) encoding. In GPB, the encoding can either be compact GPB (for optimising the network bandwidth usage) or self-describing GPB. The encodings supported are:

- **GPB encoding:** configuring for GPB encoding requires metadata in the form of compiled .proto files. A .proto file describes the GPB message format, which is used to stream data. The .proto files are available in the Github repository.
  - **Compact GPB encoding:** data is streamed in compressed and non self-describing format. A .proto file corresponding to each sensor-path must be used by the receiver to decode the streamed data.
  - **Key-value (KV-GPB) encoding:** data of each sensor path streamed is in a self-describing formatted ASCII text. A single .proto file `telemetry.proto` is used by the receiver to decode any sensor path data. Because the key names are included in the streamed data, the data on the wire is much larger as compared to compact GPB encoding.
- **JSON encoding**

Note Telemetry data is streamed out of the router using an Extensible Manageability Services Deamon (emsd) process. The data of interest is subscribed through subscriptions and streamed through gRPC, TCP or UDP sessions. However, a combination of gRPC, TCP and UDP sessions with more than 150 active sessions leads to emsd crash or process restart.

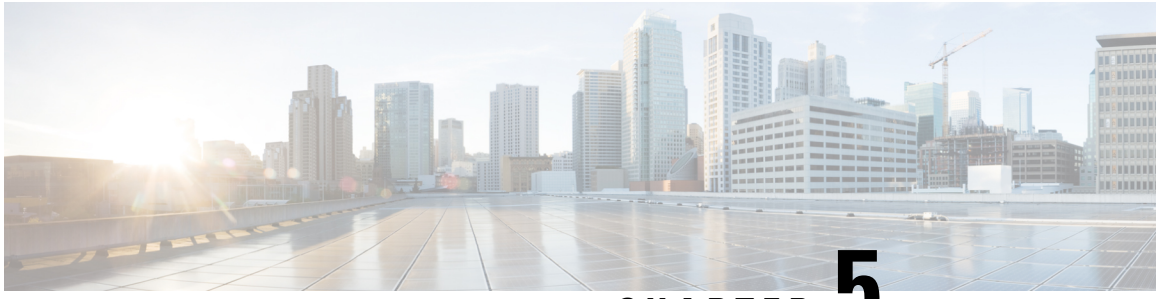

CHAPTER 5

Use Cases on Using Telemetry

This section provides use case on using Telemetry.

Example: Configure Event-driven Telemetry for LLDP

Telemetry supports NETCONF event notifications where the NETCONF client is configured to receive event notifications from a NETCONF server through a subscription. The NETCONF client must subscribe using a `create-subscription` request. Currently, only the events from Link Layer Discovery Protocol (LLDP) is supported. These event notifications are sent until either the NETCONF session or the subscription is terminated.

Note Configuring a sensor group and a subscription is not required for receiving NETCONF notifications. While sensor path and subscription configurations are required for receiving telemetry events, NETCONF `create-subscription` is required for receiving NETCONF notifications.

To generate NETCONF notifications:

1. Enable NETCONF agent and SSH sub system.

```
ssh server netconf
netconf-yang agent ssh
```

2. Enable model-driven telemetry.

```
telemetry model-driven
```

3. Enable LLDP.

```
lldp
```

This example shows event-driven telemetry fo LLDP configuration data.

1. Create a destination group.

```
grpc
port 56782
```

```
address-family ipv4
!
telemetry model-driven
destination-group <destination-udp>
  address-family ipv4 <client-ip>1 port <udp port num>
   encoding self-describing-gpb
   protocol udp
  !
!
destination-group <destination-tcp>
  address-family ipv4 <client-ip> port <tcp port num>
   encoding gpb
   protocol tcp
  !
destination-group <destination-grpc>
  address-family ipv4 <grpc client ip>port <grpc port num>
   encoding self-describing-gpb
   protocol grpc no-tls
```

2. Create a sensor group.

```
sensor-group <sensor-group-name>
  sensor-path Cisco-IOS-XR-ethernet-lldp-oper:lldp/global-lldp/lldp-info
  sensor-path Cisco-IOS-XR-ethernet-lldp-oper:lldp/nodes/node/interfaces/interface
  sensor-path Cisco-IOS-XR-ethernet-lldp-oper:lldp/nodes/node/neighbors/details/detail

 !
```

3. Create a subscription.

```
subscription udp-out
  sensor-group-id <sensor-group-name> sample-interval 0
  destination-id <destination-udp>
!

subscription <subscription-name>
  sensor-group-id <sensor-group-name> sample-interval 0
  destination-id <destination-tcp>

subscription <subscription-name>
  sensor-group-id <sensor-group-name> sample-interval 0
!
netconf-yang agent
ssh
!
```

4. Set the notification to stream data when an event occurs.

```
Router(config-lldp)#timer 12
Router(config-lldp)#commit

Router(config-lldp)#holdtime 150
Router (config-lldp)#commit

Router (config-lldp)#exit
#506
<?xml version="1.0"?>
<notification xmlns="urn:ietf:params:xml:ns:netconf:notification:1.0">
 <eventTime>Date-and-Time</eventTime>
 <lldp xmlns="http://cisco.com/ns/yang/Cisco-IOS-XR-ethernet-lldp-oper">
  <global-lldp>
   <lldp-info>
    <chassis-id>000b.1bc9.e700</chassis-id>
```

```
    <chassis-id-sub-type>4</chassis-id-sub-type>
    <system-name>ios</system-name>
    <timer>12</timer>
    <hold-time>120</hold-time>
    <re-init>2</re-init>
   </lldp-info>
  </global-lldp>
 </lldp>
</notification>
Ready to send a request.
Paste your request or enter 'get', 'get-config', 'create-sub', or 'bye' to quit):
```

5. Validate response received from NETCONF agent.

```
#506
<?xml version="1.0"?>
<notification xmlns="urn:ietf:params:xml:ns:netconf:notification:1.0">
 <eventTime>Date-and-Time</eventTime>
 <lldp xmlns="http://cisco.com/ns/yang/Cisco-IOS-XR-ethernet-lldp-oper">
  <global-lldp>
   <lldp-info>
    <chassis-id>000b.1bc9.e700</chassis-id>
    <chassis-id-sub-type>4</chassis-id-sub-type>
    <system-name>ios</system-name>
    <timer>12</timer>
    <hold-time>150</hold-time>
    <re-init>2</re-init>
   </lldp-info>
  </global-lldp>
 </lldp>
</notification>
```

Example: Create and Delete LACP Bundle or Member

OpenConfig-Link Aggregation Control Protocol (OC-LACP) data model can be used to stream model-driven telemetry (MDT) and event-driven telemetry (EDT) data. Link Aggregation Control Protocol (LACP) controls the bundling of one or more ports together to form a single logical link. This single link provides higher bidirectional bandwidth, redundancy, and load balancing between the routers in the network.

The OC-LACP model defined by the OC community, helps manage LACP-enabled bundles and member interfaces. Cisco IOS XR software supports OC-LACP version 1.0.2. The support is extended to version 1.1.0 from Cisco IOS XR software release 6.6.1.

Note Streaming model-driven or event-driven telemetry data is supported only on operational state parameters.

The support for telemetry is provided only for LACP state data at global, bundle and member level.

Using this model, user can configure LACP parameters on the bundle interface and view state data for LACP-enabled bundle and member interfaces.

The OC LACP yang model is available in the Github repository.

The following logs shows an example of expected telemetry data when a LACP member is added to bundle, and then deleted from the bundle.

Add a LACP Member to Bundle

1. Add an ethernet link bundle with the specified bundle-id.

```
Router#config
Router(config)#interface bundle-ether 4
```

2. Specify the interface details.

```
Router(config)#interface gigabitEthernet 0/2/0/3
```

3. Add the link to the specified bundle. To enable active or passive LACP on the bundle, include the optional `mode active` or `mode passive` keywords in the command string.

```
Router(config-if)#bundle id 4 mode passive
Router(config-if)#no shutdown
```

4. Check the log.

```
Sub_id 200000001, flag 4, len 830
--------
{"node_id_str":"ios","subscription_id_str":"app_TEST_200000001","encoding_path":"openconfig-lacp:lacp",
"collection_id":"5","collection_start_time":"1542876320548","msg_timestamp":"1542876320548","
data_json":[{"timestamp":"1542876320548","keys":[],"content":{"interfaces":{"interface":{"name":"Bundle-Ether4",
"members":{"member":{"interface":"GigabitEthernet0/2/0/3","state":{"interface":"GigabitEthernet0/2/0/3",
"activity":"PASSIVE","timeout":"LONG","synchronization":"OUT_SYNC","aggregatable":true,"collecting":false,
"distributing":false,"system-id":"02-9d-af-84-41-05","oper-key":4,"partner-id":"00-00-00-00-00-00","partner-key":0,
"port-num":0,"partner-port-num":0,"counters":{"lacp-in-pkts":"0","lacp-out-pkts":"0","lacp-rx-errors":"0",
"lacp-unknown-errors":"0","lacp-errors":"0"}}}}}}}}}],"collection_end_time":"1542876320548"}
--------
Sub_id 200000001, flag 4, len 830
--------
{"node_id_str":"ios","subscription_id_str":"app_TEST_200000001","encoding_path":"openconfig-lacp:lacp","collection_id":
"6","collection_start_time":"1542876320569","msg_timestamp":"1542876320569","data_json":[{"timestamp":"1542876320568",
"keys":[],"content":{"interfaces":{"interface":{"name":"Bundle-Ether4","members":{"member":{"interface":
"GigabitEthernet0/2/0/3","state":{"interface":"GigabitEthernet0/2/0/3","activity":"PASSIVE","timeout":"LONG",
"synchronization":"OUT_SYNC","aggregatable":true,"collecting":false,"distributing":false,"system-id":
"02-9d-af-84-41-05","oper-key":4,"partner-id":"00-00-00-00-00-00","partner-key":0,"port-num":4,"partner-port-num":0,
"counters":{"lacp-in-pkts":"0","lacp-out-pkts":"0","lacp-rx-errors":"0","lacp-unknown-errors":"0","lacp-errors":"0"}}}}}}}}}],
"collection_end_time":"1542876320569"}
--------
Sub_id 200000001, flag 4, len 466
--------
{"node_id_str":"ios","subscription_id_str":"app_TEST_200000001","encoding_path":"openconfig-lacp:lacp","collection_id":
"7","collection_start_time":"1542876320570","msg_timestamp":"1542876320570","data_json":[{"timestamp":"1542876320568",
"keys":[],"content":{"interfaces":{"interface":{"name":"Bundle-Ether4","state":{"name":"Bundle-Ether4","interval":"SLOW","lacp-mode":
"PASSIVE","system-id-mac":"02-9d-af-84-41-05","system-priority":32768}}}}}],"collection_end_time":"1542876320570"}
```

Delete a LACP Member from Bundle

1. Delete a LACP member from the bundle, a scenario where the bundle also becomes non-LACP.

```
Router(config)#interface gigabitEthernet 0/2/0/3
Router(config-if)#bundle id 4 mode on
Router(config-if)#commit
```

2. Check the log.

```
--------
Sub_id 200000001, flag 4, len 425
--------
{"node_id_str":"ios","subscription_id_str":"app_TEST_200000001","encoding_path":"openconfig-lacp:lacp",
"collection_id":"8","collection_start_time":"1542876408256","msg_timestamp":"1542876408256","data_json":
```

[{"timestamp":"1542876408256","delete":true,"keys":[],"content":{"interfaces":{"interface":{"name":
"Bundle-Ether4","members":{"member":{"interface":"GigabitEthernet0/2/0/3"}}}}}},"collection_end_time":
"1542876408256"}

Sub_id 200000001, flag 4, len 365

{"node_id_str":"ios","subscription_id_str":"app_TEST_200000001","encoding_path":"openconfig-lacp:lacp",
"collection_id":"9","collection_start_time":"1542876408256","msg_timestamp":"1542876408256","data_json":
[{"timestamp":"1542876408256","delete":true,"keys":[],"content":{"interfaces":{"interface":{"name":
"Bundle-Ether4"}}}}],"collection_end_time":"1542876408256"}