



SR-TE On-Demand Next Hop

When redistributing routing information across domains, provisioning of multi-domain services (Layer 2 VPN and Layer 3 VPN) has its own complexity and scalability issues. Effective Cisco IOS XE Everest 16.6.1, On-Demand Next Hop (ODN) triggers delegation of computation of an end-to-end LSP to a PCE controller including constraints and policies without doing any redistribution. It then installs the reapplied multi-domain LSP for the duration of the service into the local forwarding information base (FIB).

- [Restrictions for SR-TE On-Demand Next Hop, on page 1](#)
- [Information About SR-TE On-Demand Next Hop, on page 1](#)
- [SR-TE Policy, Color Extended Community, Affinity Constraint, and Disjointness Constraint, on page 5](#)
- [How to Configure Segment Routing On-Demand Next Hops—Layer 3 and Layer 3 VPN, on page 8](#)
- [Verifying Segment Routing On-Demand Next Hop—Layer 3 and Layer 3 VPN, on page 11](#)
- [Configuring Color Extended Community, Affinity Constraint, and Disjointness Constraint, on page 16](#)
- [Verifying SR-TE ODN Color Extended Community, Affinity Constraint, and Disjointness Constraint, on page 18](#)
- [Troubleshooting the SR-TE ODN Color Extended Community, Affinity Constraint, and Disjointness Constraint, on page 22](#)


Restrictions for SR-TE On-Demand Next Hop

- ODN anycast SID is not supported.
- ODN for IPv6 is not supported.
- SR ODN Tunnel is *not* supported on BGP NSR. It is only supported on BGP NSF.

Information About SR-TE On-Demand Next Hop

On-Demand Next hop leverages upon BGP Dynamic SR-TE capabilities and adds the path computation (PCE) ability to find and download the end to end path based on the requirements. ODN triggers an SR-TE auto-tunnel based on the defined BGP policy. As shown in the following figure, an end-to-end path between ToR1 and AC1 can be established from both ends based on low latency or other criteria for VRF (L3VPN) or IPv4 services. The work-flow for ODN is summarized as follows:

Figure 1: ODN Operation

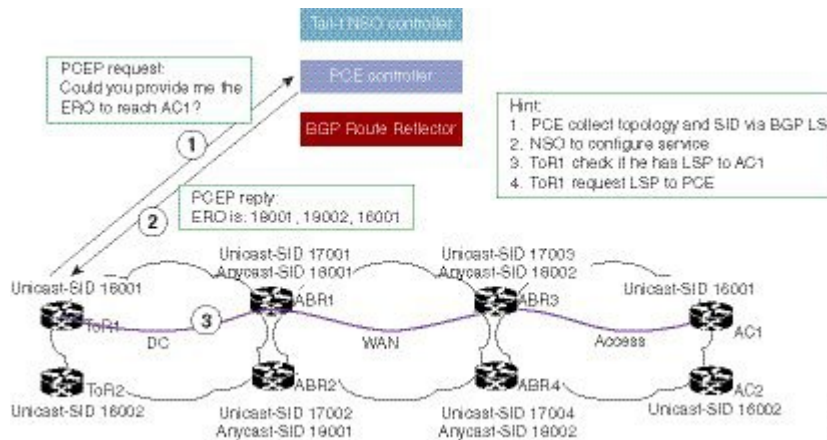

1. PCE controller collects topology and SIDs information via BGP Link State (BGP-LS). For more information on BGP-LS, refer [BGP Link-State](#).
2. If NSO controller is enabled, it configures L3VPN VRF or IPv4 prefixes and requests are sent to ToR1 and AC1.
3. ToR1 and AC1 checks if an LSP toward each other exists. If not, a request is sent to the PCE controller to compute that SR-TE path that matches SR-TE policy that is carried through BGP.
4. PCE controller computes the path and replies with a label stack (18001, 18002, 16001, example in ToR1).
5. ToR1 and AC1 create an SR-TE auto-tunnel and reply to the NSO controller indicating that the LSP for VRF or IPv4 is up and operational.

Fast Convergence Default Optimize

The fast convergence "default optimize" feature modifies the default settings of all the protocols to recommended defaults for fast convergence. To revert the defaults to pre-fast-convergence settings for both IS-IS and OSPF, **routing-default-optimize** command is used. This command sends signals to IS-IS and OSPF and modifies the default configuration for these protocols.

By default, the fast convergence setting is enabled which means when you upgrade the software, you can automatically see the new behavior. This makes easier integration of the devices in a multivendor deployment and reduces support cases for poor convergence.

When default optimize is disabled, existing protocol default configuration is used. When default optimize is enabled, new protocol defaults are used. The show running configurations does not display configuration lines for default settings even when default settings are being used.

A configuration of a protocol overrides the default, but a change to default optimize does not override any configuration.

The following is the sample output of **spf-interval** command in IS-IS:

```
Device(config-if)# router isis
Device(config-router)# spf-interval 10 5500 5500
```

If a non-default value is configured, it is displayed in show running configuration output:

```
Device(config-router)# spf-interval 5 50 200
Device(config-router)# do show run | inc spf-interval
spf-interval 5 50 200
```

You can revert to the default values by configuring the default values or by removing the non-default configuration.

Default Optimize Values for IS-IS

The following table summarizes the configuration impacted by default optimize:

IS-IS command	Parameters	Default optimize disabled	Default optimize enabled
fast-flood			
	number of LSPs flooded back-to-back	Disabled	10
spf-interval			
	Initial (milliseconds)	5500	50
	Secondary (milliseconds)	5500	200
	Max (seconds)	10	5
pre-interval			
	Initial (milliseconds)	2000	50
	Secondary (milliseconds)	5000	200
	Max (seconds)	5	5
lsp-gen-interval			
	Initial (milliseconds)	50	50
	Secondary (milliseconds)	5000	200
	Max (seconds)	5	5
log-adjacency-changes		disabled	enabled

Default Optimize Values for OSPF

The following table summarizes the configuration impacted by default optimize for OSPFv2/v3:

OSPF command	Parameters	Default optimize disabled	Default optimize enabled
timers throttle spf			
	Initial (milliseconds)	5500	50

OSPF command	Parameters	Default optimize disabled	Default optimize enabled
	Secondary (milliseconds)	10000	200
	Max (seconds)	10	5
timers throttle lsa all			
	Initial (milliseconds)	0	50
	Secondary (milliseconds)	5000	200
	Max (seconds)	5	5
timers lsa arrival			
	milliseconds	1000	100

The following is the sample output of show ip ospf command for OSPFv2 with the default-optimize values.

```

Device# show ip ospf
Routing Process "ospf 10" with ID 10.0.0.1
  Start time: 00:00:01.471, Time elapsed: 03:00:34.706
  Supports only single TOS(TOS0) routes
  Supports opaque LSA
  Supports Link-local Signaling (LLS)
  Supports area transit capability
  Supports NSSA (compatible with RFC 3101)
  Supports Database Exchange Summary List Optimization (RFC 5243)
  Event-log enabled, Maximum number of events: 1000, Mode: cyclic
  Router is not originating router-LSAs with maximum metric
  Initial SPF schedule delay 50 msec
  Minimum hold time between two consecutive SPF's 200 msec
  Maximum wait time between two consecutive SPF's 5000 msec
  Incremental-SPF disabled
  Initial LSA throttle delay 50 msec
  Minimum hold time for LSA throttle 200 msec
  Maximum wait time for LSA throttle 5000 msec
  Minimum LSA arrival 100 msec
  LSA group pacing timer 240 secs
  Interface flood pacing timer 33 msec
  Retransmission pacing timer 66 msec
  EXCHANGE/LOADING adjacency limit: initial 300, process maximum 300
  Number of external LSA 18. Checksum Sum 0x075EB2
  Number of opaque AS LSA 0. Checksum Sum 0x000000
  Number of DCbitless external and opaque AS LSA 0
  Number of DoNotAge external and opaque AS LSA 0
  Number of areas in this router is 1. 1 normal 0 stub 0 nssa
  Number of areas transit capable is 0
  External flood list length 0
  IETF NSF helper support enabled
  Cisco NSF helper support enabled
  Reference bandwidth unit is 100 mbps
    Area BACKBONE(0)
      Number of interfaces in this area is 4 (2 loopback)
      Area has RRR enabled
      Area has no authentication
      SPF algorithm last executed 02:27:23.736 ago
      SPF algorithm executed 20 times
      Area ranges are
      Number of LSA 94. Checksum Sum 0x321DCF

```

```

Number of opaque link LSA 0. Checksum Sum 0x000000
Number of DCbitless LSA 0
Number of indication LSA 0
Number of DoNotAge LSA 0
Flood list length 0

```

The following is the sample output of **show ospf** command for OSPFv3 with the default-optimize values.

```

Device# show ospfv3
OSPFv3 10 address-family ipv6
Router ID 11.11.11.11
Supports NSSA (compatible with RFC 3101)
Supports Database Exchange Summary List Optimization (RFC 5243)
Event-log enabled, Maximum number of events: 1000, Mode: cyclic
Router is not originating router-LSAs with maximum metric
Initial SPF schedule delay 50 msec
Minimum hold time between two consecutive SPFs 200 msec
Maximum wait time between two consecutive SPFs 5000 msec
Initial LSA throttle delay 50 msec
Minimum hold time for LSA throttle 200 msec
Maximum wait time for LSA throttle 5000 msec
Minimum LSA arrival 100 msec
LSA group pacing timer 240 secs
Interface flood pacing timer 33 msec
Retransmission pacing timer 66 msec
Retransmission limit dc 24 non-dc 24
EXCHANGE/LOADING adjacency limit: initial 300, process maximum 300
Number of external LSA 0. Checksum Sum 0x000000
Number of areas in this router is 1. 1 normal 0 stub 0 nssa
Graceful restart helper support enabled
Reference bandwidth unit is 100 mbps
RFC1583 compatibility enabled
Area BACKBONE(0)
  Number of interfaces in this area is 2
  SPF algorithm executed 7 times
  Number of LSA 3. Checksum Sum 0x012426
  Number of DCbitless LSA 0
  Number of indication LSA 0
  Number of DoNotAge LSA 0
  Flood list length 0

```

SR-TE Policy, Color Extended Community, Affinity Constraint, and Disjointness Constraint

Effective Cisco IOS XE Gibraltar 16.11.1, the router supports:

- MPLS TE new SR-TE policy command—**segment-routing traffic-eng**
- Color-extended community
- Affinity constraints
- Disjointness constraints

SR-TE Policy Command

Effective Cisco IOS XE Gibraltar 16.11.1, a new command (**segment-routing traffic-eng**) is added to configure the SR policy under segment routing. For information on using this command, see the “*Configuring Color-Extended Community*” section.

Color Extended Community

In earlier releases, the router created segment routed Traffic Engineering (SR-TE) tunnels based on a tunnel-profile or attribute set. As part of this functionality, an inbound route-map with a “match community” and “set attribute-set” was added on the ingress node and the route-map matched against communities received in the BGP updates. A BGP update with a matching community would initiate an SR-TE tunnel for the nexthop TE-profile.

However, effective Cisco IOS XE Gibraltar 16.11.1, ‘color extended’ community is now added as follows:

- An SR-TE policy is created on the ingress router for the Color-Endpoint pair.
- The egress router adds the ‘color extended’ community to the BGP updates that require a Traffic-Engineered path.

Affinity Constraint

Affinity is a 32-bit constraint used by the PCE and PCALC for calculating paths that take the “affinity constraint” into account.

Affinity constraints let you assign, or map, color names for path affinities. After mappings are defined, the attributes can be referred to by the corresponding color name in the command.

Affinity maps are used to map operator-defined color names to a bit position in the affinity bitmap

Supported Affinity constraints are:

- include-all—indicates that constrained shortest path first (CSPF) includes a link when calculating a path, only if each link administrative group bit has the same name as each affinity bit.
- include-any—indicates that CSPF includes a link when calculating a path, if at least one link administrative group bit has the same name as an affinity bit.
- exclude-any—indicates that CSPF excludes a link when calculating a path, if any link administrative group bit has the same name as an affinity bit.

Disjointness Constraint

Disjointness is used to describe two or more services that must be completely disjoint of each other. Disjointness is useful for providing traffic flow redundancy in the network.

Disjointness is controlled by the PCE. The PCE learns of the network topology through an IGP (OSPF or IS-IS) through the BGP-LS protocol and is capable of computing paths based on the IGP or TE metric.

The PCE uses the disjoint policy to compute two lists of segments that steer traffic from the source node to the destination node along disjoint paths. Disjoint paths can originate from either the same or different head-ends.

A "disjoint level" refers to the type of resources that should not be shared by the two computed paths. The PCE supports the following disjoint path computations:

- Link
- Node
- Shared risk link group (SRLG)

When the first request is received from Path Computation client (PCC) or an ingress node, with a given disjoint-group ID, a list of segments is computed based on the metric requested, encoding the shortest path from source to destination.

When the second request is received with the same disjoint-group ID, based on the information received in both requests, the PCE computes two disjoint paths from the source to the destination.

Both paths are computed at the same time. The shortest list of segments is calculated to steer traffic on the computed paths.

Limitations

- On the Cisco ASR 903 routers with RSP3 module, the total stack limit is four labels without recirculation. However, with recirculation, total stack limit is seven labels.

```
Router# show mpls outlabel-stack reservation
Application    Outlabels      Status
              Reserved
      bgp              0      COMPLETE
      transport        0      COMPLETE
      vpn              1      COMPLETE    --- 1 Label is used for VPN service
Platform Max OutLabels:4
Platform Max Primary Recirc OutLabels:0
Platform Max Repair Recirc OutLabels:3
Total Available Primary Path OutLabels including recirc Labels:3
Total Available Repair Path OutLabels including recirc Labels:6
Reg apps: OSPF-1 (3) MPLS-TE (3)
```

Router#


- The maximum number of SR-TE ODN policies supported is 500.
- Static SR-TE policy is not supported.
- From Cisco IOS XE Bengaluru Release 17.5.1, SR-TE policy counters are supported on the Cisco ASR 903 routers with RSP3 module only if the number of transport labels used for SR-TE policy does not exceed two labels. See the [Feature History](#) for more information.
- SR-TE policy goes down only after 60 seconds when the connection to PCEP is disconnected due to any reason.
- 6PE and 6VPE services are supported only if the number of transport labels used for SR-TE policy does not exceed two labels.

How to Configure Segment Routing On-Demand Next Hops—Layer 3 and Layer 3 VPN

Configuring Segment Routing On-Demand Next Hops—Layer 3 and Layer 3 VPN

Perform the following steps to configure on-demand next hop for SR-TE. The following figure is used as a reference to explain the configuration steps.

Figure 2: ODN Auto-Tunnel Setup

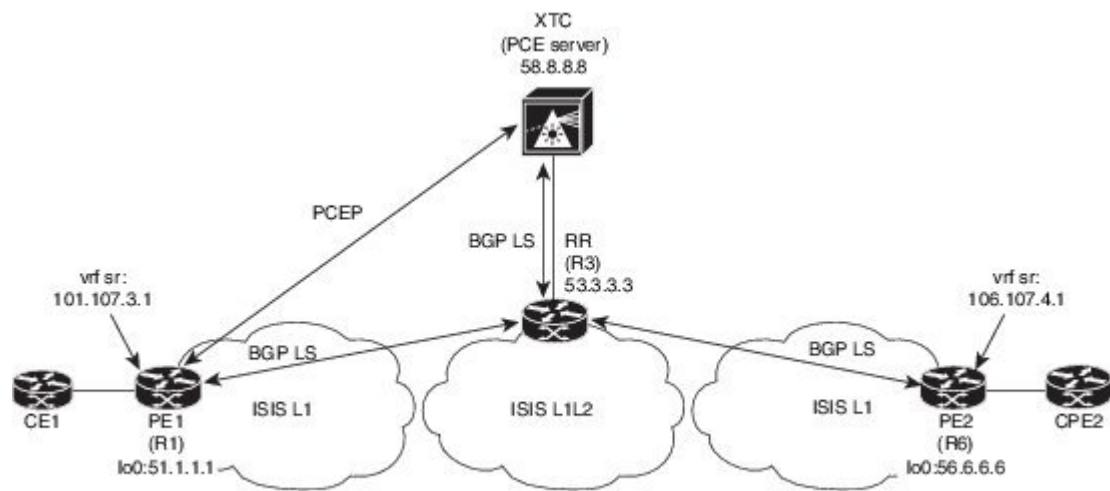

1. Configure the router (R6 tailend) with VRF interface.

```
vrf definition sr
rd 100:100
route-target export 100:100
route-target import 100:100
!
address-family ipv4
exit-address-family
!
address-family ipv6
exit-address-family
!
interface gigabitEthernet0/0/11
vrf forwarding sr
ip address 30.30.30.1 255.255.255.0
```

2. Tags VRF prefix with BGP community on R6 (tailend).

```
route-map BGP_TE_MAP permit 9
match ip address L3VPN_ODN_ROUTES
set community 3276850
```



```
ip access-list extended L3VPN_ODN_ROUTES
permit ip 30.30.30.1 255.255.0.0 any
```

3. Enable BGP on R6 (tailend) and R1 (headend) to advertise and receive VRF SR prefix and match on community set on R6 (tailend).

```
router bgp 100 <-- This BGP configuration applies to the tailend
bgp router-id 172.16.0.1
bgp log-neighbor-changes
bgp graceful-restart
no bgp default ipv4-unicast
neighbor 10.0.0.2 remote-as 100
neighbor 10.0.0.2 update-source Loopback0
address-family ipv4
neighbor 10.0.0.2 activate
neighbor 10.0.0.2 send-community both
neighbor 10.0.0.2 next-hop-self
exit-address-family
address-family vpnv4
neighbor 10.0.0.2 activate
neighbor 10.0.0.2 send-community both
neighbor 10.0.0.2 route-map BGP_TE_MAP out
exit-address-family
address-family link-state link-state
neighbor 10.0.0.2 activate
exit-address-family
address-family ipv4 vrf sr
redistribute connected
exit-address-family
route-map BGP_TE_MAP permit 9
match ip address traffic
set community 3276850
ip access-list extended traffic
permit ip 10.0.0.1 255.255.0.0 any
router bgp 100 <-- This BGP configuration applies to the headend
bgp router-id 192.168.0.2
bgp log-neighbor-changes
bgp graceful-restart
no bgp default ipv4-unicast
neighbor 10.0.0.2 remote-as 100
neighbor 10.0.0.2 update-source Loopback0
address-family ipv4
neighbor 10.0.0.2 activate
neighbor 10.0.0.2 send-community both
neighbor 10.0.0.2 next-hop-self
exit-address-family
address-family vpnv4
neighbor 10.0.0.2 activate
neighbor 10.0.0.2 send-community both
neighbor 10.0.0.2 route-map BGP_TE_MAP in
exit-address-family
address-family link-state link-state
neighbor 10.0.0.2 activate
exit-address-family
address-family ipv4 vrf sr
redistribute connected
exit-address-family
route-map BGP_TE_MAP permit 9
match community 1
set attribute-set BGP_TE5555
ip community-list 1 permit 3276850
mpls traffic-eng lsp attributes BGP_TE5555
```

```
path-selection metric igp
pce
```

4. Enable route-map or attribute set on headend (R1).

```
route-map BGP_TE_MAP permit 9
match community 1
set attribute-set BGP_TE5555
ip community-list 1 permit 3276850
mpls traffic-eng lsp attributes BGP_TE5555
path-selection metric igp
pce
end
```

5. Enable PCE and auto-tunnel configurations on R1.

```
mpls traffic-eng tunnels
mpls traffic-eng pcc peer 10.0.0.3 source 10.0.0.4 precedence 255
mpls traffic-eng auto-tunnel p2p tunnel-num min 2000 max 5000
```

6. Enable all core links with SR-TE configurations and ensure that they are enabled as point-to-point interfaces.

```
mpls traffic-eng tunnels
interface GigabitEthernet0/2/0
ip address 101.102.6.1 255.255.255.0
ip router isis 1
mpls traffic-eng tunnels
isis network point-to-point
interface GigabitEthernet0/3/1
vrf forwarding sr
ip address 101.107.3.1 255.255.255.0
negotiation auto
end
```

7. Enable R3 (RR) to advertise TED to the PCE server via BGP-LS.

```
router isis 1
net 49.0002.0000.0000.0003.00
ispf level-1-2
metric-style wide
nsf cisco
nsf interval 0
distribute link-state
segment-routing mpls
segment-routing prefix-sid-map advertise-local
redistribute static ip level-1-2
mpls traffic-eng router-id Loopback0
mpls traffic-eng level-1
mpls traffic-eng level-2
router bgp 100
bgp router-id 10.0.0.2
bgp log-neighbor-changes
bgp graceful-restart
no bgp default ipv4-unicast
neighbor 10.0.0.3 remote-as 100
neighbor 10.0.0.3 update-source Loopback0
address-family ipv4
neighbor 10.0.0.3 activate
exit-address-family
```

8. Enable PCE server configuration and verify that BGP-LS session is properly established with RR.

```

Device# show bgp li li summary
BGP router identifier 10.0.0.3, local AS number 100
BGP generic scan interval 60 secs
Non-stop routing is enabled
BGP table state: Active
Table ID: 0x0 RD version: 1436
BGP main routing table version 1436
BGP NSR Initial initsync version 1 (Reached)
BGP NSR/ISSU Sync-Group versions 0/0
BGP scan interval 60 secs
BGP is operating in STANDALONE mode.
Process RcvTblVer bRIB/RIB LabelVer ImportVer SendTblVer StandbyVer
Speaker 1436 1436 1436 1436 1436
0
Neighbor Spk AS MsgRcvd MsgSent TblVer InQ OutQ Up/Down St/PfxRcd
10.0.0.2 0 100 19923 17437 1436 0 0 1w2d 103
Device# show pce ipv4 topo | b Node 3
Node 3
TE router ID: 10.0.0.2
Host name: R3
ISIS system ID: 0000.0000.0003 level-1
ISIS system ID: 0000.0000.0003 level-2
Prefix SID:
Prefix 10.0.0.2, label 20011 (regular)

```



Note The above **show** command is run only on the PCE server, for example the Cisco ASR 9000 Series Aggregation Services Routers.

Verifying Segment Routing On-Demand Next Hop—Layer 3 and Layer 3 VPN

The ODN verifications are based on L3VPN VRF prefixes.

1. Verify that PCEP session between R1 (headend and PCE server) is established.

```

Device# show pce client peer
PCC's peer database:
-----
Peer address: 10.0.0.3 (best PCE)
State up
Capabilities: Stateful, Update, Segment-Routing

```

2. Verify that PCEP session is established between all the peers (PCCs).

```

Device# show pce ipv4 peer
PCE's peer database:
-----
Peer address: 10.0.0.4
State: Up
Capabilities: Stateful, Segment-Routing, Update
Peer address: 172.16.0.5
State: Up
Capabilities: Stateful, Segment-Routing, Update

```



Note The above **show** command is run only on the PCE server, for example the Cisco ASR 9000 Series Aggregation Services Routers.

3. Verify that R1 (headend) has no visibility to R6 loopback address.

```
Device# show ip route 192.168.0.1
% Network not in table
```

4. Verify that VRF prefix is injected via MP-BGP in R1 VRF SR routing table.

```
Device# show ip route vrf sr
Routing Table: sr
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2
      i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
      ia - IS-IS inter area, * - candidate default, U - per-user static route
      o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
      a - application route
      + - replicated route, % - next hop override, p - overrides from PfR
Gateway of last resort is not set
C L
B
10.0.0.6/8 is variably subnetted, 2 subnets, 2 masks
   10.0.0.7/24 is directly connected, GigabitEthernet0/3/1
   10.0.0.7/32 is directly connected, GigabitEthernet0/3/1
   10.0.0.8/24 is subnetted, 1 subnets
     10.0.0.9 [200/0] via binding label: 865, 4d21h
```

5. Verify that BGP is associating properly the policy and binding SID with the VRF prefix.

```
Device# show ip bgp vpnv4 vrf sr 106.107.4.0
BGP routing table entry for 100:100:106.107.4.0/24, version 3011
Paths: (1 available, best #1, table sr)
  Not advertised to any peer
  Refresh Epoch 4
  Local
    192.168.0.1 (metric 10) (via default) from 10.0.0.2 (10.0.0.2)
      Origin incomplete, metric 0, localpref 100, valid, internal, best
      Community: 3276850
      Extended Community: RT:100:100
      Originator: 192.168.0.1, Cluster list: 10.0.0.2
      mpls labels in/out nlabel/1085
      binding SID: 865 (BGP_TE5555)
      rx pathid: 0, tx pathid: 0x0
```

6. Verify binding label association with VRF prefix.

```
Device# show ip route vrf sr 106.107.4.0
Routing Table: sr
Routing entry for 106.107.4.0/24
  Known via "bgp 100", distance 200, metric 0, type internal
  Routing Descriptor Blocks:
    * Binding Label: 865, from 10.0.0.2, 4d22h ago
      Route metric is 0, traffic share count is 1
      AS Hops 0
```

```
MPLS label: 1085
MPLS Flags: NSF
```

7. Verify that VRF prefix is forwarded via ODN auto-tunnel.

```
Device# show ip cef label-table
Label Next Hop Interface
0 no route
865 attached Tunnel2000
Device# show ip cef vrf sr 106.107.4.0 detail
10.0.0.8/24, epoch 15, flags [rib defined all labels]
recursive via 865 label 1085
attached to Tunnel2000
```

8. Verify ODN auto-tunnel status.

```
Device# show mpls traffic-eng tunnels
P2P TUNNELS/LSPs:
Name: R1_t2000 (Tunnel2000) Destination: 192.168.0.1 Ifhandle: 0x6F5
(auto-tunnel for BGP TE)
Status:
Admin: up Oper: up Path: valid Signalling: connected---.. auto-tunnel
2000
path option 1, (SEGMENT-ROUTING) (PCE) type dynamic (Basis for Setup, path weight
10)
Config Parameters:
Bandwidth: 0 kbps (Global) Priority: 7 7 Affinity: 0x0/0xFFFF
Metric Type: IGP (interface)
Path Selection:
Protection: any (default)
Path-selection Tiebreaker:
Global: not set Tunnel Specific: not set Effective: min-fill (default)
Hop Limit: disabled
Cost Limit: disabled
Path-invalidation timeout: 10000 msec (default), Action: Tear
AutoRoute: disabled LockDown: disabled Loadshare: 0 [0] bw-based auto-bw: disabled
Attribute-set: BGP_TE5555--- attribute-set
Fault-OAM: disabled, Wrap-Protection: disabled, Wrap-Capable: No
Active Path Option Parameters:
State: dynamic path option 1 is active
BandwidthOverride: disabled LockDown: disabled Verbatim: disabled
PCEP Info:
Delegation state: Working: yes Protect: no
Working Path Info:
Request status: processed
Created via PCRep message
PCE metric: 30, type: IGP
Reported paths:
Tunnel Name: Tunnel2000_w
LSPs:
LSP[0]:
from PCE server: 10.0.0.3-- via PCE server
source 10.0.0.4, destination 192.168.0.1, tunnel ID 2000, LSP ID 1
State: Admin up, Operation active
Binding SID: 865
Setup type: SR
Bandwidth: requested 0, used 0
LSP object:
PLSP-ID 0x807D0, flags: D:0 S:0 R:0 A:1 O:2
Metric type: IGP, Accumulated Metric 0
ERO:
SID[0]: Adj, Label 2377, NAI: local 101.102.6.1 remote 10.0.0.10
SID[1]: Unspecified, Label 17, NAI: n/a
```

```

        SID[2]: Unspecified, Label 20, NAI: n/a
History:
  Tunnel:
    Time since created: 4 days, 22 hours, 21 minutes
    Time since path change: 4 days, 22 hours, 21 minutes
    Number of LSP IDs (Tun_Instances) used: 1
    Current LSP: [ID: 1]
    Uptime: 4 days, 22 hours, 21 minutes
  Tun_Instance: 1
Segment-Routing Path Info (isis level-1)
  Segment0[Link]: 101.102.6.1 - 10.0.0.10, Label: 2377
  Segment1[ - ]: Label: 17
  Segment2[ - ]: Label: 20

```

9. Verify ODN auto-tunnel LSP status on R1 (headend).

```

Device# show pce client lsp brief
PCC's tunnel database:
-----
Tunnel Name: Tunnel2000_w
  LSP ID 1
Tunnel Name: Tunnel2000_p
R1# sh pce client lsp detail
PCC's tunnel database:
-----
Tunnel Name: Tunnel2000_w
LSPs:
LSP[0]:
  source 10.0.0.4, destination 192.168.0.1, tunnel ID 2000, LSP ID 1
  State: Admin up, Operation active
  Binding SID: 865
  Setup type: SR
  Bandwidth: requested 0, used 0
  LSP object:
    PLSP-ID 0x807D0, flags: D:0 S:0 R:0 A:1 O:2
  Metric type: IGP, Accumulated Metric 0
  ERO:
    SID[0]: Adj, Label 2377, NAI: local 101.102.6.1 remote 10.0.0.10
    SID[1]: Unspecified, Label 17, NAI: n/a
    SID[2]: Unspecified, Label 20, NAI: n/a

```

10. Verify ODN LSP status on the PCE server.

```

Device# show pce lsp summary
PCE's LSP database summary:
-----
All peers:
Number of LSPs: 1
Operational: Up: 1 Down: 0
Admin state: Up: 1 Down: 0
Setup type: RSVP: 0 Segment routing: 1
Peer 10.0.0.4:
Number of LSPs: 1
Operational: Up: 1 Down: 0
Admin state: Up: 1 Down: 0
Setup type: RSVP: 0 Segment routing: 1

```

11. Verify detailed LSP information on the PCE server.

```

Device# show pce lsp detail
PCE's tunnel database:
-----

```

```

PCC 10.0.0.4:
Tunnel Name: Tunnel2000_w
LSPs:
LSP[0]:
  source 10.0.0.4, destination 192.168.0.1, tunnel ID 2000, LSP ID 48
  State: Admin up, Operation active
  Binding SID: 872
  PCEP information:
    plsp-id 526288, flags: D:1 S:0 R:0 A:1 O:2
  Reported path:
    Metric type: IGP, Accumulated Metric 0
    SID[0]: Adj, Label 885, Address: local 10.0.0.9 remote 10.0.0.10
    SID[1]: Unknown, Label 17,
    SID[2]: Unknown, Label 20,
  Computed path:
    Computed Time: Tue Dec 20 13:12:57 2016 (00:11:53 ago)
    Metric type: IGP, Accumulated Metric 30
    SID[0]: Adj, Label 885, Address: local 10.0.0.9 remote 10.0.0.10
    SID[1]: Adj, Label 17, Address: local 10.0.0.12 remote 10.0.0.13
    SID[2]: Adj, Label 20, Address: local 10.0.0.14 remote 10.0.0.14
  Recorded path:
    None

```

12. Shut down the interface that is connected to VRF SR so that the prefix is no longer advertised by MP-BGP.

```

Device# interface GigabitEthernet0/2
Device(config-if)# shut

```

13. Verify that VRF prefix is no longer advertised to R1 (headend) via R6 (tailend).

```

Device# show ip route vrf sr
Routing Table: sr
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PfR
Gateway of last resort is not set
  10.0.0.6/8 is variably subnetted, 2 subnets, 2 masks
C   10.0.0.7/24 is directly connected, GigabitEthernet0/3/1
L   10.0.0.8/32 is directly connected, GigabitEthernet0/3/1

```

14. Verify that no ODN auto-tunnel exists.


```

Device# show mpls traffic-eng tunnels
P2P TUNNELS/LSPs:
P2MP TUNNELS:
P2MP SUB-LSPS:

```

Configuring Color Extended Community, Affinity Constraint, and Disjointness Constraint

Consider the following topology:

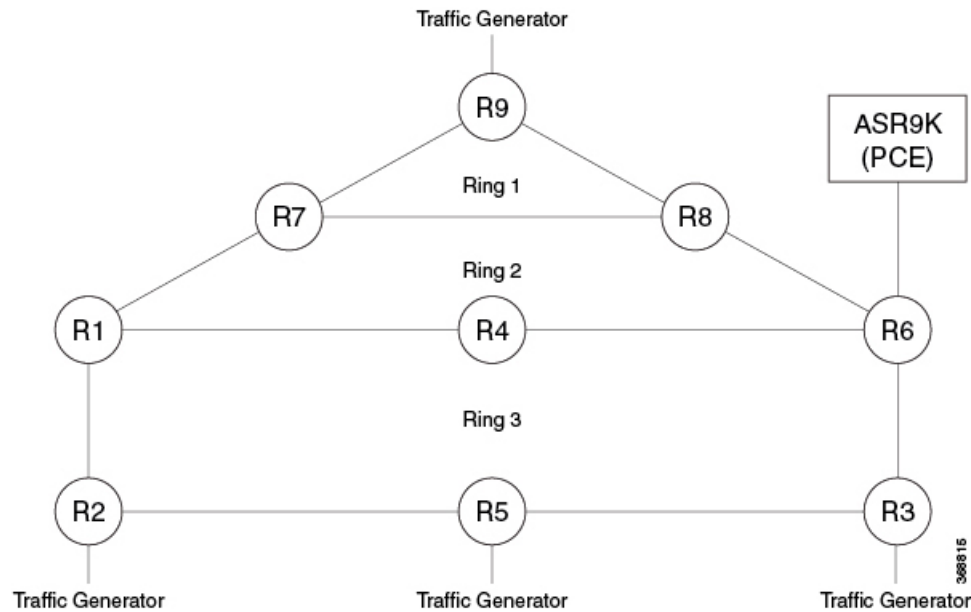

Configuring Color Extended Community

SR-TE Policy Headend Configuration on Node R3

```
segment-routing traffic-eng
on-demand color 100
authorize restrict
  ipv4 prefix-list R9350_BGP_INTER_DOMAIN
candidate-paths
  preference 1
  constraints
    segments
      dataplane mpls
  !
!
dynamic
  pcep
  !
  !
  !
  !
pcc
  pce address <pce loopback ip>source-address <pcc loopback ip>
  !
```

SR-TE Policy Tailend Configuration on Node R9

```
route-map R9_R3_R5_R2_BGP_INTER_DOMAIN permit 10
match ip address prefix-list R9350_BGP_INTER_DOMAIN
```



```

set extcommunity color 100 -----☐ Extended Color community configuration
route-map R9_R3_R5_R2_BGP_INTER_DOMAIN permit 20
ip prefix-list R9350_BGP_INTER_DOMAIN seq 35 permit 50.0.0.0/11 le 32
router bgp 1
 address-family vpnv4
  neighbor 201.201.201.201 activate
  neighbor 201.201.201.201 send-community both
  neighbor 201.201.201.201 route-map R9_R3_R5_R2_BGP_INTER_DOMAIN out
  neighbor 206.206.206.206 activate
  neighbor 206.206.206.206 send-community both
  neighbor 206.206.206.206 route-map R9_R3_R5_R2_BGP_INTER_DOMAIN out
exit-address-family
!
```

In the SR-TE ODN color template, to select the metric type, choose either **igp** or **te**:

```
Router(config-srte-odn-path-pref-dyn-metric)# type ?
  igp  Specify IGP metric
  te    Specify TE metric
```

Configuring Affinity Constraint

```

segment-routing traffic-eng
interface GigabitEthernet0/2/3
  affinity
    name 1
  on-demand color 100
  authorize restrict
    ipv4 prefix-list R9350_BGP_INTER_DOMAIN
  candidate-paths
    preference 1
    constraints
      segments
        dataplane mpls
    !
  affinity -----□ Affinity configuration
    include-any -----□ Affinity Type configuration
      name 1 -----□ Affinity Name configuration
    !
    !
  dynamic
    pcep
    !
    !
  !
  !
  !
pcc
  pce address <pce loopback ip> source-address <pcc loopback ip>
  !
  affinity-map -----□ Affinity Map configuration
    name 1 bit-position 1

```

Configuring Disjointness Constraint

```
segment-routing traffic-eng
on-demand color 100
  authorize restrict
    ipv4 prefix-list R9350_BGP_INTER_DOMAIN
candidate-paths
  preference 1
  constraints
    segments
```

```

    dataplane mpls
    !
    affinity
    include-any
    name 1
    !
    !
    association-group -----□ Disjointness configuration
    identifier 1
    disjointness type node -----□ Disjointness Type configuration
    source 1.0.0.0
    !
    !
    dynamic
    pcep
    !
    !
    !
    !
    pcc
    pce address <pce loopback ip> source-address <pcc loopback ip>
    !
    affinity-map
    name 1 bit-position 1

```

Verifying SR-TE ODN Color Extended Community, Affinity Constraint, and Disjointness Constraint

SR-TE Policy Name: 209.209.209.209|100

```

Router# show segment-routing traffic-eng policy name 209.209.209.209|100
Name: 209.209.209.209|100 (Color: 100 End-point: 209.209.209.209)
Status:
  Admin: up, Operational: up for 51:34:38 (since 01-07 06:19:08.040)-□ Policy state is
UP
Candidate-paths:
  Preference 1:
  Constraints:
    Affinity:
      include-any: -----□ Affinity Type
      1 -----□ Affinity Name
    Disjointness information:
      Group ID: 1, Source: 1.0.0.0
      Type: Node Disjointness -----□ Disjointness Type
      Dynamic (pce 12.12.12.12) (active) -----□ PCE Computed Candidate-path
      Weight: 0, Metric Type: TE -----□ Metric Type
      Metric Type: TE, Path Accumulated Metric: 53 -□ Total IGP Metric from Source to
Destination
      18010 [Prefix-SID, 202.202.202.202] -----|
      18007 [Prefix-SID, 211.211.211.211] -----|
      18002 [Prefix-SID, 207.207.207.207] -----□ This Segment List should
follow Affinity path
      21 [Adjacency-SID, 10.10.20.2 - 10.10.20.1] -----|
Attributes:
  Binding SID: 87 -----□ Binding SID Allocated
  Allocation mode: dynamic
  State: Programmed
  Auto-policy info:

```

Creator: BGP SR Policy Client
IPv6 caps enable: yes

To view detailed information about SR-TE Policy 209.209.209.209|100

Router# show segment-routing traffic-eng policy name 209.209.209.209|100 detail
Name: 209.209.209.209|100 (Color: 100 End-point: 209.209.209.209)

Status:

Admin: up, Operational: up for 00:04:19 (since 01-10 06:20:57.810)

Candidate-paths:

Preference 1:

Constraints:

Affinity:

include-any:

1

Disjointness information:

Group ID: 1, Source: 1.0.0.0

Type: Node Disjointness

Dynamic (pce 12.12.12.12) (active)

Weight: 0, Metric Type: TE

Metric Type: TE, Path Accumulated Metric: 53

18010 [Prefix-SID, 202.202.202.202]

18007 [Prefix-SID, 211.211.211.211]

18002 [Prefix-SID, 207.207.207.207]

21 [Adjacency-SID, 10.10.20.2 - 10.10.20.1]

Attributes:

Binding SID: 87

Allocation mode: dynamic

State: Programmed

Auto-policy info:

Creator: BGP SR Policy Client

IPv6 caps enable: yes

Forwarding-ID: 65711 (0x44) -----□ This FWD-ID is used for forwarding traffic

Stats:

Packets: 8893 Bytes: 852848 -----□ This counter indicates traffic flowing

through this SRTE policy

Event history: ---□ This indicates event happened with this SRTE Policy

Timestamp Value	Client	Event type	Context:
----- -----	-----	-----	-----:
01-06 05:59:26.096	BGP SR Policy Cl	Policy created	Name:
209.209.209.209 100			
01-06 05:59:26.096	BGP SR Policy Cl	Set colour	Colour: 100
01-06 05:59:26.096	BGP SR Policy Cl	Set end point	End-point:
209.209.209.209			
01-06 05:59:26.096	BGP SR Policy Cl	Set dynamic pce	Path option:
dynamic pce			
01-06 05:59:26.480	FH Resolution	Policy state UP	Status:
PATH RESOLVED			
01-06 05:59:40.424	FH Resolution	REOPT triggered	Status:
REOPTIMIZED			
01-06 05:59:49.249	FH Resolution	REOPT triggered	Status:
REOPTIMIZED			
01-06 05:59:56.469	FH Resolution	REOPT triggered	Status:
REOPTIMIZED			
01-07 05:15:19.918	FH Resolution	Policy state DOWN	Status:
PATH NOT RESOLVED			
01-07 06:15:55.739	FH Resolution	Policy state UP	Status:
PATH RESOLVED			
01-07 06:16:08.552	FH Resolution	REOPT triggered	Status:

```

REOPTIMIZED
  01-07 06:19:08.040      FH Resolution      Policy state DOWN      Status:
PATH NOT RESOLVED
  01-10 06:20:57.810      FH Resolution      Policy state UP        Status:
PATH RESOLVED
  01-10 06:21:05.211      FH Resolution      REOPT triggered        Status:
REOPTIMIZED
  01-10 06:21:08.036      FH Resolution      REOPT triggered        Status:
REOPTIMIZED
  01-10 06:21:10.073      FH Resolution      REOPT triggered        Status:
REOPTIMIZED

```

To check if the Affinity constraint is working, shut down any of the interfaces falling under the Affinity-defined path. If the constraint works, the SR-TE policy goes down instead of taking the another path (if available) to reach to the destination.

To check if the disjointness constraint is working, check the SR-TE policy information given by the PCE, which consists of Segment IDs used for the computed path from source to destination.

Disjointness constraint works, if the Segment IDs of both the SR-TE policies are different. For example:

```

SRTE Policy 1:          SRTE Policy 2:

      SID[0]: Node, Label 16002, NAI: 207.207.207.207          SID[0]: Node, Label
16003, NAI: 208.208.208.208
      SID[1]: Node, Label 16004, NAI: 201.201.201.201          SID[1]: Node, Label 16006,
NAI: 206.206.206.206
      SID[2]: Node, Label 16011, NAI: 205.205.205.205          SID[2]: Node, Label 16011,
NAI: 205.205.205.205

```



Note SID[2] of policies 1 and 2 is the same since destination of both the SR-TE policies is the same.

To view the SR-TE policy and Affinity constraint in the PCE:

```
RP/0/RSP0/CPU0:ASR9K# show pce lsp pcc ipv4 213.213.213.213 private
```

```
Thu Jan 10 00:11:52.983 UTC
```

```
PCE's tunnel database:
```

```
-----
```

```
PCC 213.213.213.213:
```

```
Tunnel Name: 209.209.209.209|100
```

```
LSPs:
```

```
LSP[0]:
```

```
source 203.203.203.203, destination 209.209.209.209, tunnel ID 177, LSP ID 0
```

```
State: Admin up, Operation ----□ SRTE Policy is up
```

```
Setup type: Segment Routing
```

```
Binding SID: 87
```

```
Maximum SID Depth: 4
```

```
Absolute Metric Margin: 0
```

```
Relative Metric Margin: 0%
```

```
Affinity: exclude-any 0x0 include-any 0x2 include-all 0x0 ----□ This indicates Affinity
taken into account by PCE
```

```
PCEP information:
```

```
PLSP-ID 0x800b1, flags: D:1 S:0 R:0 A:1 O:2 C:0
```

```
LSP Role: Disjoint LSP
```

```
State-sync PCE: None
```

```
PCC: 213.213.213.213
```

```
LSP is subdelegated to: None
```

```

Reported path:
  Metric type: TE, Accumulated Metric 53
  SID[0]: Node, Label 18010, Address 202.202.202.202
  SID[1]: Node, Label 18007, Address 211.211.211.211
  SID[2]: Node, Label 18002, Address 207.207.207.207
  SID[3]: Adj, Label 21, Address: local 10.10.20.2 remote 10.10.20.1
Computed path: (Local PCE)
  Computed Time: Thu Jan 10 00:09:36 UTC 2019 (00:02:17 ago)
  Metric type: TE, Accumulated Metric 53
  SID[0]: Node, Label 18010, Address 202.202.202.202
  SID[1]: Node, Label 18007, Address 211.211.211.211
  SID[2]: Node, Label 18002, Address 207.207.207.207
  SID[3]: Adj, Label 21, Address: local 10.10.20.2 remote 10.10.20.1
Recorded path:
  None
Disjoint Group Information:
  Type Node-Disjoint, Group 1, Sub-Group 1.0.0.0

```

Event history (latest first):

Time	Event
Thu Jan 10 00:09:37 UTC 2019	Report from 213.213.213.213 (LSP owner) Symbolic-name: 209.209.209.209 100, LSP-ID: 0, Source: 203.203.203.203 Destination: 209.209.209.209, D:1, R:0, A:1 O:2, Sig.BW: 0, Act.BW: 0 Reported Path: (Metric 53) Label 18010, Address 202.202.202.202 Label 18007, Address 211.211.211.211 Label 18002, Address 207.207.207.207 Label 21, Address: local 10.10.20.2 remote 10.10.20.1 Chng:0, AssoChng:0
Thu Jan 10 00:09:36 UTC 2019	Update to 213.213.213.213 (PCC) Symbolic-name: 209.209.209.209 100, LSP-ID: 0, D:1 Path: (Metric 53) Label 18010, Address 202.202.202.202 Label 18007, Address 211.211.211.211 Label 18002, Address 207.207.207.207 Label 21, Address: local 10.10.20.2 remote 10.10.20.1
Thu Jan 10 00:09:36 UTC 2019	Path Computation (Disjoint LSP) Symbolic-name: 209.209.209.209 100, LSP-ID: 0, D:1 Source: 203.203.203.203 Destination: 209.209.209.209 Status: Disjoint Path Success
Wed Jan 09 23:54:42 UTC 2019	Update to 213.213.213.213 (PCC) Symbolic-name: 209.209.209.209 100, LSP-ID: 0, D:1 Path: (Metric 53) Label 18007, Address 211.211.211.211 Label 18002, Address 207.207.207.207 Label 21, Address: local 10.10.20.2 remote 10.10.20.1
Wed Jan 09 23:54:42 UTC 2019	Path Computation (Disjoint LSP) Symbolic-name: 209.209.209.209 100, LSP-ID: 0, D:1 Source: 203.203.203.203 Destination: 209.209.209.209 Status: Fallback Node to Shortest Path Computed Path: (Metric 53) Label 18007, Address 211.211.211.211 Label 18002, Address 207.207.207.207 Label 21, Address: local 10.10.20.2 remote 10.10.20.1
Wed Jan 09 23:54:21 UTC 2019	Path Computation (Disjoint LSP) Symbolic-name: 209.209.209.209 100, LSP-ID: 0, D:1 Source: 203.203.203.203 Destination: 209.209.209.209

```

Status: Disjoint Path Success

Computed Path: (Metric 53)
Label 18010, Address 202.202.202.202
Label 18007, Address 211.211.211.211
Label 18002, Address 207.207.207.207
Label 21, Address: local 10.10.20.2 remote 10.10.20.1

Computed Path: (Metric 53)
Label 18010, Address 202.202.202.202
Label 18007, Address 211.211.211.211
Label 18002, Address 207.207.207.207
Label 21, Address: local 10.10.20.2 remote 10.10.20.1
Thu Jan 10 00:09:05 UTC 2019 Path Computation (Disjoint LSP)
Symbolic-name: 209.209.209.209|100, LSP-ID: 0, D:1
Source: 203.203.203.203 Destination: 209.209.209.209
Status: Fallback Node to Shortest Path
Computed Path: (Metric 53)
Label 18007, Address 211.211.211.211
Label 18002, Address 207.207.207.207
Label 21, Address: local 10.10.20.2 remote 10.10.20.1
Wed Jan 09 23:54:42 UTC 2019 Report from 213.213.213.213 (LSP owner)
Symbolic-name: 209.209.209.209|100, LSP-ID: 0,
Source: 203.203.203.203 Destination: 209.209.209.209,
D:1, R:0, A:1 O:2, Sig.BW: 0, Act.BW: 0
Reported Path: (Metric 53)
Label 18007, Address 211.211.211.211
Label 18002, Address 207.207.207.207
Label 21, Address: local 10.10.20.2 remote 10.10.20.1
Chng:0, AssoChng:0

RP/0/RSP0/CPU0:ASR9K#

To view disjointness between policies 1 and 2:

RP/0/RSP0/CPU0:ASR9K# show pce association type link group-id 3

Wed Aug 29 05:56:52.228 UTC
PCE's association database:
-----
Association: Type Link-Disjoint, Group 3, Sub-Group 1.0.0.0, Not Strict
Associated LSPs:
LSP[0]:
PCC 213.213.213.213, tunnel name 209.209.209.209|104, PLSP ID 524460, tunnel ID 172,
LSP ID 0, Configured on PCC
LSP[1]:
PCC 213.213.213.213, tunnel name 209.209.209.209|105, PLSP ID 524461, tunnel ID 173,
LSP ID 0, Configured on PCC
Status: Satisfied -----□ This indicates that Disjointness between SRTE Policies
is working
RP/0/RSP0/CPU0:ASR9K#

```

Troubleshooting the SR-TE ODN Color Extended Community, Affinity Constraint, and Disjointness Constraint

If SR-TE policy is down, check the status of the SR-TE Policy under the SR-TE policy information

```

Router# show segment-routing traffic-eng policy name 209.209.209.209|100
Name: 209.209.209.209|106 (Color: 106 End-point: 209.209.209.209)
Status:
Admin: up, Operational: down for 00:00:18 (since 01-10 13:06:42.142)
Candidate-paths:
Preference 1:
Constraints:

```

```

Affinity:
  include-any:
    1
  Dynamic (pce) (inactive)
    Weight: 0, Metric Type: IGP
Attributes:
  Binding SID: 269
  Allocation mode: dynamic
  State: Programmed
Auto-policy info:
  Creator: BGP SR Policy Client
  IPv6 caps enable: yes
Router#

```



Note The possible reasons for the policy being down are:

- Connection to PCE is down.
- Max SID depth is exceeded.
- An interface falling under Affinity-defined path from source to destination has been shut down.

To check the SR-TE policy status on the PCE:

```

RP/0/RSP0/CPU0:ASR9K#show pce lsp pcc ipv4 213.213.213.213 private
Thu Jan 10 00:11:52.983 UTC
PCE's tunnel database:
-----
PCC 213.213.213.213:
Tunnel Name: 209.209.209.209|100
LSPs:
LSP[0]:
  source 203.203.203.203, destination 209.209.209.209, tunnel ID 177, LSP ID 0
  State: Admin up, Operation active      ----☒ SRTE Policy is up
  Setup type: Segment Routing
  Binding SID: 87

```

```

Maximum SID Depth: 4
Absolute Metric Margin: 0
Relative Metric Margin: 0%

```

```

Affinity: exclude-any 0x0 include-any 0x2 include-all 0x0  ---☐ This indicates Affinity
is taken into account by the PCE

```

PCE is aware of the network topology. This information is used for path computation using the following command. This information is also used to determine if nodes and links are present and have the expected attributes (IGP/TE admin weights, SIDs and so on).

```

RP/0/RSP0/CPU0:ASR9K# show pce ipv4 topology
Tue Jan 15 01:36:20.298 UTC
PCE's topology database - detail:
-----
Node 1
  TE router ID: 207.207.207.207
  Host name: 920-R7
  ISIS system ID: 0000.0000.0207 level-1 ASN: 1
  ISIS system ID: 0000.0000.0207 level-2 ASN: 1
  Prefix SID:

```

```

ISIS system ID: 0000.0000.0207 level-1 ASN: 1 domain ID: 0
  Prefix 207.207.207.207, label 16002 (regular), flags: N
ISIS system ID: 0000.0000.0207 level-1 ASN: 1 domain ID: 0
  Prefix 207.207.207.207, label 18002 (strict), flags: N
ISIS system ID: 0000.0000.0207 level-2 ASN: 1 domain ID: 0
  Prefix 207.207.207.207, label 16002 (regular), flags: N
ISIS system ID: 0000.0000.0207 level-2 ASN: 1 domain ID: 0
  Prefix 207.207.207.207, label 18002 (strict), flags: N
SRGB INFO:
  ISIS system ID: 0000.0000.0207 level-1 ASN: 1
    SRGB Start: 16000 Size: 8000
  ISIS system ID: 0000.0000.0207 level-2 ASN: 1
    SRGB Start: 16000 Size: 8000
Link[0]: local address 10.10.21.1, remote address 10.10.21.2
  Local node:
    ISIS system ID: 0000.0000.0207 level-1 ASN: 1
  Remote node:
    TE router ID: 208.208.208.208
    Host name: 920-R8
    ISIS system ID: 0000.0000.0208 level-1 ASN: 1
    Metric: IGP 10, TE 10, Latency 10
    Bandwidth: Total 1250000000 Bps, Reservable 0 Bps
    Admin-groups: 0x00000000
    Adj SID: 16 (unprotected) 17 (protected)
Link[1]: local address 10.10.21.1, remote address 10.10.21.2
  Local node:
ISIS system ID: 0000.0000.0207 level-2 ASN: 1
  Remote node:
    TE router ID: 208.208.208.208
    Host name: 920-R8
    ISIS system ID: 0000.0000.0208 level-2 ASN: 1
    Metric: IGP 10, TE 10, Latency 10
    Bandwidth: Total 1250000000 Bps, Reservable 0 Bps
    Admin-groups: 0x00000000
    Adj SID: 18 (unprotected) 19 (protected)
Link[2]: local address 10.10.20.2, remote address 10.10.20.1
  Local node:
    ISIS system ID: 0000.0000.0207 level-2 ASN: 1
  Remote node:
    TE router ID: 209.209.209.209
    Host name: 920-R9
    ISIS system ID: 0000.0000.0209 level-2 ASN: 1
    Metric: IGP 40, TE 40, Latency 40
    Bandwidth: Total 1250000000 Bps, Reservable 0 Bps
    Admin-groups: 0x00000052
    Adj SID: 20 (unprotected) 22 (protected)
    SRLG Values: 25
Node 2
  TE router ID: 209.209.209.209
  Host name: 920-R9
  ISIS system ID: 0000.0000.0209 level-1 ASN: 1
  ISIS system ID: 0000.0000.0209 level-2 ASN: 1
  Prefix SID:
    ISIS system ID: 0000.0000.0209 level-1 ASN: 1 domain ID: 0
      Prefix 209.209.209.209, label 16001 (regular), flags: N
    ISIS system ID: 0000.0000.0209 level-1 ASN: 1 domain ID: 0
      Prefix 209.209.209.209, label 18001 (strict), flags: N
    ISIS system ID: 0000.0000.0209 level-2 ASN: 1 domain ID: 0
      Prefix 209.209.209.209, label 16001 (regular), flags: N
    ISIS system ID: 0000.0000.0209 level-2 ASN: 1 domain ID: 0
      Prefix 209.209.209.209, label 18001 (strict), flags: N
  SRGB INFO:
    ISIS system ID: 0000.0000.0209 level-1 ASN: 1
      SRGB Start: 16000 Size: 8000

```



```
ISIS system ID: 0000.0000.0209 level-2 ASN: 1
SRGB Start: 16000 Size: 8000
Link[0]: local address 10.10.20.1, remote address 10.10.20.2
Local node:
ISIS system ID: 0000.0000.0209 level-2 ASN: 1
Remote node:
TE router ID: 207.207.207.207
Host name: 920-R7
ISIS system ID: 0000.0000.0207 level-2 ASN: 1
Metric: IGP 40, TE 40, Latency 40
Bandwidth: Total 1250000000 Bps, Reservable 0 Bps
Admin-groups: 0x00000052
Adj SID: 1980 (unprotected) 1981 (protected)
Link[1]: local address 10.10.22.1, remote address 10.10.22.2
Local node:
ISIS system ID: 0000.0000.0209 level-2 ASN: 1
Remote node:
TE router ID: 208.208.208.208
Host name: 920-R8
ISIS system ID: 0000.0000.0208 level-2 ASN: 1
Metric: IGP 10, TE 50, Latency 50
Bandwidth: Total 1250000000 Bps, Reservable 0 Bps
Admin-groups: 0x0000002C
Adj SID: 1971 (unprotected) 1972 (protected)

RP/0/RSP0/CPU0:ASR9K#
```

Further troubleshooting tips:

- Enable the following debug commands on the PCCs:
 - debug segment-routing traffic-eng path
 - debug segment-routing traffic-eng pcalc
 - debug segment-routing traffic-eng policy
 - debug segment-routing traffic-eng topology
 - debug segment-routing traffic-eng ha
- Enable the following debug commands on the PCE:
 - debug pce pcep
 - debug pce cspf
 - debug pce cspf-internal
 - debug pce error
 - debug pce path

