



Filter

- [Filters, on page 1](#)

Filters

Create presets using the following filters:

Criteria

Enter keyword(s) in the field to apply the search function. Use **Select All**, **Reject All**, or **Default** to modify the list.

- Risk score: device individual risk
- Networks: device IPs
- Device tags: devices
- Activity tags: activities
- Groups: devices
- Sensors: device “location”

Filters work differently whether they are affecting devices or activities. Their combination limits the scope of data visualized in the different views for a preset. Each category allows you to define a subset of the components, or activities for the Activity filter. If filters are defined by several categories, the resulting dataset is the intersection of the selections for each category. Parameter and filter usage is explained below.

Risk Score

Use the Risk Score to filter devices based on their score or a range of Risk scores. Risk scores can be inclusive or exclusive filters. All devices will be filtered based on this range.

Risk score, filter definition

Risk score – inclusive filter

In the example above, only the devices with a risk score in the selected range will be selected.

Networks

Define a filter based on two network settings: IP range or VLAN ID. This filter will have an impact on the Activity List. The result will be “all activities with one end belonging to this network.” Activities with at least one device in the corresponding network are selected.

Regarding the Device list, only the devices with at least one IP address in the corresponding network range are selected.

For instance, use exclusion and combination for this result:

Network filter – negative filter

Device	Device	First activity	Last activity	Tags
Siemens 192.168.21.50	Broadcast ffffffff	Jul 6, 2021 10:56:20 AM	Jul 6, 2021 10:59:16 AM	Broadcast, ARP
Weintek 192.168.0.92	1756-L81ES/B (Port1-Link03)	Jul 6, 2021 10:56:20 AM	Jul 6, 2021 10:59:15 AM	Read Var, EthernetIP
1756-L71/B LOGIX557 1 (Port1-Link00)	Cisco 192.168.20.254	Jul 6, 2021 10:56:20 AM	Jul 6, 2021 10:59:15 AM	ARP
1756-L71/B LOGIX557 1 (Port1-Link00)	Weintek 192.168.0.92	Jul 6, 2021 10:56:20 AM	Jul 6, 2021 10:59:14 AM	Low Volume, EthernetIP

Multiple negative selections are not supported on 4.0.0.

Filter combination

You can define filters in several categories simultaneously. The preset will be calculated first by filtering the activities with all the activity-based filters. Then, the devices will be filtered with their own filter criteria. The result is the preset dataset. This preset dataset is used to precompute the view that Cyber Vision presents to you. Select a time frame to further filter the preset dataset.

Device tag filters

Device tags are used to select components. Device tag filters are inclusive or exclusive. The combination of several device tags selects all the components with at least one of the selected device tags. If the device tag filter is exclusive, the system will ignore all components with the selected device tags. For example:

Device tag filters

Device tag filter definition	Device	Tags	Visible ?
<input checked="" type="checkbox"/> Controller (8) <input checked="" type="checkbox"/> Network Switch (2) <input checked="" type="checkbox"/> Rockwell Automation <input checked="" type="checkbox"/> Siemens	IE4000PRP2.ccv 80:2d:bf:1e:23:8c	Network Switch	Yes
	Schneider 192.168.22.68	Controller	Yes
	Siemens 192.168.21.41	Controller, Siemens	No
	1756-L71/B LOGIX5571 (Port1-Link00)	Controller, Rockwell Automation	No

When devices are filtered the **Device view only** presents the devices corresponding to the filter. For the other displays like activity list or map, the devices which are communicating with the selected devices will be displayed too (all engineering stations or HMI in our example).


It will give the following results:

Device tag filter, example of Controllers – list of devices

Device	Group	First activity	Last activity	IP	MAC	Risk score	Tags
5049-L304ERS2/B (Port1-Link00)	RA_Controllers	Jul 6, 2021 10:56:20 AM	Jul 6, 2021 10:59:18 AM	192.168.20.23	Sc8B:16:a3:10f2 (+ 1 other)	70	Controller, Rockwell Automation
1756-L81ES/B (Port1-Link00)	RA_Controllers	Jul 6, 2021 10:56:20 AM	Jul 6, 2021 10:59:15 AM	192.168.20.25	Sc8B:16:ed:cc:08 (+ 1 other)	70	Controller, Rockwell Automation
1756-L71/B LOGIX5571 (Port1-Link00)	RA_Controllers	Jul 6, 2021 10:56:20 AM	Jul 6, 2021 10:59:14 AM	192.168.20.21	Sc8B:16:ef:af:12e (+ 1 other)	70	Controller, Rockwell Automation

In the associated map, all the components which communicate with the controllers will also be displayed. These other components are shadowed to be recognized:

Device tag filter, example of Controllers - map

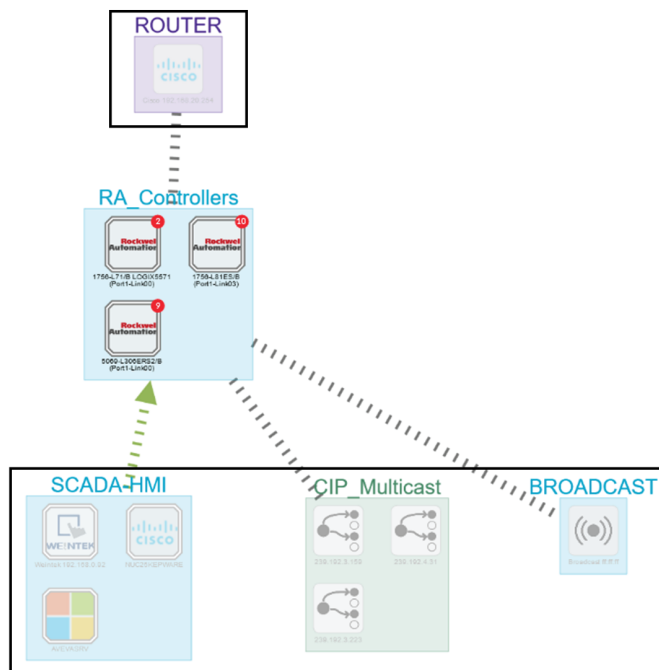

Activity Tags

Filtering on **Activity tags** will not have the same behavior than a filter based on **Devices**. Inclusive activity tag filters will be the same, but exclusive activity tag filters will remove activities only when all activity tags are included in the set of excluded tags. For example, if an activity has two tags, both tags need to be excluded to hide the activity.

For example, if an activity has two tags, both tags need to be excluded to hide the activity.

Activity filter – negative filter 1

186 Activities [New data](#)

Device	Device	First activity	Last activity	Tags	Flows	Packets	Volume
IE3400SWITCHES.ccv 04:5fb9cce59:87	CDP/VTP/UDLD Multicast ccccccc	Jul 6, 2021 11:06:14 AM	Jul 6, 2021 11:09:38 AM	Multicast, CDP	-10	2	920 B
Broadcast ffffff	Moxa 192.168.0.28	Jul 6, 2021 11:06:11 AM	Jul 6, 2021 11:09:35 AM	Broadcast, ARP	-10	2	56 B
Moxa 192.168.0.28	EItegroup 192.168.0.26	Jul 6, 2021 11:06:11 AM	Jul 6, 2021 11:09:39 AM	Net Management, ARP, SNMP	-10	29232	2.9 MB
Broadcast ffffff	Good 192.168.0.4	Jul 6, 2021 11:06:03 AM	Jul 6, 2021 11:09:42 AM	Broadcast, ARP	-10	18	504 B
EItegroup 192.168.0.26	Vmware 192.168.0.18	Jul 6, 2021 11:06:01 AM	Jul 6, 2021 11:09:42 AM	Ping, ARP, ICMP	-10	14	1.08 kB
IE3400SWITCHES.ccv 04:5fb9cce59:87	LLDP/STP bridges Multicast 0:0:0	Jul 6, 2021 11:05:58 AM	Jul 6, 2021 11:09:43 AM	Multicast	-10	36	2.16 kB
EItegroup 192.168.0.26	Virtual 192.168.0.235	Jul 6, 2021 11:05:58 AM	Jul 6, 2021 11:09:43 AM	Remote access, Low Volume	-10	1536	720 kB
EItegroup 192.168.0.52	23.200.213.221	Jul 6, 2021 10:59:09 AM	Jul 6, 2021 10:59:16 AM	Insecure, Web, HTTP	-10	5	330 B
SRV-AD-LABCCV	Broadcast 192.168.0.255	Jul 6, 2021 10:59:07 AM	Jul 6, 2021 10:59:07 AM	Broadcast, Low Volume, Netbios, SMB	-10	1	243 B

In the example above, several activities show because the ARP tag is present, as well as other **Activity tags**. There is no exact match. The activity below is hidden.

filter 2

Cisco 192.168.0.140	Vmware 192.168.0.7	Jul 6, 2021 10:56:30 AM	Jul 6, 2021 10:56:30 AM	ARP
1756-L71/B LOGIX5571 (Port1-Link00)	Cisco 192.168.20.254	Jul 6, 2021 10:56:20 AM	Jul 6, 2021 10:59:15 AM	ARP

To remove broadcast and ARP activities, select both activity tags, as shown below.

Activity filter – negative filter 3

Last 5 years (Jul 13, 2016 2:45:18 PM – Jul 12, 2021 2:45:18 PM) [Refresh](#)

163 Activities [New data](#)

Device	Device	First activity	Last activity	Tags	Flows	Packets	Volume
IE3400SWITCHES.ccv 04:5fb9cce59:87	CDP/VTP/UDLD Multicast ccccccc	Jul 6, 2021 11:06:14 AM	Jul 6, 2021 11:09:38 AM	Multicast, CDP	-10	2	920 B
Moxa 192.168.0.28	EItegroup 192.168.0.26	Jul 6, 2021 11:06:11 AM	Jul 6, 2021 11:09:39 AM	Net Management, ARP, SNMP	-10	29232	2.9 MB
EItegroup 192.168.0.26	Vmware 192.168.0.18	Jul 6, 2021 11:06:01 AM	Jul 6, 2021 11:09:42 AM	Ping, ARP, ICMP	-10	14	1.08 kB
IE3400SWITCHES.ccv 04:5fb9cce59:87	LLDP/STP bridges Multicast 0:0:0	Jul 6, 2021 11:05:58 AM	Jul 6, 2021 11:09:43 AM	Multicast	-10	36	2.16 kB
EItegroup 192.168.0.26	Virtual 192.168.0.235	Jul 6, 2021 11:05:58 AM	Jul 6, 2021 11:09:43 AM	Remote access, Low Volume	-10	1536	720 kB
EItegroup 192.168.0.52	23.200.213.221	Jul 6, 2021 10:59:09 AM	Jul 6, 2021 10:59:16 AM	Insecure, Web, HTTP	-10	5	330 B
SRV-AD-LABCCV	Broadcast 192.168.0.255	Jul 6, 2021 10:59:07 AM	Jul 6, 2021 10:59:07 AM	Broadcast, Low Volume, Netbios, SMB	-10	1	243 B
40.125.122.176	NUC2SKEPWARE	Jul 6, 2021 10:58:55 AM	Jul 6, 2021 10:59:17 AM	Web, Encrypted, HTTPS	-10	13	858 B


For very specific use cases, combine inclusive and exclusive tags. The above rules, for positive and negative selection, are combined, resulting in the following logic:

- Activities are selected as soon as at least one tag is in the set of included tags
- From this selection, activities which all tags are in the set of included AND excluded tags are hidden

Groups

Filter devices by Groups. Each group or sub-group could be added as an inclusive or exclusive filter.

Group filter

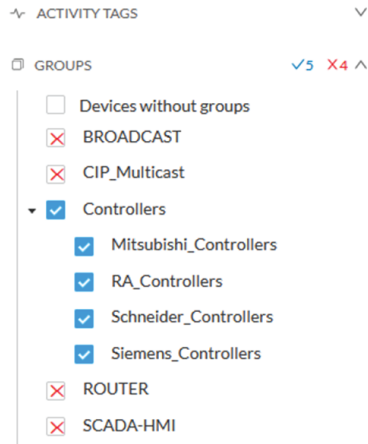

In the example above, only the devices belonging to the selected groups will be selected. Activities always involve two end points and are selected if either end point is part of a selected group, and none are part of an excluded group.

Sensors

Filter Activities based on the sensor that analyzed the associated packets. For tags, use inclusive and exclusive filters. Usually, either option is used but not both. Inclusive: selects data coming from a set of sensors. Exclusive: Ignore the data from a set of sensors.


Sensor filter




Keyword

A keyword can be used to filter devices using the “Search” section of the GUI. This keyword will be used to select devices based on their name, properties, IP, MAC and tags.

Keyword = 4c:71:0d

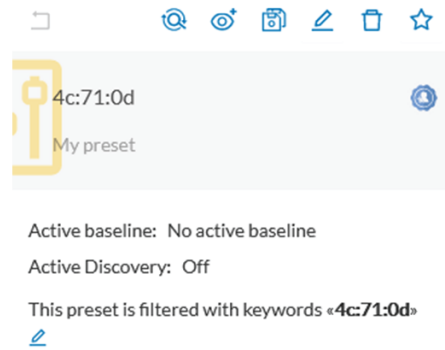

Keyword =siemens

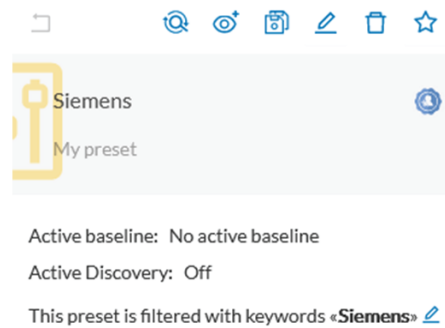

Filter combination

The user can define filters in several categories simultaneously. The preset will be calculated first by filtering the activities with all the activity-based filters. Then, the devices will be filtered with their own filter criteria. The result is the preset dataset. This preset dataset is used to precompute the view that is proposed to the user. The user can select a time frame to further filter the preset dataset.

