

Validate Secure Access Domain Bypass on Secure Client

Issue

Organizations using Cisco Secure Access often configure Bypass domains to allow specific websites, applications, or


Environment

- Cisco Secure Access with Roaming Security Modules along with Domain Bypass.

Resolution


When we configure a Domain with:

- **Bypass Secure access**, the configuration is pushed to the client in the file allowlist.txt under **C: > Program D**

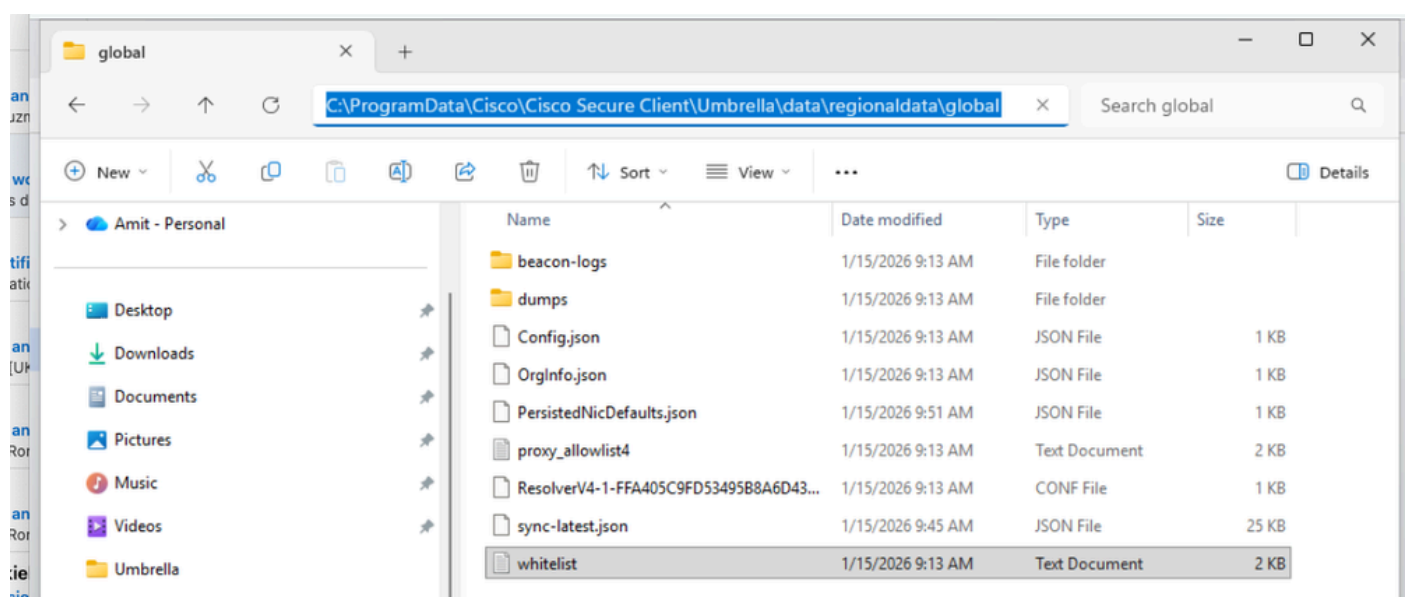

inline_image_0.png

- **Bypass SWG**, the configuration is pushed to the client in the SWGConfig.json file under **C: > Program Data > Cisco > Cisco Secure Client > Umbrella > SWG:**

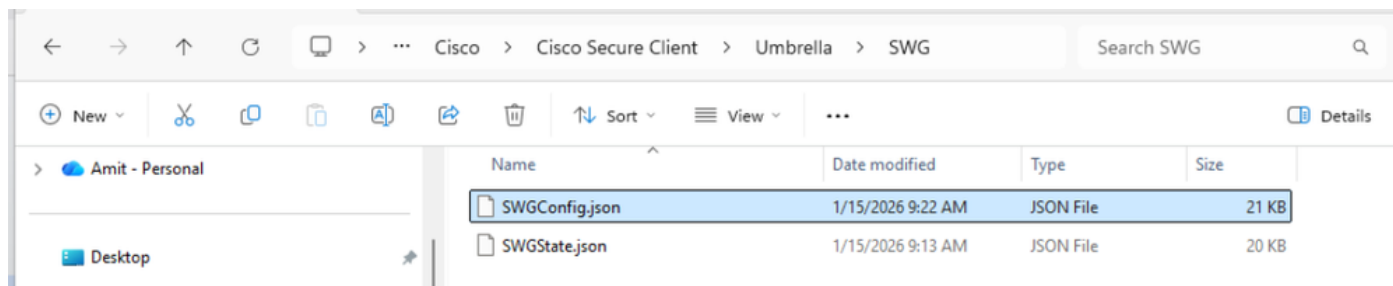

inline_image_1.png



Note:

Sync Timer between Client and the cloud is approximately 25 min but if you want to override it you can rest

Cause

The root cause of the issue was that the user checked the incorrect file for SWG Bypass.

Related Content

- [Cisco Technical Support & Downloads](#)