



# Cisco DNA Center ITSM Integration Workflows

- [Cisco DNA Center Integration Supported Workflows, on page 1](#)
- [Cisco DNA Center Integration with a Generic REST Endpoint, on page 1](#)
- [Cisco DNA Center Integration with ServiceNow Without the Cisco DNA App, on page 7](#)
- [Cisco DNA Center Integration with ServiceNow Using the Cisco DNA App, on page 17](#)
- [Cisco DNA Center Endpoint Attribute Retrieval with ServiceNow, on page 37](#)

## Cisco DNA Center Integration Supported Workflows

The following Cisco DNA Center ITSM integration workflows are supported:

- Cisco DNA Center ITSM integration with a generic REST endpoint: For information about this workflow, see [Cisco DNA Center Integration with a Generic REST Endpoint, on page 1](#).
- Cisco DNA Center ITSM integration with ServiceNow without using the Cisco DNA application for ServiceNow: For information about this workflow, see [Cisco DNA Center Integration with ServiceNow Without the Cisco DNA App, on page 7](#).
- Cisco DNA Center ITSM integration with ServiceNow using the Cisco DNA application for ServiceNow: For information about this workflow, see [Cisco DNA Center Integration with ServiceNow Using the Cisco DNA App, on page 17](#).
- Cisco DNA Center ITSM endpoint attribute retrieval with ServiceNow using the Cisco DNA application for ServiceNow: For information about this workflow, see [Cisco DNA Center Endpoint Attribute Retrieval with ServiceNow, on page 37](#).

## Cisco DNA Center Integration with a Generic REST Endpoint

The following table describes the procedure for configuring Cisco DNA Center integration with a generic REST endpoint. You may wish to publish network and SWIM events to a REST endpoint (outside of a configuration management database) for performance, security, event response, or other reasons.

Table 1: Cisco DNA Center to Generic REST Endpoint Integration Procedure

Step	Description
Step 1	Install or upgrade to Cisco DNA Center, Release 2.2.2. For information about installing Cisco DNA Center, see the <a href="#">Cisco DNA Center Installation Guide</a> .
Step 2	Determine the REST endpoint (system location and IP address) for the publication of the Assurance (network) events and/or SWIM events.
Step 3	Configure network events using <b>Events</b> window in the Cisco DNA Center GUI. You can configure REST API endpoints for events using the GUI. Click <b>Platform &gt; Developer Toolkit &gt; Events</b> . Review the network events listed in the window and click a specific event to configure, then click <b>Subscribe</b> to create a REST API endpoint. For information, see <a href="#">Configure Network Events, on page 2</a> . <b>Important</b> Network event notifications are sent when the event actually occurs and not according to any polling schedule that you configure.
Step 4	Configure network event settings in <b>Event Settings</b> . The Cisco DNA Center platform and ITSM integration allows the user to choose from a list of possible issues to create and modify the severity of events, incidents, or problems to match business priorities. For information, see <a href="#">Configure Event Settings, on page 6</a> .
Step 5	Access the REST endpoint and review the network event data that has been posted using the REST APIs in this procedure. Begin to review and manipulate this data according to your business or network needs.

## Configure Network Events

You can subscribe to specific events that may occur in your network. After you subscribe, you receive a notification by REST API whenever the event occurs. You subscribe to an event using the **Events** window in the Cisco DNA Center platform GUI.

Figure 1: Cisco DNA Center Platform Events Window

Event ID	Name	Type	Category	Severity
INTEGRATIONS-ITSM-842	<a href="#">Publish CMDB sync failure</a>	INTEGRATIONS	INFO	3
LICMGMT-DEV-DEREG-FAILURE	<a href="#">Device de-registration failed</a>	APP	TASK_FAILURE	3
LICMGMT-DEV-DEREG-SUCCESS	<a href="#">Device de-registration succeeded</a>	APP	TASK_COMPLETE	4
LICMGMT-DEV-REG-FAILURE	<a href="#">Device registration failed</a>	APP	TASK_FAILURE	3
LICMGMT-DEV-REG-	<a href="#">Device registration</a>			3

### Before you begin

- For a REST API subscription of events, you have configured the REST API event notifications in the **Webhook** window in Cisco DNA Center. You access the **Webhook** window by clicking the **Menu** icon (**☰**) > **System** > **Settings** > **External Services** > **Destinations** > **Webhook**.
- You must have the appropriate permissions to perform the tasks described in this procedure. For information about Role-Based Access Control for the Cisco DNA Center platform, see the [Cisco DNA Center Platform User Guide](#).

**Step 1** In the Cisco DNA Center GUI, click the **Menu** icon (**☰**) and choose **Platform** > **Developer Toolkit** > **Events**.

**Step 2** In the **Events** window, review the events displayed in the table.

**Note** You can adjust the events that are displayed by entering a keyword in the **Find** field.

**Step 3** Review the data on an individual event within the table.

The following **Events** data is provided:


- **Event ID:** Identification number for the event.
- **Name:** Name of the event (link).  
If you click this link, the **Name** slide-in pane opens for the selected event. The **Name** slide-in pane consists of two tabs: **Events Details** and **Active Subscriptions**.
- **Description:** Brief description of the event.
- **Type:** Network, App, System, Security, or Integrations type of event.
- **Category:** Error, Warn, Info, Alert, Task Progress, or Task Complete.
- **Severity:** 1 through 5.

**Note** Severity 1 is the most important or critical priority and should be assigned for this type of event.

- **Status:** Subscription status (whether a user has subscribed to the event and will appear in the **Active Subscriptions** tab). If subscribed to an event, the type of notification also appears in the **Broadcast Methods** column (REST URL, email, or SNMP trap).

**Step 4** Click a **Name** link to open an event subscription slide-in pane.

**Figure 2: Individual Event Window**

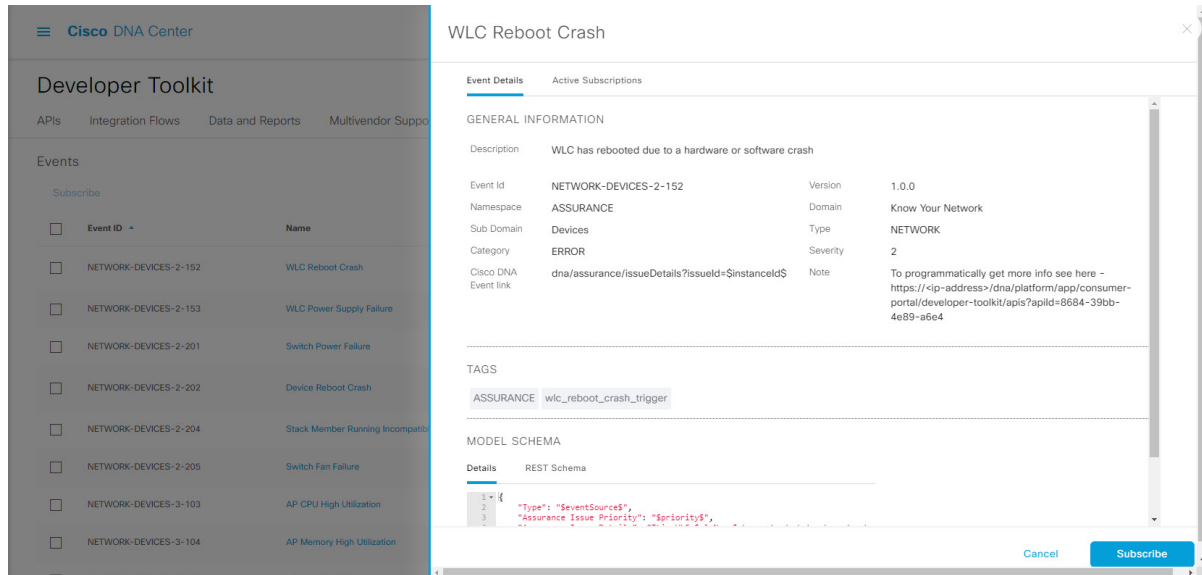

**Step 5** Review the data displayed in the event subscription slide-in pane.

The following **Event Details** tab data is displayed:

- **Description:** Brief description of the event and how it is triggered.
- **Event ID:** Identification number of the event.
- **Version:** Version number of the event.
- **Namespace:** Namespace of the event.  
The default value for all events is ASSURANCE.
- **Domain:** REST API domain to which the event belongs.
- **Sub Domain:** Sub-group under the REST API domain to which the event belongs.
- **Type:** Network, App, System, Security, or Integrations type of event.
- **Category:** Error, Warn, Info, Alert, Task Progress, Task Complete.
- **Severity:** 1 through 5.

**Note** Severity 1 is the most important or critical priority and should be assigned for this type of event.

- **Cisco DNA Event Link:** Event broadcast using REST URL.

- **Note:** Additional information about the event or to assist in further understanding the event.
- **Tags:** Cisco DNA Center component that is affected by the event. The default value is ASSURANCE with additional syntax for the specific Assurance issue.
- **Model Schema:** Model schema about the event:
  - **Details:** Example of model schema detail for the event.
  - **REST Schema:** REST schema format for the event.

**Step 6** Click the **Active Subscriptions** tab.

The following data is displayed:

- **Broadcast Methods:** Email, REST API, or SNMP trap.
- **Count and Instances:** Number of instances of notifications for emails, REST APIs, or SNMP traps.

Click the subscription count under **Count and Instances**. To edit the subscription, click **Edit**. To unsubscribe, click **Unsubscribe**. For multiple subscriptions, you need to unsubscribe from each subscription one at a time. The ability to subscribe to or unsubscribe from multiple subscriptions is not supported using the GUI.

- **Actions:** Either unsubscribe or edit the active subscription.

**Note** After subscribing to an event, a **Try It** button appears in the **Active Subscriptions** tab. To run an event simulation, click **Try It**. For information about this feature, see the [Cisco DNA Center Platform User Guide](#).

**Step 7** To add the event to your active subscription of events and receive future notifications, click **Subscribe**.

You subscribe to an event to receive either an email, REST API endpoint, or SNMP trap notification. If you subscribe to a REST API endpoint notification (for example for a web hook), then configure the following fields:

- **Name:** Name of the event.
- **Subscription Type: REST**  
Subscription type can be set for either email, REST API endpoint, or SNMP trap.
- **Select an existing endpoint:** Select the Subscription Endpoint and URL by using the drop down arrow.
- **Create a new endpoint:** Click the active link to access the **Webhook** tab and configure the settings for the REST API endpoint.

**Note** After you configure the values in the **Webhook** tab, return to the event and select it as your configured REST API endpoint.

- **Trust certificate:** Choose whether a trust certificate is required for REST API endpoint notification.
- **HTTP Method:** Choose either the PUT or POST method.
- **Authentication:** Select the Authentication type:
  - **Basic:** Authentication where the client sends HTTP requests with the Authorization header that contains the word 'Basic', followed by a space and a base64-encoded string 'username:password'. If you select **Basic**, then the **Header Key** field is automatically populated with the **Authorization** value.
  - **Token:** Authentication where users are authenticated using a security token provided by the server. If you select **Token**, the **Header Key** field is automatically populated with the **X-Auth-Token** value.

- **No Authentication:** No authentication needed.
- **Headers:** Enter the **Header Name** and **Header Value**. Click **Add** to add the header values.

**Note** The **Header Name** field may be auto-populated depending upon your **Authentication** selection above.

Click **Subscribe** to save and enable the subscription or **Cancel** to cancel and exit the window.

## Configure Event Settings

The Cisco DNA Center platform and ITSM integration permits you to choose from a list of possible issues to create and modify the severity of events, incidents, or problems in ServiceNow to match your business priorities. You perform these tasks in the **Events Settings** window. The **Events Settings** window is accessible from the **Configurations** menu option in the Cisco DNA Center platform.



**Note** For this release, there are no SWIM events to configure in **Event Settings**, you only configure network assurance events.



**Important** The **Event Settings** window and its functionality are applicable only to events for an ITSM (ServiceNow) integration and not for events configured to other destinations. To configure events to a webhook or other destination, click the link above the columns. Use the **Events** window to configure events for an email, webhook, or SNMP trap.

**Figure 3: Events Settings Window**

Event Name	Domain	Type	Category	Severity	Workflow	Actions
AP Coverage Hole	Know Your Network	NETWORK	WARN	3	Incident	Edit
AP CPU High Utilization	Know Your Network	NETWORK	WARN	3	Incident	Edit
AP License Exhausted on WLC	Know Your Network	NETWORK	WARN	3	Incident	Edit
AP Memory High Utilization	Know Your Network	NETWORK	WARN	3	Incident	Edit
AP Reboot Crash	Know Your Network	NETWORK	WARN	3	Incident	Edit
BGP Tunnel Connectivity	Know Your Network	NETWORK	ERROR	2	Incident	Edit

### Before you begin

You must have the appropriate permissions to perform the tasks as described in this procedure. For information about Role-Based Access Control for the Cisco DNA Center platform, see the [Cisco DNA Center Platform User Guide](#).

---

**Step 1** In the Cisco DNA Center GUI, click the **Menu** icon (☰) and choose **Platform > Manage > Configurations**. A **Configurations** window that contains an **Events Settings** section is displayed.

**Step 2** Review the information presented in the **Event Settings** section:

- **Event Name:** Name of the Cisco DNA Center event.
- **Domain:** Domain of the Cisco DNA Center event.
- **Type:** Network, App, System, Security, or Integrations.
- **Category:** Error, Warn, Info, Alert, Task Progress, or Task Complete.
- **Severity:** P1 (Severity 1) through P5 (Severity 5).

**Note** Severity 1 is the most important or critical priority and should be assigned for this type of event.

- **Workflow:** Incident, Problem, Event, or RFC (Request for Change).
- **Actions:** Edit.

To adjust what is displayed in the table, click the **Filter** icon or enter a keyword in the **Find** field. For example, to display all access point notifications, enter **AP** in the **Find** field. To view all network notifications, enter **Network** in the **Find** field. To view all severity notifications, enter **1** in the **Find** field.

**Step 3** To edit an event, click **Edit** in the **Actions** column.

To choose a setting, click the down-arrow and adjust the value. For example, click **Network** and adjust to **App**. This changes the event type from a network type to an application type. Click **Severity** and adjust the setting from **5** to **1**. The severity level is raised from 5 to 1.

**Step 4** Click the box next to the event name to enable notifications.

This enables notifications through Cisco DNA Center when the event occurs in the future.

**Step 5** Click **Save**.

---

## Cisco DNA Center Integration with ServiceNow Without the Cisco DNA App

The following table describes the procedure for configuring Cisco DNA Center integration with ServiceNow without using the Cisco DNA app. Follow the procedure to configure integration for network events, SWIM events, or both event types depending upon the functionality that you require.



**Note** You can also use the **Basic ITSM (ServiceNow) CMDB synchronization** bundle with this workflow. If you use this bundle, be sure to choose **Post device inventory details to a staging table** as the destination type. The other destination type (**Synchronize device inventory directly with CMDB**) requires the Cisco DNA App. Additionally, the **Post device inventory details to a staging table** destination type only sends data to the REST API endpoint. You will need to create a script to perform any further action on the data.

**Table 2: Cisco DNA Center to ServiceNow Integration without the Cisco DNA App Procedure**

Step	Description
Step 1	Install or upgrade to Cisco DNA Center, Release 2.2.2. For information about <i>installing</i> Cisco DNA Center, see the <a href="#">Cisco DNA Center Installation Guide</a> .
Step 2	Install or upgrade to ServiceNow running the following version: <ul style="list-style-type: none"> <li>• Paris</li> <li>• Orlando</li> <li>• New York Patch 1</li> </ul> Refer to your ServiceNow documentation for its installation and upgrade procedures. <b>Note</b> This procedure needs to be performed by a ServiceNow administrator.
Step 3	Configure the <b>Network Issue Monitor and Enrichment for ITSM (ServiceNow)</b> bundle. For information, see <a href="#">Configure the Network Issue Monitor and Enrichment for ITSM (ServiceNow) Bundle, on page 9</a> .  This bundle enables Change Management between the two systems (Cisco DNA Center and ServiceNow). Change Management and Incident/Problem Management workflows should be enabled based on the automation or assurance use cases that you want to log tickets to in ServiceNow.
Step 4	Configure network event settings in <b>Event Settings</b> . For information, see <a href="#">Configure Event Settings, on page 12</a> .  <b>Note</b> The Cisco DNA Center platform and ITSM integration allows the user to choose from a list of possible issues to create and modify the severity of events, incidents, or problems in ServiceNow to match business priorities.



Step	Description
Step 5	<p>Configure the <b>Cisco DNA Center Automation events for ITSM (ServiceNow)</b> bundle.</p> <p>For information, see <a href="#">Configure the Cisco DNA Center Automation Events for ITSM (ServiceNow) Bundle, on page 14</a>.</p> <p>The <b>Cisco DNA Center Automation events for ITSM (ServiceNow)</b> bundle has been improved for this release. This bundle retrieves events relating to software image updates required for compliance, security or any other operational triggers from Cisco DNA Center. With past releases, the bundle published the event data on a user-defined recurring schedule to an ITSM (Service Now) system. In this release, SWIM event notifications are sent from Cisco DNA Center to ServiceNow when they occur and not on a polling and notify schedule. Additionally, for this release there is no SWIM event that you must configure in <b>Event Settings</b>. Previous releases required that you configure a single SWIM event (<b>Device Image Outdated</b>).</p> <p>For additional information about this improved bundle and feature, see <a href="#">About SWIM Closed Loop Automation</a>.</p>
Step 6	<p>Access your ServiceNow instance and review the network and SWIM event data that has been posted using the REST APIs in this procedure. Begin to review and manipulate this data in ServiceNow per your business or network needs.</p> <p><b>Note</b> The ServiceNow user must have the role of <code>evt_mgmt_integration</code> to post events to the event table (<code>em_event</code>).</p>

## Configure the Network Issue Monitor and Enrichment for ITSM (ServiceNow) Bundle


Perform this procedure to set up monitoring for network for assurance and maintenance issues, as well as publishing event details to a ServiceNow system.



**Note** Event data can be published to the **Event** table in ServiceNow. This requires that you have the Event Management plugin in your ServiceNow instance. If you do not have the Event Management plugin in your ServiceNow instance, the bundle can be configured to send the data to a REST API endpoint in the Cisco DNA App.

### Before you begin

You must have the appropriate permissions to perform the tasks as described in this procedure. For information about Role-Based Access Control for the Cisco DNA Center platform, see the [Cisco DNA Center Platform User Guide](#).

**Step 1** In the Cisco DNA Center GUI, click the **Menu** icon () and choose **Platform > Manage > Bundles**.  
Review the displayed bundles and their current status.

**Step 2** Click the **Network Issue Monitor and Enrichment for ITSM (ServiceNow)** bundle link or icon (colored square with initial) for additional information about the bundle.

Additional information provided may include the following:

- **General information:** Vendor, version, platform, tags displayed under the square icon.
- **Information:** Tab that displays general information (purpose of bundle and how bundle works in the network), sample schemas, configuration notes, and other data about the bundle.
- **Contents:** Tab that accesses the APIs and integration flows that make up the bundle, or provides information about the integration flows that make up the bundle.
- **Release Notes:** Tab that displays latest release information about the bundle, including its version.

**Step 3** Click each of the above tabs and review the information about the bundle.

**Step 4** Click the **Enable** button to enable the bundle.

An **Information** field appears in the window.

**Step 5** In the **Information** field, click the **Enable** button to confirm enabling the bundle.

After clicking the **Enable** button to confirm, a success message appears.

**Step 6** Click **OK** in the success message.


**Step 7** Click the **Configure** button to configure at the bundle level.

A configuration slide-in pane appears.

**Step 8** In the configuration slide-in pane, click **ServiceNow Access Settings** to configure a ServiceNow Connection instance.

**Step 9** Click the radio button to configure either an existing ServiceNow Connection instance or configure a new instance.

**Figure 4: Example of ServiceNow Instance Configuration Fields**

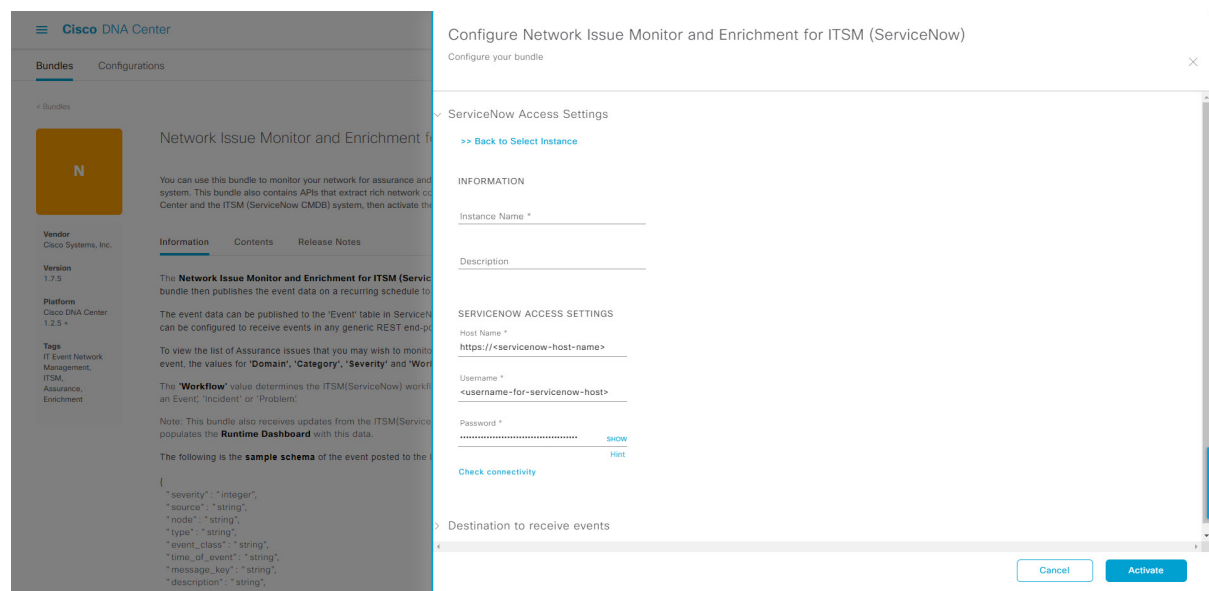

For configuring an existing ServiceNow Connection instance, choose it from the drop-down menu in the window and click **Activate**.

**Step 10** For configuring a new ServiceNow Connection instance, the following additional information must be entered.

- **Instance Name:** Name of the instance.
- **Description:** Descriptive text of the instance.
- **Host name:** Host name for the ServiceNow system.
- **Username:** Username required to access the ServiceNow system.
- **Password:** Password required to access the ServiceNow system.


**Step 11** Click **Check Connectivity** to test whether you can connect to the server where the endpoint is located.

After a successful test of connectivity to the server, proceed to configure **Destination to receive events**.

**Step 12** In the configuration slide-in pane, click **Destination to receive events** to configure a Destination Connection instance.

**Step 13** Click the radio button to configure either an existing Destination Connection instance or configure a new instance.

**Figure 5: Example of Destination to Receive Events Configuration Fields**

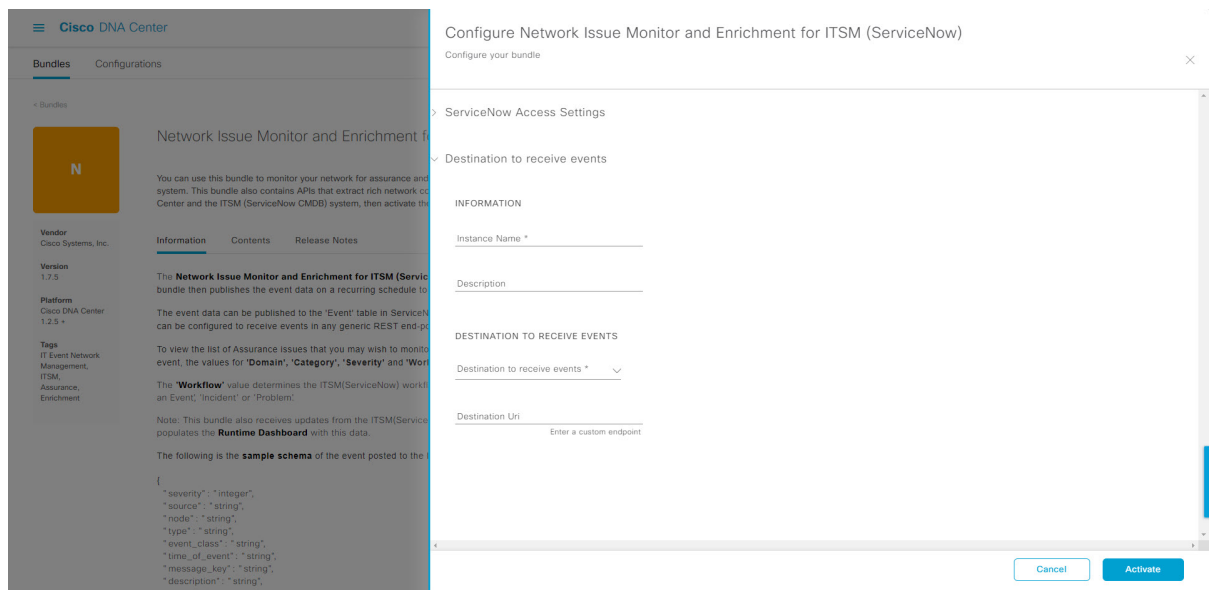

For configuring an existing Destination Connection instance, choose it from the drop-down menu in the window and click **Activate**.

**Step 14** For configuring a new Destination instance, the following additional information must be entered.

- **Instance Name:** Name of the instance.
- **Description:** Descriptive text of the instance.
- **Destination to receive events:** Choose one of the following:
  - **Event Management:** When setting up Cisco DNA Center integration with ServiceNow without using the Cisco DNA App, choose the **Event Management** option. The **Event Management** option also requires that you have the Event Management plugin configured within the ServiceNow instance.
  - **REST API Endpoint:** The **REST API Endpoint** option can be used with the Cisco DNA App. Data is sent to a REST API endpoint within the Cisco DNA App with the **REST API Endpoint** option.

- **Generic REST Endpoint in ServiceNow:** For the **Generic REST Endpoint in ServiceNow** option, you can send the data to a different staging table in ServiceNow.
- **Destination URI:** Enter a destination URI (Uniform Resource Indicator) for the **Generic REST Endpoint in ServiceNow** option. This field is mandatory for this option.

After entering this information, proceed to the next step.

**Step 15** Click **Activate** to save your changes and activate the bundle or click **Cancel** to cancel the configuration and close the slide-in pane.

The changes made to the bundle begin to take effect immediately. Additionally, the bundle status changes from **ENABLED** to **ACTIVE**.

## Configure Event Settings

The Cisco DNA Center platform and ITSM integration permits you to choose from a list of possible issues to create and modify the severity of events, incidents, or problems in ServiceNow to match your business priorities. You perform these tasks in the **Events Settings** window. The **Events Settings** window is accessible from the **Configurations** menu option in the Cisco DNA Center platform.




**Note** For this release, there are no SWIM events to configure in **Event Settings**, you only configure network assurance events.



**Important** The **Event Settings** window and its functionality is only applicable to events for an ITSM (ServiceNow) integration and not for events configured to other destinations. For events being configured to a webhook or other destination, click the link above the columns to access the **Events** window. Use the **Events** window to configure events for an email, webhook, or SNMP trap.

Figure 6: Events Settings Window

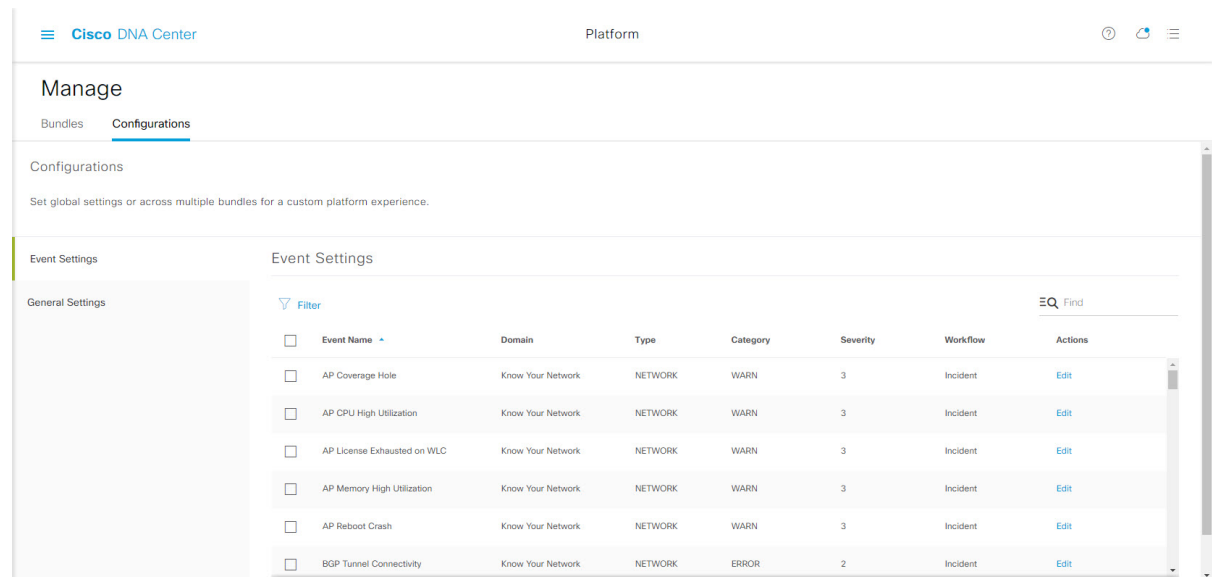

### Before you begin

You must have the appropriate permissions to perform the tasks as described in this procedure. For information about Role-Based Access Control for the Cisco DNA Center platform, see the [Cisco DNA Center Platform User Guide](#).

**Step 1** In the Cisco DNA Center GUI, click the **Menu** icon (☰) and choose **Platform** > **Manage** > **Configurations**.

A **Configurations** window opens that contains an **Events Settings** section.

**Step 2** Review the **Event Settings** section that appears.

The following **Event Settings** information is displayed:

- **Event Name:** Name of the Cisco DNA Center event.
- **Domain:** Domain of the Cisco DNA Center event.
- **Type:** Network, App, System, Security, Integrations type.
- **Category:** Error, Warn, Info, Alert, Task Progress, Task Complete
- **Severity:** P1 (Severity 1) through P5 (Severity 5).

**Note** Severity 1 is the most important or critical priority and should be assigned as such.

- **Workflow:** Incident, Problem, Event, or RFC (Request for Change)
- **Actions:** Edit

You can adjust what is displayed in the table by clicking the **Filter** icon and using the filter, or by typing a keyword in the **Find** field. For example, to display all access point notifications, type 'AP' in the **Find** field. To view all network notifications, type 'Network' in the **Find** field. To view all severity notifications, type '1' in the **Find** field.

**Step 3** Click **Edit** in the **Actions** column to edit an event.

Choose a setting by clicking on the downward pointing angle and adjust the value. For example, click **Network** and adjust to **App**. This changes the event type from a network type to an application type. Click **Severity** and adjust to **1** from **5**. This raises the severity level from 5 to 1.

**Step 4** Click the box next to the Event name to enable notifications.

This enables notifications through Cisco DNA Center when the event occurs in the future.

**Step 5** Click **Save** to save your configuration.

## Configure the Cisco DNA Center Automation Events for ITSM (ServiceNow) Bundle

Perform this procedure to set up monitoring and publishing events requiring software image updates for compliance, security, or other operational triggers to a ServiceNow system.



**Note** Event data can be published to the **Event** table in ServiceNow. This requires that you have the Event Management plugin in your ServiceNow instance. If you do not have the Event Management plugin in your ServiceNow instance, the bundle can be configured to send the data to a REST API endpoint in the Cisco DNA App.

### Before you begin

You must have the appropriate permissions to perform the tasks as described in this procedure. For information about Role-Based Access Control for the Cisco DNA Center platform, see the [Cisco DNA Center Platform User Guide](#).

**Step 1** In the Cisco DNA Center GUI, click the **Menu** icon (☰) and choose **Platform > Manage > Bundles**.

Review the displayed bundles and their current status.

**Step 2** Click the **Cisco DNA Center Automation events for ITSM (ServiceNow)** bundle link or icon (colored square with initial) for additional information about the bundle.

Additional information provided may include the following:

- **General information:** Vendor, version, platform, tags displayed under the square icon.
- **Information:** Tab that displays general information (purpose of bundle and how bundle works in the network), sample schemas, configuration notes, and other data about the bundle.
- **Contents:** Tab that accesses the APIs and integration flows that make up the bundle, or provides information about the integration flows that make up the bundle.
- **Release Notes:** Tab that displays latest release information about the bundle, including its version.

**Step 3** Click each of the above tabs and review the information about the bundle.

**Step 4** Click the **Enable** button to enable the bundle.

An **Information** field appears in the window.

**Step 5** Click the **Enable** button in the **Information** field to confirm enabling the bundle.

After clicking the **Enable** button to confirm, a success message appears.

**Step 6** Click **OK** in the success message.


**Step 7** Click the **Configure** button to configure at the bundle level.

A configuration slide-in pane appears.

**Step 8** In the configuration slide-in pane, click **ServiceNow Access Settings** to configure a ServiceNowConnection instance.

**Step 9** Click the radio button to configure either an existing ServiceNow Connection instance or configure a new instance.

**Figure 7: Example of ServiceNow Instance Configuration Fields**

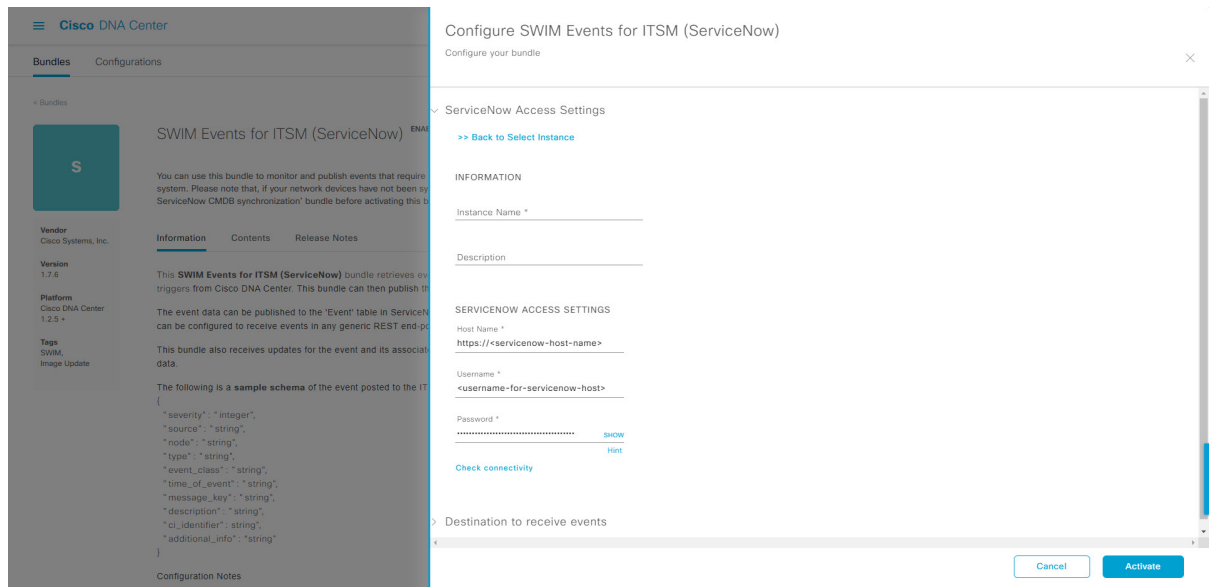

For configuring an existing ServiceNow Connection instance, choose it from the drop-down menu in the window and click **Activate**.

**Step 10** For configuring a new ServiceNowConnection instance, the following additional information must be entered.


- **Instance Name:** Name of the instance.
- **Description:** Descriptive text of the instance.
- **Host name:** Host name for the ServiceNow system.
- **Username:** Username required to access the ServiceNow system.
- **Password:** Password required to access the ServiceNow system.

**Step 11** Click **Check Connectivity** to test whether you can connect to the server where the endpoint is located.

After a successful test of connectivity to the server, proceed to activate the bundle.

- Step 12** In the configuration slide-in pane, click **Destination to receive events** to configure an Destination Connection instance.
- Step 13** Click the radio button to configure either an existing Destination Connection instance or configure a new instance.

**Figure 8: Example of Destination to Receive Events Configuration Fields**

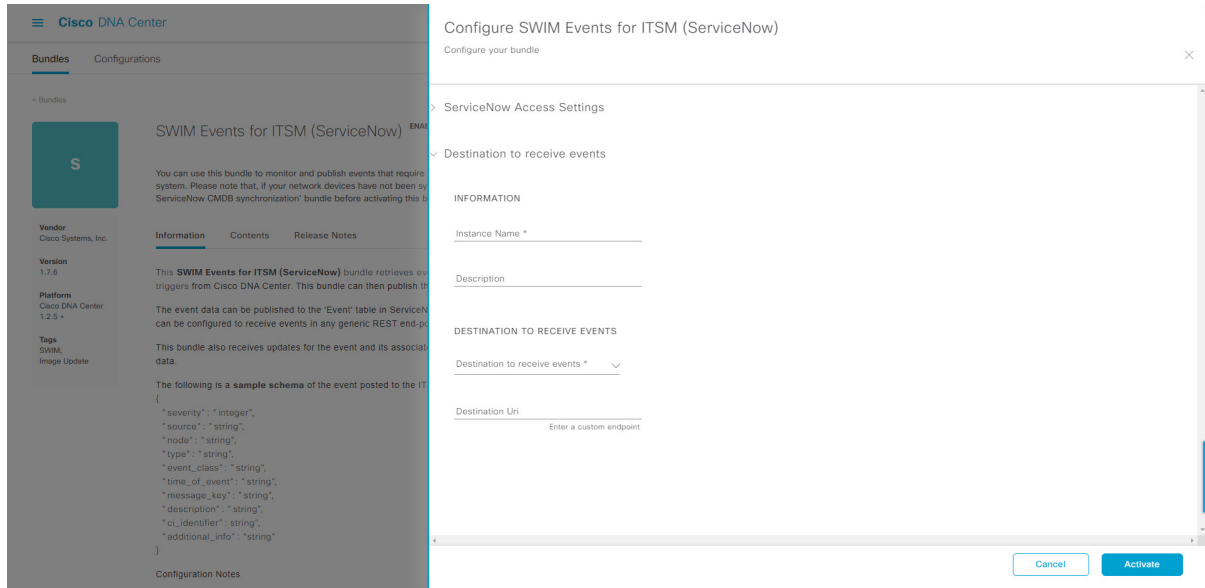

For configuring an existing Destination Connection instance, choose it from the drop-down menu in the window and click **Activate**.

- Step 14** For configuring a new Destination instance, the following additional information must be entered.

- **Instance Name:** Name of the instance.
- **Description:** Descriptive text of the instance.
- **Destination to receive events:** Choose one of the following:
  - **Event Management:** When setting up Cisco DNA Center integration with ServiceNow without using the Cisco DNA App, choose the **Event Management** option. The **Event Management** option also requires that you have the Event Management plugin configured within the ServiceNow instance.
  - **REST API Endpoint:** The **REST API Endpoint** option can be used with the Cisco DNA App. Data is sent to a REST API endpoint within the Cisco DNA App with the **REST API Endpoint** option.
  - **Generic REST Endpoint in ServiceNow:** For the **Generic REST Endpoint in ServiceNow** option, you can send the data to a different staging table in ServiceNow.
- **Destination URI:** Enter a destination Uniform Resource Indicator (URI) for the **Generic REST Endpoint in ServiceNow** option. This field is mandatory for this option.

After entering this information, proceed to the next step.

- Step 15** Click **Activate** to save your changes and activate the bundle or click **Cancel** to cancel the configuration and close the slide-in pane.



**Note** By clicking **Activate**, you enable the changes made to the bundle and the changes take effect immediately. Additionally, the bundle's status changes from **ENABLED** to **ACTIVE**.

## Cisco DNA Center Integration with ServiceNow Using the Cisco DNA App

Cisco DNA Center supports an application (Cisco DNA) that facilitates integration with ServiceNow. This application or app is designed to work with ServiceNow *without* its Event Management plugin.

The Cisco DNA app is installed within the ServiceNow instance and performs the following tasks:

- Schedules the basic one-way synchronization of Cisco DNA Center discovered devices into the ServiceNow Configuration Management Database (CMDB) using Cisco DNA Center inventory as a source of truth. The Cisco DNA app supports CMDB synchronization from Cisco DNA Center to ServiceNow.
- Automatically triggers problem, incident, and change workflows for network events published by Cisco DNA Center.
- Enriches ITSM tickets with network details from Cisco DNA Center. The Cisco DNA app makes REST API calls into Cisco DNA Center for fetching enrichment information of various types such as device, issue, user, and client for a user created ticket.
- Supports integration of the Cisco DNA Center platform with ServiceNow for an automated way to create change request (CR) tickets in ServiceNow for network events.

The following table describes the procedure for configuring Cisco DNA Center integration with ServiceNow using the Cisco DNA app. Follow the procedure to configure integration for network events, SWIM events, or both event types depending upon the functionality that you require.

**Table 3: Cisco DNA Center to ServiceNow Integration with Cisco DNA App Procedure**

Step	Description
Step 1	Install or upgrade to Cisco DNA Center, Release 2.2.2. For information about <i>installing</i> Cisco DNA Center, see the <a href="#">Cisco DNA Center Installation Guide</a> .
Step 2	Install or upgrade to ServiceNow running the following version: <ul style="list-style-type: none"> <li>• Paris</li> <li>• Orlando</li> </ul> Refer to your ServiceNow documentation for its installation and upgrade procedures. <b>Note</b> This procedure is to be performed by a ServiceNow administrator.

Step	Description
Step 3	<p>Click the following link to access the ServiceNow Store website where the Cisco DNA app is located:</p> <p><a href="https://store.servicenow.com/sn_appstore_store.do#!/store/application/03eb0f4ddb6ba00f27978b5ae96197b/2.0.0">https://store.servicenow.com/sn_appstore_store.do#!/store/application/03eb0f4ddb6ba00f27978b5ae96197b/2.0.0</a></p> <p>Proceed to download and install the Cisco DNA app (version 2.0.0) into ServiceNow by following the documentation available at the website.</p> <p><b>Note</b> This procedure is to be performed by a ServiceNow administrator.</p>
Step 4	<p>Review and ensure that the requirements are met for the Cisco DNA Center to ServiceNow integration.</p> <p>For information, see <a href="#">Requirements, on page 19</a>.</p>
Step 5	<p>Access the Cisco DNA Center platform GUI and configure the <b>Basic ITSM (ServiceNow) CMDB Synchronization</b> bundle.</p> <p>For information, see <a href="#">Configure the Basic ITSM (ServiceNow) CMDB Synchronization Bundle, on page 20</a>.</p> <p><b>Note</b> Synchronizing the network device inventory with the ServiceNow CMDB is a prerequisite to enable the auto-generation of ITSM tickets. Therefore, the CMDB Sync must be enabled first (if it is not already done outside of Cisco DNA Center). Check with your ServiceNow administrator to see whether the CMDB Sync is being done elsewhere.</p>
Step 6	<p>Configure the <b>Network Issue Monitor and Enrichment for ITSM (ServiceNow)</b> bundle. For information, see <a href="#">Configure the Network Issue Monitor and Enrichment for ITSM (ServiceNow) Bundle, on page 9</a>.</p> <p>This bundle enables data to be sent from Cisco DNA Center to create any type of workflow in ServiceNow. Change Management and Incident/Problem Management workflows should be enabled based on the automation or assurance use cases that you want to log tickets to in ServiceNow.</p>
Step 7	<p>Configure network event settings in <b>Event Settings</b>.</p> <p>For information, see <a href="#">Configure Event Settings, on page 32</a>.</p> <p><b>Note</b> The Cisco DNA Center platform and ITSM integration allows the user to choose from a list of possible issues to create and modify the severity of events, incidents, or problems in ServiceNow to match business priorities.</p>
Step 8	<p>Configure the <b>Cisco DNA Center Automation events for ITSM (ServiceNow)</b> bundle.</p> <p>For information, see <a href="#">Configure the Cisco DNA Center Automation Events for ITSM (ServiceNow) Bundle, on page 14</a>.</p>

Step	Description
Step 9	Access your ServiceNow instance and review the network and SWIM event data that has been posted using the Cisco DNA Center REST APIs in this procedure. Begin to review and utilize this data per your business or network needs.

## Requirements

Review and ensure that the following networking and systems requirements are met for the Cisco DNA Center-to-ServiceNow integration:

- Networking:
  - The Cisco DNA app is configured with the IP address and access information of the Cisco DNA Center installation that it is being integrated with.




---

**Note** Contact your Cisco DNA Center administrator to obtain this information.

---

- HTTPS network access between Cisco DNA Center and ServiceNow (including the MID server) is established.




---

**Note** Contact and work with your network administrator to establish this.

---

- Management, Instrumentation, and Discovery (MID) Server:
  - The MID server is up and running, as well as accessible from the ServiceNow instance.
  - The Cisco DNA Center platform is accessible from the MID server.
  - The Cisco DNA Center platform REST APIs are allowed from the MID server.




---

**Note** The MID server is used to proxy the REST requests from the ServiceNow instance.

---

See the *Scope Certified Application Installation and Configuration Guide* on the ServiceNow Store website for MID server configuration information: [https://store.servicenow.com/sn\\_appstore\\_store.do#!/store/application/03eb0f4ddb6ba00f27978b5ae96197b/2.0.0](https://store.servicenow.com/sn_appstore_store.do#!/store/application/03eb0f4ddb6ba00f27978b5ae96197b/2.0.0)

- Cisco DNA Center Platform:
  - The Cisco DNA Center platform is enabled in Cisco DNA Center.
  - The requisite bundle or bundles in the Cisco DNA Center platform are configured and activated (as described in the following procedures).




---

**Note** These bundles have the required APIs that integrate with the Cisco DNA app in ServiceNow.

---

## Configure the Basic ITSM (ServiceNow) CMDB Synchronization Bundle

Perform this procedure to either trigger or schedule a synchronization between the Cisco DNA Center devices and your ServiceNow CMDB system. If devices have not been synchronized between Cisco DNA Center and the ServiceNow CMDB system, this bundle must be activated as a prerequisite, before activating any other bundles.




---

**Note** The Cisco DNA Center CMDB synchronization cannot detect multiple instances of Cisco DNA Center:

- To identify the attributes that were synchronized from a particular Cisco DNA Center instance, each attribute is tagged with a Cisco DNA Center IP address.
- ServiceNow can now identify which Cisco DNA Center instance the attribute came from. An extra attribute for the Configuration Item (CI) has been added to retain the Cisco DNA Center IP address or hostname information.

---

### Before you begin

- Ensure that you have ServiceNow running on a system that you will integrate with Cisco DNA Center platform.
- Run a successful **Discovery** job in Cisco DNA Center. You can check whether a **Discovery** job is successful in **Device Inventory**. In the Cisco DNA Center GUI, click the **Menu** icon (☰) and choose **Provision > Inventory** to view the results.
- You must have the appropriate permissions to perform the tasks as described in this procedure. For information about role-based access control for the Cisco DNA Center platform, see the [Cisco DNA Center Platform User Guide](#).

---

**Step 1** In the Cisco DNA Center GUI, click the **Menu** icon (☰) and choose **Platform > Manage > Bundles**.

Review the displayed bundles and their current status.

**Step 2** Click the **Basic ITSM (ServiceNow) CMDB synchronization** bundle link or icon (colored square with initial) for additional information about the bundle.

Additional information provided may include the following:

- **General information:** Vendor, version, platform, tags displayed under the square icon.
- **Information:** Tab that displays general information (purpose of bundle and how bundle works in the network), sample schemas, configuration notes, and other data about the bundle.

- **Contents:** Tab that accesses the integration flows and APIs that make up the bundle.
- **Release Notes:** Tab that displays latest release information about the bundle, including its version.

**Step 3** Click the **Contents** tab.

**Step 4** Click the **Integration Flows** header.

An integration flow or list of integration flows appear underneath the header.

**Step 5** Click the **Enable** button to activate the integration flow links.

An **Information** field appears in the window.

**Step 6** In the **Information** field, click the **Enable** button to confirm enabling the bundle.

After clicking the **Enable** button to confirm, a success message appears.

**Step 7** Click **Okay** in the success message.

**Step 8** Click the integration flow link to perform the tasks listed below:

- Review the **Description**, **Tags**, **How to Use this Flow**, and scheduler.
- Click **Run Now** (to run the scheduler now), **Run Later** (to schedule for a later time), or **Recurring** (to set up a recurring schedule).  
For **Run Later**, you need to select a date, time, and time zone. For **Recurring**, you need to set a repeating interval (daily or weekly), an interval duration (minutes or hours), and a start and end date.
- Click **Schedule** to enable the scheduler.

**Important** Only configure and enable an integration flow schedule, after you have finished configuring the bundle itself as described in this procedure. You configure and enable an integration flow schedule by returning to this view and clicking **Schedule**, or by clicking the **View Flows** link in the **Configure Basic ITSM (ServiceNow) CMDB synchronization** slide-in pane (see following steps), or by clicking the menu icon (☰) > **Platform** > **Developer Toolkit** > **Integration Flows** > **Schedule to Publish Inventory Details-ServiceNow Connector**.


**Step 9** Click the **X** icon to return to the previous bundle window.

**Step 10** Click the **Configure** button to configure at the bundle level.

A configuration slide-in pane appears. Review the CMDB synchronization information.

**Step 11** Click the radio button to configure either existing or new ServiceNow access settings for the CMDB synchronization.

Figure 9: ServiceNow Access Settings

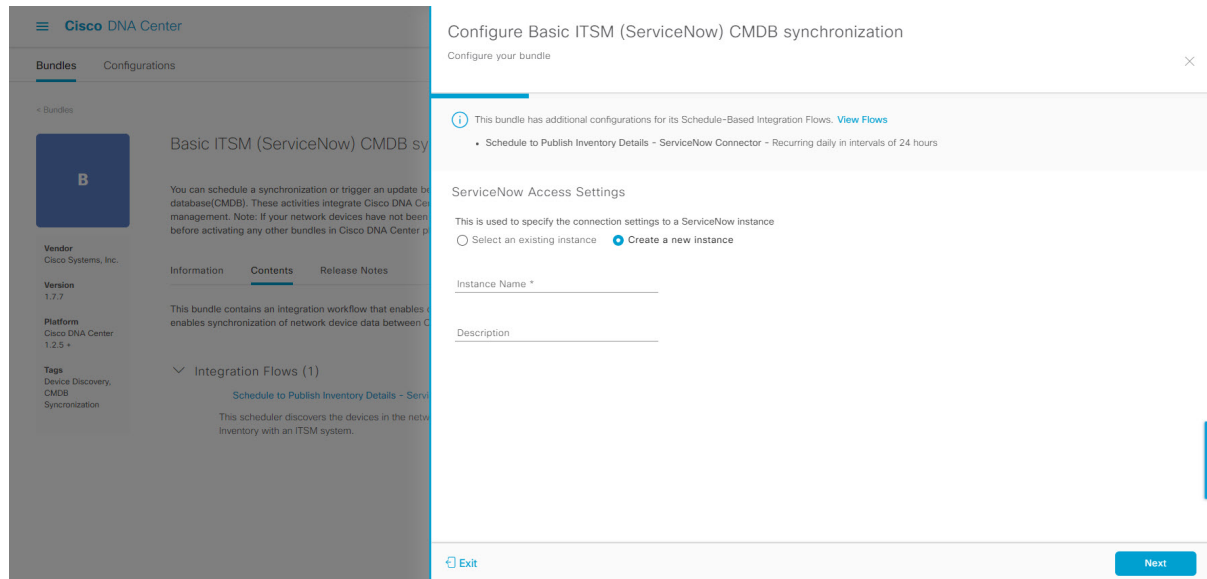

For configuring an existing setting, choose it from the drop-down menu in the window and click **Next**.


**Step 12** For configuring a new access setting, the following instance information must be entered.

- **Instance Name:** Name of the instance.
- **Description:** Descriptive text of the instance.

Click **Next**.

**Step 13** For configuring a new access setting, the following additional settings information must be entered.

Figure 10: ServiceNow Access Settings

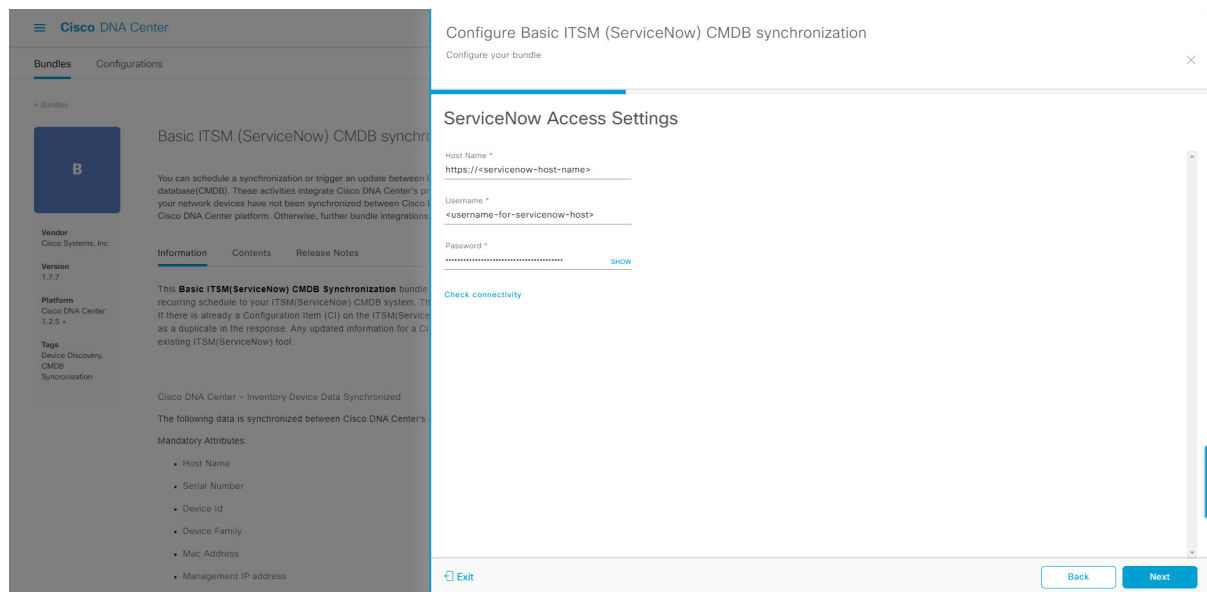

- **Hostname:** Hostname or IP address of the ServiceNow server.
- **Username:** Username for access to the ServiceNow server.
- **Password:** Password for access to the ServiceNow server.


Click **Check Connectivity** to check access to the ServiceNow server.

Click **Next**.

#### Step 14

Click the radio button to configure either an existing instance or configure a new instance for the CMDB inventory settings.

**Figure 11: CMDB Inventory Settings**

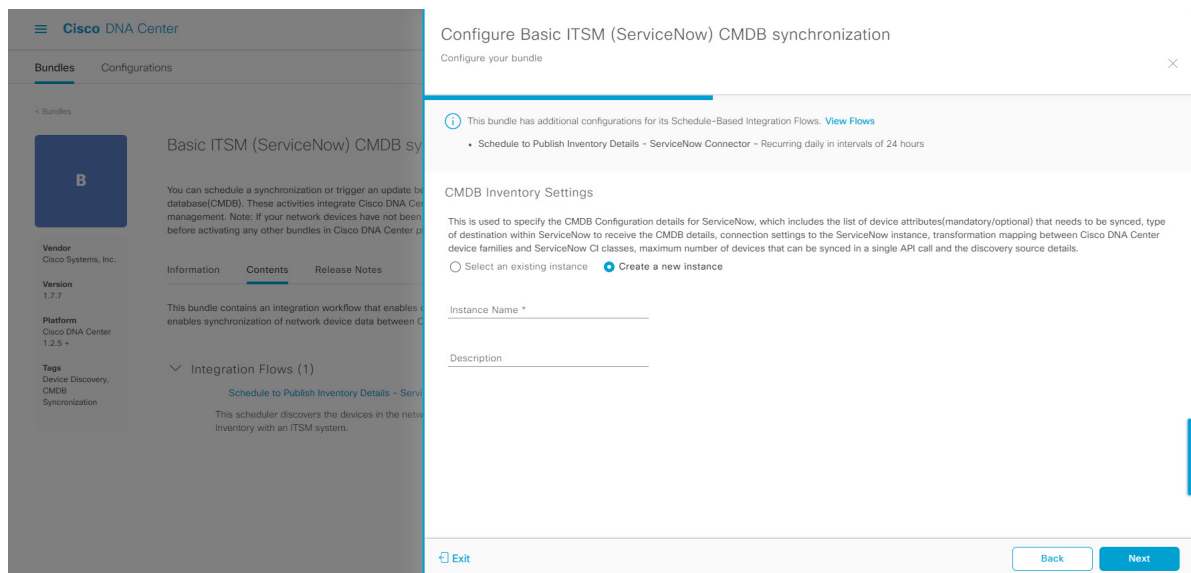

For configuring an existing instance, choose it from the drop-down menu in the window and click **Configure**.

#### Step 15

For configuring a new instance, the following additional information must be entered.

- **Instance Name:** Name of the instance.
- **Description:** Descriptive text of the instance.

Click **Next**.

#### Step 16


In the **Select Destination** window, enter the following information:

- **Destination Type:** There are two destination type options to choose from:
  - **Synchronize device inventory directly with CMDB**
  - **Post device inventory details to a staging table**

**Note** Use the **Synchronize device inventory directly with CMDB** destination type to send data to a REST API endpoint within the Cisco DNA app. You should use this destination type, if you are using the Cisco DNA app and do not have your own customized ServiceNow instance. Use the other destination type (**Post device inventory details to a staging table**) to send data to a REST API endpoint outside of the Cisco DNA app. Ensure that the created staging table has a field called `u_inventory_details`. The inventory details from the Cisco DNA app are mapped to this field. With the **Post device inventory details to a staging table** destination type, after data transfer you must write custom code to take the data from the staging table and map it to the ServiceNow CMDB.

- **Destination URI:** Uniform Resource Indicator of the ServiceNow server (CMDB) or staging table.

**Figure 12: Select Destination Window**

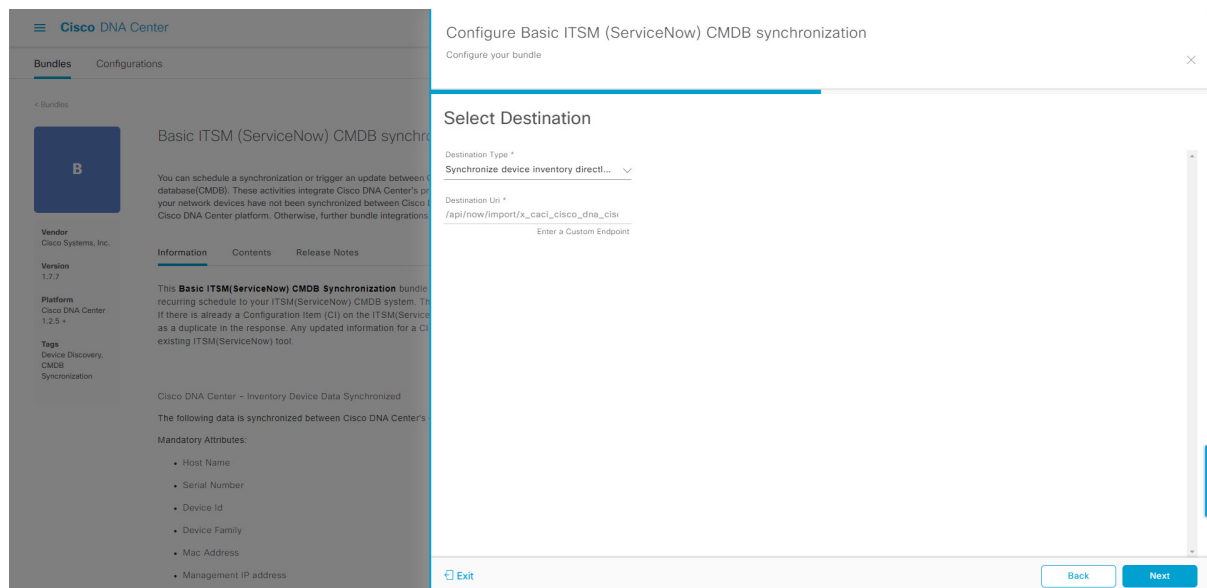

Click **Next**.


**Step 17** In the **Select Inventory Data Fields** window, select the data fields to be synchronized.

**Note** Inventory data fields are Cisco created data types that can be designated as an attribute or reference to be synchronized into a CMDB or staging table.

Clicking the top check box in the **Select Inventory Data Fields** window will select all of the inventory data fields for synchronization. Click this top check box if you want to sync all of the inventory data fields. Otherwise, review and click one check box at a time to create a smaller subset of inventory data fields for synchronization.



Figure 13: Select Inventory Data Fields Window

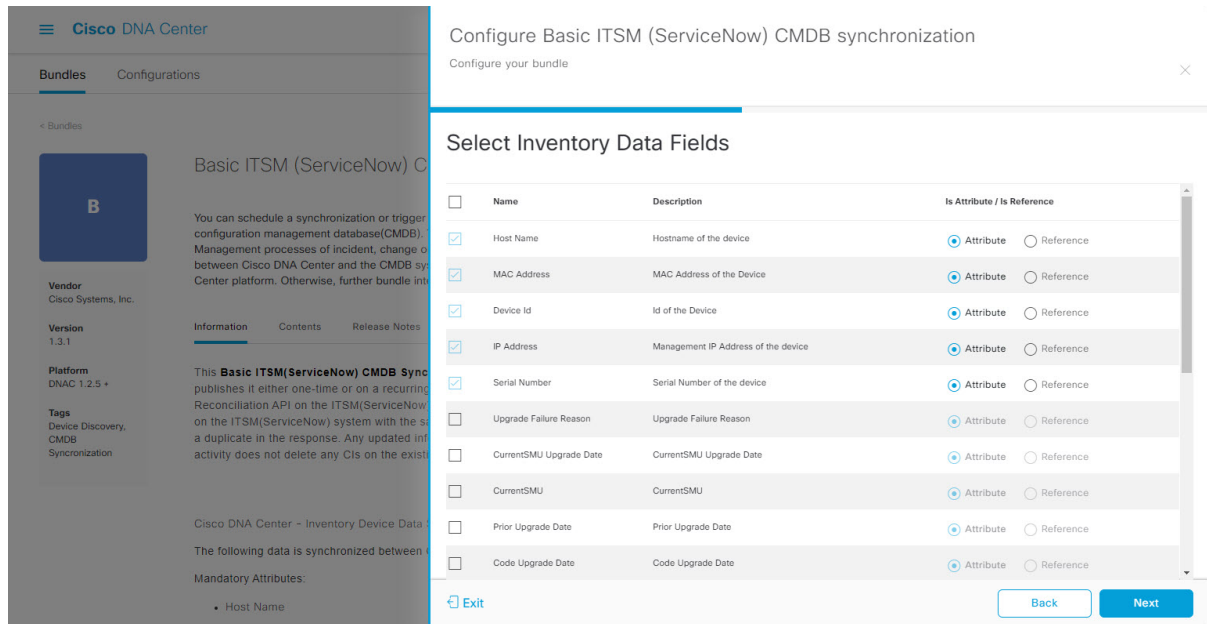

The **Select Inventory Data Fields** window consists of the following columns:

- **Name:** Name of the inventory data field.
- **Description:** Brief description of the inventory data field.
- **Is Attribute/Is Reference:** Whether the inventory data field is an attribute or a reference. A reference data field is used to create a relationship between two tables in a database. This is used for querying purposes. An attribute data field is used to add more data to a table in a database.

**Step 18** For the data fields selected to be synchronized in the preceding step, review their designation as either attribute or reference.


To change a data field's default designation, just click the desired data field designation (**Attribute** or **Reference**).

Currently, the integration only supports 'location', 'building', and 'part number' as reference fields.

After selecting the data fields to be synchronized and whether the data field is an attribute or reference, click **Next**.

**Step 19** In the **Update Transforms** window, either accept or update the ServiceNow transformation mapping between Cisco DNA Center device families and ServiceNow CI classes.

Figure 14: Update Transforms Window

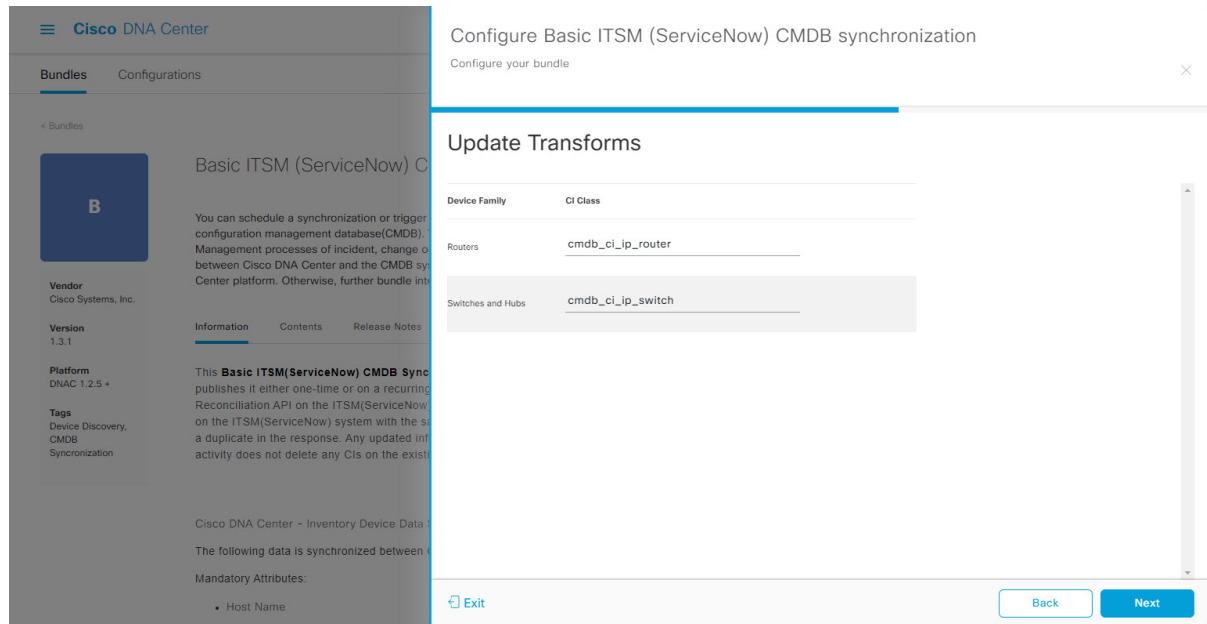

Device families are the Cisco DNA Center device classifications (for example, Unified AP, Routers, Wireless Controller, Switches, and Hubs), where the inventory attributes/references mapping to ServiceNow is already available in the existing Cisco DNA Center application in ServiceNow. The type and number of device families can vary depending upon the different Cisco devices in the user's network.

**Note** Cisco DNA Center platform is able to automatically retrieve all of the device families in the user's Cisco DNA Center network and display them in this GUI window.

CI classes are the database tables for ServiceNow (for example, cmdb\_ci\_wap\_network, cmdb\_ci\_ip\_router, cmdb\_ci\_ip\_switch, and x\_caci\_cisco\_dna\_wireless\_lan\_controller). The **CI Class** column in the GUI window is used to map the CI classes to their respective device families.

The following table displays the Cisco DNA Center default CI classes for each device family. The default CI classes can be modified by the user. In case of other device families not listed below, Cisco will not have any default values specified in the **CI Class** column. The ServiceNow application user needs to either manually create the corresponding CI Classes and attributes/references mapping or use a pre-existing CI class a 'parent' CI class. Ensure the pre-existing or newly created class is inherited from the Network Gear (cmdb\_ci\_netgear) class.

Table 4: Default Device Family to CI Class Mapping List

Device Family	Corresponding CI Class
Unified AP	cmdb_ci_wap_network
Wireless Controller	x_caci_cisco_dna_wireless_lan_controller
Routers	cmdb_ci_ip_router
Switches and Hubs	cmdb_ci_ip_switch
Meraki Access Point	cmdb_ci_wap_network


Device Family	Corresponding CI Class
Meraki Cameras	cmdb_ci_netgear
Meraki Dashboard	cmdb_ci_netgear
Meraki Security Appliances	cmdb_ci_netgear
Meraki Switches	cmdb_ci_ip_switch

After accepting or updating the information in this window, click **Next**.

## Step 20

In the **Set Source Identifier and Operational Limit** window, configure the data source and maximum limit.

**Figure 15: Set Source Identifier and Operational Limit Window**

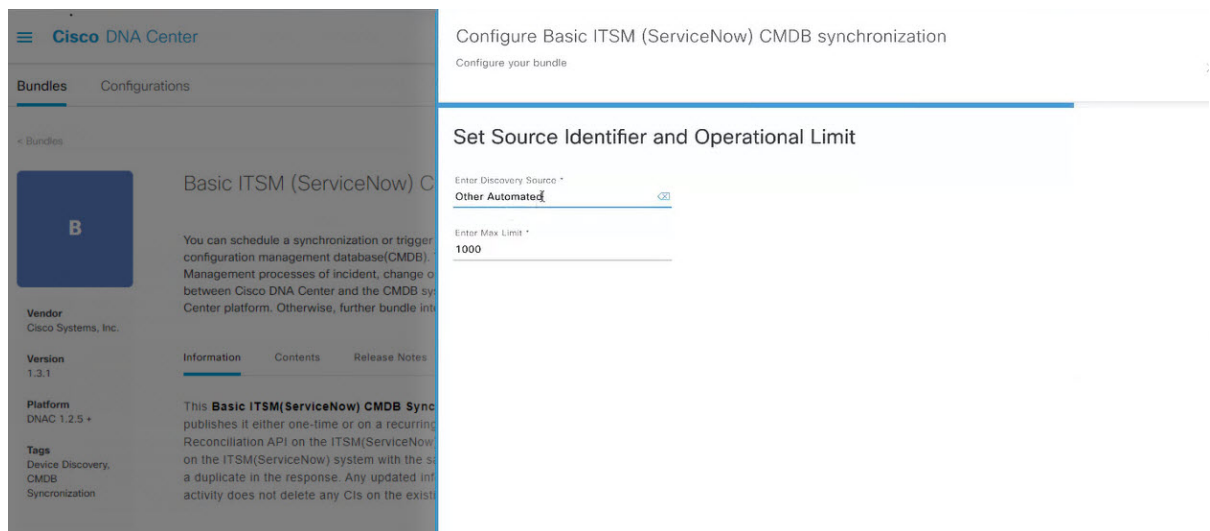

Configure the following values:

- **Enter Destination Type:** Enter the same value as previously selected or keep the value at its default, **Other Automated**.
  - **Synchronize device inventory directly with CMDB**
  - **Post device inventory details to a staging table**

**Note** **Other Automated** is a preconfigured value for the discovery source attribute in an OOB ServiceNow instance. This is the value that indicates the data source from where the ServiceNow CI was discovered. As a default, Cisco uses one of the existing preconfigured values for the integration.

We recommend that the user creates their own discovery source, so as to uniquely identify the source from where the devices were fetched to sync into the ServiceNow instance. The steps to create a new discovery source are described in the ServiceNow App 'Installation and Configuration guide'.


- **Enter the Max Limit:** Maximum number of devices that can be synchronized in an iteration (single API call).

After entering the above information, click **Next**.

## Step 21

In the **Summary** window, review the configuration summary.

Figure 16: Summary Window

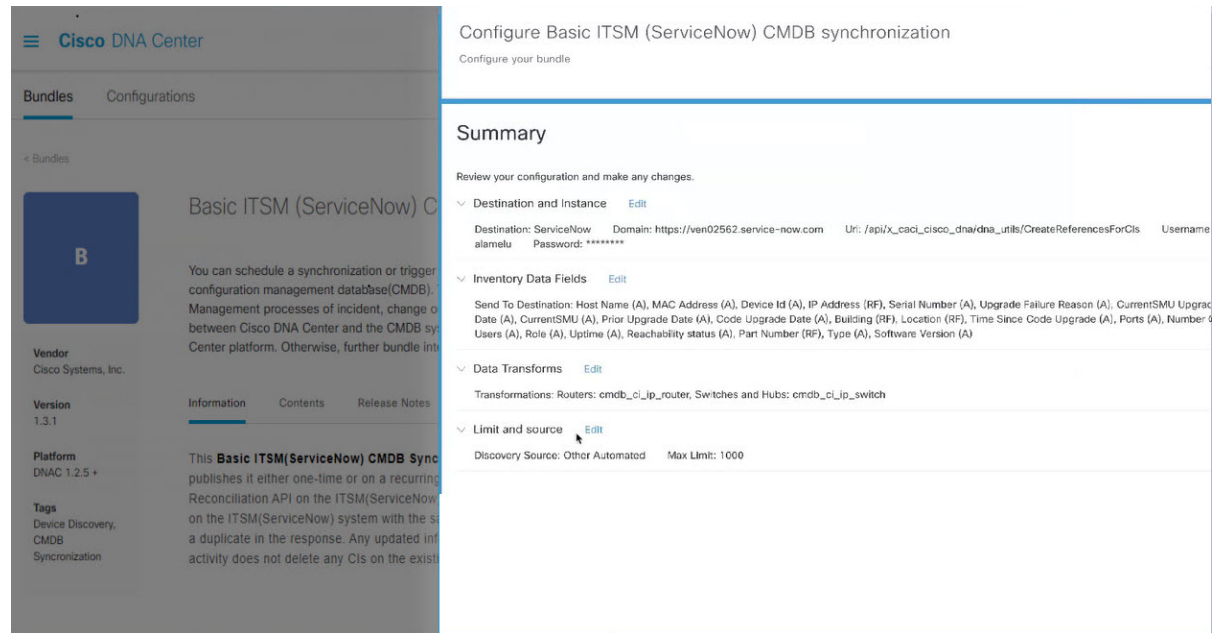

After reviewing the information, click **Configure**.

For a successful configuration, you will receive a **Done! Bundle Configured** message.

### What to do next

Configure the Integration Flow for this bundle (**Schedule to Publish Inventory Details - ServiceNow Connector**), using one of the methods described in Step 8.

You can also test the CMDB synchronization by performing the following tasks:

- In the Cisco DNA Center GUI, click the **Menu** icon (☰) and choose **Platform > Runtime Dashboard > CMDB Synchronization Summary**. Click **Refresh** to refresh the GUI view. Review the inventory device synchronization status to ServiceNow.
- In the Cisco DNA Center GUI, click the **Menu** icon (☰) and choose **Platform > Runtime Dashboard > Event Summary**. Click **Refresh** to refresh the GUI view. Click the individual events in the window to view the event data and access links to ServiceNow.
- Go to ServiceNow and search for a synchronized device. Check the **Configuration** and **Other Attributes** tabs for synchronized data in that device's record.

## Configure the Network Issue Monitor and Enrichment for ITSM (ServiceNow) Bundle

Perform this procedure to set up monitoring for network for assurance and maintenance issues, as well as publishing event details to a ServiceNow system.



---

**Note** Event data can be published to the **Event** table in ServiceNow. This requires that you have the Event Management plugin in your ServiceNow instance. If you do not have the Event Management plugin in your ServiceNow instance, the bundle can be configured to send the data to a REST API endpoint in the Cisco DNA App.

---

### Before you begin

You must have the appropriate permissions to perform the tasks as described in this procedure. For information about Role-Based Access Control for the Cisco DNA Center platform, see the [Cisco DNA Center Platform User Guide](#).


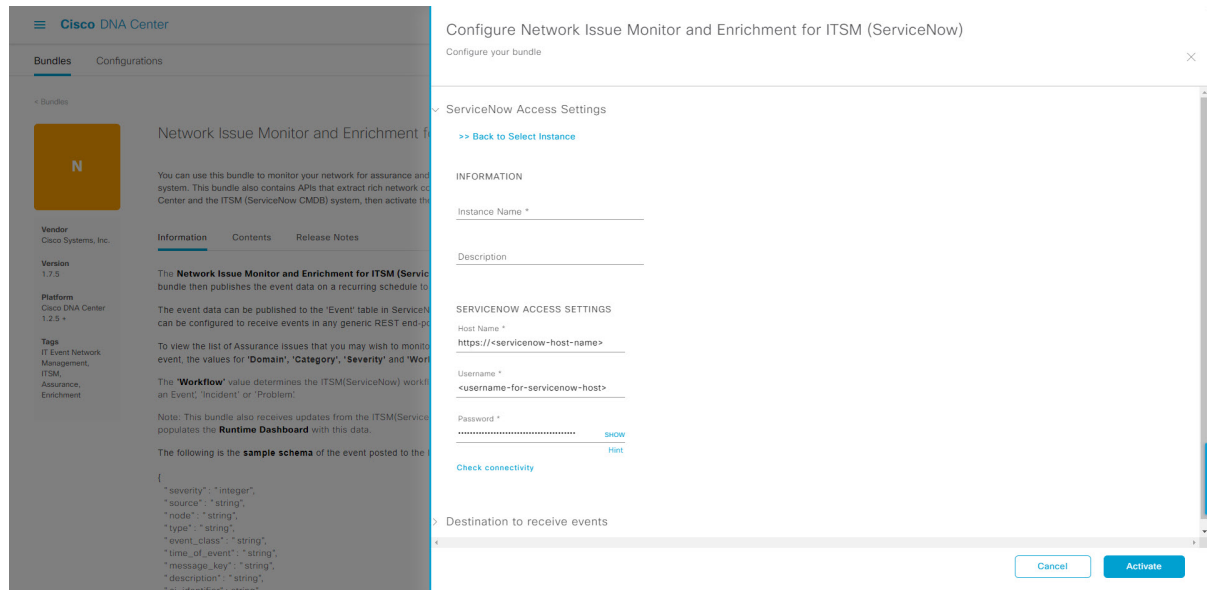
- 
- Step 1** In the Cisco DNA Center GUI, click the **Menu** icon () and choose **Platform > Manage > Bundles**.  
Review the displayed bundles and their current status.
- Step 2** Click the **Network Issue Monitor and Enrichment for ITSM (ServiceNow)** bundle link or icon (colored square with initial) for additional information about the bundle.  
Additional information provided may include the following:
- **General information:** Vendor, version, platform, tags displayed under the square icon.
  - **Information:** Tab that displays general information (purpose of bundle and how bundle works in the network), sample schemas, configuration notes, and other data about the bundle.
  - **Contents:** Tab that accesses the APIs and integration flows that make up the bundle, or provides information about the integration flows that make up the bundle.
  - **Release Notes:** Tab that displays latest release information about the bundle, including its version.
- Step 3** Click each of the above tabs and review the information about the bundle.
- Step 4** Click the **Enable** button to enable the bundle.  
An **Information** field appears in the window.
- Step 5** In the **Information** field, click the **Enable** button to confirm enabling the bundle.  
After clicking the **Enable** button to confirm, a success message appears.
- Step 6** Click **OK** in the success message.
- Step 7** Click the **Configure** button to configure at the bundle level.  
A configuration slide-in pane appears.
- Step 8** In the configuration slide-in pane, click **ServiceNow Access Settings** to configure a ServiceNow Connection instance.
- Step 9** Click the radio button to configure either an existing ServiceNow Connection instance or configure a new instance.

Figure 17: Example of ServiceNow Instance Configuration Fields



For configuring an existing ServiceNow Connection instance, choose it from the drop-down menu in the window and click **Activate**.

**Step 10** For configuring a new ServiceNow Connection instance, the following additional information must be entered.

- **Instance Name:** Name of the instance.
- **Description:** Descriptive text of the instance.
- **Host name:** Host name for the ServiceNow system.
- **Username:** Username required to access the ServiceNow system.
- **Password:** Password required to access the ServiceNow system.


**Step 11** Click **Check Connectivity** to test whether you can connect to the server where the endpoint is located.

After a successful test of connectivity to the server, proceed to configure **Destination to receive events**.

**Step 12** In the configuration slide-in pane, click **Destination to receive events** to configure a Destination Connection instance.

**Step 13** Click the radio button to configure either an existing Destination Connection instance or configure a new instance.

Figure 18: Example of Destination to Receive Events Configuration Fields

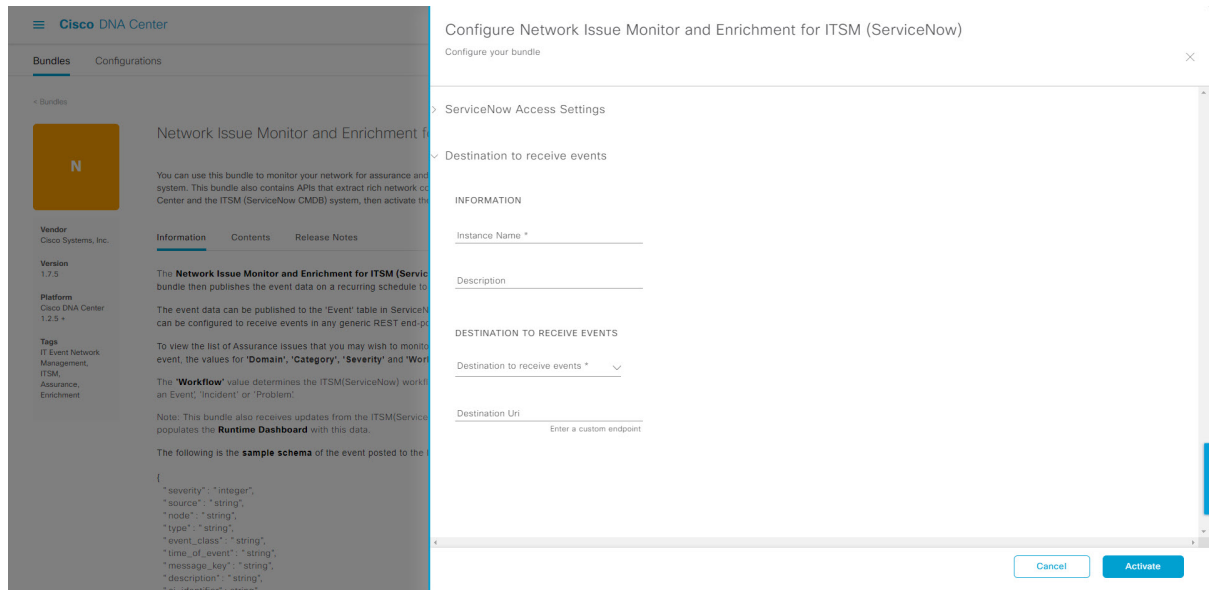

For configuring an existing Destination Connection instance, choose it from the drop-down menu in the window and click **Activate**.

**Step 14**

For configuring a new Destination instance, the following additional information must be entered.

- **Instance Name:** Name of the instance.
- **Description:** Descriptive text of the instance.
- **Destination to receive events:** Choose one of the following:
  - **Event Management:** When setting up Cisco DNA Center integration with ServiceNow without using the Cisco DNA App, choose the **Event Management** option. The **Event Management** option also requires that you have the Event Management plugin configured within the ServiceNow instance.
  - **REST API Endpoint:** The **REST API Endpoint** option can be used with the Cisco DNA App. Data is sent to a REST API endpoint within the Cisco DNA App with the **REST API Endpoint** option.
  - **Generic REST Endpoint in ServiceNow:** For the **Generic REST Endpoint in ServiceNow** option, you can send the data to a different staging table in ServiceNow.
  - **Destination URI:** Enter a destination URI (Uniform Resource Indicator) for the **Generic REST Endpoint in ServiceNow** option. This field is mandatory for this option.

After entering this information, proceed to the next step.

**Step 15**

Click **Activate** to save your changes and activate the bundle or click **Cancel** to cancel the configuration and close the slide-in pane.

The changes made to the bundle begin to take effect immediately. Additionally, the bundle status changes from **ENABLED** to **ACTIVE**.

## Configure Event Settings

The Cisco DNA Center platform and ITSM integration permits you to choose from a list of possible issues to create and modify the severity of events, incidents, or problems in ServiceNow to match your business priorities. You perform these tasks in the **Events Settings** window. The **Events Settings** window is accessible from the **Configurations** menu option in the Cisco DNA Center platform.



**Note** For this release, there are no SWIM event to configure in **Event Settings**, you only configure network assurance events.



**Important** The **Event Settings** window and its functionality is only applicable to events for an ITSM (ServiceNow) integration and not for events configured to other destinations. For events being configured to a webhook or other destination, click the link above the columns to access the **Events** window. Use the **Events** window to configure events for an email, webhook, or SNMP trap.

**Figure 19: Events Settings Window**

Event Name	Domain	Type	Category	Severity	Workflow	Actions
AP Coverage Hole	Know Your Network	NETWORK	WARN	3	Incident	Edit
AP CPU High Utilization	Know Your Network	NETWORK	WARN	3	Incident	Edit
AP License Exhausted on WLC	Know Your Network	NETWORK	WARN	3	Incident	Edit
AP Memory High Utilization	Know Your Network	NETWORK	WARN	3	Incident	Edit
AP Reboot Crash	Know Your Network	NETWORK	WARN	3	Incident	Edit
BGP Tunnel Connectivity	Know Your Network	NETWORK	ERROR	2	Incident	Edit

### Before you begin

You must have the appropriate permissions to perform the tasks as described in this procedure. For information about Role-Based Access Control for the Cisco DNA Center platform, see the [Cisco DNA Center Platform User Guide](#).

- Step 1** In the Cisco DNA Center GUI, click the **Menu** icon ( ) and choose **Platform** > **Manage** > **Configurations**. A **Configurations** window opens that contains an **Events Settings** section.
- Step 2** Review the **Event Settings** section that appears.



The following **Event Settings** information is displayed:

- **Event Name:** Name of the Cisco DNA Center event.
- **Domain:** Domain of the Cisco DNA Center event.
- **Type:** Network, App, System, Security, Integrations type.
- **Category:** Error, Warn, Info, Alert, Task Progress, Task Complete
- **Severity:** P1 (Severity 1) through P5 (Severity 5).

**Note** Severity 1 is the most important or critical priority and should be assigned as such.

- **Workflow:** Incident, Problem, Event, or RFC (Request for Change)
- **Actions:** Edit

You can adjust what is displayed in the table by clicking the **Filter** icon and using the filter, or by typing a keyword in the **Find** field. For example, to display all access point notifications, type 'AP' in the **Find** field. To view all network notifications, type 'Network' in the **Find** field. To view all severity notifications, type '1' in the **Find** field.

**Step 3** Click **Edit** in the **Actions** column to edit an event.

Choose a setting by clicking on the downward pointing angle and adjust the value. For example, click **Network** and adjust to **App**. This changes the event type from a network type to an application type. Click **Severity** and adjust to **1** from **5**. This raises the severity level from 5 to 1.

**Step 4** Click the box next to the Event name to enable notifications.

This enables notifications through Cisco DNA Center when the event occurs in the future.

**Step 5** Click **Save** to save your configuration.

---

## Configure the Cisco DNA Center Automation Events for ITSM (ServiceNow) Bundle

Perform this procedure to set up monitoring and publishing events requiring software image updates for compliance, security, or other operational triggers to a ServiceNow system.



---

**Note** Event data can be published to the **Event** table in ServiceNow. This requires that you have the Event Management plugin in your ServiceNow instance. If you do not have the Event Management plugin in your ServiceNow instance, the bundle can be configured to send the data to a REST API endpoint in the Cisco DNA App.


---

### Before you begin

You must have the appropriate permissions to perform the tasks as described in this procedure. For information about Role-Based Access Control for the Cisco DNA Center platform, see the [Cisco DNA Center Platform User Guide](#).

- 
- Step 1** In the Cisco DNA Center GUI, click the **Menu** icon (☰) and choose **Platform > Manage > Bundles**.  
Review the displayed bundles and their current status.
- Step 2** Click the **Cisco DNA Center Automation events for ITSM (ServiceNow)** bundle link or icon (colored square with initial) for additional information about the bundle.  
Additional information provided may include the following:
- **General information:** Vendor, version, platform, tags displayed under the square icon.
  - **Information:** Tab that displays general information (purpose of bundle and how bundle works in the network), sample schemas, configuration notes, and other data about the bundle.
  - **Contents:** Tab that accesses the APIs and integration flows that make up the bundle, or provides information about the integration flows that make up the bundle.
  - **Release Notes:** Tab that displays latest release information about the bundle, including its version.
- Step 3** Click each of the above tabs and review the information about the bundle.
- Step 4** Click the **Enable** button to enable the bundle.  
An **Information** field appears in the window.
- Step 5** Click the **Enable** button in the **Information** field to confirm enabling the bundle.  
After clicking the **Enable** button to confirm, a success message appears.
- Step 6** Click **OK** in the success message.
- Step 7** Click the **Configure** button to configure at the bundle level.  
A configuration slide-in pane appears.
- Step 8** In the configuration slide-in pane, click **ServiceNow Access Settings** to configure a ServiceNowConnection instance.
- Step 9** Click the radio button to configure either an existing ServiceNow Connection instance or configure a new instance.

Figure 20: Example of ServiceNow Instance Configuration Fields

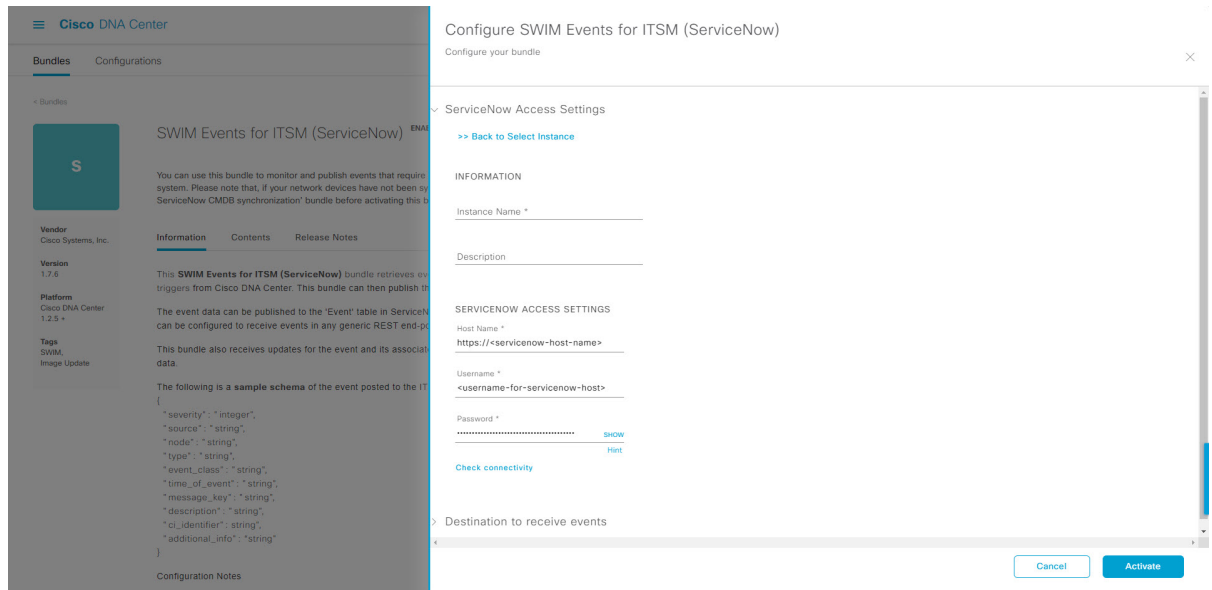

For configuring an existing ServiceNow Connection instance, choose it from the drop-down menu in the window and click **Activate**.

**Step 10** For configuring a new ServiceNowConnection instance, the following additional information must be entered.

- **Instance Name:** Name of the instance.
- **Description:** Descriptive text of the instance.
- **Host name:** Host name for the ServiceNow system.
- **Username:** Username required to access the ServiceNow system.
- **Password:** Password required to access the ServiceNow system.


**Step 11** Click **Check Connectivity** to test whether you can connect to the server where the endpoint is located.

After a successful test of connectivity to the server, proceed to activate the bundle.

**Step 12** In the configuration slide-in pane, click **Destination to receive events** to configure an Destination Connection instance.

**Step 13** Click the radio button to configure either an existing Destination Connection instance or configure a new instance.

Figure 21: Example of Destination to Receive Events Configuration Fields

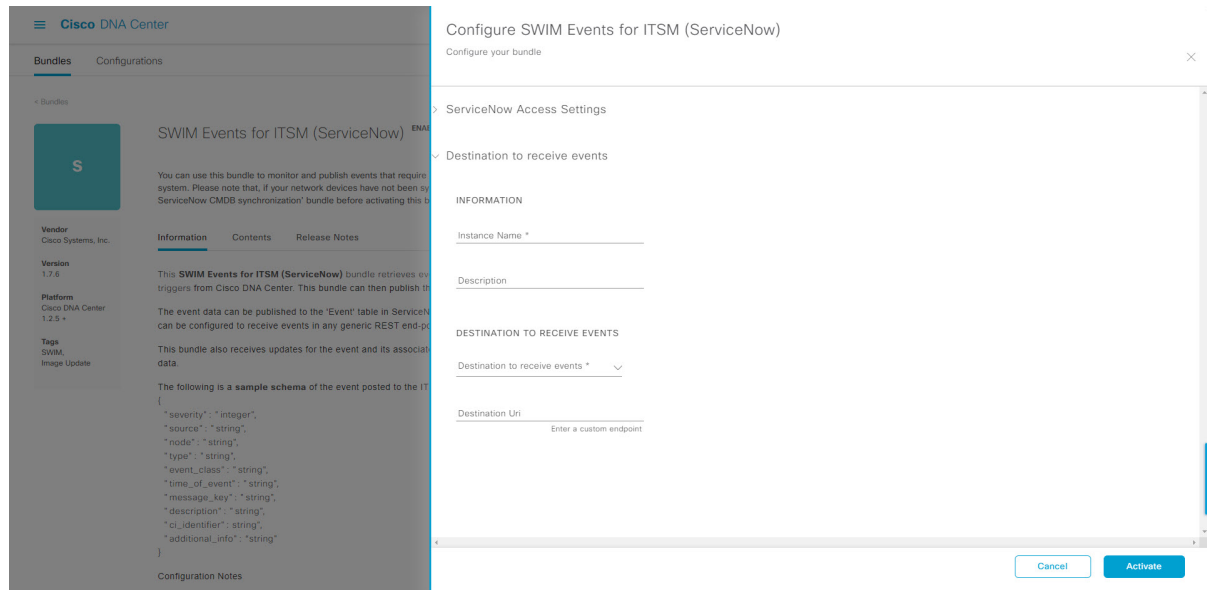

For configuring an existing Destination Connection instance, choose it from the drop-down menu in the window and click **Activate**.

**Step 14** For configuring a new Destination instance, the following additional information must be entered.

- **Instance Name:** Name of the instance.
- **Description:** Descriptive text of the instance.
- **Destination to receive events:** Choose one of the following:
  - **Event Management:** When setting up Cisco DNA Center integration with ServiceNow without using the Cisco DNA App, choose the **Event Management** option. The **Event Management** option also requires that you have the Event Management plugin configured within the ServiceNow instance.
  - **REST API Endpoint:** The **REST API Endpoint** option can be used with the Cisco DNA App. Data is sent to a REST API endpoint within the Cisco DNA App with the **REST API Endpoint** option.
  - **Generic REST Endpoint in ServiceNow:** For the **Generic REST Endpoint in ServiceNow** option, you can send the data to a different staging table in ServiceNow.
- **Destination URI:** Enter a destination Uniform Resource Indicator (URI) for the **Generic REST Endpoint in ServiceNow** option. This field is mandatory for this option.

After entering this information, proceed to the next step.

**Step 15** Click **Activate** to save your changes and activate the bundle or click **Cancel** to cancel the configuration and close the slide-in pane.

**Note** By clicking **Activate**, you enable the changes made to the bundle and the changes take effect immediately. Additionally, the bundle's status changes from **ENABLED** to **ACTIVE**.

# Cisco DNA Center Endpoint Attribute Retrieval with ServiceNow

With this Cisco DNA Center release, you can schedule a synchronization or trigger an update between the endpoint inventory and your ITSM (ServiceNow) configuration management database (CMDB). Endpoint attribute information from ServiceNow can be used to help profile endpoints in your network. ServiceNow appears in the endpoint profiling workspace as an additional probe. You may create custom profiling rules leveraging the attributes sent by ServiceNow.

Mapping between the ServiceNow CMDB fields and endpoint attributes occur at the platform level and is accomplished using the new **Endpoint Attribute Retrieval with ITSM (ServiceNow)** bundle. This bundle supports a new integration flow, **Scheduler for ServiceNow Asset Sync**. The **Scheduler for ServiceNow Asset Sync** integration flow can be configured to run on a set schedule to invoke an internal Cisco API to retrieve the endpoint attribute information from ServiceNow.

The following table describes the procedure for configuring Cisco DNA Center endpoint attribute retrieval with ServiceNow.



**Note** This procedure does not modify or delete any CIs on the existing ITSM (ServiceNow) tool.

**Table 5: Cisco DNA Center Endpoint Attribute Retrieval with ServiceNow**

Step	Description
Step 1	Install or upgrade to Cisco DNA Center, Release 2.2.2. For information about installing Cisco DNA Center, see the <a href="#">Cisco DNA Center Installation Guide</a> .
Step 2	Install or upgrade to ServiceNow running the following version: <ul style="list-style-type: none"> <li>• Paris</li> <li>• Orlando</li> <li>• New York Patch 1</li> </ul> Refer to your ServiceNow documentation for its installation and upgrade procedures. <b>Note</b> This procedure is to be performed by a ServiceNow administrator.

Step	Description
Step 3	<p>Download and install the Cisco DNA app (version 2.0.0) into ServiceNow by following the documentation available at the ServiceNow website.</p> <p><b>Note</b> Cisco DNA Center supports an application (Cisco DNA) that facilitates endpoint attribute retrieval with an ITSM (ServiceNow). This application or app is designed to work with ServiceNow <i>without</i> its Event Management plugin.</p> <p>Click this link to access the ServiceNow Store website where the Cisco DNA app is located:</p> <p><a href="https://store.servicenow.com/sn_appstore_store.do#!/store/application/03eb0f4ddb6ba00f27978b5ae96197b/2.0.0">https://store.servicenow.com/sn_appstore_store.do#!/store/application/03eb0f4ddb6ba00f27978b5ae96197b/2.0.0</a></p> <p><b>Note</b> This procedure is to be performed by a ServiceNow administrator.</p>
Step 4	<p>Review and ensure that the requirements are met for the Cisco DNA Center to ServiceNow integration.</p> <p>For information, see <a href="#">Requirements, on page 19</a>.</p>
Step 5	<p>Configure the <b>Endpoint Attribute Retrieval with ITSM (ServiceNow)</b> bundle.</p> <p>For information, see <a href="#">Configure the Endpoint Attribute Retrieval Bundle with ITSM (ServiceNow), on page 39</a>.</p>

## Requirements

Review and ensure that the following networking and systems requirements are met for the Cisco DNA Center-to-ServiceNow integration:

- Networking:

- The Cisco DNA app is configured with the IP address and access information of the Cisco DNA Center installation that it is being integrated with.




---

**Note** Contact your Cisco DNA Center administrator to obtain this information.

---

- HTTPS network access between Cisco DNA Center and ServiceNow (including the MID server) is established.




---

**Note** Contact and work with your network administrator to establish this.

---

- Management, Instrumentation, and Discovery (MID) Server:

- The MID server is up and running, as well as accessible from the ServiceNow instance.
- The Cisco DNA Center platform is accessible from the MID server.

- The Cisco DNA Center platform REST APIs are allowed from the MID server.



---

**Note** The MID server is used to proxy the REST requests from the ServiceNow instance.

---

See the *Scope Certified Application Installation and Configuration Guide* on the ServiceNow Store website for MID server configuration information: [https://store.servicenow.com/sn\\_appstore\\_store.do#!/store/application/03eb0f4ddb6ba00f27978b5ae96197b/2.0.0](https://store.servicenow.com/sn_appstore_store.do#!/store/application/03eb0f4ddb6ba00f27978b5ae96197b/2.0.0)

- Cisco DNA Center Platform:
  - The Cisco DNA Center platform is enabled in Cisco DNA Center.
  - The requisite bundle or bundles in the Cisco DNA Center platform are configured and activated (as described in the following procedures).



---

**Note** These bundles have the required APIs that integrate with the Cisco DNA app in ServiceNow.

---

## Configure the Endpoint Attribute Retrieval Bundle with ITSM (ServiceNow)

Perform this procedure to configure the Cisco DNA Center endpoint attribute retrieval from the ServiceNow CMDB.

### Before you begin

- Ensure that you have ServiceNow running on a system that you will integrate with Cisco DNA Center platform
- You must have the appropriate permissions to perform the tasks as described in this procedure. For information about Role-Based Access Control for the Cisco DNA Center platform, see the [Cisco DNA Center Platform User Guide](#).

---

**Step 1** In the Cisco DNA Center GUI, click the **Menu** icon () and choose **Platform > Manage > Bundles**.

Review the displayed bundles and their current status.

**Step 2** Click the **Endpoint Attribute Retrieval with ITSM (ServiceNow)** bundle link or icon (colored square with initial) for additional information about the bundle.

Additional information provided may include the following:

- **General information:** Vendor, version, platform, tags displayed under the square icon.
- **Information:** Tab that displays general information (purpose of bundle and how bundle works in the network), sample schemas, configuration notes, and other data about the bundle.

**Note** The specific endpoint attribute data that is retrieved is displayed in the **Information** tab. The following endpoint attribute data will be retrieved from ServiceNow (with the display name in Cisco DNA Center within the parenthesis):

- Asset Tag (CMDB asset tag)
  - Model Category (CMDB model category)
  - Model (CMDB model)
  - Managed by (CMDB managed by)
  - Serial Number (CMDB serial number)
  - Location (CMDB location)
  - Department (CMDB department)
  - MAC address (CMDB MAC address)
  - Display name (CMDB display name)
- **Contents:** Tab that accesses the APIs and integration flows that make up the bundle, or provides information about the integration flows that make up the bundle.
  - **Release Notes:** Tab that displays latest release information about the bundle, including its version.

**Step 3** Click the **Contents** tab.

**Step 4** Click the **Integration Flows** header.

An integration flow or list of integration flows appear underneath the header.

**Step 5** Click the **Enable** button to activate the integration flow links.

An **Information** field appears in the window.

**Step 6** In the **Information** field, click the **Enable** button to confirm enabling the bundle.

After clicking the **Enable** button to confirm, a success message appears.

**Step 7** Click **Okay** in the success message.

**Step 8** Click the link for the individual integration flow to perform the tasks listed below:


For Schedule-based integration flow (**Scheduler for ServiceNow Asset Sync**), perform the following tasks:

- Review the **Description**, **Tags**, **How to Use this Flow**, and scheduler.
- Click **Run Now** (to run the scheduler now), **Run Later** (to schedule for a later time), or **Recurring** (to set up a recurring schedule).
  - For **Run Later**, you need to select a date, time, and time zone. For **Recurring**, you need to set a repeating interval (daily or weekly), an interval duration (minutes or hours), and a start and end date.
- Click **Schedule** to enable the scheduler.



**Important** Only configure and enable an integration flow schedule, after you have finished configuring the bundle itself as described in this procedure. You can configure and enable an integration flow schedule by returning to this view and clicking **Schedule**, or by clicking the **View Flows** link in the **Endpoint Attribute Retrieval with ITSM (ServiceNow)** slide-in pane (see following steps), or by clicking the **Menu icon** (☰) > **Platform** > **Developer Toolkit** > **Integration Flows** > **Scheduler for ServiceNow Asset Sync**.

**Figure 22: Scheduler for ServiceNow Asset Sync**

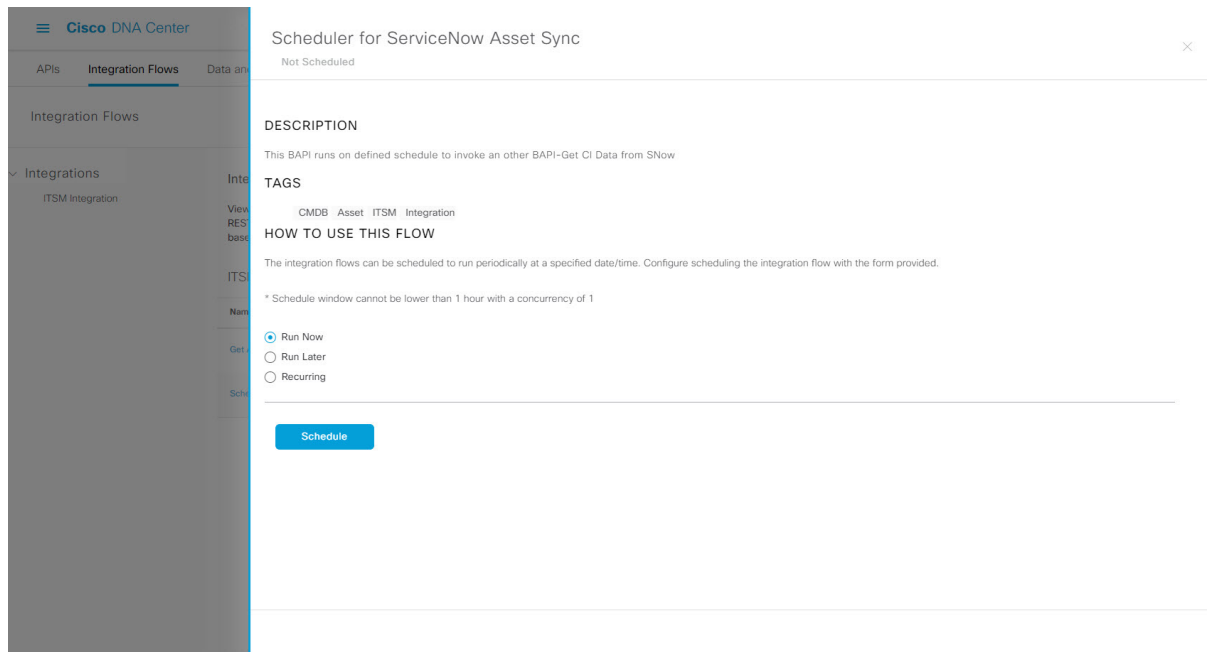

**Step 9** Click the **X** icon at the upper right of the window to close it and return to the previous bundle window.

**Step 10** Click the **Configure** button to configure at the bundle level.

A configuration slide-in pane appears. Proceed to review the **Configure Endpoint Attribute Retrieval with ITSM (ServiceNow)** information.


**Step 11** Click the **Configure** button to configure at the bundle level.

A configuration slide-in pane appears.

**Step 12** In the configuration slide-in pane, click **ServiceNow Access Settings** to configure a ServiceNow Connection instance.

**Step 13** Click the radio button to configure either an existing ServiceNow Connection instance or configure a new instance.

Figure 23: Example of ServiceNow Instance Configuration Fields

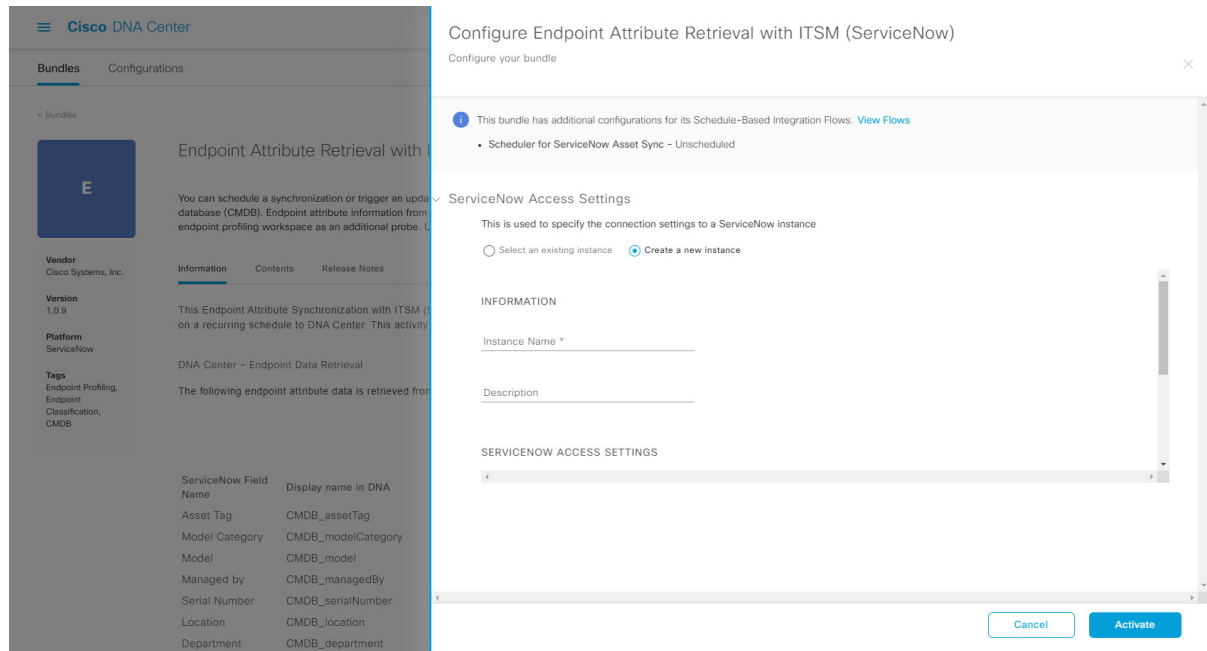

For configuring an existing ServiceNow Connection instance, choose it from the drop-down menu in the window and click **Activate**.

**Step 14** For configuring a new ServiceNow Connection instance, the following additional information must be entered.

- **Instance Name:** Name of the instance.
- **Description:** Descriptive text of the instance.
- **Host name:** Host name for the ServiceNow system.
- **Username:** Username required to access the ServiceNow system.
- **Password:** Password required to access the ServiceNow system.

**Step 15** Click **Check Connectivity** to test whether you can connect to the server where the endpoint is located.

**Step 16** Click **Activate** to activate the bundle.

### What to do next

Configure the integration flow (**Scheduler for ServiceNow Asset Sync**) for this bundle, using one of the methods described in Step 8 above.