

Configuración TrustSec SXP entre el ISE y ASA v

Contenido

[Introducción](#)

[prerrequisitos](#)

[Requisitos](#)

[Componentes Utilizados](#)

[Diagrama de la red](#)

[Direcciones de IP](#)

[Configuración inicial](#)

[Dispositivo de red ISE](#)

[Registro ASA como dispositivo de red](#)

[Genere fuera de la banda \(OOB\) PAC \(credenciales protegidos del acceso\) y descargue](#)

[Configuración de servidor AAA del ASDM](#)

[Cree al Grupo de servidores AAA](#)

[Agregue el servidor al grupo de servidores](#)

[Importe el PAC descargado del ISE](#)

[Restaure los datos del entorno](#)

[Verificación](#)

[Registros vivos ISE](#)

[Grupos de seguridad ISE](#)

[ASDM PAC](#)

[Datos y grupos de seguridad del entorno del ASDM](#)

[Configuración del ASDM SXP](#)

[Permiso SXP](#)

[Fije la dirección IP de origen predeterminada SXP y omita la contraseña SXP](#)

[Agregue al par SXP](#)

[Configuración ISE SXP](#)

[Configuración de la contraseña global SXP](#)

[Agregue el dispositivo SXP](#)

[Verificación SXP](#)

[Verificación ISE SXP](#)

[Asignaciones ISE SXP](#)

[Verificación del ASDM SXP](#)

[IP docto del ASDM SXP a las asignaciones SGT](#)

[Captura de paquetes tomada en el ISE](#)

Introducción

Este documento describe cómo configurar una conexión SXP (Exchange Protocol del grupo de seguridad) entre ISE (Identity Services Engine) y un ASA v (dispositivo de seguridad adaptante virtual).

SXP es el Exchange Protocol SGT (etiqueta del grupo de seguridad) usado por TrustSec para propagar el IP a las asignaciones SGT a los dispositivos de TrustSec. SXP fue desarrollado para permitir las redes incluyendo los dispositivos de tercero o los dispositivos de Cisco de la herencia que no soportan marcar con etiqueta en línea SGT para tener capacidades de TrustSec. SXP es un Peering Protocol, un dispositivo actuará como un Presidente y el otro como módulo de escucha. El altavoz SXP es responsable para enviar los atascamientos IP-SGT y el módulo de escucha es responsable de recoger estos atascamientos. La conexión SXP utiliza el puerto TCP 64999 como el Transport Protocol y el MD5 subyacentes para la Integridad del mensaje/la autenticidad.

SXP se ha publicado como borrador IETF en el siguiente enlace:

<https://datatracker.ietf.org/doc/draft-smith-kandula-sxp/>

Prerrequisitos

Requisitos

Matriz de compatibilidad de TrustSec:

<http://www.cisco.com/c/en/us/solutions/enterprise-networks/trustsec/solution-overview-listing.html>


Componentes Utilizados

ISE 2.3

ASAv 9.8.1

ASDM 7.8.1.150

Diagrama de la red

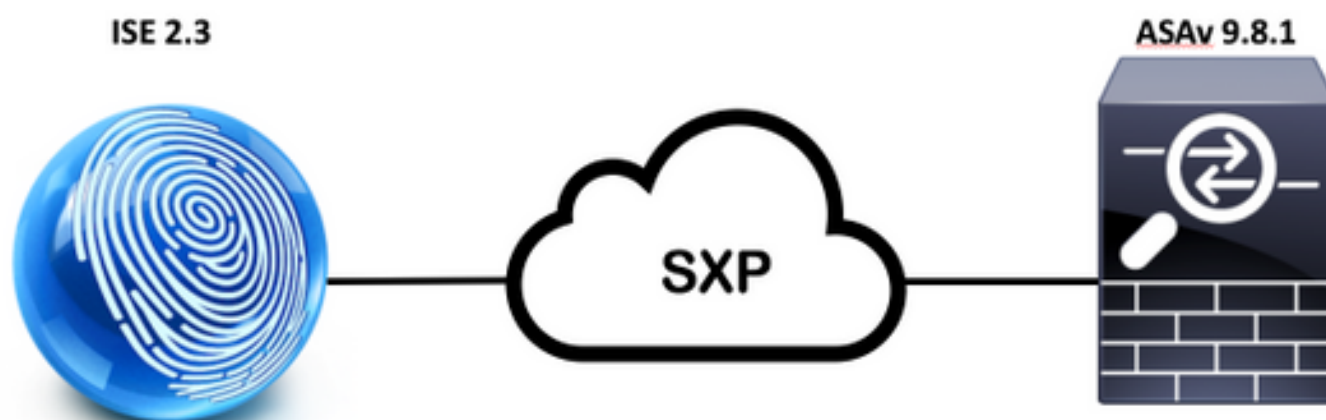

Direcciones de IP

ISE: 14.36.143.223

ASAv: 14.36.143.30

Configuración inicial

Dispositivo de red ISE

Registro ASA como dispositivo de red

WorkCenters > TrutSec > componentes > dispositivos de red > Add

Network Devices List > **New Network Device**

Network Devices

* Name

Description

IP Address /

RADIUS Authentication Settings

RADIUS UDP Settings

Protocol **RADIUS**

* Shared Secret

CoA Port

Advanced TrustSec Settings

▼ **Device Authentication Settings**

Use Device ID for TrustSec

Identification

Device Id

* Password

▼ **TrustSec Notifications and Updates**

* Download environment data every

* Download peer authorization policy every

* Reauthentication every ⓘ

* Download SGACL lists every

Other TrustSec devices to trust this device

Send configuration changes to device Using CoA CLI (SSH)

Ssh Key

Genere fuera de la banda (OOB) PAC (credenciales protegidos del acceso) y descargue

▼ **Out Of Band (OOB) TrustSec PAC**

Issue Date

Expiration Date

Issued By

Generate PAC

The Identity field specifies the username or machine name presented as the "inner username" by the EAP-FAST protocol. If the Identity string entered here does not match that username, authentication will fail.

* Identity


* Encryption Key

* PAC Time to Live

Expiration Date 29 Jan 2018 22:47:42 GMT

Opening ASAv.pac

You have chosen to open:

 **ASAv.pac**
which is: **Binary File**
from: **https://14.36.143.223**

Would you like to save this file?

Configuración de servidor AAA del ASDM

Cree al Grupo de servidores AAA

La configuración > el Firewall > la identidad de TrustSec > del grupo de servidores puestos > manejan...

Server Group Setup


Server Group Name:

Grupos de servidores AAA > Add

AAA Server Groups						
Server Group	Protocol	Accounting Mode	Reactivation Mode	Dead Time	Max Failed Attempts	Realm Id
LOCAL	LOCAL					

- Grupo de servidores AAA: Name> del <Group
- Autorización dinámica del permiso

AAA Server Group:

Protocol: 

Realm-id:

Accounting Mode: Simultaneous Single

Reactivation Mode: Depletion Timed

Dead Time: minutes

Max Failed Attempts:

Enable interim accounting update

Update Interval: Hours

Enable Active Directory Agent mode

ISE Policy Enforcement

Enable dynamic authorization

Dynamic Authorization Port:

Use authorization only mode (no common password configuration required)

VPN3K Compatibility Option ⤴

Specify whether a downloadable ACL received from RADIUS should be merged with a Cisco AV-Pair ACL.

Do not merge

Place the downloadable ACL after Cisco AV-Pair ACL

Place the downloadable ACL before Cisco AV-Pair ACL

Agregue el servidor al grupo de servidores

Servidores en el grupo seleccionado > Add

Servers in the Selected Group

Server Name or IP Address	Interface	Timeout
---------------------------	-----------	---------

Add

Edit

Delete

Move Up

Move Down

Test

- Nombre del servidor o dirección IP: **Dirección IP <ISE >**
- Puerto de la autenticación de servidor: **1812**
- Puerto de contabilidad del servidor: **1813**
- Clave del Secreto de servidor: **Cisc0123**
- Contraseña común: **Cisc0123**

Server Group: 14.36.143.223

Interface Name: outside

Server Name or IP Address: 14.36.143.223

Timeout: 10 seconds

RADIUS Parameters

Server Authentication Port: 1812

Server Accounting Port: 1813

Retry Interval: 10 seconds

Server Secret Key: ●●●●●●●●

Common Password: ●●●●●●●●

ACL Netmask Convert: Standard


Microsoft CHAPv2 Capable:

SDI Messages

Message Table


Importación PAC descargada del ISE

Configuración > Firewall > identidad de TrustSec > del grupo de servidores puestos > importación PAC...

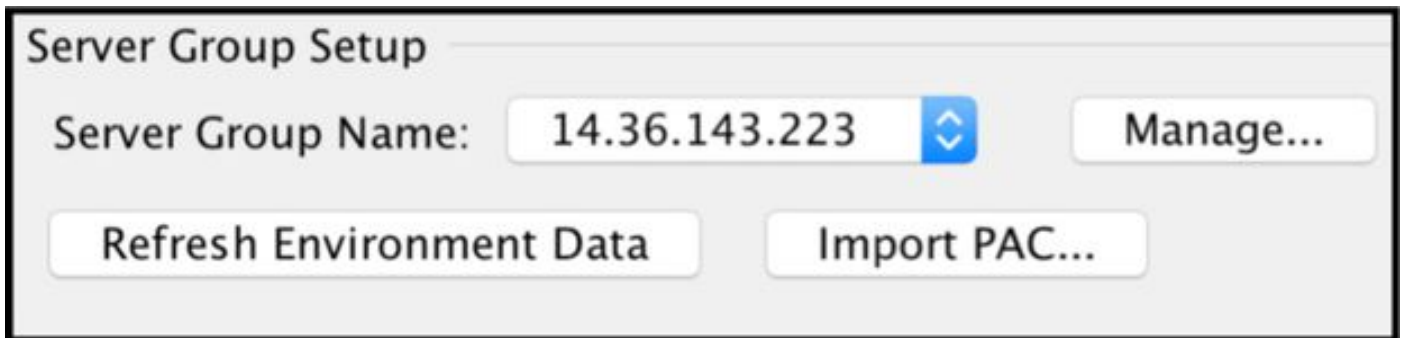


The 'Server Group Setup' dialog box features a title bar with the text 'Server Group Setup'. Below the title bar, there is a 'Server Group Name' field containing the IP address '14.36.143.223' and a blue dropdown arrow icon. To the right of this field is a 'Manage...' button. Below the name field are two buttons: 'Refresh Environment Data' on the left and 'Import PAC...' on the right.

- Contraseña Cisc0123

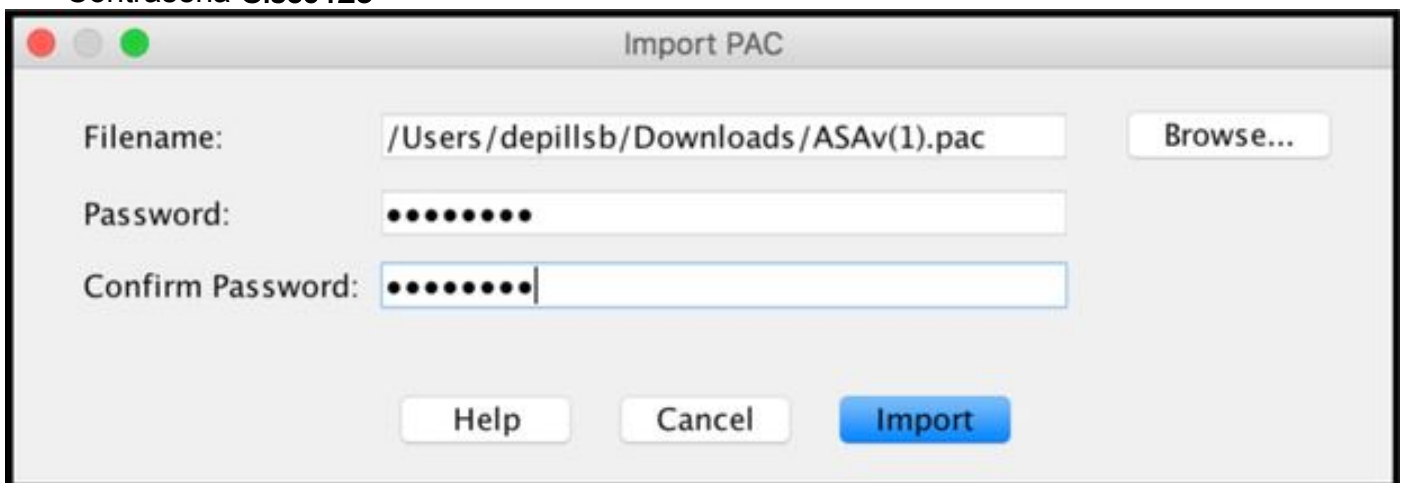

The 'Import PAC' dialog box has a title bar with the text 'Import PAC'. It contains three input fields: 'Filename:' with the path '/Users/depillsb/Downloads/ASAv(1).pac' and a 'Browse...' button; 'Password:' with a masked field of seven dots; and 'Confirm Password:' with a masked field of seven dots and a cursor. At the bottom, there are three buttons: 'Help', 'Cancel', and 'Import'.

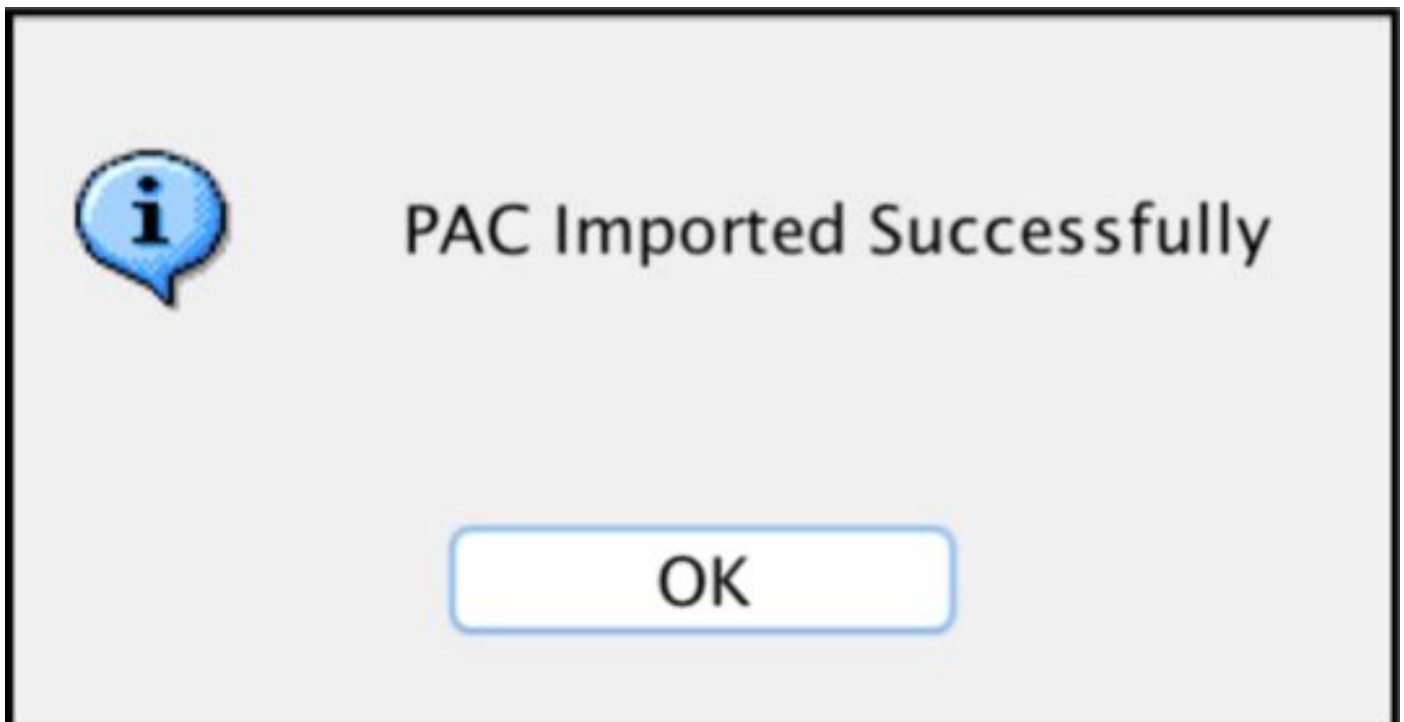

The 'PAC Imported Successfully' dialog box features a blue information icon on the left. The main text reads 'PAC Imported Successfully'. At the bottom center, there is a large 'OK' button.

Restaura los datos del entorno

La configuración > el Firewall > la identidad de TrustSec > del grupo de servidores puestos >

restauran los datos del entorno

Server Group Setup

Server Group Name: 

Verificación

Registros vivos ISE

Operaciones > RADIUS > registros vivos

<input checked="" type="checkbox"/>		ASAv	#CTSREQUEST#	
<input checked="" type="checkbox"/>		ASAv	#CTSREQUEST#	NetworkDeviceAuthorization >> NDAC

Authentication Details

Source Timestamp	2017-07-30 00:05:53.432
Received Timestamp	2017-07-30 00:05:53.433
Policy Server	ISE23
Event	5233 TrustSec Data Download Succeeded
Username	#CTSREQUEST#
Network Device	ASAv
Device Type	All Device Types
Location	All Locations
NAS IPv4 Address	14.36.143.30
NAS Port Type	Virtual
Security Group	TrustSec_Devices
Response Time	33 milliseconds

CiscoAVPair

```
cts-environment-data=ASAv,  
cts-environment-version=1,  
cts-device-capability=env-data-fragment,  
cts-pac-opaque=****,  
coa-push=true
```

Result

State	ReauthSession:0e248dff2f27TfOfK10NeCx1yRhjPAO8_ssZ9U9VVy/o3dFT_tk
Class	CACS:0e248dff2f27TfOfK10NeCx1yRhjPAO8_ssZ9U9VVy/o3dFT_tk:ISE23/290687604/9
cisco-av-pair	cts:server-list=CTSServerList1-0001
cisco-av-pair	cts:security-group-tag=0002-02
cisco-av-pair	cts:environment-data-expiry=86400
cisco-av-pair	cts:security-group-table=0001-18

CiscoAVPair

cts-security-group-table=0001,
cts-pac-opaque=****,
coa-push=true

Result

State	ReauthSession:0e248fdcf4PVaU72zvhHwsT3F4qpdgq4rMsifPkqEcQiG4O_YZw
Class	CACS:0e248fdcf4PVaU72zvhHwsT3F4qpdgq4rMsifPkqEcQiG4O_YZw:ISE23/290687604/10
cisco-av-pair	cts:security-group-table=0001-18
cisco-av-pair	cts:security-group-info=0-0-00-Unknown
cisco-av-pair	cts:security-group-info=ffff-1-00-ANY
cisco-av-pair	cts:security-group-info=9-0-00-Auditors
cisco-av-pair	cts:security-group-info=f-0-00-BYOD
cisco-av-pair	cts:security-group-info=5-0-00-Contractors
cisco-av-pair	cts:security-group-info=8-0-00-Developers
cisco-av-pair	cts:security-group-info=c-0-00-Development_Servers
cisco-av-pair	cts:security-group-info=4-0-00-Employees
cisco-av-pair	cts:security-group-info=6-2-00-Guests
cisco-av-pair	cts:security-group-info=3-0-00-Network_Services
cisco-av-pair	cts:security-group-info=e-0-00-PCI_Servers
cisco-av-pair	cts:security-group-info=a-0-00-Point_of_Sale_Systems
cisco-av-pair	cts:security-group-info=b-0-00-Production_Servers
cisco-av-pair	cts:security-group-info=7-0-00-Production_Users
cisco-av-pair	cts:security-group-info=ff-0-00-Quarantined_Systems
cisco-av-pair	cts:security-group-info=d-0-00-Test_Servers
cisco-av-pair	cts:security-group-info=2-2-00-TrustSec_Devices
cisco-av-pair	cts:security-group-info=10-0-00-Tester

















Grupos de seguridad ISE

Grupos del > Security (Seguridad) de los centros de trabajo > de TrustSec > de los componentes

Security Groups

For Policy Export go to [Administration](#) > [System](#) > [Backup & Restore](#) > [Policy Export Page](#)

 Edit  Add  Import  Export  Trash  Push

<input type="checkbox"/>	Icon	Name ↓	SGT (Dec / Hex)	Description
<input type="checkbox"/>		Auditors	9/0009	Auditor Security Group
<input type="checkbox"/>		BYOD	15/000F	BYOD Security Group
<input type="checkbox"/>		Contractors	5/0005	Contractor Security Group
<input type="checkbox"/>		Developers	8/0008	Developer Security Group
<input type="checkbox"/>		Development_Servers	12/000C	Development Servers Security Group
<input type="checkbox"/>		Employees	4/0004	Employee Security Group
<input type="checkbox"/>		Guests	6/0006	Guest Security Group
<input type="checkbox"/>		Network_Services	3/0003	Network Services Security Group
<input type="checkbox"/>		PCI_Servers	14/000E	PCI Servers Security Group
<input type="checkbox"/>		Point_of_Sale_Systems	10/000A	Point of Sale Security Group
<input type="checkbox"/>		Production_Servers	11/000B	Production Servers Security Group
<input type="checkbox"/>		Production_Users	7/0007	Production User Security Group
<input type="checkbox"/>		Quarantined_Systems	255/00FF	Quarantine Security Group
<input type="checkbox"/>		Tester	16/0010	
<input type="checkbox"/>		Test_Servers	13/000D	Test Servers Security Group
<input type="checkbox"/>		TrustSec_Devices	2/0002	TrustSec Devices Security Group

ASDM PAC

El monitorear > propiedades > identidad por TrustSec > el PAC

PAC Information:

Valid until: **Jan 30 2018 05:46:44**
AID: 6f5719523570b8d229f23073404e2d37
I-ID: ASAv
A-ID-Info: ISE 2.2p1
PAC-type: Cisco Trustsec

PAC Opaque:

```
000200b000030001000400106f5719523570b8d229f23073404e2d3700060094000301
00359249c4dd61484890f29bbe81859edb00000013597a55c100093a803f883e4ddafa
d162ae02fac03da08f9424cb323fa8aaeae44c6d6d7db3659516132f71b25aa5be3f38
9b76fdbbc1216d1d14e689ebb36d7344a5166247e950bbf62a370ea8fc941fa1d6c4ce5
9f438e787052db75a4e45ff2f0ab8488dfdd887a02119cc0c4174fc234f33d9ee9f9d4
dad759e9c8
```

Datos y grupos de seguridad del entorno del ASDM

El monitorear > propiedades > identidad por TrustSec > los **datos del entorno**

Environment Data:

Status: Active
Last download attempt: Successful
Environment Data Lifetime: 86400 secs
Last update time: 21:07:01 UTC Jul 29 2017
Env-data expires in: 0:21:39:07 (dd:hr:mm:sec)
Env-data refreshes in: 0:21:29:07 (dd:hr:mm:sec)

Security Group Table:

Valid until: 21:07:01 UTC Jul 30 2017
Total entries: 18

Name	Tag	Type
ANY	65535	unicast
Auditors	9	unicast
BYOD	15	unicast
Contractors	5	unicast
Developers	8	unicast
Development_Servers	12	unicast
Employees	4	unicast
Guests	6	unicast
Network_Services	3	unicast
PCI_Servers	14	unicast
Point_of_Sale_Systems	10	unicast
Production_Servers	11	unicast
Production_Users	7	unicast
Quarantined_Systems	255	unicast
Test_Servers	13	unicast
Tester	16	unicast
TrustSec_Devices	2	unicast
Unknown	0	unicast

Configuración del ASDM SXP

Permiso SXP

Configuración > Firewall > identidad por el Exchange Protocol de TrustSec > del permiso SGT (SXP)



Fije la dirección IP de origen predeterminada SXP y omita la contraseña SXP

Configuración > Firewall > identidad de TrustSec > de los pares de la conexión

A screenshot of a configuration form for SXP. It contains three input fields: "Default Source" with the value "14.36.143.30", "Default Password" with seven black dots, and "Confirm Password" with seven black dots.

Agregue al par SXP

La configuración > el Firewall > la identidad por TrustSec > la conexión mira > Add



- IP Address de Peer: Dirección IP <ISE >

Peer IP Address:	<input type="text" value="14.36.143.223"/>
Password:	<input type="text" value="Default"/>
Mode:	<input type="text" value="Local"/>
Role:	<input type="text" value="Listener"/>

Configuración ISE SXP

Configuración de la contraseña global SXP

WorkCenters > TrustSec > configuraciones > configuraciones SXP

- Contraseña global: Cisc0123

SXP Settings

- Publish SXP bindings on PxGrid
- Add radius mappings into SXP IP SGT mapping table

Global Password

Global Password

This global password will be overridden by the device specific password

Agregue el dispositivo SXP

WorkCenters > TrustSec > Devices (Dispositivos) > Add (Agregar) SXP > SXP

▼ Add Single Device

Input fields marked with an asterisk (*) are required.

name

IP Address *

Peer Role *

Connected PSNs *

SXP Domain *

Status *

Password Type *

Password

Version *

► Advanced Settings

Verificación SXP

Verificación ISE SXP

WorkCenters > TrustSec > dispositivos SXP > SXP

SXP Devices

0 Selected Rows/Page / 1 Total Rows

<input type="checkbox"/>	Name	IP Address	Status	Peer Role	Pass...	Negoti...	SX...	Connected To	Duration [d...	SXP Domain
<input type="checkbox"/>	ASAv	14.36.143.30	ON	LISTENER	DEFAULT	V3	V4	ISE23	00:00:00:02	default

Asignaciones ISE SXP

WorkCenters > TrustSec > SXP > todas las asignaciones SXP

Refresh Add SXP Domain filter Manage SXP Domain filters

IP Address	SGT	Learned From	Learned By	SXP Domain	PSNs Involved
10.122.158.253/32	Guests (6/0006)	14.36.143.223	Local	default	ISE23
10.122.160.93/32	Guests (6/0006)	14.36.143.223	Local	default	ISE23
10.122.165.49/32	Employees (4/0004)	14.36.143.223	Local	default	ISE23
10.122.165.58/32	Guests (6/0006)	14.36.143.223	Local	default	ISE23
14.0.69.220/32	Guests (6/0006)	14.36.143.223	Local	default	ISE23
14.36.143.99/32	Employees (4/0004)	14.36.143.223	Local	default	ISE23
14.36.143.105/32	TrustSec_Devices (2/0002)	14.36.143.223	Local	default	ISE23
14.36.147.70/32	Employees (4/0004)	14.36.143.223	Local	default	ISE23
172.18.250.123/32	Employees (4/0004)	14.36.143.223	Local	default	ISE23
192.168.1.0/24	Contractors (5/0005)	14.36.143.223	Local	default	ISE23

Verificación del ASDM SXP

El monitorear > propiedades > identidad por TrustSec > las conexiones SXP

SGT Exchange Protocol (SXP) Connections:

SXP: Enabled
 Highest version: 3
 Default password: Set
 Default local IP: 14.36.143.30
 Reconcile period: 120 secs
 Retry open period: 120 secs
 Retry open timer: Not Running
 Total number of SXP connections: 1
 Total number of SXP connections shown: 1

Peer Connection Status:

Filter: Peer IP Address ...

Peer	Source	Status	Version	Role	Instance #	Password	Reconcile Timer	Delete Hold-down Timer	Last Changed
14.36.143.223	14.36.143.30	On	3	Listener	1	Default	Not Running	Not Running	0:00:22:56 (dd:hr:mm:se)

IP docto del ASDM SXP a las asignaciones SGT

El monitorear > propiedades > identidad por TrustSec > las asignaciones IP

Security Group IP Mapping Table:

Total number of Security Group IP Mappings: 10

Total number of Security Group IP Mappings shown: 10

Filter:

TAG



Tag	Name	IP Address
4	Employees	14.36.143.99
6	Guests	10.122.158.253
6	Guests	10.122.160.93
4	Employees	14.36.147.70
2	TrustSec_Devices	14.36.143.105
4	Employees	172.18.250.123
4	Employees	10.122.165.49
6	Guests	14.0.69.220
6	Guests	10.122.165.58
5	Contractors	192.168.1.0/24

Captura de paquetes tomada en el ISE

2060	0.000000	14.36.143.223	14.36.143.30	TCP	86	25982	-	64999	[SYN]	Seq=0	Win=29200	Len=0	MD5	MSS=1460	SACK_PERM=1	WS=1
2061	0.000782	14.36.143.30	14.36.143.223	TCP	78	64999	-	25982	[SYN, ACK]	Seq=0	Ack=1	Win=32768	Len=0	MSS=1460	MD5	
2062	0.000039	14.36.143.223	14.36.143.30	TCP	74	25982	-	64999	[ACK]	Seq=1	Ack=1	Win=29200	Len=0	MD5		
2074	0.039078	14.36.143.223	14.36.143.30	SMPP	102				SMPP	Bind_receiver						
2075	0.000522	14.36.143.30	14.36.143.223	TCP	74	64999	-	25982	[ACK]	Seq=1	Ack=29	Win=32768	Len=0	MD5		
2076	0.000212	14.36.143.30	14.36.143.223	SMPP	90				SMPP	Bind_transmitter						
2077	0.000024	14.36.143.223	14.36.143.30	TCP	74	25982	-	64999	[ACK]	Seq=29	Ack=17	Win=29200	Len=0	MD5		
2085	0.008444	14.36.143.223	14.36.143.30	SMPP	311				SMPP	Query_sm						
2086	0.000529	14.36.143.30	14.36.143.223	TCP	74	64999	-	25982	[ACK]	Seq=17	Ack=266	Win=32768	Len=0	MD5		