

# Configuration d'une sauvegarde BRI Multilink RNIS avec Dialer Watch

## Contenu

[Introduction](#)

[Conditions préalables](#)

[Conditions requises](#)

[Composants utilisés](#)

[Conventions](#)

[Configurez](#)

[Diagramme du réseau](#)

[Configurations](#)

[Vérifiez](#)

[Exemple de sortie de la commande show](#)

[Dépannez](#)

[Dépannage des commandes](#)

[Informations connexes](#)

## [Introduction](#)

Ce document fournit une configuration d'échantillon pour configurer une sauvegarde BRI Multilink RNIS utilisant la Fonction Dialer Watch.

Il fournit à des commandes de dépannage de base, aussi bien qu'à des instructions spécifiques pour dépannage des configurations le multilink point par point (de PPP) mis en application dans un scénario de sauvegarde en même temps que la Fonction Dialer Watch.

Cette configuration peut être utilisée quand l'interface ou les sous-interfaces de relais de cadre principal descendent.

## [Conditions préalables](#)

### [Conditions requises](#)

Aucune condition préalable spécifique n'est requise pour ce document.

### [Composants utilisés](#)

Les informations dans ce document sont basées sur les versions de logiciel et de matériel ci-dessous.

- Deux versions de logiciel 12.2(3) et 12.2(5) courantes de Cisco IOS® de Routeurs de Cisco 2500 (matériel de terminal de données en relais de trame [DTE]).
- Un routeur de Cisco 4500 agissant en tant que commutateur de Relais de trames.

Les informations présentées dans ce document ont été créées à partir de périphériques dans un environnement de laboratoire spécifique. Tous les périphériques utilisés dans ce document ont démarré avec une configuration effacée (par défaut). Si vous travaillez dans un réseau opérationnel, assurez-vous de bien comprendre l'impact potentiel de toute commande avant de l'utiliser.

## Conventions

Pour plus d'informations sur les conventions des documents, référez-vous aux [Conventions utilisées pour les conseils techniques de Cisco](#).


## Configurez

Cette section vous fournit des informations pour configurer les fonctionnalités décrites dans ce document.

**Note:** Pour trouver les informations complémentaires sur les commandes utilisées dans ce document, utilisez l'utilitaire de recherche de commande

## Diagramme du réseau

Ce document utilise la configuration réseau indiquée dans le diagramme suivant :

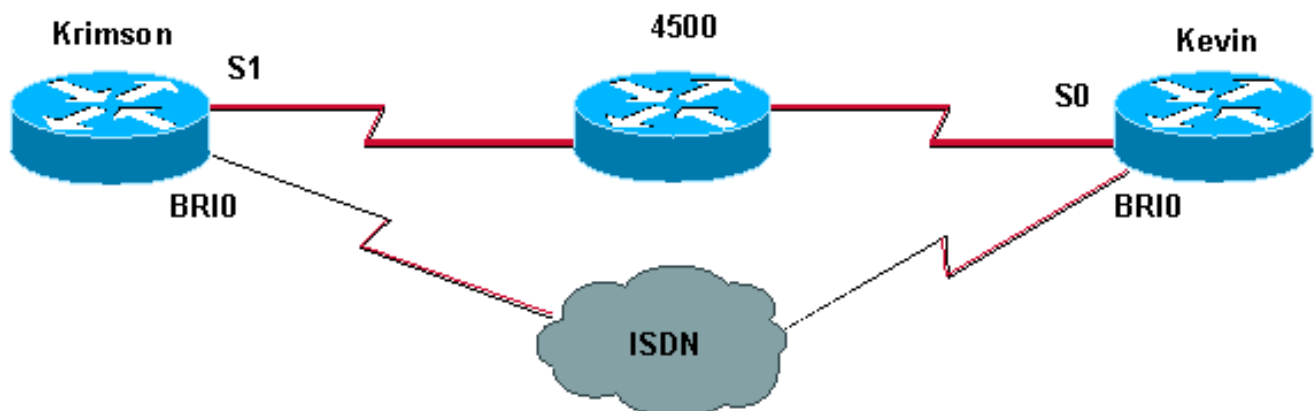

## Configurations

Ce document utilise les configurations présentées ci-dessous.

- [krimson \(routeur de Cisco 2500\)](#)
- [Kevin \(routeur de Cisco 2500\)](#)

<b>krimson (routeur de Cisco 2500)</b>
--

<code>krimson#show running-config</code>
--

```
Building configuration...
!
version 12.2
service timestamps debug datetime msec
service timestamps log datetime msec
hostname krimson
!
username kevin password 0 <password>
!
isdn switch-type basic-net3
!
interface Loopback0
ip address 10.7.7.1 255.255.255.0
ip ospf network point-to-point
!
interface Ethernet0
ip address 10.200.16.30 255.255.255.0
!
interface Serial1
bandwidth 64
no ip address
encapsulation frame-relay
!
interface Serial1.1 point-to-point
ip address 10.5.5.2 255.255.255.0
no ip route-cache
frame-relay interface-dlci 20
!
interface BRI0
no ip address
encapsulation ppp
no ip route-cache
no ip mroute-cache
load-interval 30
no keepalive
dialer pool-member 1
isdn switch-type basic-net3
no fair-queue
no cdp enable
ppp authentication chap
!
interface Dialer0
ip address 10.9.9.1 255.255.255.0
encapsulation ppp
no ip route-cache
no ip mroute-cache
dialer pool 1
dialer remote-name kevin
dialer string 6120
dialer load-threshold 1 either
dialer watch-group 1
dialer-group 1
no cdp enable
ppp authentication chap
ppp multilink
!
!
router ospf 10
log-adjacency-changes
network 10.5.5.0 0.0.0.255 area 0
network 10.7.7.0 0.0.0.255 area 0
network 10.9.9.0 0.0.0.255 area 0
!
ip default-gateway 10.200.16.1
```

```
no ip classless
ip route 0.0.0.0 0.0.0.0 10.200.16.1
no ip http server
!
access-list 101 deny ospf any any
access-list 101 permit ip any any
dialer watch-list 1 ip 10.8.8.0 255.255.255.0
dialer-list 1 protocol ip list 101
!
line con 0
exec-timeout 0 0
privilege level 15
line aux 0
transport input all
line vty 0 4
exec-timeout 0 0
password <password>
login
!
end
```

### Kevin (routeur de Cisco 2500)

```
kevin#show running-config
Building configuration...
!
version 12.2
service timestamps debug datetime msec
service timestamps log datetime msec
!
hostname kevin
!
username krimson password 0 <password>
!
isdn switch-type basic-net3
!
!
!
interface Loopback0
ip address 10.8.8.1 255.255.255.0
ip ospf network point-to-point
!
interface Loopback1
ip address 172.19.0.1 255.255.255.255
!
interface Ethernet0
ip address 10.200.16.26 255.255.255.0
!
interface Serial0
no ip address
encapsulation frame-relay
!
interface Serial0.1 point-to-point
ip address 10.5.5.1 255.255.255.0
no cdp enable
frame-relay interface-dlci 20
!
interface BRI0
no ip address
encapsulation ppp
dialer pool-member 1
isdn switch-type basic-net3
no cdp enable
```

```
ppp authentication chap
!
interface Dialer0
ip address 10.9.9.2 255.255.255.0
encapsulation ppp
dialer pool 1
dialer remote-name krimson
dialer-group 1
no cdp enable
ppp authentication chap
ppp multilink
!
router ospf 10
log-adjacency-changes
network 10.5.5.0 0.0.0.255 area 0
network 10.8.8.0 0.0.0.255 area 0
network 10.9.9.0 0.0.0.255 area 0
!
ip default-gateway 10.200.16.1
ip classless
ip route 0.0.0.0 0.0.0.0 10.200.16.1
no ip http server
!
access-list 101 deny ospf any any
access-list 101 permit ip any any
dialer-list 1 protocol ip list 101
!
!
line con 0
exec-timeout 0 0
line aux 0
modem InOut
line vty 0 4
exec-timeout 0 0
password <password>
login
!
end
```

## Vérifiez

Cette section présente des informations que vous pouvez utiliser pour vous assurer que votre configuration fonctionne correctement.

certaines commandes show sont prises en charge par l'outil Interpréteur de sortie, qui vous permet d'afficher une analyse de la sortie de la commande show.

- **show interfaces serial** - Affiche des informations au sujet de l'identificateur de connexion de liaison de données multicast (DLCI), des DLCI utilisés sur l'interface, et du DLCI utilisé pour l'interface de gestion locale (LMI).
- **interface dialer d'exposition** - Affiche des informations au sujet de l'interface de numérotation.
- **show ip route** - Entrées de table de Routage IP d'affichages.
- **show frame-relay pvc** - Affiche l'état de PVCs sur le routeur.

## Exemple de sortie de la commande show

Les commandes show suivantes affichent l'état initial sur le routeur appelant tandis que le lien de

## Relais de trames est en hausse et fonctionnel :

```
krimson#show interface serial 1.1
```

```
Serial1.1 is up, line protocol is up
Hardware is HD64570
Internet address is 10.5.5.2/24
MTU 1500 bytes, BW 64 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation FRAME-RELAY
```

```
krimson#show frame pvc
```

```
PVC Statistics for interface Serial1 (Frame Relay DTE)
```

```
Active Inactive Deleted Static
```

```
Local 1 0 0 0
Switched 0 0 0 0
Unused 0 0 0 0
```

```
DLCI = 20, DLCI USAGE = LOCAL, PVC STATUS = ACTIVE, INTERFACE = Serial1.1
```

```
input pkts 53280 output pkts 62150 in bytes 3851528
out bytes 6340750 dropped pkts 0 in FECN pkts 0
in BECN pkts 0 out FECN pkts 0 out BECN pkts 0
in DE pkts 0 out DE pkts 0
out bcast pkts 62092 out bcast bytes 6334184
pvc create time 1w2d, last time pvc status changed 00:02:54
```

```
krimson#show interface dialer 0
```

```
Dialer0 is up (spoofing), line protocol is up (spoofing)
Hardware is Unknown
Internet address is 10.9.9.1/24
MTU 1500 bytes, BW 56 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation PPP, loopback not set
DTR is pulsed for 1 seconds on reset
Last input 00:01:50, output never, output hang never
Last clearing of "show interface" counters 8w0d
Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: weighted fair
Output queue: 0/1000/64/0 (size/max total/threshold/drops)
Conversations 0/1/16 (active/max active/max total)
Reserved Conversations 0/0 (allocated/max allocated)
Available Bandwidth 12 kilobits/sec
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
31010 packets input, 2101372 bytes
31036 packets output, 2100401 bytes
```

```
krimson#show interface serial 1
```

```
Serial1 is up, line protocol is up
Hardware is HD64570
MTU 1500 bytes, BW 64 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation FRAME-RELAY, loopback not set
Keepalive set (10 sec)
LMI enq sent 53297, LMI stat recvd 52975, LMI upd recvd 0, DTE LMI up
LMI enq recvd 3, LMI stat sent 0, LMI upd sent 0
LMI DLCI 1023 LMI type is CISCO frame relay DTE
FR SVC disabled, LAPF state down
Broadcast queue 0/64, broadcasts sent/dropped 62118/1, interface broadcasts 53298
Last input 00:00:01, output 00:00:01, output hang never
Last clearing of "show interface" counters 3w1d
```

```
Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: weighted fair
Output queue: 0/1000/64/0 (size/max total/threshold/drops)
Conversations 0/3/16 (active/max active/max total)
Reserved Conversations 0/0 (allocated/max allocated)
Available Bandwidth 48 kilobits/sec
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
106412 packets input, 4626191 bytes, 0 no buffer
Received 0 broadcasts, 0 runts, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
115787 packets output, 7047349 bytes, 0 underruns
0 output errors, 0 collisions, 46425 interface resets
0 output buffer failures, 0 output buffers swapped out
76 carrier transitions
DCD=up DSR=up DTR=up RTS=up CTS=up
```

#### krimson#show ip route

```
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
```

Gateway of last resort is 10.200.16.1 to network 0.0.0.0

```
192.168.64.0/30 is subnetted, 1 subnets
C 192.168.64.0 is directly connected, Dialer4
10.0.0.0/24 is subnetted, 6 subnets
C 10.5.5.0 is directly connected, Serial1.1
O 10.8.8.0 [110/1563] via 10.5.5.1, 00:04:35, Serial1.1
C 10.9.9.0 is directly connected, Dialer0
C 10.7.7.0 is directly connected, Loopback0
C 10.9.8.0 is directly connected, Dialer1
C 10.200.16.0 is directly connected, Ethernet0
S* 0.0.0.0/0 [1/0] via 10.200.16.1
```

La sortie suivante prouve que le lien de Relais de trames va vers le bas et la liaison RNIS est soulevée :

```
*Apr 26 04:57:25.801: OSPF: Rcv hello from 172.19.0.1 area 0 from Serial1.1 10.5.5.1
*Apr 26 04:57:25.805: OSPF: End of hello processing

*Apr 26 04:57:36.765: %LINK-3-UPDOWN: Interface Serial1, changed state to down
*Apr 26 04:57:36.773: OSPF: Interface Serial1.1 going Down
*Apr 26 04:57:36.777: %OSPF-5-ADJCHG: Process 10, Nbr 172.19.0.1 on Serial1.1
from FULL to DOWN, Neighbor Down: Interface down or detached
*Apr 26 04:57:36.921: DDR: Dialer Watch: watch-group = 1
*Apr 26 04:57:36.925: DDR: network 10.8.8.0/255.255.255.0 DOWN,
*Apr 26 04:57:36.929: DDR: primary DOWN
*Apr 26 04:57:36.929: DDR: Dialer Watch: Dial Reason: Primary of group 1 DOWN
*Apr 26 04:57:36.933: DDR: Dialer Watch: watch-group = 1,
*Apr 26 04:57:36.933: BR0 DDR: rotor dialout [priority]
*Apr 26 04:57:36.933: DDR: dialing secondary by dialer string 6120 on Di0
*Apr 26 04:57:36.937: BR0 DDR: Attempting to dial 6120
*Apr 26 04:57:36.941: ISDN BR0: Outgoing call id = 0x818B, dsl 0
*Apr 26 04:57:37.033: ISDN BR0: Event: Call to 6120 at 64 Kb/s
*Apr 26 04:57:37.033: ISDN BR0: process_bri_call(): call id 0x818B, called_number
6120, speed 64, call type DATA
*Apr 26 04:57:37.037: CCBRI_Go Fr Host InPkgInfo (Len=20) :
*Apr 26 04:57:37.041: 1 0 1 81 8B 0 4 2 88 90 18 1 83 70 5 80 36 31 32 30
```

```
*Apr 26 04:57:37.049:
*Apr 26 04:57:37.049: CC_CHAN_GetIdleChanbri: dsl 0
*Apr 26 04:57:37.053: Found idle channel B1
*Apr 26 04:57:37.065: ISDN BR0: TX -> SETUP pd = 8 callref = 0x0E
*Apr 26 04:57:37.069: Bearer Capability i = 0x8890
*Apr 26 04:57:37.077: Channel ID i = 0x83
*Apr 26 04:57:37.081: Called Party Number i = 0x80, '6120', Plan:Unknown,
Type:Unknown
*Apr 26 04:57:37.161: ISDN BR0: RX <- CALL_PROC pd = 8 callref = 0x8E
*Apr 26 04:57:37.165: Channel ID i = 0x89
*Apr 26 04:57:37.181: CCBRI_Go Fr L3 pkt (Len=7) :
*Apr 26 04:57:37.181: 2 1 E 98 18 1 89
*Apr 26 04:57:37.185:
*Apr 26 04:57:37.189: ISDN BR0: LIF_EVENT: ces/callid 1/0x818B HOST_PROCEEDING
*Apr 26 04:57:37.189: ISDN BR0: HOST_PROCEEDING
*Apr 26 04:57:37.193: ISDN BR0: HOST_MORE_INFO
*Apr 26 04:57:37.461: ISDN BR0: RX <- CONNECT pd = 8 callref = 0x8E
*Apr 26 04:57:37.477: CCBRI_Go Fr L3 pkt (Len=4) :
*Apr 26 04:57:37.481: 7 1 E 91
*Apr 26 04:57:37.481:
*Apr 26 04:57:37.485: ISDN BR0: LIF_EVENT: ces/callid 1/0x818B HOST_CONNECT
*Apr 26 04:57:37.489: %LINK-3-UPDOWN: Interface BRI0:1, changed state to up
*Apr 26 04:57:37.493: BR0:1 DDR: Dialer Watch: resetting call in progress
*Apr 26 04:57:37.497: %DIALER-6-BIND: Interface BR0:1 bound to profile Di0
*Apr 26 04:57:37.509: ISDN: get_isdn_service_state(): idb 0x221DA8
bchan 2 is_isdn 1 Not a Pri
*Apr 26 04:57:37.513: BR0:1 PPP: Treating connection as a callout
*Apr 26 04:57:37.513: BR0:1 PPP: Phase is ESTABLISHING, Active Open
[0 sess, 0 load]
*Apr 26 04:57:37.517: BR0:1 LCP: O CONFREQ [Closed] id 102 len 29
*Apr 26 04:57:37.521: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Apr 26 04:57:37.525: BR0:1 LCP: MagicNumber 0x2180E264 (0x05062180E264)
*Apr 26 04:57:37.529: BR0:1 LCP: MRRU 1524 (0x110405F4)
*Apr 26 04:57:37.529: BR0:1 LCP: EndpointDisc 1 krimson (0x130A016B72696D736F6E)
*Apr 26 04:57:37.533: ISDN BR0: Event: Connected to 6120 on B1 at 64 Kb/s
*Apr 26 04:57:37.541: ISDN BR0: TX -> CONNECT_ACK pd = 8 callref = 0x0E
*Apr 26 04:57:37.581: BR0:1 LCP: I CONFREQ [REQsent] id 191 len 27
*Apr 26 04:57:37.585: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Apr 26 04:57:37.589: BR0:1 LCP: MagicNumber 0xCA476259 (0x0506CA476259)
*Apr 26 04:57:37.593: BR0:1 LCP: MRRU 1524 (0x110405F4)
*Apr 26 04:57:37.593: BR0:1 LCP: EndpointDisc 1 kevin (0x1308016B6576696E)
*Apr 26 04:57:37.601: BR0:1 LCP: O CONFACK [REQsent] id 191 len 27
*Apr 26 04:57:37.605: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Apr 26 04:57:37.605: BR0:1 LCP: MagicNumber 0xCA476259 (0x0506CA476259)
*Apr 26 04:57:37.609: BR0:1 LCP: MRRU 1524 (0x110405F4)
*Apr 26 04:57:37.613: BR0:1 LCP: EndpointDisc 1 kevin (0x1308016B6576696E)
*Apr 26 04:57:37.617: BR0:1 LCP: I CONFACK [ACKsent] id 102 len 29
*Apr 26 04:57:37.621: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Apr 26 04:57:37.621: BR0:1 LCP: MagicNumber 0x2180E264 (0x05062180E264)
*Apr 26 04:57:37.625: BR0:1 LCP: MRRU 1524 (0x110405F4)
*Apr 26 04:57:37.629: BR0:1 LCP: EndpointDisc 1 krimson (0x130A016B72696D736F6E)
*Apr 26 04:57:37.633: BR0:1 LCP: State is Open
*Apr 26 04:57:37.633: BR0:1 PPP: Phase is AUTHENTICATING, by both
[0 sess, 0 load]
*Apr 26 04:57:37.637: BR0:1 CHAP: O CHALLENGE id 157 len 28 from "krimson"
*Apr 26 04:57:37.657: BR0:1 CHAP: I CHALLENGE id 159 len 26 from "kevin"
*Apr 26 04:57:37.661: BR0:1 CHAP: O RESPONSE id 159 len 28 from "krimson"
*Apr 26 04:57:37.709: BR0:1 CHAP: I SUCCESS id 159 len 4
*Apr 26 04:57:37.725: BR0:1 CHAP: I RESPONSE id 157 len 26 from "kevin"
*Apr 26 04:57:37.733: BR0:1 CHAP: O SUCCESS id 157 len 4
*Apr 26 04:57:37.737: BR0:1 PPP: Phase is VIRTUALIZED [0 sess, 0 load]
*Apr 26 04:57:37.745: Di0 PPP: Phase is UP [0 sess, 0 load]
*Apr 26 04:57:37.749: Di0 IPCP: O CONFREQ [Closed] id 103 len 10
*Apr 26 04:57:37.753: Di0 IPCP: Address 10.9.9.1 (0x03060A090901)
```



```
*Apr 26 04:57:37.757: Di0 MLP: Added first link BR0:1 to bundle kevin
*Apr 26 04:57:37.757: Di0 PPP: Treating connection as a callout
*Apr 26 04:57:37.765: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial1,
changed state to down
*Apr 26 04:57:37.773: Di0 IPCP: I CONFREQ [REQsent] id 103 len 10
*Apr 26 04:57:37.777: Di0 IPCP: Address 10.9.9.2 (0x03060A090902)
*Apr 26 04:57:37.777: Di0 IPCP: O CONFACK [REQsent] id 103 len 10
*Apr 26 04:57:37.781: Di0 IPCP: Address 10.9.9.2 (0x03060A090902)
*Apr 26 04:57:37.801: Di0 IPCP: I CONFACK [ACKsent] id 103 len 10
*Apr 26 04:57:37.805: Di0 IPCP: Address 10.9.9.1 (0x03060A090901)
*Apr 26 04:57:37.805: Di0 IPCP: State is Open
*Apr 26 04:57:37.813: Di0 DDR: dialer protocol up
*Apr 26 04:57:37.821: Di0 IPCP: Install route to 10.9.9.2
*Apr 26 04:57:38.225: BR0 DDR: rotor dialout [priority]
*Apr 26 04:57:38.225: BR0 DDR: Attempting to dial 6120
*Apr 26 04:57:38.229: ISDN BR0: Outgoing call id = 0x818C, dsl 0
*Apr 26 04:57:38.233: ISDN BR0: Event: Call to 6120 at 64 Kb/s
*Apr 26 04:57:38.233: ISDN BR0: process_bri_call(): call id 0x818C, called_number
6120, speed 64, call type DATA
*Apr 26 04:57:38.237: CCBRI_Go Fr Host InPkgInfo (Len=20) :
*Apr 26 04:57:38.241: 1 0 1 81 8C 0 4 2 88 90 18 1 83 70 5 80 36 31 32 30
*Apr 26 04:57:38.249:
*Apr 26 04:57:38.249: CC_CHAN_GetIdleChanbri: dsl 0
*Apr 26 04:57:38.253: Found idle channel B2
*Apr 26 04:57:38.265: ISDN BR0: TX -> SETUP pd = 8 callref = 0x0F
*Apr 26 04:57:38.269: Bearer Capability i = 0x8890
*Apr 26 04:57:38.277: Channel ID i = 0x83
*Apr 26 04:57:38.281: Called Party Number i = 0x80, '6120', Plan:Unknown,
Type:Unknown
*Apr 26 04:57:38.377: ISDN BR0: RX <- CALL_PROC pd = 8 callref = 0x8F
*Apr 26 04:57:38.385: Channel ID i = 0x8A
*Apr 26 04:57:38.405: CCBRI_Go Fr L3 pkt (Len=7) :
*Apr 26 04:57:38.405: 2 1 F 98 18 1 8A
*Apr 26 04:57:38.409:
*Apr 26 04:57:38.413: ISDN BR0: LIF_EVENT: ces/callid 1/0x818C HOST_PROCEEDING
*Apr 26 04:57:38.413: ISDN BR0: HOST_PROCEEDING
*Apr 26 04:57:38.417: ISDN BR0: HOST_MORE_INFO
*Apr 26 04:57:38.737: %LINEPROTO-5-UPDOWN: Line protocol on Interface BRI0:1,
changed state to up
*Apr 26 04:57:38.761: ISDN BR0: RX <- CONNECT pd = 8 callref = 0x8F
*Apr 26 04:57:38.781: CCBRI_Go Fr L3 pkt (Len=4) :
*Apr 26 04:57:38.781: 7 1 F 91
*Apr 26 04:57:38.785:
*Apr 26 04:57:38.785: ISDN BR0: LIF_EVENT: ces/callid 1/0x818C HOST_CONNECT
*Apr 26 04:57:38.789: %LINK-3-UPDOWN: Interface BRI0:2, changed state to up
*Apr 26 04:57:38.797: %DIALER-6-BIND: Interface BR0:2 bound to profile Di0
*Apr 26 04:57:38.805: %ISDN-6-CONNECT: Interface BRI0:1 is now connected
to 6120 kevin
*Apr 26 04:57:38.809: ISDN: get_isdn_service_state():
idb 0x225754 bchan 3 is_isdn 1 Not a Pri
*Apr 26 04:57:38.813: BR0:2 PPP: Treating connection as a callout
*Apr 26 04:57:38.817: BR0:2 PPP: Phase is ESTABLISHING, Active Open
[0 sess, 0 load]
*Apr 26 04:57:38.821: BR0:2 LCP: O CONFREQ [Closed] id 50 len 29
*Apr 26 04:57:38.825: BR0:2 LCP: AuthProto CHAP (0x0305C22305)
*Apr 26 04:57:38.825: BR0:2 LCP: MagicNumber 0x2180E77A (0x05062180E77A)
*Apr 26 04:57:38.829: BR0:2 LCP: MRRU 1524 (0x110405F4)
*Apr 26 04:57:38.833: BR0:2 LCP: EndpointDisc 1 krimson (0x130A016B72696D736F6E)
*Apr 26 04:57:38.837: ISDN BR0: Event: Connected to 6120 on B2 at 64 Kb/s
*Apr 26 04:57:38.845: ISDN BR0: TX -> CONNECT_ACK pd = 8 callref = 0x0F
*Apr 26 04:57:38.885: BR0:2 LCP: I CONFREQ [REQsent] id 102 len 27
*Apr 26 04:57:38.889: BR0:2 LCP: AuthProto CHAP (0x0305C22305)
*Apr 26 04:57:38.893: BR0:2 LCP: MagicNumber 0xCA476774 (0x0506CA476774)
*Apr 26 04:57:38.897: BR0:2 LCP: MRRU 1524 (0x110405F4)
```

```

*Apr 26 04:57:38.897: BR0:2 LCP: EndpointDisc 1 kevin (0x1308016B6576696E)
*Apr 26 04:57:38.905: BR0:2 LCP: O CONFACK [REQsent] id 102 len 27
*Apr 26 04:57:38.905: BR0:2 LCP: AuthProto CHAP (0x0305C22305)
*Apr 26 04:57:38.909: BR0:2 LCP: MagicNumber 0xCA476774 (0x0506CA476774)
*Apr 26 04:57:38.913: BR0:2 LCP: MRRU 1524 (0x110405F4)
*Apr 26 04:57:38.917: BR0:2 LCP: EndpointDisc 1 kevin (0x1308016B6576696E)
*Apr 26 04:57:38.921: BR0:2 LCP: I CONFACK [ACKsent] id 50 len 29
*Apr 26 04:57:38.925: BR0:2 LCP: AuthProto CHAP (0x0305C22305)
*Apr 26 04:57:38.925: BR0:2 LCP: MagicNumber 0x2180E77A (0x05062180E77A)
*Apr 26 04:57:38.929: BR0:2 LCP: MRRU 1524 (0x110405F4)
*Apr 26 04:57:38.933: BR0:2 LCP: EndpointDisc 1 krimson (0x130A016B72696D736F6E)
*Apr 26 04:57:38.937: BR0:2 LCP: State is Open
*Apr 26 04:57:38.937: BR0:2 PPP: Phase is AUTHENTICATING, by both
[0 sess, 0 load]
*Apr 26 04:57:38.941: BR0:2 CHAP: O CHALLENGE id 104 len 28 from "krimson"
*Apr 26 04:57:38.961: BR0:2 CHAP: I CHALLENGE id 102 len 26 from "kevin"
*Apr 26 04:57:38.969: BR0:2 CHAP: O RESPONSE id 102 len 28 from "krimson"
*Apr 26 04:57:39.017: BR0:2 CHAP: I SUCCESS id 102 len 4
*Apr 26 04:57:39.033: BR0:2 CHAP: I RESPONSE id 104 len 26 from "kevin"
*Apr 26 04:57:39.037: BR0:2 CHAP: O SUCCESS id 104 len 4
*Apr 26 04:57:39.045: BR0:2 PPP: Phase is VIRTUALIZED [0 sess, 0 load]
*Apr 26 04:57:39.049: Di0 MLP: Added link BR0:2 to bundle kevin
*Apr 26 04:57:40.045: %LINEPROTO-5-UPDOWN: Line protocol on Interface BRI0:2,
changed state to up
*Apr 26 04:57:40.749: OSPF: Rcv hello from 172.19.0.1 area 0 from Dialer0 10.9.9.2
*Apr 26 04:57:40.757: OSPF: 2 Way Communication to 172.19.0.1 on Dialer0, state 2WAY
*Apr 26 04:57:40.757: OSPF: Send DBD to 172.19.0.1 on Dialer0 seq 0x67F opt
0x42 flag 0x7 len 32
*Apr 26 04:57:40.765: OSPF: End of hello processing
*Apr 26 04:57:40.801: OSPF: Rcv DBD from 172.19.0.1 on Dialer0 seq 0x2175 opt
0x42 flag 0x7 len 32 mtu 1500 state EXSTART
*Apr 26 04:57:40.805: OSPF: NBR Negotiation Done. We are the SLAVE
*Apr 26 04:57:40.805: OSPF: Send DBD to 172.19.0.1 on Dialer0 seq 0x2175 opt
0x42 flag 0x2 len 72
*Apr 26 04:57:40.853: OSPF: Rcv DBD from 172.19.0.1 on Dialer0 seq 0x2176 opt
0x42 flag 0x3 len 72 mtu 1500 state EXCHANGE
*Apr 26 04:57:40.857: OSPF: Send DBD to 172.19.0.1 on Dialer0 seq 0x2176 opt
0x42 flag 0x0 len 32
*Apr 26 04:57:40.865: OSPF: Database request to 172.19.0.1
*Apr 26 04:57:40.865: OSPF: sent LS REQ packet to 10.9.9.2, length 12
*Apr 26 04:57:40.905: OSPF: Rcv DBD from 172.19.0.1 on Dialer0 seq 0x2177 opt
0x42 flag 0x1 len 32 mtu 1500 state EXCHANGE
*Apr 26 04:57:40.909: OSPF: Exchange Done with 172.19.0.1 on Dialer0
*Apr 26 04:57:40.909: OSPF: Send DBD to 172.19.0.1 on Dialer0 seq 0x2177 opt
0x42 flag 0x0 len 32
*Apr 26 04:57:40.921: OSPF: Synchronized with 172.19.0.1 on Dialer0, state FULL
*Apr 26 04:57:40.925: %OSPF-5-ADJCHG: Process 10, Nbr 172.19.0.1 on Dialer0
from LOADING to FULL, Loading Done
*Apr 26 04:57:44.917: %ISDN-6-CONNECT: Interface BRI0:2 is now connected to
6120 kevin
*Apr 26 04:58:00.753: OSPF: Rcv hello from 172.19.0.1 area 0 from Dialer0 10.9.9.2
*Apr 26 04:58:00.753: OSPF: End of hello processing
*Apr 26 04:57:50.753: OSPF: Rcv hello from 172.19.0.1 area 0 from Dialer0 10.9.9.2
*Apr 26 04:57:50.753: OSPF: End of hello processing

```

```

krimson#show interface serial 1

```

```

Serial1 is down, line protocol is down

```

```

!--- note that the physical Frame Relay interface is down. due to shutdown on locally
attacher port on FR switch Hardware is HD64570 MTU 1500 bytes, BW 64 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255 Encapsulation FRAME-RELAY, loopback not set
Keepalive set (10 sec) LMI enq sent 53316, LMI stat recvd 52994, LMI upd recvd 0, DTE LMI down
LMI enq recvd 3, LMI stat sent 0, LMI upd sent 0 LMI DLCI 1023 LMI type is CISCO frame relay DTE
FR SVC disabled, LAPF state down Broadcast queue 0/64, broadcasts sent/dropped 62140/1,
interface broadcasts 53317 Last input 00:00:57, output 00:00:57, output hang never Last clearing

```

of "show interface" counters 3wld Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0 Queueing strategy: weighted fair Output queue: 0/1000/64/0 (size/max total/threshold/drops) Conversations 0/3/16 (active/max active/max total) Reserved Conversations 0/0 (allocated/max allocated) Available Bandwidth 48 kilobits/sec 5 minute input rate 0 bits/sec, 0 packets/sec 5 minute output rate 0 bits/sec, 0 packets/sec 106450 packets input, 4627830 bytes, 0 no buffer --More-- Received 0 broadcasts, 0 runts, 0 giants, 0 throttles 0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort 115828 packets output, 7049810 bytes, 0 underruns 0 output errors, 0 collisions, 46426 interface resets 0 output buffer failures, 0 output buffers swapped out 77 carrier transitions DCD=down DSR=down DTR=up RTS=up CTS=down krimson#**show interface serial 1.1**

Serial1.1 is down, line protocol is down  
Hardware is HD64570  
Internet address is 10.5.5.2/24  
MTU 1500 bytes, BW 64 Kbit, DLY 20000 usec,  
reliability 255/255, txload 1/255, rxload 1/255  
Encapsulation FRAME-RELAY

**krimson#show interface dialer**

Dialer0 is up, line protocol is up  
Hardware is Unknown  
Internet address is 10.9.9.1/24  
MTU 1500 bytes, BW 128 Kbit, DLY 20000 usec,  
reliability 255/255, txload 1/255, rxload 1/255  
Encapsulation PPP, loopback not set  
DTR is pulsed for 1 seconds on reset  
Time to interface disconnect: idle 00:00:57  
Interface is bound to BR0:1  
Interface is bound to BR0:2  
LCP Open, multilink Open  
Open: IPCP  
Last input 00:00:09, output never, output hang never  
Last clearing of "show interface" counters 8w0d  
Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0  
Queueing strategy: weighted fair  
Output queue: 0/1000/64/0 (size/max total/threshold/drops)  
Conversations 0/1/16 (active/max active/max total)  
Reserved Conversations 0/0 (allocated/max allocated)  
Available Bandwidth 66 kilobits/sec  
5 minute input rate 0 bits/sec, 0 packets/sec  
5 minute output rate 0 bits/sec, 0 packets/sec  
31025 packets input, 2102400 bytes  
31053 packets output, 2101523 bytes  
Bound to:  
BRI0:1 is up, line protocol is up  
Hardware is BRI  
MTU 1500 bytes, BW 64 Kbit, DLY 20000 usec,  
reliability 255/255, txload 1/255, rxload 1/255  
Encapsulation PPP, loopback not set  
Keepalive not set  
DTR is pulsed for 1 seconds on reset  
Interface is bound to Di0 (Encapsulation PPP)  
LCP Open, multilink Open  
Last input 00:00:11, output 00:00:01, output hang never  
Last clearing of "show interface" counters never  
Queueing strategy: fifo  
Output queue 0/40, 0 drops; input queue 0/75, 0 drops  
30 second input rate 0 bits/sec, 0 packets/sec  
30 second output rate 0 bits/sec, 0 packets/sec  
34919 packets input, 2419929 bytes, 0 no buffer  
Received 0 broadcasts, 0 runts, 0 giants, 0 throttles  
29 input errors, 18 CRC, 0 frame, 0 overrun, 0 ignored, 11 abort  
34744 packets output, 2252062 bytes, 0 underruns  
0 output errors, 0 collisions, 27 interface resets  
0 output buffer failures, 0 output buffers swapped out

```
925 carrier transitions
Bound to:
BRI0:2 is up, line protocol is up
Hardware is BRI
MTU 1500 bytes, BW 64 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation PPP, loopback not set
Keepalive not set
DTR is pulsed for 1 seconds on reset
Interface is bound to Di0 (Encapsulation PPP)
LCP Open, multilink Open
Last input 00:00:03, output 00:00:07, output hang never
Last clearing of "show interface" counters never
Queueing strategy: fifo
Output queue 0/40, 0 drops; input queue 0/75, 0 drops
30 second input rate 0 bits/sec, 0 packets/sec
30 second output rate 0 bits/sec, 0 packets/sec
2165 packets input, 87326 bytes, 0 no buffer
Received 0 broadcasts, 0 runts, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
2260 packets output, 89305 bytes, 0 underruns
0 output errors, 0 collisions, 27 interface resets
0 output buffer failures, 0 output buffers swapped out
345 carrier transitions
```

```
krimson#show frame pvc
```

```
PVC Statistics for interface Serial1 (Frame Relay DTE)
```

```
Active Inactive Deleted Static
```

```
Local 0 0 1 0
Switched 0 0 0 0
Unused 0 0 0 0
```

```
DLCI = 20, DLCI USAGE = LOCAL, PVC STATUS = DELETED, INTERFACE = Serial1.1
```

```
input pkts 53307 output pkts 62181 in bytes 3853472
out bytes 6343822 dropped pkts 0 in FECN pkts 0
in BECN pkts 0 out FECN pkts 0 out BECN pkts 0
in DE pkts 0 out DE pkts 0
out bcast pkts 62123 out bcast bytes 6337256
pvc create time lw2d, last time pvc status changed 00:01:12
```

```
krimson#show ip route
```

```
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
```

```
Gateway of last resort is 10.200.16.1 to network 0.0.0.0
```

```
192.168.64.0/30 is subnetted, 1 subnets
C 192.168.64.0 is directly connected, Dialer4
10.0.0.0/8 is variably subnetted, 6 subnets, 2 masks
C 10.9.9.2/32 is directly connected, Dialer0
O 10.8.8.0/24 [110/782] via 10.9.9.2, 00:01:03, Dialer0
!--- now route to the destination network points to backup interface as a next hop C
10.9.9.0/24 is directly connected, Dialer0 C 10.7.7.0/24 is directly connected, Loopback0 C
10.9.8.0/24 is directly connected, Dialer1 C 10.200.16.0/24 is directly connected, Ethernet0 S*
0.0.0.0/0 [1/0] via 10.200.16.1
```

L'interface de Relais de trames est soulevée, et l'Interface de sauvegarde descend.

krimson#show interface serial 1.1

```
Serial1.1 is up, line protocol is up
Hardware is HD64570
Internet address is 10.5.5.2/24
MTU 1500 bytes, BW 64 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation FRAME-RELAY
```

```
*Apr 26 04:59:49.481: %LINK-3-UPDOWN: Interface Serial1, changed state to up
*Apr 26 04:59:50.481: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial1,
changed state to up
*Apr 26 05:01:44.001: Di0 DDR: idle timeout
```

```
!--- backup is going down after expiration of the idle timer *Apr 26 05:01:44.001: DDR:
Dialer Watch: watch-group = 1 *Apr 26 05:01:44.001: DDR: network 10.8.8.0/255.255.255.0 UP, *Apr
26 05:01:44.005: DDR: primary DOWN *Apr 26 05:01:44.009: Di0 DDR: disconnecting call *Apr 26
05:01:44.013: BR0:1 PPP: Phase is TERMINATING [0 sess, 1 load] *Apr 26 05:01:44.013: BR0:1 LCP:
O TERMREQ [Open] id 106 len 4 *Apr 26 05:01:44.021: BR0:2 PPP: Phase is TERMINATING [0 sess, 1
load] *Apr 26 05:01:44.021: BR0:2 LCP: O TERMREQ [Open] id 54 len 4 *Apr 26 05:01:44.029: Di0
IPCP: State is Closed *Apr 26 05:01:44.033: Di0 PPP: Phase is TERMINATING [0 sess, 1 load] *Apr
26 05:01:44.033: Di0 LCP: State is Closed *Apr 26 05:01:44.037: Di0 PPP: Phase is DOWN [0 sess,
1 load] *Apr 26 05:01:44.041: Di0 IPCP: Remove route to 10.9.9.2 *Apr 26 05:01:44.045: BR0:1
LCP: I TERMACK [TERMsent] id 106 len 4 *Apr 26 05:01:44.049: BR0:1 LCP: State is Closed *Apr 26
05:01:44.049: BR0:1 PPP: Phase is DOWN [0 sess, 1 load] *Apr 26 05:01:44.053: BR0 DDR: has
total 1 call(s), dial_out 1, dial_in 0 *Apr 26 05:01:44.057: BR0:1 PPP: Treating connection as a
callout *Apr 26 05:01:44.057: BR0:1 PPP: Phase is ESTABLISHING, Active Open [0 sess, 1 load]
*Apr 26 05:01:44.061: BR0:1 LCP: O CONFREQ [Closed] id 107 len 15 *Apr 26 05:01:44.065: BR0:1
LCP: AuthProto CHAP (0x0305C22305) *Apr 26 05:01:44.069: BR0:1 LCP: MagicNumber 0x2184A57C
(0x05062184A57C) *Apr 26 05:01:44.069: %DIALER-6-UNBIND: Interface BR0:1 unbound from profile
Di0 *Apr 26 05:01:44.077: BR0:1 DDR: disconnecting call *Apr 26 05:01:44.077: BR0:1 DDR: Dialer
Watch: resetting call in progress *Apr 26 05:01:44.081: DDR: Dialer Watch: watch-group = 1 *Apr
26 05:01:44.081: DDR: network 10.8.8.0/255.255.255.0 UP, *Apr 26 05:01:44.085: DDR: primary DOWN
*Apr 26 05:01:44.085: ISDN BR0: Event: Hangup call to call id 0x818D *Apr 26 05:01:44.089: ISDN
BR0: process_disconnect(): call id 0x818D, call type is DATA, b_idb 0x221DA8, ces 1, cause
Normal call clearing(0x10) *Apr 26 05:01:44.097: %ISDN-6-DISCONNECT: Interface BRI0:1
disconnected from 6120 kevin, call lasted 120 seconds *Apr 26 05:01:44.101: ISDN:
get_isdn_service_state(): idb 0x221DA8 bchan 2 is_isdn 1 Not a Pri *Apr 26 05:01:44.105:
CCBRI_Go Fr Host InPkgInfo (Len=13) : *Apr 26 05:01:44.105: 5 0 1 81 8D 3 8 1 90 8 2 80 90 *Apr
26 05:01:44.109: *Apr 26 05:01:44.121: ISDN BR0: TX -> DISCONNECT pd = 8 callref = 0x10 *Apr 26
05:01:44.129: Cause i = 0x8090 - Normal call clearing *Apr 26 05:01:44.137: BR0:2 LCP: I TERMACK
[TERMsent] id 54 len 4 *Apr 26 05:01:44.141: BR0:2 LCP: State is Closed *Apr 26 05:01:44.141:
BR0:2 PPP: Phase is DOWN [0 sess, 1 load] *Apr 26 05:01:44.145: BR0 DDR: has total 0 call(s),
dial_out 0, dial_in 0 *Apr 26 05:01:44.149: BR0:2 PPP: Treating connection as a callout *Apr 26
05:01:44.149: BR0:2 PPP: Phase is ESTABLISHING, Active Open [0 sess, 1 load] *Apr 26
05:01:44.153: BR0:2 LCP: O CONFREQ [Closed] id 55 len 15 *Apr 26 05:01:44.157: BR0:2 LCP:
AuthProto CHAP (0x0305C22305) *Apr 26 05:01:44.161: BR0:2 LCP: MagicNumber 0x2184A5D9
(0x05062184A5D9) *Apr 26 05:01:44.161: %DIALER-6-UNBIND: Interface BR0:2 unbound from profile
Di0 *Apr 26 05:01:44.165: BR0:2 DDR: disconnecting call *Apr 26 05:01:44.173: ISDN BR0: Event:
Hangup call to call id 0x818E *Apr 26 05:01:44.173: ISDN BR0: process_disconnect(): call id
0x818E, call type is DATA, b_idb 0x225754, ces 1, cause Normal call clearing(0x10) *Apr 26
05:01:44.181: %ISDN-6-DISCONNECT: Interface BRI0:2 disconnected from 6120 kevin, call lasted 119
seconds *Apr 26 05:01:44.189: ISDN: get_isdn_service_state(): idb 0x225754 bchan 3 is_isdn 1 Not
a Pri *Apr 26 05:01:44.189: CCBRI_Go Fr Host InPkgInfo (Len=13) : *Apr 26 05:01:44.193: 5 0 1 81
8E 3 8 1 90 8 2 80 90 *Apr 26 05:01:44.197: *Apr 26 05:01:44.205: ISDN BR0: RX <- RELEASE pd = 8
callref = 0x90 *Apr 26 05:01:44.221: ISDN BR0: TX -> DISCONNECT pd = 8 callref = 0x11 *Apr 26
05:01:44.225: Cause i = 0x8090 - Normal call clearing *Apr 26 05:01:44.241: CCBRI_Go Fr L3 pkt
(Len=4) : *Apr 26 05:01:44.241: 4D 1 10 97 *Apr 26 05:01:44.245: *Apr 26 05:01:44.249: ISDN BR0:
LIF_EVENT: ces/callid 1/0x818D HOST_DISCONNECT_ACK *Apr 26 05:01:44.253: ISDN:
get_isdn_service_state(): idb 0x221DA8 bchan 2 is_isdn 1 Not a Pri *Apr 26 05:01:44.257: ISDN
BR0: HOST_DISCONNECT_ACK: call type is DATA *Apr 26 05:01:44.257: %LINK-3-UPDOWN: Interface
BRI0:1, changed state to down *Apr 26 05:01:44.265: BR0:1 LCP: State is Closed *Apr 26
```

```

05:01:44.265: BR0:1 PPP: Phase is DOWN [0 sess, 0 load] *Apr 26 05:01:44.269: BR0:1 DDR:
disconnecting call *Apr 26 05:01:44.273: ISDN BR0: LIF_EVENT: ces/callid 1/0x818D
HOST_DISCONNECT_ACK *Apr 26 05:01:44.277: ISDN: get_isdn_service_state(): idb 0x221DA8 bchan 2
is_isdn 1 Not a Pri *Apr 26 05:01:44.277: ISDN BR0: HOST_DISCONNECT_ACK: call type is DATA *Apr
26 05:01:44.289: ISDN BR0: TX -> RELEASE_COMP pd = 8 callref = 0x10 *Apr 26 05:01:44.305: ISDN
BR0: RX <- RELEASE pd = 8 callref = 0x91 *Apr 26 05:01:44.325: CCBRI_Go Fr L3 pkt (Len=4) : *Apr
26 05:01:44.325: 4D 1 11 97 *Apr 26 05:01:44.329: *Apr 26 05:01:44.333: ISDN BR0: LIF_EVENT:
ces/callid 1/0x818E HOST_DISCONNECT_ACK *Apr 26 05:01:44.337: ISDN: get_isdn_service_state():
idb 0x225754 bchan 3 is_isdn 1 Not a Pri *Apr 26 05:01:44.341: ISDN BR0: HOST_DISCONNECT_ACK:
call type is DATA *Apr 26 05:01:44.341: %LINK-3-UPDOWN: Interface BRI0:2, changed state to down
*Apr 26 05:01:44.345: BR0:2 LCP: State is Closed *Apr 26 05:01:44.349: BR0:2 PPP: Phase is DOWN
[0 sess, 0 load] *Apr 26 05:01:44.349: BR0:2 DDR: disconnecting call *Apr 26 05:01:44.353: ISDN
BR0: LIF_EVENT: ces/callid 1/0x818E HOST_DISCONNECT_ACK *Apr 26 05:01:44.357: ISDN:
get_isdn_service_state(): idb 0x225754 bchan 3 is_isdn 1 Not a Pri *Apr 26 05:01:44.361: ISDN
BR0: HOST_DISCONNECT_ACK: call type is DATA *Apr 26 05:01:44.369: ISDN BR0: TX -> RELEASE_COMP
pd = 8 callref = 0x11 *Apr 26 05:01:45.009: %LINEPROTO-5-UPDOWN: Line protocol on Interface
BRI0:1, changed state to down *Apr 26 05:01:45.017: %LINEPROTO-5-UPDOWN: Line protocol on
Interface BRI0:2, changed state to down krimson#show isdn active

```

```

-----
ISDN ACTIVE CALLS
-----

```

```

Call Calling Called Remote Seconds Seconds Seconds Charges
Type Number Number Name Used Left Idle Units/Currency
-----
-----

```

```

krimson#show ip route

```

```

Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route

```

```

Gateway of last resort is 10.200.16.1 to network 0.0.0.0

```

```

192.168.64.0/30 is subnetted, 1 subnets

```

```

C 192.168.64.0 is directly connected, Dialer4

```

```

10.0.0.0/24 is subnetted, 6 subnets

```

```

C 10.5.5.0 is directly connected, Serial1.1

```

```

O 10.8.8.0 [110/1563] via 10.5.5.1, 00:00:11, Serial1.1

```

```

!--- The monitored router again shows the primary interface as the next hop C 10.9.9.0 is
directly connected, Dialer0 C 10.7.7.0 is directly connected, Loopback0 C 10.9.8.0 is directly
connected, Dialer1 C 10.200.16.0 is directly connected, Ethernet0 S* 0.0.0.0/0 [1/0] via
10.200.16.1

```

## Dépannez

Cette section fournit des informations que vous pouvez utiliser pour dépanner votre configuration.

La configuration illustrée de Relais de trames ici, qui a des sous-interfaces point par point et utilise le Protocole OSPF (Open Shortest Path First) comme protocole de routage, est spécifique à cette installation. Cependant, les étapes de dépannage indiquées ci-dessous sont plus de général et peuvent être utilisées avec différentes configurations telles que les point-à-multipoints en relais de trame ou la liaison principale avec le High-Level Data Link Control (HDLC) et l'encapsulation PPP, indépendamment du protocole de routage utilisé.

Pour vérifier la fonctionnalité de sauvegarde, nous avons placé une des interfaces sur le routeur de Cisco 4500 qui agit en tant que commutateur de Relais de trames dans l'état d'arrêt, afin de simuler des problèmes dans le réseau de Relais de trames. En conséquence, ceci mène à l'état

inactif PVC étant conduit au routeur DTE par l'intermédiaire du réseau de Relais de trames, et à un événement de sous-interface de relais de trame vers le bas. Ceci lance l'Interface de sauvegarde.

## Dépannage des commandes

certaines commandes show sont prises en charge par l'outil Interpréteur de sortie, qui vous permet d'afficher une analyse de la sortie de la commande show.

**Note:** Avant d'exécuter les commandes **debug**, référez-vous à la section **Informations importantes sur les commandes Debug**.

- **debug isdn q931** - Affiche des informations au sujet de l'établissement d'appel et du démontage de la connexion réseau RNIS (couche 3) entre le routeur local (côté utilisateur) et le réseau.
- **debug isdn event** - Événements RNIS d'affichages se produisant du côté utilisateur (sur le routeur) de l'interface RNIS.
- **mettez au point le numéroteur** - Les informations de débogage d'affichages au sujet des paquets ou des événements sur une interface de numérotation.
- **debug ppp negotiation** - Entraîne la commande de **debug ppp** d'afficher des paquets PPP transmis pendant le startup de PPP, où des options PPP sont négociées.
- **debug ppp authentication** - Entraîne la commande de **debug ppp** d'afficher des messages du protocole d'authentification, y compris des échanges de paquet de Protocol d'authentification de défi (CHAP) et des échanges de Password Authentication Protocol (PAP).
- **debug ip ospf events** - L'affiche des informations sur des événements liés à l'OSPF, tels que des contiguités, les informations d'engorgement, a indiqué la sélection de routeur, et calcul de plus court chemin le premier (SPF)
- **debug frame-relay events** - Les informations de débogage d'affichages au sujet de l'ARP de Relais de trames répondent sur les réseaux qui prennent en charge un canal multicast et utilisent l'adressage dynamique.

## Informations connexes

- [Pages d'assistance sur la technologie de numérotation](#)
- [Support technique - Cisco Systems](#)