

Configurer BGP Global IPv6 sur SRv6

Table des matières

[Introduction](#)

[Informations générales](#)

[Topologie](#)

[Configuration de SRv6](#)

[Configuration du routeur R1](#)

[Configuration du routeur R2](#)

[Configuration du routeur R3](#)

[Flux de signalisation du SID SRv6](#)

[1. État avant activation de l'encapsulation de SRv6](#)

[2. Activer l'encapsulation SRv6](#)

[3. R3 reçoit la mise à jour BGP et l'installe dans la table de monodiffusion IPv6 BGP](#)

[4. R3 installe les modules RIB et FIB](#)

Introduction

Ce document décrit le flux du plan de contrôle lors de l'application du routage de segment d'encapsulation sur IPv6 (SRv6) à une session de monodiffusion IPv6 BGP.

Informations générales

Pour plus d'informations, consultez le [Guide de configuration du routage de segment pour les routeurs de la gamme Cisco ASR 9000, IOS XR version 24.1.x, 24.2.x, 24.3.x, 24.4.x](#).

Topologie

La topologie utilisée dans ce document est représentée à la Figure 1. Le domaine SRv6 se compose de trois routeurs, qui fonctionnent tous sur Cisco IOS-XR. L'infrastructure sous-jacente SRv6 est mise en oeuvre à l'aide de IS-IS avec uSID SRv6. L'appairage de monodiffusion IPv6 BGP est établi entre les routeurs R1 et R3, tandis que le routeur R2 ne participe pas au protocole BGP et fonctionne comme un routeur P dans cette configuration. L'interface de bouclage 6 sur R1 et R3 représente un préfixe IPv6 qui doit être échangé entre les deux homologues de monodiffusion IPv6 BGP.

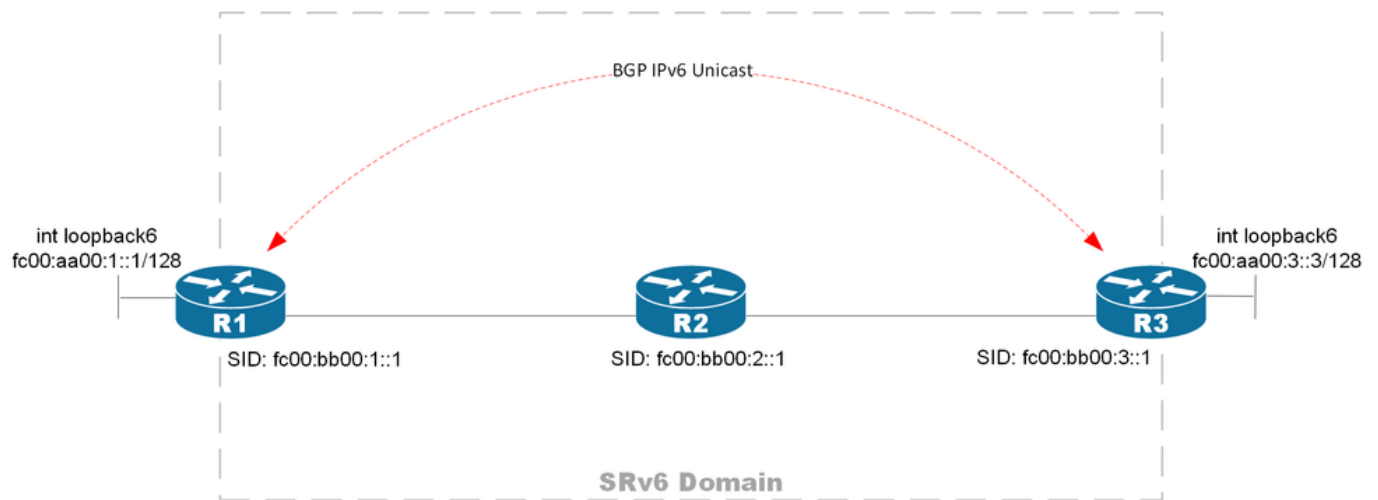


Figure 1. Schéma de topologie de la monodiffusion BGP ipv6 sur SRv6

Configuration de SRv6

Cette section présente la configuration des trois routeurs SRv6. Le routeur R2 inclut uniquement la configuration SRv6, car il ne participe pas au protocole BGP.

Configuration du routeur R1

Le routeur R1 fait partie du domaine SRv6 avec un localisateur fc00:bb00:1::/48. Il fonctionne également comme un routeur de monodiffusion IPv6 BGP, à l'origine du préfixe local fc00:aa00:1::1/128. En outre, il établit l'appairage de monodiffusion IPv6 BGP avec le routeur R3 sur l'infrastructure SRv6. La configuration mise en surbrillance en gras sert de point de départ pour le débogage du flux de contrôle décrit dans ce document et est le seul déclencheur utilisé partout.

<#root>

```
interface Loopback0
  ipv4 address 10.0.0.1 255.255.255.255
  ipv6 address fc00:bb00:1::1/128
!
interface Loopback6
  ipv6 address fc00:aa00:1::1/128
!
interface TenGigE0/0/0/8
  ipv6 enable
!
router isis 1
  is-type level-1
  net 49.0000.0000.0001.00
  address-family ipv6 unicast
  metric-style wide
  segment-routing srv6
    locator MAIN
  !
!
!
```

```

interface TenGigE0/0/0/8
  point-to-point
  address-family ipv6 unicast
  !
!
!
router bgp 1
  bgp router-id 10.0.0.1
  segment-routing srv6
    locator MAIN
  !
  address-family ipv6 unicast
    segment-routing srv6
      locator MAIN
      alloc mode per-vrf
    !
    network fc00:aa00:1::1/128
  !
  neighbor fc00:bb00:3::1
    remote-as 1
    update-source Loopback0
    address-family ipv6 unicast

```

encapsulation-type srv6

```

!
!
segment-routing
  srv6
    encapsulation
      source-address fc00:bb00:1::1
    !
    locators
      locator MAIN
        micro-segment behavior unode psp-usd
        prefix fc00:bb00:1::/48
    !

```

Configuration du routeur R2

Le routeur R2 fait partie du domaine SRv6 avec un localisateur fc00:bb00:2::/48. Il ne participe pas au protocole BGP et fonctionne comme un routeur P dans cette topologie.

```

interface Loopback0
  ipv4 address 10.0.0.2 255.255.255.255
  ipv6 address fc00:bb00:2::1/128
  !
interface TenGigE0/0/0/0
  description T0 R1
  ipv6 enable
  !
interface TenGigE0/0/0/1
  description T0 R2
  ipv6 enable
  !
router isis 1

```

```

is-type level-1
net 49.0000.0000.0002.00
address-family ipv6 unicast
metric-style wide
segment-routing srv6
  locator MAIN
!
!
!
interface TenGigE0/0/0/0
point-to-point
address-family ipv6 unicast
!
!
interface TenGigE0/0/0/1
point-to-point
address-family ipv6 unicast
!
!
!
segment-routing
srv6
encapsulation
source-address fc00:bb00:2::1
!
locators
locator MAIN
micro-segment behavior unode psp-usd
prefix fc00:bb00:2::/48
!

```

Configuration du routeur R3

Le routeur R3 fait partie du domaine SRv6 avec un localisateur fc00:bb00:3::/48. Il a l'appairage de monodiffusion IPv6 BGP avec le routeur R1, et les deux échangent les préfixes IPv6 de ses interfaces de bouclage 6.

```

interface Loopback0
ipv4 address 10.0.0.3 255.255.255.255
ipv6 address fc00:bb00:3::1/128
!
interface Loopback6
ipv6 address fc00:aa00:3::3/128
!
interface TenGigE0/0/0/1
description T0 R2
ipv6 enable
!
router isis 1
is-type level-1
net 49.0000.0000.0003.00
address-family ipv6 unicast
metric-style wide
segment-routing srv6
  locator MAIN
!

```

```

!
!
interface TenGigE0/0/0/1
  point-to-point
  address-family ipv6 unicast
!
!
!
router bgp 1
  bgp router-id 10.0.0.3
  segment-routing srv6
    locator MAIN
!
  address-family ipv6 unicast
    segment-routing srv6
      locator MAIN
      alloc mode per-vrf
!
  network fc00:aa00:3::3/128
!
  neighbor fc00:bb00:1::1
    remote-as 1
    update-source Loopback0
    address-family ipv6 unicast
      encapsulation-type srv6
!
!
segment-routing
  srv6
    encapsulation
      source-address fc00:bb00:3::1
!
  locators
    locator MAIN
      micro-segment behavior unode psp-usd
      prefix fc00:bb00:3::/48
!
!
!
!

```

Flux de signalisation du SID SRv6

Dans l'infrastructure SRv6 sous-jacente, chaque routeur dispose d'informations d'état des liaisons dans toute la topologie, chacune annonçant son localisateur SRv6 via le protocole ISIS d'état des liaisons. La base de données ISIS sur R1 indique l'emplacement de tous les routeurs faisant partie du domaine SRv6.

<#root>

RP/0/RSP0/CPU0:R1#

show isis database verbose R1 | include SRv6 Locator

SRv6 Locator: MT (IPv6 Unicast)

fc00:bb00:1::/48

```

D:0 Metric: 1 Algorithm: 0

RP/0/RSP0/CPU0:R1#
show isis database verbose R2 | include SRv6 Locator

  SRv6 Locator:    MT (IPv6 Unicast)
fc00:bb00:2::/48

D:0 Metric: 0 Algorithm: 0

RP/0/RSP0/CPU0:R1#
show isis database verbose R3 | include SRv6 Locator

  SRv6 Locator:    MT (IPv6 Unicast)
fc00:bb00:3::/48

D:0 Metric: 1 Algorithm: 0

```

Cette implémentation SRv6 prend en charge la superposition du trafic de la table de routage globale (GRT). Lorsque le service de superposition de monodiffusion globale BGP IPv6 est activé sur R1 et R3, chaque routeur génère un nouveau SID de service. Ce SID de service est associé au VRF par défaut et utilise le comportement uDT6 du terminal dans ce scénario. Ce SID de service doit être échangé entre les homologues de monodiffusion BGP IPv6 pour activer le transfert SRv6 entre les deux homologues BGP. La section suivante décrit les étapes du flux de signalisation BGP, en commençant par l'exécution du déclencheur (activation de encapsulation-type srv6) jusqu'au point où le transfert SRv6 est programmé sur le routeur R3.

1. État avant activation de l'encapsulation de SRv6

Avant d'activer l'encapsulation SRv6 sur le SAFI de monodiffusion IPv6 pour l'homologue BGP, le routeur R1 doit avoir des préfixes BGP IPv6 avec des SID de service attribués. Cela se produit lorsque 'segment-routing srv6' est activé sous le SAFI global de monodiffusion IPv6 sur R1. Le résultat affiche le SID local fc00:bb00:1:e002:: est attribué à tous les préfixes sous BGP ipv6 unicast.

```

<#root>

RP/0/RSP0/CPU0:R1#
show bgp ipv6 unicast local-sids

BGP router identifier 10.0.0.1, local AS number 1
BGP generic scan interval 60 secs
Non-stop routing is enabled
BGP table state: Active
Table ID: 0xe0800000 RD version: 7
BGP table nexthop route policy:
BGP main routing table version 7
BGP NSR Initial initsync version 7 (Reached)
BGP NSR/ISSU Sync-Group versions 0/0

```

BGP scan interval 60 secs

Status codes: s suppressed, d damped, h history, * valid, > best

i - internal, r RIB-failure, S stale, N Nexthop-discard

Origin codes: i - IGP, e - EGP, ? - incomplete

Network	Local Sid	Alloc mode	Locator
*> fc00:aa00:1::1/128	fc00:bb00:1:e002::	per-vrf	MAIN
*> ifc00:aa00:3::3/128	NO SRv6 Sid	-	-

Processed 2 prefixes, 2 paths

Ce SID de service est programmé localement par le processus sid_mgr sur R1 qui a un comportement de point de terminaison en tant qu'uDT6 qui est associé au vrf par défaut et qui appartient à bgp. Cela signifie simplement chaque fois que le paquet de réception de R1 avec l'adresse de destination correspond au SID de service fc00:bb00:1:e002:: et il s'agit du dernier segment, le routeur R1 doit décapsuler l'en-tête et envoyer le paquet décapsulé à la recherche FIB de la table VRF par défaut IPv6. Cela est conforme à la RFC8986 qui répertorie tous les comportements de point de terminaison SRv6. Notez la sortie où elle montre le sid_mgr créer le service SID fc00:bb00:1:e002:: et transmettez ces informations à RIB, puis à FIB.

<#root>

RP/0/RSP0/CPU0:R1#

show segment-routing srv6 sid all

*** Locator: 'MAIN' ***

SID	Behavior	Context	Owner	Sta
fc00:bb00:1::	uN (PSP/USD)	'default':1	sidmgr	InU
fc00:bb00:1:e001::	uA (PSP/USD)	[Te0/0/0/8, Link-Local]:0	isis-1	InU
fc00:bb00:1:e002::	uDT6	'default'	bgp-1	

InUse Y

RP/0/RSP0/CPU0:R1#

show segment-routing srv6 sid fc00:bb00:1:e002:: internal

*** Locator: 'MAIN' ***

SID	Behavior	Context	Owner	Sta
fc00:bb00:1:e002::	uDT6	'default'	bgp-1	InUse Y

SID Function: 0xe002
SID context: { table-id=0xe0800000 ('default':IPv6/Unicast) }
App data: [0000000000000000]
Locator: 'MAIN'
Allocation type: Dynamic
Owner List:

1) Name: bgp-1, Client-ID: 32, Proto-ID: 8, Node-ID: 0, Locator-ID: 5 ()
Refcount: 1
Flags: 0x0 ()
Chkpt Obj ID: 0x2f60
TI Object:
Type: Entry
Ptr: 0x140160285526000, Producer ID: 0
Flags:
Generic: 0x0 ()
Specific: 0x0 ()
Modified: Fri Jun 27 16:27:05 EST 2025 (2d01h ago)
Created: Jun 27 16:17:40.796 (2d01h ago)
Event history:
SIDMGR-OPCODE-EVENT-CLASS
Total entries : 4

Event	Time Stamp	S, M
object create	Jun 27 16:17:40.864	1, 0
object delete	Jun 27 16:27:04.320	1, 1
object modify	Jun 27 16:27:04.320	0, 1
object refcount decrement	Jun 27 16:27:04.320	0, 1

RP/0/RSP0/CPU0:R1#

show route ipv6 fc00:bb00:1:e002:: detail

Routing entry for

fc00:bb00:1:e002::/64

Known via

"local-srv6 bgp-1"

, distance 0, metric 0,

SRv6 Endpoint uDT6

, SRv6 Format f3216

Installed Jun 27 16:27:06.040 for 2d01h

Routing Descriptor Blocks

directly connected

Route metric is 0

Label: None

Tunnel ID: None

Binding Label: None

Extended communities count: 0

NHID: 0x0 (Ref: 0)

Route version is 0x15 (21)

No local label

IP Precedence: Not Set

QoS Group ID: Not Set

Flow-tag: Not Set

Fwd-class: Not Set

Route Priority: RIB_PRIORITY_LOCAL (3) SVD Type RIB_SVD_TYPE_LOCAL

Download Priority 0, Download Version 3140327

No advertising protos.

RP/0/RSP0/CPU0:R1#

show cef ipv6 fc00:bb00:1:e002::

fc00:bb00:1:e002::/64, version 3140327,

SRv6 Endpoint uDT6

, internal 0x1000001 0x0 (ptr 0x7bb98f54) [1], 0x400 (0x7ba7cfa0), 0x0 (0x7a90d290)
Updated Jun 27 16:27:06.043
Prefix Len 64, traffic index 0, precedence n/a, priority 0
gateway array (0x78e92608) reference count 3, flags 0x0, source rib (7), 0 backups
[4 type 3 flags 0x8401 (0x78f35598) ext 0x0 (0x0)]
LW-LDI[type=3, refc=1, ptr=0x7ba7cfa0, sh-ldi=0x78f35598]
gateway array update type-time 1 Jun 26 15:54:48.345
LDI Update time Jun 26 15:54:48.349
LW-LDI-TS Jun 27 16:17:42.533
Accounting: Disabled
via ::/128, 0 dependencies, weight 0, class 0 [flags 0x0]
path-idx 0 NHID 0x0 [0x781b61e8 0x0]
next hop ::/128

Load distribution: 0 (refcount 4)

Hash OK Interface Address
0 Y recursive Lookup in table

Comme R1 n'a pas activé l'encapsulation SRv6 sous son homologue de monodiffusion BGP ipv6, R1 annonce ces préfixes vers R3 sans TLV SRv6 dans la mise à jour BGP, même si R1 a attribué localement des SID locaux.

<#root>

RP/0/RSP0/CPU0:R1#

show bgp ipv6 unicast

BGP router identifier 10.0.0.1, local AS number 1
BGP generic scan interval 60 secs
Non-stop routing is enabled
BGP table state: Active
Table ID: 0xe0800000 RD version: 7
BGP table nexthop route policy:
BGP main routing table version 7
BGP NSR Initial initsync version 7 (Reached)
BGP NSR/ISSU Sync-Group versions 0/0
BGP scan interval 60 secs

Status codes: s suppressed, d damped, h history, * valid, > best
i - internal, r RIB-failure, S stale, N Nexthop-discard

Origin codes: i - IGP, e - EGP, ? - incomplete

Network	Next Hop	Metric	LocPrf	Weight	Path
*> fc00:aa00:1::1/128 ::		0		32768	i
*> ifc00:aa00:3::3/128 fc00:bb00:3::1		0	100	0	i

Processed 2 prefixes, 2 paths

RP/0/RSP0/CPU0:R1#

show bgp ipv6 unicast advertised neighbor fc00:bb00:3::1

```
fc00:aa00:1::1/128 is advertised to fc00:bb00:3::1
Path info:
  neighbor: Local          neighbor router id: 10.0.0.1
  valid local best
Received Path ID 0, Local Path ID 1, version 4
Attributes after inbound policy was applied:
  next hop: ::
  MET ORG AS
  origin: IGP metric: 0
  aspath:
Attributes after outbound policy was applied:
  next hop: fc00:bb00:1::1
  MET ORG AS
  origin: IGP metric: 0
  aspath:
```

Le routeur R3 reçoit la mise à jour du routeur R1 sans SID. R3 installe les préfixes reçus de R1 dans sa table RIB et FIB sans en-tête SRv6.

<#root>

RP/0/RSP0/CPU0:R3#

show bgp ipv6 unicast received-sids

```
BGP router identifier 10.0.0.3, local AS number 1
BGP generic scan interval 60 secs
Non-stop routing is enabled
BGP table state: Active
Table ID: 0xe0800000 RD version: 44
BGP table nexthop route policy:
BGP main routing table version 44
BGP NSR Initial initsync version 6 (Reached)
BGP NSR/ISSU Sync-Group versions 0/0
BGP scan interval 60 secs
```

```
Status codes: s suppressed, d damped, h history, * valid, > best
               i - internal, r RIB-failure, S stale, N Nexthop-discard
Origin codes: i - IGP, e - EGP, ? - incomplete
   Network          Next Hop                Received Sid
*> ifc00:aa00:1::1/128 fc00:bb00:1::1      NO SRv6 Sid
*> fc00:aa00:3::3/128 ::                  NO SRv6 Sid
```

Processed 2 prefixes, 2 paths

RP/0/RSP0/CPU0:R3#

show route ipv6 unicast fc00:aa00:1::1/128 detail

```
Routing entry for fc00:aa00:1::1/128
  Known via "bgp 1", distance 200, metric 0, type internal
  Installed Jun  8 17:34:24.126 for 00:12:38
  Routing Descriptor Blocks
```

```

fc00:bb00:1::1, from fc00:bb00:1::1
  Route metric is 0
  Label: None
  Tunnel ID: None
  Binding Label: None
  Extended communities count: 0
  NHID: 0x0 (Ref: 0)
  Path Grouping ID: 1
Route version is 0x1d (29)
No local label
IP Precedence: Not Set
QoS Group ID: Not Set
Flow-tag: Not Set
Fwd-class: Not Set
Route Priority: RIB_PRIORITY_RECURSIVE (12) SVD Type RIB_SVD_TYPE_LOCAL
Download Priority 4, Download Version 162
No advertising protos.

```

RP/0/RSP0/CPU0:R3#

show cef ipv6 fc00:aa00:1::1/128

```

fc00:aa00:1::1/128, version 162, internal 0x5000001 0x40 (ptr 0x7941f0f4) [1], 0x0 (0x0), 0x0 (0x0)
Updated Jun  8 17:34:24.128
Prefix Len 128, traffic index 0, precedence n/a, priority 4
  gateway array (0x78eac518) reference count 1, flags 0x2010, source rib (7), 0 backups
    [1 type 3 flags 0x48441 (0x78f4f538) ext 0x0 (0x0)]
  LW-LDI[type=0, refc=0, ptr=0x0, sh-ldi=0x0]
  gateway array update type-time 1 Jun  8 17:34:24.129
  LDI Update time Jun  8 17:34:24.129

Level 1 - Load distribution: 0
[0] via fc00:bb00:1::1/128, recursive

Accounting: Disabled
  via fc00:bb00:1::1/128, 5 dependencies, recursive [flags 0x6000]
    path-idx 0 NHID 0x0 [0x7941edb4 0x0]
    next hop fc00:bb00:1::1/128 via fc00:bb00:1::/48

  Load distribution: 0 (refcount 1)

Hash  OK  Interface          Address
0     Y   TenGigE0/0/0/1         remote

```

2. Activer l'encapsulation SRv6

L'activation de l'encapsulation SRv6 entraîne l'envoi par R1 d'un message de mise à jour BGP à son homologue avec le type d'attribut 40, qui est utilisé dans le routage de segment pour annoncer un préfixe BGP avec un identificateur de routage de segment (SID) spécifique. Le routeur R1 envoie la mise à jour à R3 pour le préfixe IPv6 fc00:bb00:3::1 (étape 1) avec le SID associé fc00:bb00:1:e002::. À la réception de la commande UPDATE, le routeur R3 met à jour sa table de monodiffusion IPv6 BGP (étape 2) et met ensuite à jour ses tables RIB et FIB (étape 3). La figure 2 illustre le flux de signalisation BGP ainsi que les étapes correspondantes.

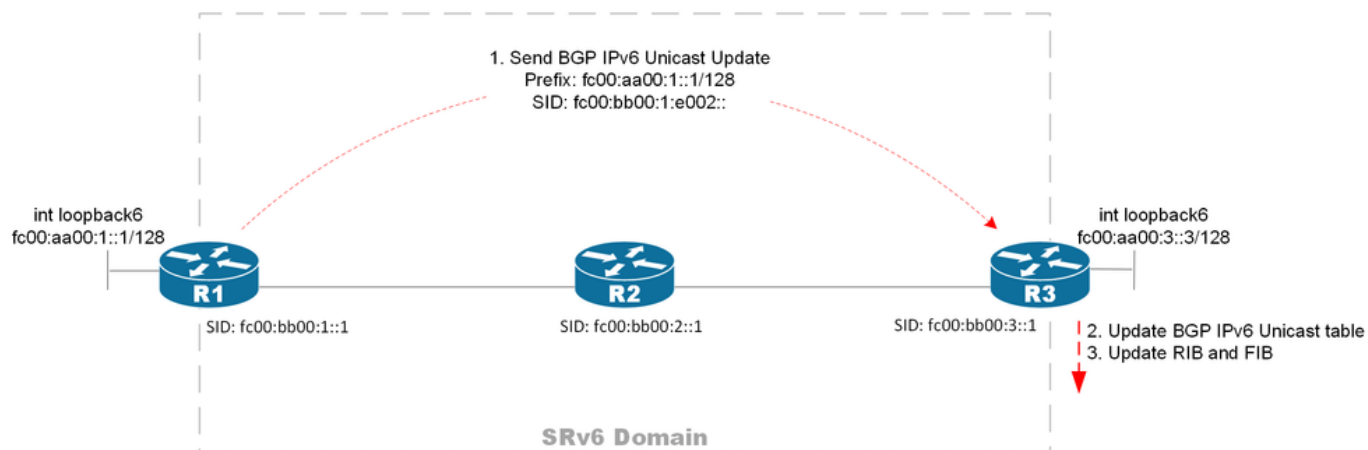


Figure 2. Flux de signalisation BGP après activation de l'encapsulation srv6

Le résultat affiche le journal de débogage BGP immédiatement après l'activation de l'encapsulation SRv6 sur l'homologue R3, indiquant que R1 envoie un message de mise à jour BGP à R3 :

```
router bgp 1
 neighbor fc00:bb00:3::1
  address-family ipv6 unicast
  encapsulation-type srv6
!
!
!
end
```

```
RP/0/RSP0/CPU0:R1(config)#commit
```

```
bgp[1100]: [default-upd] (ip6u): Added reference to table TBL:default (2/1) refcount 9
bgp[1100]: [default-upd] (ip6u): Created update group for table TBL:default (2/1), index 0.3 neighbor f
bgp[1100]: [default-upd] (ip6u): Removed neighbor fc00:bb00:3::1 from update group 0.2 for IPv6 Unicast
bgp[1100]: [default-upd] (ip6u): Removing neighbor fc00:bb00:3::1 from update filter-group 0.2 in IPv6
bgp[1100]: [default-upd]: Enqueue Wdw: Nbr:fc00:bb00:3::1(5) Wdw:0 Del:0 Pending:0 RefreshPending:0
bgp[1100]: [default-upd]: Deleting filter-group 0.2 in TBL:default (2/1) refcount 2
bgp[1100]: [default-upd] (ip6u): Deleted update group 0.2
bgp[1100]: [default-upd] (ip6u): Added reference to table TBL:default (2/1) refcount 10
bgp[1100]: [default-upd]: Compute RT set for vrf default neighbor fc00:bb00:3::1 from old filter-group
bgp[1100]: [default-upd]: Allocating filter-group 0.3in TBL:default (2/1)
bgp[1100]: [default-upd] (ip6u): Added reference to table TBL:default (2/1) refcount 11
bgp[1100]: [default-upd] (ip6u): Adding vrf default neighbor fc00:bb00:3::1 to new filter-group 0.3 in
bgp[1100]: [default-upd] (ip6u): Added vrf default neighbor fc00:bb00:3::1 to update filter-group 0.3 in
bgp[1100]: [default-upd] (ip6u): Added neighbor fc00:bb00:3::1 to update sub-group 0.1 in IPv6 Unicast
bgp[1100]: [default-upd] (ip6u): Started updgrp timer for updgrp 0.3:: delay=0.010, delaytype=0
bgp[1100]: [default-upd] (ip6u): Removed reference to Table TBL:default (2/1) refcount 9
bgp[1100]: [default-upd] (ip6u): Starting updgen walk for updgrp 0.3:: targetver=27: tblver=27, labelv
bgp[1100]: [default-upd] (ip6u): Computing updates for update sub-group 0.1 (Regular)
bgp[1100]: [default-upd] (ip6u): bgp_srv6_execute_sid_alloc_mode_policy: Use default SRv6 alloc mode pe
bgp[1100]: [default-upd]: table-attr walk for table TBL:default (2/1), resume version 0, subgrp version
bgp[1100]: [default-upd] (ip6u): process UPDATE for: tbl=TBL:default (2/1), afi=5: ug=0.3, (Regular), p
bgp[1100]: [default-upd] (ip6u): Ran 'internal' policy '(null)', result 'TRUE', ptr 0x7f4584005f30, use
bgp[1100]: [default-upd] (ip6u):      tbl=TBL:default (2/1), afi=5: ug=0.3, sg=0.1, ugfl=0x00104183: n
bgp[1100]: [default-upd] (ip6u):      <NH&LABEL-SEL>: tbl=TBL:default (2/1), afi=5: ug=0.3, sg=0.1, ugfl
bgp[1100]: [default-upd] (ip6u):      <nh&label-sel>:: labselectdo=1, labselectdone=0, updlab=1048577(0
bgp[1100]: [default-upd]: Comm-lib: Assigned ID (0x1d000008) for elem-type PREFIX_SID SRV6_L3SVC
bgp[1100]: [default-upd]: Comm-lib: Assigned ID (0x9000000c) for elem-type Attribute
```

```

bgp[1100]: [default-upd] (ip6u): Permit UPDATE to filter-group 0.3 (Regular, pelem Regular) for fc00:aa
bgp[1100]: [default-upd] (ip6u): Sending UPDATE message(0x0x7f4589fd4ba4) to sub-group 0.1 (Regular, pe
bgp[1100]: [default-upd] (ip6u): origin i, path , metric 0, localpref 100, Prefix-SID attribute 0x05002
bgp[1100]: [default-upd] (ip6u): Created msg elem 0x0x7f4589e3afc8 (pointing to message 0x0x7f4589fd4ba
bgp[1100]: [default-upd] (ip6u): process UPDATE for: tbl=TBL:default (2/1), afi=5: ug=0.3, (Regular), p
bgp[1100]: [default-upd] (ip6u): No unreachable (not advertising to sender: fc00:bb00:3::1) sent to sub
bgp[1100]: [default-upd] (ip6u): Generated 1 updates for update sub-group 0.1 (average size = 126 bytes
bgp[1100]: [default-upd] (ip6u): Updates replicated to neighbor fc00:bb00:3::1
bgp[1100]: [default-iowt]: fc00:bb00:3::1 send UPDATE length (incl. header) 126
bgp[1100]: [default-iowt]: Send message dump for fc00:bb00:3::1:
bgp[1100]: [default-iowt]: ffff ffff ffff ffff ffff ffff ffff ffff
bgp[1100]: [default-iowt]: 007e 0200 0000 6790 0e00 2600 0201 10fc
bgp[1100]: [default-iowt]: 00bb 0000 0100 0000 0000 0000 0000 0100
bgp[1100]: [default-iowt]: 80fc 00aa 0000 0100 0000 0000 0000 0000
bgp[1100]: [default-iowt]: 0140 0101 0040 0200 8004 0400 0000 0040
bgp[1100]: [default-iowt]: 0504 0000 0064 c028 2505 0022 0001 001e
bgp[1100]: [default-iowt]: 00fc 00bb 0000 01e0 0200 0000 0000 0000
bgp[1100]: [default-iowt]: 0000 003e 0001 0006 2010 1000 0000
bgp[1100]: [default-iowt]: bgp_io_nbr_add_version: New ver: nbr=fc00:bb00:3::1, io_wr_txsn=58992, acksn
bgp[1100]: [default-iowt]: bgp_io_nbr_derive_acked_version: nbr=fc00:bb00:3::1, io_wr_txsn=58992, acksn
bgp[1100]: [default-iowt]: fc00:bb00:3::1 (afi:4) advancedpeer_acked_version to 10refresh peer acked ve
bgp[1100]: [default-iowt]: fc00:bb00:3::1 (afi:5) received ack for version 27
bgp[1100]: [default-iowt]: bgp_write_list_tonet: IO_SENDMSG: nbr=fc00:bb00:3::1, fd=530: total=1, send-
bgp[1100]: [default-iowt] (ip6u): Deleting msg elem 0x0x7f4589e3afc8 (message 0x0x7f4589fd4ba4), for fi
bgp[1100]: [default-iowt] (ip6u): Deleting message 0x0x7f4589fd4ba4, from subgroup 0.1
bgp[1100]: [default-iowt]: Keepalive timer started for fc00:bb00:3::1(loc 10): last 529293 this 529308
bgp[1100]: [default-iowt]: bgp write for afi 4 for neighbor fc00:bb00:3::1 (fd 530)
bgp[1100]: [default-iowt]: bgp write for afi 5 for neighbor fc00:bb00:3::1 (fd 530)
bgp[1100]: [default-iowt]: bgp_io_nbr_derive_acked_version: nbr=fc00:bb00:3::1, io_wr_txsn=58992, acksn
bgp[1100]: [default-iowt]: fc00:bb00:3::1 (afi:4) advancedpeer_acked_version to 10refresh peer acked ve
bgp[1100]: [default-iowt]: fc00:bb00:3::1 (afi:5) advancedpeer_acked_version to 27refresh peer acked ve
bgp[1100]: [default-iowt]: bgp_io_write_nbr_ver_timer_process: nbr_ver_timer handler: Walk complete: nb

```

Le résultat affiche l'entrée de trace BGP sur R1 :

```

default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:7799: trying to find update group for nbr fc00:bb00:3
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:6752: created update group for table TBL:default (2/1
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:2039: Filter-group op (Filter-group Rm Nbr) Tbl/Nbr(A
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:1501: Filter-group op (Delete) Tbl/Nbr(TBL:default (2
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:6798: Delete update group for table TBL:default (2/1)
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:2181: Filter-group op (Filter-group Compute Nbr RT) T
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:1411: Filter-group op (Alloc) Tbl/Nbr(TBL:default (2/
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:2725: Filter-group op (Filter-group Add Nbr new) Tbl/
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:2751: created filtergrp 3 for vrf default nbr fc00:bb
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:4473: Created subgrp:1(0x840070a0) refr:0 for nbr fc0
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:6935: added vrf default nbr fc00:bb00:3::1 to update
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:3088: TBL:default (2/1) free subgrp SG:2 subgrp:0x840
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:1316: Update gen Start bit operation Filtergrp delete
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:11342: Updgen - TBL:default (2/1) UG: 0.3 SG: 0.1 msg
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:11344: Updgen - pfx: [tot] adv/wdn/sup/skp/be[2] 1/0
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:11351: Updgen - fpx: wdn/skp[0/0] ver: 0 -> 27 res ve
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:4009: Updgen - UG: 3 FG: 3 afi:5 msg: 1 ver -> 27
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:4011: pfx: adv/wdn/sup/skp 1/0/0/1
default-bgp/spkr-tr2-common 0/RSP0/CPU0 t32558 [COMMON]:638: vrf default nbr fc00:bb00:3::1, set peer a
default-bgp/spkr-tr2-gen 0/RSP0/CPU0 t32501 [GEN]:617: vrf default nbr 2000:0:0:1::1, old state 1, new

```

Le message décodé BGP UPDATE montre le type d'attribut 40 et le type TLV 5, qui contiennent le SID de service fc00:bb00:1:e002::.

Attribute

```
ATTRIBUTE FLAG:          0xC0
ATTRIBUTE FLAG binary: 11000000
    Bit 0, the Optional bit, is 1 so this is an optional attribute
    Bit 1, the Transitive bit, is 1 so this is a transitive attribute
    Bit 2, the Partial bit, is not set
    Bit 3, the Extended Length Bit, is 0 so the length field is 1 byte
    The lower-order four bits of the Attribute Flag are unused and are set to 0000

ATTRIBUTE TYPE:          0x28    - 40
ATTRIBUTE LENGTH:        0x25    - 37 bytes
ATTRIBUTE CONTENT:        0x0500220001001E00FC00BB000001E00200000000000000000003E00010006201010000000

    BGP Prefix-SID:
    Type:                5 (0x05) - SRv6 L3 Service
    Length:               34 - 0x0022
    Value:                0x0001001E00FC00BB000001E00200000000000000000003E00010006201010000000
    Reserved:             0x00
    Sub Type:              1 (0x01)
    Sub Length:            30 (0x001E)
    SRv6 SID = FC00:BB00:0001:E002:0000:0000:0000:0000
    SID Flags:             0 (0x00)
    Endpoint Behavior:     62 (0x003E)
    Reserved2 :            0 (0x00)
    SRv6 SID Optional Type: 1 (0x01)
    SRv6 SID Optional Len: 6 (0x0006)
    SRv6 SID Optional Value: 35253360001024 (0x201010000000)
```

Le message BGP UPDATE décodé complet est le suivant :

Message #1 - 126 bytes

```
FF FF FF FF  FF FF FF FF  FF FF FF FF  FF FF FF FF
00 7E 02 00  00 00 67 90  0E 00 26 00  02 01 10 FC
00 BB 00 00  01 00 00 00  00 00 00 00  00 00 01 00
80 FC 00 AA  00 00 01 00  00 00 00 00  00 00 00 00
01 40 01 01  00 40 02 00  80 04 04 00  00 00 00 40
05 04 00 00  00 64 C0 28  25 05 00 22  00 01 00 1E
00 FC 00 BB  00 00 01 E0  02 00 00 00  00 00 00 00
00 00 00 3E  00 01 00 06  20 10 10 00  00 00
```

```
BGP Marker:    0xFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF
BGP Length:    0x007E    - 126 bytes
BGP Type:      0x02    - UPDATE
```

```
UPDATE
UNFEASIBLE ROUTES LENGTH:    0x0000    - 0 bytes
TOTAL PATH ATTRIBUTES LENGTH: 0x0067    - 103 bytes
```

Attribute

```
ATTRIBUTE FLAG:    0x90
ATTRIBUTE FLAG binary: 10010000
```


Bit 1, the Transitive bit, is 0 so this is a non-transitive attribute
Bit 2, the Partial bit, is not set
Bit 3, the Extended Length Bit, is 0 so the length field is 1 byte
The lower-order four bits of the Attribute Flag are unused and are set to 0000

ATTRIBUTE TYPE: 0x04 - 4
ATTRIBUTE LENGTH: 0x04 - 4 bytes
ATTRIBUTE CONTENT: 0x00000000 - 0

Attribute

ATTRIBUTE FLAG: 0x40
ATTRIBUTE FLAG binary: 01000000
Bit 0, the Optional bit, is 0 so this is a well-known attribute
Bit 1, the Transitive bit, is 1 so this is a transitive attribute
Bit 2, the Partial bit, is not set
Bit 3, the Extended Length Bit, is 0 so the length field is 1 byte
The lower-order four bits of the Attribute Flag are unused and are set to 0000

ATTRIBUTE TYPE: 0x05 - 5
ATTRIBUTE LENGTH: 0x04 - 4 bytes
ATTRIBUTE CONTENT: 0x00000064 - 100

Attribute

ATTRIBUTE FLAG: 0xC0
ATTRIBUTE FLAG binary: 11000000
Bit 0, the Optional bit, is 1 so this is an optional attribute
Bit 1, the Transitive bit, is 1 so this is a transitive attribute
Bit 2, the Partial bit, is not set
Bit 3, the Extended Length Bit, is 0 so the length field is 1 byte
The lower-order four bits of the Attribute Flag are unused and are set to 0000

ATTRIBUTE TYPE: 0x28 - 40
ATTRIBUTE LENGTH: 0x25 - 37 bytes
ATTRIBUTE CONTENT: 0x0500220001001E00FC00BB000001E00200000000000000000003E00010006201010000000

BGP Prefix-SID:

Type: 5 (0x05) - SRv6 L3 Service
Length: 34 - 0x0022
Value: 0x0001001E00FC00BB000001E00200000000000000000003E00010006201010000000
Reserved: 0x00
Sub Type: 1 (0x01)
Sub Length: 30 (0x001E)
SRv6 SID = FC00:BB00:0001:E002:0000:0000:0000:0000
SID Flags: 0 (0x00)
Endpoint Behavior: 62 (0x003E)
Reserved2 : 0 (0x00)
SRv6 SID Optional Type: 1 (0x01)
SRv6 SID Optional Len: 6 (0x0006)
SRv6 SID Optional Value: 35253360001024 (0x201010000000)

NLRI

NLRI LENGTH: UPDATE Length - 23 - TOTAL PATH ATTRIBUTES LENGTH - UNFEASIBLE ROUTES LENGTH

NLRI LENGTH: 126 - 23 - 103 - 0
NLRI LENGTH: 0 bytes

3. R3 reçoit la mise à jour BGP et l'installe dans la table de monodiffusion IPv6 BGP

Le routeur R3 reçoit une mise à jour BGP de R1, qui peut être observée en activant le débogage BGP sur R3. Le paquet de mise à jour BGP reçu doit correspondre à celui envoyé par R1, comme indiqué dans le résultat du débogage.

```
bgp[1100]: [default-rtr]: UPDATE from fc00:bb00:1::1 contains nh fc00:bb00:1::1/128, gw_afi 5, flags 0x
bgp[1100]: [default-rtr]: NH-Validate-Create: addr=fc00:bb00:1::1/128, len=16, nlrifi=5, nbr=fc00:bb00:1::1/128
bgp[1100]: [default-rtr]: --bgp4_rcv_attributes--: END: nbr=fc00:bb00:1::1: msg=0x0x7fc420108bdc/126,
bgp[1100]: [default-rtr]: Comm-lib: Assigned ID (0x1d0000ac) for elem-type PREFIX_SID SRV6_L3SVC
bgp[1100]: [default-rtr]: Comm-lib: Assigned ID (0x900000de) for elem-type Attribute
bgp[1100]: [default-rtr] (ip6u): Received UPDATE from fc00:bb00:1::1 with attributes:
bgp[1100]: [default-rtr] (ip6u): nexthop fc00:bb00:1::1/128, origin i, localpref 100, metric 0
bgp[1100]: [default-rtr] (ip6u): Received prefix fc00:aa00:1::1/128 (path ID: none) from fc00:bb00:1::1
bgp[1100]: [default-rtr] (ip6u): Handling OCRIB attrs while relacing path 0x7fc3e1be61d8. Old oc attr (
bgp[1100]: [default-rtr]: bgp_bmp_table_path_update_cb: Operation: 0x1, Inbound Post-Policy Route Mon i
bgp[1100]: [default-rtr] (ip6u): Done modify path (old tlv size=0 new tlv size=0) for net=fc00:aa00:1::1/128
bgp[1100]: [default-rtr]: bgp_set_path_metric:8712 afi 5 net fc00:aa00:1::1/128 path 0x7fc3e1be61d8 nh
bgp[1100]: [default-rtr] (ip6u): bestpath: (full bp 1) start for net=fc00:aa00:1::1/128, nver=2000371,
bgp[1100]: [default-rtr] (ip6u): bestpath: (full 1) calculated for net=fc00:aa00:1::1/128, nver=2000371
bgp[1100]: [default-rtr] (ip6u): bestpath: change for net=fc00:aa00:1::1/128, nver=2000371, nfl=0x000003
bgp[1100]: [default-rtr] (ip6u): bestpath: update flags for net=fc00:aa00:1::1/128, nver=2000371, nfl=0
bgp[1100]: [default-rtr] (ip6u): bestpath: modified path: net=fc00:aa00:1::1/128, nver=2000371, nfl=0x0
bgp[1100]: [default-rtr] (ip6u): bgp_srv6_get_alloc_mode_locator_from_policy: Use default SRv6 alloc mo
bgp[1100]: [default-rtr] (ip6u): bestpath: complete for net=fc00:aa00:1::1/128, nver=2000371, nfl=0x0000
bgp[1100]: [default-rtr]: Received UPDATE from fc00:bb00:1::1 (length incl. header = 126)
bgp[1100]: [default-rtr]: Receive message dump for fc00:bb00:1::1:
bgp[1100]: [default-rtr]: ffff ffff ffff ffff ffff ffff ffff ffff
bgp[1100]: [default-rtr]: 007e 0200 0000 6790 0e00 2600 0201 10fc
bgp[1100]: [default-rtr]: 00bb 0000 0100 0000 0000 0000 0000 0100
bgp[1100]: [default-rtr]: 80fc 00aa 0000 0100 0000 0000 0000 0000
bgp[1100]: [default-rtr]: 0140 0101 0040 0200 8004 0400 0000 0040
bgp[1100]: [default-rtr]: 0504 0000 0064 c028 2505 0022 0001 001e
bgp[1100]: [default-rtr]: 00fc 00bb 0000 01e0 0200 0000 0000 0000
bgp[1100]: [default-rtr]: 0000 003e 0001 0006 2010 1000 0000
bgp[1100]: [default-rtr]: Enabling read from: fc00:bb00:1::1 readset: 1 msgcount: 0
bgp[1100]: [default-iowt]: bgp write for afi 4 for neighbor fc00:bb00:1::1 (fd 516)
bgp[1100]: [default-iowt]: bgp write for afi 5 for neighbor fc00:bb00:1::1 (fd 516)
bgp[1100]: [default-imp] (ip6u): START import walk from 2000371 to 2000372 skip_walk 1
bgp[1100]: [default-rib2] (ip6u): RIB thread triggered for versioned walk: current version 2000371, ack
bgp[1100]: [default-rib2] (ip6u): RNH rib opaque update for (IPv6 Unicast)
bgp[1100]: [default-rib2] (ip6u): RIB thread triggered for RNH walk for nh table(IPv6 Unicast): current
bgp[1100]: [default-lbl] (ip6u): Label update triggered: current version 2000371, target version 200037
bgp[1100]: [default-lbl]: Table: TBL:default (2/1) bgp_label_srv6_sid_config_release: label_sid_need_ev
bgp[1100]: [default-lbl]: uSID WLIB allocation is (LIB Default)
bgp[1100]: [default-lbl]: Table: TBL:default (2/1) bgp_label_thread_walk_type: rd:0x7fc3e1efbf30(ALLzer
bgp[1100]: [default-lbl] (ip6u): rd:0x7fc3e1efbf30 sid_walk:1 label_walk:0
bgp[1100]: [default-lbl]: uSID WLIB allocation is (LIB Default)
bgp[1100]: [default-upd] (vpn4u): Started updgrp timer for updgrp 0.1:: delay=0.010, delaytype=0
bgp[1100]: [default-lbl] (ip6u): SRv6 SID process for net: TBL:default (2/1)fc00:aa00:1::1/128(SID N) e
bgp[1100]: [default-lbl] (ip6u): SRv6 SID process for net: TBL:default (2/1)fc00:aa00:1::1/128 point 1
bgp[1100]: [default-lbl]: uSID WLIB allocation is (LIB Default)
bgp[1100]: [default-lbl] (ip6u): Label update run from 2000371 target label version 2000372, rib version
```

```

bgp[1100]: [default-lbl] (ip6u): Wake up rib thread, label version 2000372, rib version 2000371, bgp table version 2000371
bgp[1100]: [default-rib2] (ip6u): RIB thread triggered for versioned walk: current version 2000371, acknowledged version 2000371
bgp[1100]: [default-rib2] (ip6u): RNH rib opaque update for (IPv6 Unicast)
bgp[1100]: [default-rib2] (ip6u): RIB thread triggered for RNH walk for nh table(IPv6 Unicast): current version 2000371, acknowledged version 2000371
bgp[1100]: [default-rib2] (ip6u): Rib Batch-buf Route ADD: table=TBL:default (2/1), tableid=0xe0800000, tablever=2000371
bgp[1100]: [default-rib2] (ip6u): Revise route batch: installing fc00:aa00:1::1/128 with next hop fc00:aa00:1::1
bgp[1100]: [default-rib2] (ip6u): [0]: Rib Batch-buf Path ADD: table=TBL:default (2/1), net=fc00:aa00:1::1, pathid=0, pathver=2000371
bgp[1100]: [default-rib2] (ip6u): Sending convergence info for IPv6 Unicast - not converged, version: 0
bgp[1100]: [default-upd] (ip6u): Started updgrp timer for updgrp 0.1:: delay=0.010, delaytype=0
bgp[1100]: [default-rib2] (ip6u): vrf default: RIB update run to 2000372: installed 0, modified 1, skipped 0
bgp[1100]: [default-rib2] (ip6u): RIB thread finished versioned walk: table version 2000372, acknowledged version 2000371
bgp[1100]: [default-upd] (vpn4u): Starting updgen walk for updgrp 0.1:: targetver=463: tblver=463, labelver=2000371
bgp[1100]: [default-upd] (ip6u): Starting updgen walk for updgrp 0.1:: targetver=2000372: tblver=2000371
bgp[1100]: [default-upd] (ip6u): Computing updates for update sub-group 0.1 (Regular)
bgp[1100]: [default-upd] (ip6u): bgp_srv6_execute_sid_alloc_mode_policy: Use default SRv6 alloc mode policy
bgp[1100]: [default-upd]: table-attr walk for table TBL:default (2/1), resume version 0, subgrp version 0
bgp[1100]: [default-upd] (ip6u): process UPDATE for: tbl=TBL:default (2/1), afi=5: ug=0.1, (Regular), pfx=fc00:aa00:1::1
bgp[1100]: [default-upd] (ip6u): No unreachable (not advertising to sender: fc00:bb00:1::1) sent to subgrp 0.1

```

Le routeur R3 génère une trace BGP correspondant au traitement de mise à jour à partir de R1, ce qui entraîne finalement la mise à jour par R3 de sa table de monodiffusion IPv6 BGP. Cette mise à jour, qui contient le type d'attribut BGP 40, implique l'installation des SID reçus avec les préfixes de monodiffusion IPv6 BGP associés de R1.

RP/0/RSP0/CPU0:R3#show bgp trace

```

default-bgp/spkr-tr2-imp 0/RSP0/CPU0 t16100 [IMPORT]:6661: Skipping Import walk: import ver 2000371 -> 2000372
default-bgp/spkr-tr2-rib 0/RSP0/CPU0 t30391 [RIB]:17177: RIB walk for afi IPv6 Unicast: target version 2000371, current version 2000371
default-bgp/spkr-tr2-label 0/RSP0/CPU0 t16061 [LABEL]:8505: label walk afi:IPv6 Unicast, lbl ver 2000371, current ver 2000371
default-bgp/spkr-tr2-label 0/RSP0/CPU0 t16061 [LABEL]:8510: label walk afi:IPv6 Unicast, lbl ver 2000371, current ver 2000371
default-bgp/spkr-tr2-rib 0/RSP0/CPU0 t30391 [RIB]:17177: RIB walk for afi IPv6 Unicast: target version 2000371, current version 2000371
default-bgp/spkr-tr2-rib 0/RSP0/CPU0 t30391 [RIB]:14681: send converge to RIB, afi IPv6 Unicast, tableid=0xe0800000, tablever=2000371
default-bgp/spkr-tr2-rib 0/RSP0/CPU0 t30391 [RIB]:15892: RIB(default:v6u): ver 2000371 -> 2000372 :pfx=fc00:aa00:1::1
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t16101 [UPD]:11342: Updgen - TBL:default (2/1) UG: 0.1 SG: 0.1 msg=0
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t16101 [UPD]:11344: Updgen - pfx: [tot] adv/wdn/sup/skp/be[1] 0/0
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t16101 [UPD]:11351: Updgen - fpx: wdn/skp[0/0] ver: 2000371 -> 2000372
default-bgp/spkr-tr2-common 0/RSP0/CPU0 t16101 [COMMON]:3628: vrf default nbr fc00:bb00:1::1, set peer 0
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t16101 [UPD]:11663: Updgen - Skip EoR for Tbl:(TBL:default (2/1))

```

<#root>

RP/0/RSP0/CPU0:R3#

show bgp ipv6 unicast received-sids

```

BGP router identifier 10.0.0.3, local AS number 1
BGP generic scan interval 60 secs
Non-stop routing is enabled
BGP table state: Active
Table ID: 0xe0800000 RD version: 46
BGP table nexthop route policy:
BGP main routing table version 46
BGP NSR Initial initsync version 6 (Reached)
BGP NSR/ISSU Sync-Group versions 0/0

```

BGP scan interval 60 secs

Status codes: s suppressed, d damped, h history, * valid, > best

i - internal, r RIB-failure, S stale, N Nexthop-discard

Origin codes: i - IGP, e - EGP, ? - incomplete

Network	Next Hop	Received Sid
*>ifc00:aa00:1::1/128	fc00:bb00:1::1	

fc00:bb00:1:e002::

*> fc00:aa00:3::3/128 ::	NO SRv6 Sid
--------------------------	-------------

Processed 2 prefixes, 2 paths

4. R3 installe les modules RIB et FIB

R3 installe ensuite les modules RIB et FIB pour terminer le processus de signalisation. R3 joue alors le rôle de tête de réseau SRv6 avec la liste SID fc00:bb00:1:e002::. Cette entrée R1 agit comme tête de réseau SRv6 avec encapsulation dans une politique SR, abrégée en H.Encaps (RFC 8986, section 5.1). Ce comportement encapsule le paquet dans un en-tête IPv6, imposant une liste de segments et ajoutant SRH si nécessaire. Dans ce cas, il n'est pas nécessaire d'ajouter SRH car il n'y a qu'un seul segment. Le paquet va être envoyé avec l'adresse de destination fc00:bb00:1:e002::, qui est le SID de service sur R1 avec le comportement SRv6 Endpoint UDT6.

<#root>

RP/0/RSP0/CPU0:R3#

show route ipv6 fc00:aa00:1::1/128 detail

Routing entry for fc00:aa00:1::1/128

Known via "bgp 1", distance 200, metric 0, type internal

Installed Jun 8 17:52:31.546 for 00:53:55

Routing Descriptor Blocks

fc00:bb00:1::1, from fc00:bb00:1::1

Route metric is 0

Label: None

Tunnel ID: None

Binding Label: None

Extended communities count: 0

NHID: 0x0 (Ref: 0)

Path Grouping ID: 1

SRv6 Headend: H.Encaps.Red [f3216], SID-list {fc00:bb00:1:e002::}

Route version is 0x1f (31)

No local label

IP Precedence: Not Set

QoS Group ID: Not Set

Flow-tag: Not Set

Fwd-class: Not Set

Route Priority: RIB_PRIORITY_RECURSIVE (12) SVD Type RIB_SVD_TYPE_LOCAL

Download Priority 4, Download Version 166

No advertising protos.

RP/0/RSP0/CPU0:R3#

show cef ipv6 fc00:aa00:1::1/128

fc00:aa00:1::1/128, version 166,

SRv6 Headend

, internal 0x5000001 0x40 (ptr 0x7941f0f4) [1], 0x0 (0x0), 0x0 (0x7ad58368)
Updated Jun 8 17:52:31.551
Prefix Len 128, traffic index 0, precedence n/a, priority 4
gateway array (0x78eac428) reference count 1, flags 0x2010, source rib (7), 0 backups
[1 type 3 flags 0x48441 (0x78f4f4d8) ext 0x0 (0x0)]
LW-LDI[type=0, refc=0, ptr=0x0, sh-ldi=0x0]
gateway array update type-time 1 Jun 8 17:52:31.551
LDI Update time Jun 8 17:52:31.551

Level 1 - Load distribution: 0
[0] via fc00:bb00:1::/128, recursive

Accounting: Disabled
via fc00:bb00:1::/128, 5 dependencies, recursive [flags 0x6000]
path-idx 0 NHID 0x0 [0x7941edb4 0x0]
next hop fc00:bb00:1::/128 via fc00:bb00:1::/48

SRv6 H.Encaps.Red SID-list {fc00:bb00:1:e002::}

Load distribution: 0 (refcount 1)

Hash	OK	Interface	Address
0	Y	TenGigE0/0/0/1	remote

La figure 4 illustre le format de paquet lorsque le routeur R3 (fc00:aa00:3::3) envoie une requête ping à R1 (fc00:aa00:1::1).

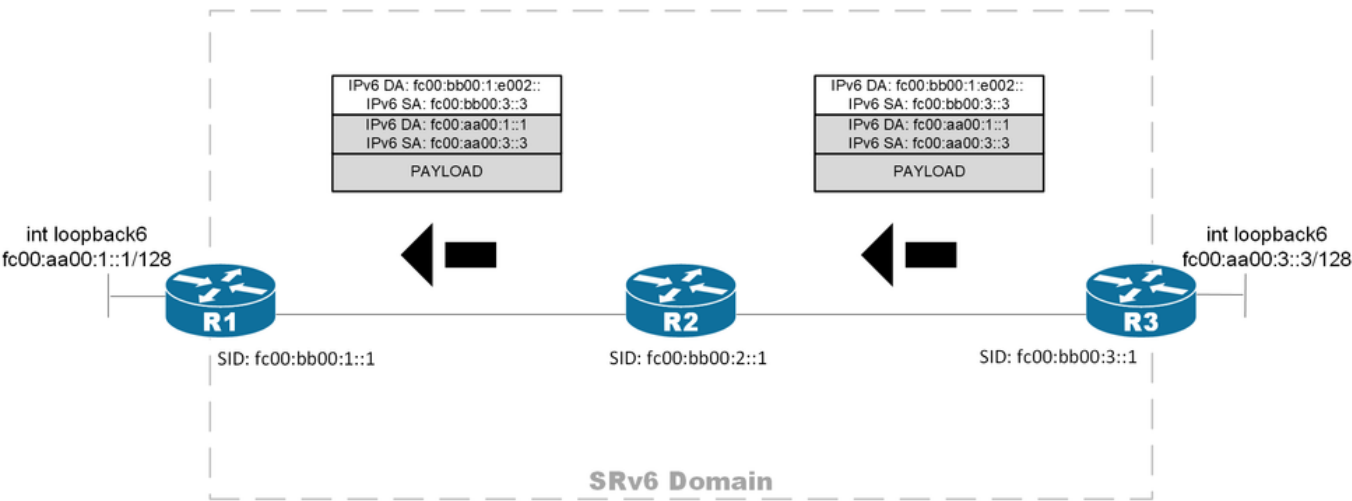


Figure 4. Traitement des paquets sur le chemin de la monodiffusion IPv6 BGP sur SRv6

À propos de cette traduction

Cisco a traduit ce document en traduction automatisée vérifiée par une personne dans le cadre d'un service mondial permettant à nos utilisateurs d'obtenir le contenu d'assistance dans leur propre langue.

Il convient cependant de noter que même la meilleure traduction automatisée ne sera pas aussi précise que celle fournie par un traducteur professionnel.