

# EIGRP でのデフォルト ルート設定

## 目次

[概要](#)

[前提条件](#)

[要件](#)

[使用するコンポーネント](#)

[設定](#)

[ネットワーク図](#)

[設定](#)

[R1 の設定](#)

[R2 の設定](#)

[R3 の設定](#)

[方法 1：デフォルト ルートと再配布を使用する](#)

[設定](#)

[確認](#)

[方法 2：サマリー アドレスを使用する](#)

[設定](#)

[確認](#)

[トラブルシューティング](#)

[Cisco サポート コミュニティ - 特集対話](#)

## 概要

このドキュメントでは、Enhanced Interior Gateway Routing Protocol ( EIGRP ) のデフォルト ルートを設定する方法について説明します。

## 前提条件

### 要件

EIGRP の基本知識

### 使用するコンポーネント

このドキュメントは、特定のソフトウェアやハードウェアのバージョンに限定されるものではありません。


## 設定

EIGRP でデフォルト ルートをアドバタイズするには、以下の方法があります。この記事では、それぞれの方法について説明します。

1 の L-AC-PLS-G ) を注文します。デフォルト ルートと再配布を使用する。

2. サマリー アドレスを使用する。

## ネットワーク図

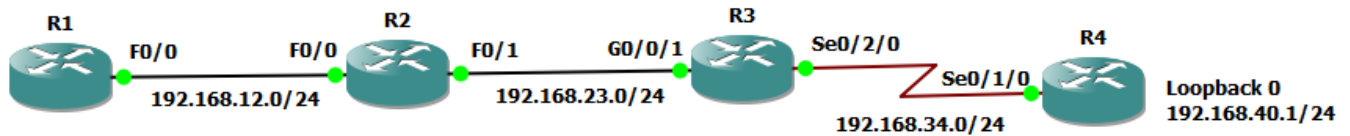

## 設定

R1、R2、および R3 の各ルータには EIGRP が設定されています。EIGRP は R3 と R4 の間では実行されていません。

### R1 の設定

```
!  
router eigrp 1 network 192.168.12.0  
!  
  
R1#show ip route  
Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP  
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area  
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2  
E1 - OSPF external type 1, E2 - OSPF external type 2  
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2  
ia - IS-IS inter area, * - candidate default, U - per-user static route  
o - ODR, P - periodic downloaded static route  
  
Gateway of last resort is not set  
  
C 192.168.12.0/24 is directly connected, FastEthernet0/0  
D 192.168.23.0/24 [90/30720] via 192.168.12.2, 00:10:27, FastEthernet0/0
```

### R2 の設定

```
!  
router eigrp 1  
 network 192.168.12.0  
 network 192.168.23.0  
!  
  
R2#show ip route  
Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP  
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area  
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2  
E1 - OSPF external type 1, E2 - OSPF external type 2  
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2  
ia - IS-IS inter area, * - candidate default, U - per-user static route  
o - ODR, P - periodic downloaded static route  
  
Gateway of last resort is not set  
  
C 192.168.12.0/24 is directly connected, FastEthernet0/0  
C 192.168.23.0/24 is directly connected, FastEthernet0/1
```

## R3 の設定

```
!  
router eigrp 1  
  network 192.168.23.0  
!
```

### R3#show ip route

```
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP  
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area  
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2  
E1 - OSPF external type 1, E2 - OSPF external type 2  
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2  
ia - IS-IS inter area, * - candidate default, U - per-user static route  
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP  
a - application route  
+ - replicated route, % - next hop override
```

Gateway of last resort is not set

```
D 192.168.12.0/24  
[90/28416] via 192.168.23.2, 00:05:16, GigabitEthernet0/0/1  
192.168.23.0/24 is variably subnetted, 2 subnets, 2 masks  
C 192.168.23.0/24 is directly connected, GigabitEthernet0/0/1  
L 192.168.23.3/32 is directly connected, GigabitEthernet0/0/1  
192.168.34.0/24 is variably subnetted, 2 subnets, 2 masks  
C 192.168.34.0/24 is directly connected, Serial0/2/0  
L 192.168.34.3/32 is directly connected, Serial0/2/0
```

## 方法 1：デフォルト ルートと再配布を使用する

### 設定

以下の方法は、スタティック デフォルト ルートを使用し、EIGRP でデフォルト ルートをアドバタイズする方法を説明しています。

```
!  
router eigrp 1  
  network 192.168.23.0  
!
```

### R3#show ip route

```
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP  
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area  
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2  
E1 - OSPF external type 1, E2 - OSPF external type 2  
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2  
ia - IS-IS inter area, * - candidate default, U - per-user static route  
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP  
a - application route  
+ - replicated route, % - next hop override
```

Gateway of last resort is not set

```
D 192.168.12.0/24  
[90/28416] via 192.168.23.2, 00:05:16, GigabitEthernet0/0/1  
192.168.23.0/24 is variably subnetted, 2 subnets, 2 masks  
C 192.168.23.0/24 is directly connected, GigabitEthernet0/0/1  
L 192.168.23.3/32 is directly connected, GigabitEthernet0/0/1  
192.168.34.0/24 is variably subnetted, 2 subnets, 2 masks
```

```
C 192.168.34.0/24 is directly connected, Serial0/2/0
L 192.168.34.3/32 is directly connected, Serial0/2/0
```

### R3#show ip route

```
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override
```

Gateway of last resort is 192.168.34.4 to network 0.0.0.0

```
S* 0.0.0.0/0 [1/0] via 192.168.34.4
D 192.168.12.0/24
    [90/28416] via 192.168.23.2, 00:59:18, GigabitEthernet0/0/1
192.168.23.0/24 is variably subnetted, 2 subnets, 2 masks
C 192.168.23.0/24 is directly connected, GigabitEthernet0/0/1
L 192.168.23.3/32 is directly connected, GigabitEthernet0/0/1
192.168.34.0/24 is variably subnetted, 2 subnets, 2 masks
C 192.168.34.0/24 is directly connected, Serial0/2/0
L 192.168.34.3/32 is directly connected, Serial0/2/0
```

**注:** この場合、EIGRP 内で network コマンドを使用して 0.0.0.0 をアドバタイズすることはできません。これは直接接続されていないからです。

スタティック ルートの再配布は、EIGRP で以下のように行われます。

### R3#show ip route

```
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override
```

Gateway of last resort is 192.168.34.4 to network 0.0.0.0

```
S* 0.0.0.0/0 [1/0] via 192.168.34.4
D 192.168.12.0/24
    [90/28416] via 192.168.23.2, 00:59:18, GigabitEthernet0/0/1
192.168.23.0/24 is variably subnetted, 2 subnets, 2 masks
C 192.168.23.0/24 is directly connected, GigabitEthernet0/0/1
L 192.168.23.3/32 is directly connected, GigabitEthernet0/0/1
192.168.34.0/24 is variably subnetted, 2 subnets, 2 masks
C 192.168.34.0/24 is directly connected, Serial0/2/0
L 192.168.34.3/32 is directly connected, Serial0/2/0
```

## 検証

### R1#show ip route

```
Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
```

o - ODR, P - periodic downloaded static route

Gateway of last resort is 192.168.12.2 to network 0.0.0.0

```
C 192.168.12.0/24 is directly connected, FastEthernet0/0
D 192.168.23.0/24 [90/30720] via 192.168.12.2, 00:14:01, FastEthernet0/0
D*EX 0.0.0.0/0 [170/286720] via 192.168.12.2, 00:00:39, FastEthernet0/0
R2#show ip route
Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route
```


Gateway of last resort is 192.168.23.3 to network 0.0.0.0

```
C 192.168.12.0/24 is directly connected, FastEthernet0/0
C 192.168.23.0/24 is directly connected, FastEthernet0/1
D*EX 0.0.0.0/0 [170/284160] via 192.168.23.3, 00:04:44, FastEthernet0/1
```

## 方法 2 : サマリー アドレスを使用する

### 設定

この方法では、EIGRP の集約ルールを使用します。

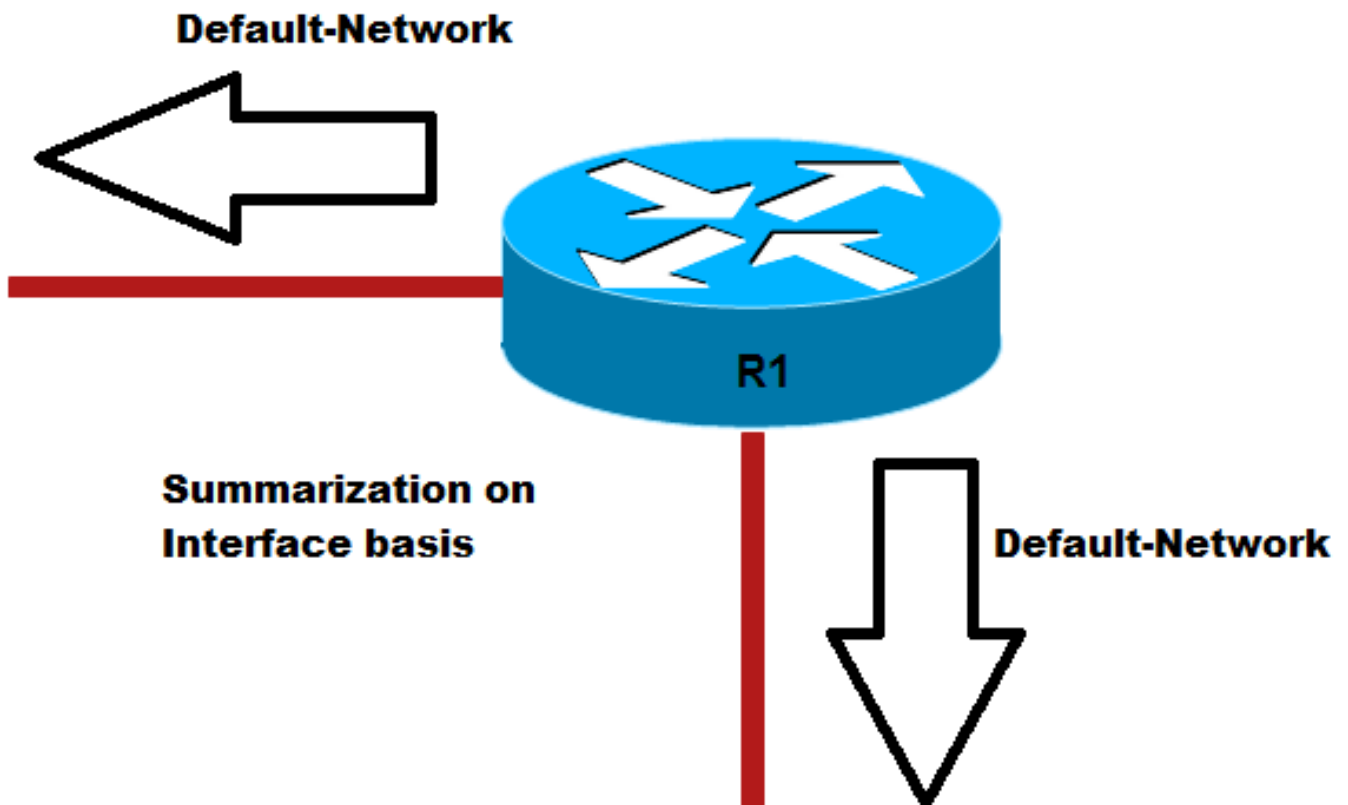

R2#show ip route

Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP  
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area  
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2  
E1 - OSPF external type 1, E2 - OSPF external type 2  
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2  
ia - IS-IS inter area, \* - candidate default, U - per-user static route  
o - ODR, P - periodic downloaded static route

Gateway of last resort is 192.168.23.3 to network 0.0.0.0

```
C 192.168.12.0/24 is directly connected, FastEthernet0/0
C 192.168.23.0/24 is directly connected, FastEthernet0/1
D*EX 0.0.0.0/0 [170/284160] via 192.168.23.3, 00:04:44, FastEthernet0/1
```

## 確認

### R3#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP  
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area  
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2  
E1 - OSPF external type 1, E2 - OSPF external type 2  
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2  
ia - IS-IS inter area, \* - candidate default, U - per-user static route  
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP  
a - application route  
+ - replicated route, % - next hop override

Gateway of last resort is 0.0.0.0 to network 0.0.0.0

```
D* 0.0.0.0/0 is a summary, 00:00:06, Null0
D 192.168.12.0/24 [90/28416] via 192.168.23.2, 00:15:54, GigabitEthernet0/0/1
192.168.23.0/24 is directly connected, GigabitEthernet0/0/1
L 192.168.23.3/32 is directly connected, GigabitEthernet0/0/1
192.168.34.0/24 is variably subnetted, 2 subnets, 2 masks
C 192.168.34.0/24 is directly connected, Serial0/2/0
L 192.168.34.3/32 is directly connected, Serial0/2/0
```

R1 と R2 のルーティング テーブルに、EIGRP から学習されたデフォルト ルートが表示されるようになります。

### R1#show ip route

Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP  
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area  
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2  
E1 - OSPF external type 1, E2 - OSPF external type 2  
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2  
ia - IS-IS inter area, \* - candidate default, U - per-user static route  
o - ODR, P - periodic downloaded static route

Gateway of last resort is 192.168.12.2 to network 0.0.0.0

```
C 192.168.12.0/24 is directly connected, FastEthernet0/0
D 192.168.23.0/24 [90/30720] via 192.168.12.2, 00:17:50, FastEthernet0/0
D* 0.0.0.0/0 [90/30976] via 192.168.12.2, 00:01:30, FastEthernet0/0
```

### R2#show ip route

Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP  
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area  
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2  
E1 - OSPF external type 1, E2 - OSPF external type 2  
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2  
ia - IS-IS inter area, \* - candidate default, U - per-user static route  
o - ODR, P - periodic downloaded static route

Gateway of last resort is 192.168.23.3 to network 0.0.0.0

C 192.168.12.0/24 is directly connected, FastEthernet0/0  
C 192.168.23.0/24 is directly connected, FastEthernet0/1  
D\* 0.0.0.0/0 [90/28416] via 192.168.23.3, 00:03:50, FastEthernet0/1

## トラブルシューティング

現在のところ、この設定に関する特定のトラブルシューティング情報はありません。