

FlexVPN のサイト間の設定例

目次

[概要](#)

[前提条件](#)

[要件](#)

[使用するコンポーネント](#)

[表記法](#)

[設定](#)

[ネットワーク図](#)

[PSK トンネルの設定](#)

[Left-Router](#)

[Right-Router](#)

[PKI トンネルの設定](#)

[Left-Router](#)

[Right-Router](#)

[確認](#)

[ルーティングの設定](#)

[ダイナミック ルーティング プロトコル](#)

[関連情報](#)

概要

このドキュメントでは、FlexVPN のサイト間のインターネット プロトコル セキュリティ (IPsec) トンネルおよび総称ルーティング カプセル化 (GRE) トンネルの設定例を紹介します。

前提条件

要件

このドキュメントに関する固有の要件はありません。

使用するコンポーネント

このドキュメントは、特定のソフトウェアやハードウェアのバージョンに限定されるものではありません。

このドキュメントの情報は、特定のラボ環境にあるデバイスに基づいて作成されたものです。このドキュメントで使用するすべてのデバイスは、クリアな（デフォルト）設定で作業を開始しています。ネットワークが稼働中の場合は、コマンドが及ぼす潜在的な影響を十分に理解しておく必要があります。

表記法

ドキュメント表記の詳細は、『[シスコテクニカルティップスの表記法](#)』を参照してください。


設定

この項では、このドキュメントで説明する機能の設定に必要な情報を提供します。

注: このセクションで使用されているコマンドの詳細を調べるには、[Command Lookup Tool](#) ([登録ユーザ専用](#)) を使用してください。

ネットワーク図

このドキュメントでは、次のネットワーク構成を使用しています。

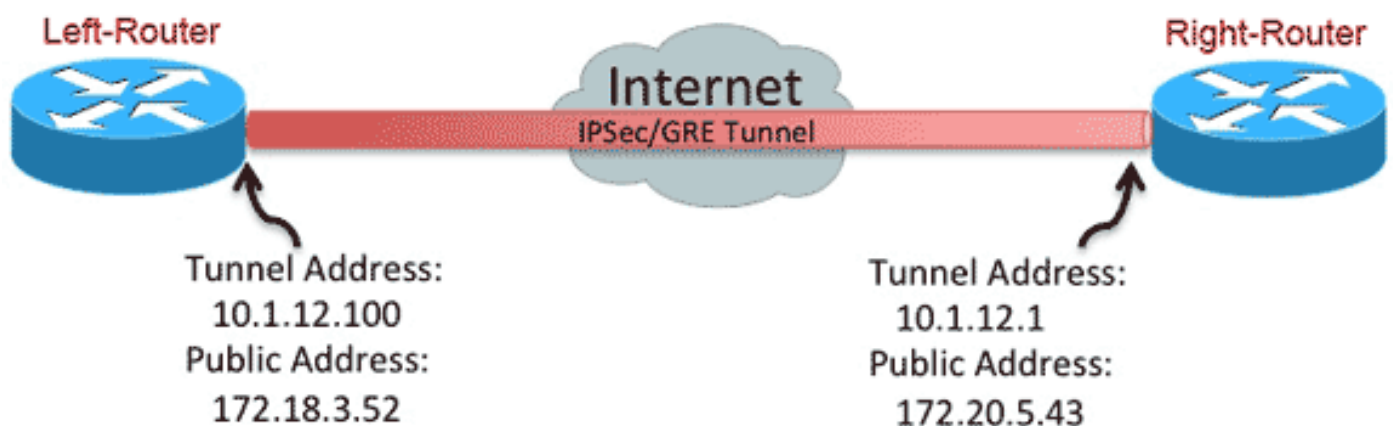

PSK トンネルの設定

このセクションの手順では、このネットワーク環境のトンネルを設定するために事前共有キー (PSK) を使用する方法について説明します。

Left-Router

1. インターネット キー交換バージョン 2 (IKEv2) キーリングを設定します。

```
crypto ikev2 keyring mykeys
peer Right-Router
address 172.20.5.43
pre-shared-key Cisco123
!
```

2. 次を実行するために、IKEv2 デフォルト プロファイルを再設定します

IKE ID の照合ローカルとリモートの認証方式の設定前の手順でリストされたキーリングの参照

```
crypto ikev2 profile default
match identity remote address 172.20.5.43 255.255.255.255
authentication local pre-share
authentication remote pre-share
keyring local mykeys
dpd 60 2 on-demand
!
```

3. IKEv2 デフォルト プロファイルを参照するために、IPSec デフォルト プロファイルを再設定します。

```
crypto ipsec profile default
set ikev2-profile default
!
interface Tunnel0
ip address 10.1.12.100 255.255.255.0
tunnel source Ethernet0/0
tunnel destination 172.20.5.43
tunnel protection ipsec profile default
!
```

4. LAN および WAN インターフェイスを設定します。

```
interface Ethernet0/0
description WAN
ip address 172.18.3.52 255.255.255.0
!
interface Ethernet0/1
description LAN
ip address 192.168.100.1 255.255.255.0
!
ip route 0.0.0.0 0.0.0.0 172.18.3.1 name route_to_internet
```

Right-Router

次の必要な変更を加えて、Left-Router の手順を繰り返します。

```
crypto ikev2 keyring mykeys
peer Left-Router
address 172.18.3.52
pre-shared-key Cisco123
!
crypto ikev2 profile default
match identity remote address 172.18.3.52 255.255.255.255
authentication local pre-share
authentication remote pre-share
keyring local mykeys
dpd 60 2 on-demand
!
crypto ipsec profile default
set ikev2-profile default
!
interface Tunnel0
ip address 10.1.12.1 255.255.255.0
tunnel source Ethernet0/0
tunnel destination 172.18.3.52
tunnel protection ipsec profile default
!
interface Ethernet0/0
description WAN
ip address 172.20.5.43 255.255.255.0
```

```
!  
interface Ethernet0/1  
description LAN  
ip address 192.168.200.1 255.255.255.0  
!  
ip route 0.0.0.0 0.0.0.0 172.20.5.1 name route_to_internet
```

PKI トンネルの設定

PSK を使用して前のセクションからのトンネルが完了したら、公開キー インフラストラクチャ (PKI) を認証に使用するために簡単に変更できます。この例では、Left-Router は Right-Router への証明書で自身を認証します。Right-Router は、Left-Router に対して自身を認証するため、引き続き PSK を使用します。これは、非対称認証を示すために行われました。ただし、証明書認証を使用するように両方を切り替えることは、ほとんど問題になりません。

Left-Router

1. ルータで Cisco IOS[®] 認証局 (CA) を設定します。

```
Left-Router#config t  
Left-Router(config)#ip http server  
Left-Router(config)#crypto pki server S2S-CA  
Left-Router(cs-server)#issuer-name cn="S2S-CA"  
Left-Router(cs-server)#grant auto  
Left-Router(cs-server)#no shut  
%Some server settings cannot be changed after CA certificate generation.  
% Please enter a passphrase to protect the private key  
% or type Return to exit  
Password:  
  
Re-enter password:  
% Generating 1024 bit RSA keys, keys will be non-exportable...  
[OK] (elapsed time was 0 seconds)  
% Exporting Certificate Server signing certificate and keys...
```

2. ID トラストポイントの認証と登録を行います。

```
Left-Router#config t  
Left-Router(config)#ip domain name cisco.com  
Left-Router(config)#crypto pki trustpoint S2S-ID  
Left-Router(ca-trustpoint)#enrollment url http://172.18.3.52:80  
Left-Router(ca-trustpoint)#subject-name cn=Left-Router.cisco.com  
Left-Router(ca-trustpoint)#exit  
Left-Router(config)#crypto pki authenticate S2S-ID  
Certificate has the following attributes:  
Fingerprint MD5: C11CD575 EC2DEACD 97E9AA3A 2DACFCAB  
Fingerprint SHA1: A8A6E79B D1932175 F12652F1 4F967077 3AEFAF08  
  
% Do you accept this certificate? [yes/no]: yes  
Trustpoint CA certificate accepted.  
Left-Router(config)#  
Left-Router(config)#crypto pki enroll S2S-ID  
%  
% Start certificate enrollment ..  
% Create a challenge password. You will need to verbally provide this  
password to the CA Administrator in order to revoke your certificate.  
For security reasons your password will not be saved in the configuration.  
Please make a note of it.  
  
Password:  
Re-enter password:  
*Oct 29 15:15:50.287: %CRYPTO-6-AUTOGEN: Generated new 512 bit key pair
```

```

% The subject name in the certificate will include: cn=R1.cisco.com
% The subject name in the certificate will include: R1.cisco.com
% Include the router serial number in the subject name? [yes/no]: no
% Include an IP address in the subject name? [no]: no
Request certificate from CA? [yes/no]: yes
% Certificate request sent to Certificate Authority
% The 'show crypto pki certificate verbose S2S-ID' command will show the fingerprint.

*Oct 29 15:15:57.722: CRYPTO_PKI: Certificate Request Fingerprint MD5:
CA34FD51 A85007EF A785E058 60D8877D
*Oct 29 15:15:57.722: CRYPTO_PKI: Certificate Request Fingerprint SHA1:
E37AAE3C 851953C3 9FABE1FD 2F0EACD5 566F361E
Left-Router(config)#exit
Left-Router#
*Oct 29 15:16:57.829: %PKI-6-CERTRET: Certificate received from Certificate Authority

```

3. IKEv2 プロファイルを再設定します。

```

Left-Router#config t
Left-Router(config)#ip domain name cisco.com
Left-Router(config)#crypto pki trustpoint S2S-ID
Left-Router(ca-trustpoint)#enrollment url http://172.18.3.52:80
Left-Router(ca-trustpoint)#subject-name cn=Left-Router.cisco.com
Left-Router(ca-trustpoint)#exit
Left-Router(config)#crypto pki authenticate S2S-ID
Certificate has the following attributes:
Fingerprint MD5: C11CD575 EC2DEACD 97E9AA3A 2DACFCAB
Fingerprint SHA1: A8A6E79B D1932175 F12652F1 4F967077 3AEFAF08

% Do you accept this certificate? [yes/no]: yes
Trustpoint CA certificate accepted.
Left-Router(config)#
Left-Router(config)#crypto pki enroll S2S-ID
%
% Start certificate enrollment ..
% Create a challenge password. You will need to verbally provide this
password to the CA Administrator in order to revoke your certificate.
For security reasons your password will not be saved in the configuration.
Please make a note of it.

Password:
Re-enter password:
*Oct 29 15:15:50.287: %CRYPTO-6-AUTOGEN: Generated new 512 bit key pair

% The subject name in the certificate will include: cn=R1.cisco.com
% The subject name in the certificate will include: R1.cisco.com
% Include the router serial number in the subject name? [yes/no]: no
% Include an IP address in the subject name? [no]: no
Request certificate from CA? [yes/no]: yes
% Certificate request sent to Certificate Authority
% The 'show crypto pki certificate verbose S2S-ID' command will show the fingerprint.

*Oct 29 15:15:57.722: CRYPTO_PKI: Certificate Request Fingerprint MD5:
CA34FD51 A85007EF A785E058 60D8877D
*Oct 29 15:15:57.722: CRYPTO_PKI: Certificate Request Fingerprint SHA1:
E37AAE3C 851953C3 9FABE1FD 2F0EACD5 566F361E
Left-Router(config)#exit
Left-Router#
*Oct 29 15:16:57.829: %PKI-6-CERTRET: Certificate received from Certificate Authority

```

Right-Router

1. ルータが Left-Router の証明書を検証できるように、CA トラストポイントを認証します。

```
Right-Router#config t
Right-Router(config)#ip domain name cisco.com
Right-Router(config)#crypto pki trustpoint S2S-ID
Right-Router(ca-trustpoint)#enrollment url http://172.18.3.52:80
Right-Router(ca-trustpoint)#revocation-check none
Right-Router(ca-trustpoint)#exit
Right-Router(config)#crypto pki authenticate S2S-IDCertificate has the following
attributes:
Fingerprint MD5: C11CD575 EC2DEACD 97E9AA3A 2DACFCAB
Fingerprint SHA1: A8A6E79B D1932175 F12652F1 4F967077 3AEFAF08

% Do you accept this certificate? [yes/no]: yes
Trustpoint CA certificate accepted.
Right-Router(config)#
```

2. 着信接続を照合するために、IKEv2 プロファイルを再設定します。

```
Right-Router#config t
Right-Router(config)#ip domain name cisco.com
Right-Router(config)#crypto pki trustpoint S2S-ID
Right-Router(ca-trustpoint)#enrollment url http://172.18.3.52:80
Right-Router(ca-trustpoint)#revocation-check none
Right-Router(ca-trustpoint)#exit
Right-Router(config)#crypto pki authenticate S2S-IDCertificate has the following
attributes:
Fingerprint MD5: C11CD575 EC2DEACD 97E9AA3A 2DACFCAB
Fingerprint SHA1: A8A6E79B D1932175 F12652F1 4F967077 3AEFAF08

% Do you accept this certificate? [yes/no]: yes
Trustpoint CA certificate accepted.
Right-Router(config)#
```

確認

`show crypto ikev2 sa detailed` コマンドを使用し、設定を確認します。

Right-Router は次を示します。

- Auth Sign = このルータが Left-Router に対して自身を認証する方法 = 事前共有キー
- Auth Verify = Left-Router がこのルータに対して自身を認証する方法 = RSA (証明書)
- Local/Remote id = 交換される ISAKMP ID

```
Right-Router#config t
Right-Router(config)#ip domain name cisco.com
Right-Router(config)#crypto pki trustpoint S2S-ID
Right-Router(ca-trustpoint)#enrollment url http://172.18.3.52:80
Right-Router(ca-trustpoint)#revocation-check none
Right-Router(ca-trustpoint)#exit
Right-Router(config)#crypto pki authenticate S2S-IDCertificate has the following attributes:
Fingerprint MD5: C11CD575 EC2DEACD 97E9AA3A 2DACFCAB
Fingerprint SHA1: A8A6E79B D1932175 F12652F1 4F967077 3AEFAF08

% Do you accept this certificate? [yes/no]: yes
Trustpoint CA certificate accepted.
Right-Router(config)#
```

ルーティング設定

前の設定例はトンネルを確立できるようにしますが、ルーティングに関する情報(つまり、トンネルで使用できる宛先)は提供されません。IKEv2 では、この情報を交換する次の2つの方法が

あります それは、ダイナミック ルーティング プロトコルと IKEv2 ルートです。

ダイナミック ルーティング プロトコル

トンネルはポイントツーポイント GRE トンネルであるため、他のポイントツーポイント インターフェイスと同様の動作となります (例: シリアル、ダイヤラ)。ルーティング情報を交換するために、リンク上で内部ゲートウェイ プロトコル (IGP) /外部ゲートウェイ プロトコル (EGP) を実行することが可能です。拡張内部ゲートウェイ ルーティング プロトコル (EIGRP) の例を次に示します。

1. LAN およびトンネル インターフェイスで EIGRP をイネーブルおよびアドバタイズするように Left-Router を設定します。

```
Right-Router#config t
Right-Router(config)#ip domain name cisco.com
Right-Router(config)#crypto pki trustpoint S2S-ID
Right-Router(ca-trustpoint)#enrollment url http://172.18.3.52:80
Right-Router(ca-trustpoint)#revocation-check none
Right-Router(ca-trustpoint)#exit
Right-Router(config)#crypto pki authenticate S2S-IDCertificate has the following
attributes:
Fingerprint MD5: C11CD575 EC2DEACD 97E9AA3A 2DACFCAB
Fingerprint SHA1: A8A6E79B D1932175 F12652F1 4F967077 3AEFAF08

% Do you accept this certificate? [yes/no]: yes
Trustpoint CA certificate accepted.
Right-Router(config)#
```

2. LAN およびトンネル インターフェイスで EIGRP をイネーブルおよびアドバタイズするように Right-Router を設定します。

```
Right-Router#config t
Right-Router(config)#ip domain name cisco.com
Right-Router(config)#crypto pki trustpoint S2S-ID
Right-Router(ca-trustpoint)#enrollment url http://172.18.3.52:80
Right-Router(ca-trustpoint)#revocation-check none
Right-Router(ca-trustpoint)#exit
Right-Router(config)#crypto pki authenticate S2S-IDCertificate has the following
attributes:
Fingerprint MD5: C11CD575 EC2DEACD 97E9AA3A 2DACFCAB
Fingerprint SHA1: A8A6E79B D1932175 F12652F1 4F967077 3AEFAF08

% Do you accept this certificate? [yes/no]: yes
Trustpoint CA certificate accepted.
Right-Router(config)#
```

3. EIGRP を通じてトンネル経由で 192.168.200.0/24 へのルートが学習されることを確認します。

```
Left-Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
+ - replicated route, % - next hop override

Gateway of last resort is 172.18.3.1 to network 0.0.0.0

S* 0.0.0.0/0 [1/0] via 172.18.3.1
10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
```

```
C 10.1.12.0/24 is directly connected, Tunnel0
L 10.1.12.100/32 is directly connected, Tunnel0
172.18.0.0/16 is variably subnetted, 2 subnets, 2 masks
C 172.18.3.0/24 is directly connected, Ethernet0/0
L 172.18.3.52/32 is directly connected, Ethernet0/0
192.168.100.0/24 is variably subnetted, 2 subnets, 2 masks
C 192.168.100.0/24 is directly connected, Ethernet0/1
L 192.168.100.1/32 is directly connected, Ethernet0/1
D 192.168.200.0/24 [90/27008000] via 10.1.12.1, 00:00:22, Tunnel0
```

IKEv2 ルート

ダイナミック ルーティング プロトコル ルートを使用してトンネル経由で宛先を学習するのではなく、IKEv2 セキュリティ アソシエーション (SA) の確立中にルートが交換される可能性があります。

1. Left-Router で、Left-Router が Right-Router にアドバタイズするサブネットのリストを設定します。

```
Left-Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
+ - replicated route, % - next hop override
```

```
Gateway of last resort is 172.18.3.1 to network 0.0.0.0
```

```
S* 0.0.0.0/0 [1/0] via 172.18.3.1
10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 10.1.12.0/24 is directly connected, Tunnel0
L 10.1.12.100/32 is directly connected, Tunnel0
172.18.0.0/16 is variably subnetted, 2 subnets, 2 masks
C 172.18.3.0/24 is directly connected, Ethernet0/0
L 172.18.3.52/32 is directly connected, Ethernet0/0
192.168.100.0/24 is variably subnetted, 2 subnets, 2 masks
C 192.168.100.0/24 is directly connected, Ethernet0/1
L 192.168.100.1/32 is directly connected, Ethernet0/1
D 192.168.200.0/24 [90/27008000] via 10.1.12.1, 00:00:22, Tunnel0
```

2. Left-Router で、アドバタイズするサブネットを指定するために、許可ポリシーを設定します。

/32 : トンネルのインターフェイスで設定/24 : ACL で参照されるルート
Left-Router#show ip route

```
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
+ - replicated route, % - next hop override
```

```
Gateway of last resort is 172.18.3.1 to network 0.0.0.0
```

```
S* 0.0.0.0/0 [1/0] via 172.18.3.1
10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 10.1.12.0/24 is directly connected, Tunnel0
L 10.1.12.100/32 is directly connected, Tunnel0
172.18.0.0/16 is variably subnetted, 2 subnets, 2 masks
C 172.18.3.0/24 is directly connected, Ethernet0/0
```



```
L 172.18.3.52/32 is directly connected, Ethernet0/0
192.168.100.0/24 is variably subnetted, 2 subnets, 2 masks
C 192.168.100.0/24 is directly connected, Ethernet0/1
L 192.168.100.1/32 is directly connected, Ethernet0/1
D 192.168.200.0/24 [90/27008000] via 10.1.12.1, 00:00:22, Tunnel0
```

3. Left-Router では、事前共有鍵が使用される場合に許可ポリシーが参照されるよう IKEv2 プロファイルを再設定します。

```
Left-Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
+ - replicated route, % - next hop override

Gateway of last resort is 172.18.3.1 to network 0.0.0.0
```

```
S* 0.0.0.0/0 [1/0] via 172.18.3.1
10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 10.1.12.0/24 is directly connected, Tunnel0
L 10.1.12.100/32 is directly connected, Tunnel0
172.18.0.0/16 is variably subnetted, 2 subnets, 2 masks
C 172.18.3.0/24 is directly connected, Ethernet0/0
L 172.18.3.52/32 is directly connected, Ethernet0/0
192.168.100.0/24 is variably subnetted, 2 subnets, 2 masks
C 192.168.100.0/24 is directly connected, Ethernet0/1
L 192.168.100.1/32 is directly connected, Ethernet0/1
D 192.168.200.0/24 [90/27008000] via 10.1.12.1, 00:00:22, Tunnel0
```

4. Right-Router では、証明書が使用される場合に許可ポリシーが参照されるよう、ステップ 1 と 2 を繰り返し、IKEv2 プロファイルを調整します。

```
Left-Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
+ - replicated route, % - next hop override

Gateway of last resort is 172.18.3.1 to network 0.0.0.0
```

```
S* 0.0.0.0/0 [1/0] via 172.18.3.1
10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 10.1.12.0/24 is directly connected, Tunnel0
L 10.1.12.100/32 is directly connected, Tunnel0
172.18.0.0/16 is variably subnetted, 2 subnets, 2 masks
C 172.18.3.0/24 is directly connected, Ethernet0/0
L 172.18.3.52/32 is directly connected, Ethernet0/0
192.168.100.0/24 is variably subnetted, 2 subnets, 2 masks
C 192.168.100.0/24 is directly connected, Ethernet0/1
L 192.168.100.1/32 is directly connected, Ethernet0/1
D 192.168.200.0/24 [90/27008000] via 10.1.12.1, 00:00:22, Tunnel0
```

5. IKEv2 SA shut no shut

6. IKEv2 ルートが交換されていることを確認します。この出力例の「Remote subnets」を参照してください。

```
Right-Router#show crypto ikev2 sa detailed
IPv4 Crypto IKEv2 SA
```

```
Tunnel-id Local Remote fvrf/ivrf Status
1 172.20.5.43/500 172.18.3.52/500 none/none READY
Encr: AES-CBC, keysize: 256, Hash: SHA512, DH Grp:5, Auth sign: PSK, Auth verify: RSA
Life/Active Time: 86400/3165 sec
CE id: 1043, Session-id: 22
Status Description: Negotiation done
Local spi: 3443E884EB151E8D Remote spi: 92779BC873F58132
Local id: 172.20.5.43
Remote id: hostname=R100.cisco.com,cn=R100.cisco.com
Local req msg id: 0 Remote req msg id: 4
Local next msg id: 0 Remote next msg id: 4
Local req queued: 0 Remote req queued: 4
Local window: 5 Remote window: 5
DPD configured for 60 seconds, retry 2
NAT-T is not detected
Cisco Trust Security SGT is disabled Initiator of SA : No

Remote subnets:
10.1.12.100 255.255.255.255
192.168.100.0 255.255.255.0

IPv6 Crypto IKEv2 SA
```

関連情報

- [テクニカルサポートとドキュメント - Cisco Systems](#)