

BGP Global IPv6 configureren via SRv6

Inhoud

[Inleiding](#)

[Achtergrondinformatie](#)

[Topologie](#)

[SRv6-configuratie](#)

[Router R1-configuratie](#)

[Router R2-configuratie](#)

[Router R3-configuratie](#)

[Signaleringsstroom van SRv6 SID](#)

[1. Staat voorafgaand aan het inschakelen van SRv6](#)

[2. Inkapseling SRv6 inschakelen](#)

[3. R3 ontvangt de BGP-update en installeert deze in BGP IPv6 Unicast Table](#)

[4. R3 installeert de RIB en FIB](#)

Inleiding


Dit document beschrijft de stroom van het controlevlak bij het toepassen van inkapseling Segment Routing over IPv6 (SRv6) naar BGP IPv6 unicast-sessie.

Achtergrondinformatie

Zie de [Configuratiehandleiding voor segmentrouting voor Cisco ASR 9000-routers, IOS XR versie 24.1.x, 24.2.x, 24.3.x, 24.4.x](#) voor meer informatie.

Topologie

De topologie die in dit document wordt gebruikt, wordt weergegeven in figuur 1. Het SRv6-domein bestaat uit drie routers, die allemaal werken op Cisco IOS-XR. De SRv6 onderliggend infrastructuur wordt geïmplementeerd met behulp van IS-IS met uSID SRv6. BGP IPv6 unicast peering wordt ingesteld tussen routers R1 en R3, terwijl router R2 niet deelneemt aan BGP en functioneert als een P-router in deze configuratie. De Loopback 6-interface op zowel R1 als R3 vertegenwoordigt een IPv6-voorvoegsel dat moet worden uitgewisseld tussen de twee BGP IPv6-unicastpeers.

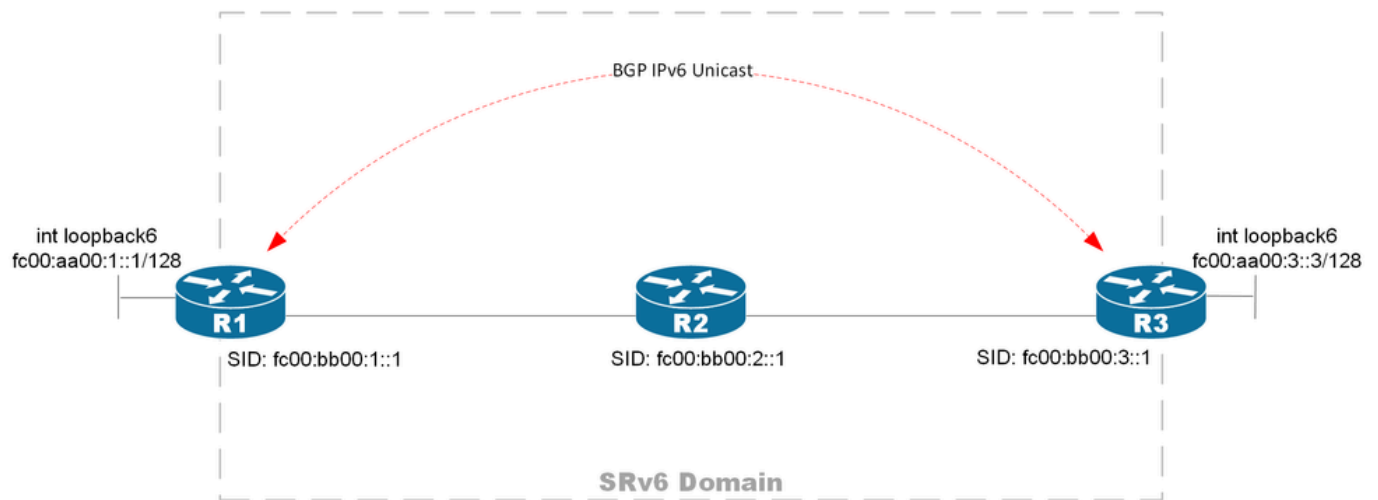

Afbeelding 1. Topologiediagram van BGP ipv6 unicast over SRv6

SRv6-configuratie

In dit gedeelte wordt de configuratie van alle drie de SRv6-routers weergegeven. Router R2 bevat alleen de SRv6-configuratie, omdat deze niet deelneemt aan BGP.

Router R1-configuratie

Router R1 maakt deel uit van het SRv6-domein met een locator van fc00:bb00:1::/48. Het werkt ook als een BGP IPv6 unicast router, afkomstig van de lokale prefix fc00:aa00:1:1/128. Daarnaast wordt BGP IPv6 unicast peering met Router R3 over de SRv6-infrastructuur. De configuratie die vet is gemarkeerd, dient als het startpunt voor het debuggen van de besturingsstroom die in dit document wordt beschreven en is de enige trigger die overal wordt gebruikt.

<#root>

```
interface Loopback0
  ipv4 address 10.0.0.1 255.255.255.255
  ipv6 address fc00:bb00:1::1/128
!
interface Loopback6
  ipv6 address fc00:aa00:1::1/128
!
interface TenGigE0/0/0/8
  ipv6 enable
!
router isis 1
  is-type level-1
  net 49.0000.0000.0001.00
  address-family ipv6 unicast
  metric-style wide
  segment-routing srv6
  locator MAIN
  !
!
!
interface TenGigE0/0/0/8
  point-to-point
```

```

    address-family ipv6 unicast
    !
    !
    !
router bgp 1
  bgp router-id 10.0.0.1
  segment-routing srv6
    locator MAIN
  !
  address-family ipv6 unicast
    segment-routing srv6
      locator MAIN
      alloc mode per-vrf
    !
    network fc00:aa00:1::1/128
  !
  neighbor fc00:bb00:3::1
    remote-as 1
    update-source Loopback0
  address-family ipv6 unicast

```

encapsulation-type srv6

```

    !
    !
segment-routing
  srv6
    encapsulation
      source-address fc00:bb00:1::1
    !
    locators
      locator MAIN
        micro-segment behavior unode psp-usd
        prefix fc00:bb00:1::/48
    !

```

Router R2-configuratie

Router R2 maakt deel uit van het SRv6-domein met een locator van fc00:bb00:2::/48. Het neemt niet deel aan BGP en functioneert als een P-router binnen deze topologie.

```

interface Loopback0
  ipv4 address 10.0.0.2 255.255.255.255
  ipv6 address fc00:bb00:2::1/128
!
interface TenGigE0/0/0/0
  description TO R1
  ipv6 enable
!
interface TenGigE0/0/0/1
  description TO R2
  ipv6 enable
!
router isis 1
  is-type level-1
  net 49.0000.0000.0002.00

```

```

address-family ipv6 unicast
  metric-style wide
  segment-routing srv6
    locator MAIN
  !
!
!
interface TenGigE0/0/0/0
  point-to-point
  address-family ipv6 unicast
  !
!
interface TenGigE0/0/0/1
  point-to-point
  address-family ipv6 unicast
  !
!
!
segment-routing
  srv6
    encapsulation
      source-address fc00:bb00:2::1
    !
    locators
      locator MAIN
        micro-segment behavior unode psp-usd
        prefix fc00:bb00:2::/48
      !

```

Router R3-configuratie

Router R3 maakt deel uit van het SRv6-domein met een locator van fc00:bb00:3::/48. Het heeft BGP IPv6 unicast peering met Router R1, en beide wisselen de IPv6 voorvoegsels van de Loopback 6 interfaces.

```

interface Loopback0
  ipv4 address 10.0.0.3 255.255.255.255
  ipv6 address fc00:bb00:3::1/128
!
interface Loopback6
  ipv6 address fc00:aa00:3::3/128
!
interface TenGigE0/0/0/1
  description T0 R2
  ipv6 enable
!
router isis 1
  is-type level-1
  net 49.0000.0000.0003.00
  address-family ipv6 unicast
    metric-style wide
    segment-routing srv6
      locator MAIN
    !
  !
!

```

```

interface TenGigE0/0/0/1
  point-to-point
  address-family ipv6 unicast
  !
!
!
router bgp 1
  bgp router-id 10.0.0.3
  segment-routing srv6
    locator MAIN
  !
  address-family ipv6 unicast
    segment-routing srv6
      locator MAIN
      alloc mode per-vrf
    !
    network fc00:aa00:3::3/128
  !
  neighbor fc00:bb00:1::1
    remote-as 1
    update-source Loopback0
    address-family ipv6 unicast
      encapsulation-type srv6
    !
  !
segment-routing
  srv6
    encapsulation
      source-address fc00:bb00:3::1
    !
    locators
      locator MAIN
        micro-segment behavior unode psp-usd
        prefix fc00:bb00:3::/48
      !
    !
  !
!
!
!
!

```

Signaleringsstroom van SRv6 SID

In de onderliggende SRv6-infrastructuur heeft elke router linkstatusinformatie in de topologie, die elk zijn SRv6-locator adverteert via het link-state ISIS-protocol. De ISIS-database op R1 toont de locator van alle router die deelneemt aan het SRv6-domein.

```
<#root>
```

```
RP/0/RSP0/CPU0:R1#
```

```
show isis database verbose R1 | include SRv6 Locator
```

```
SRv6 Locator: MT (IPv6 Unicast)
```

```
fc00:bb00:1::/48
```

```
D:0 Metric: 1 Algorithm: 0
```

```
RP/0/RSP0/CPU0:R1#
```

```
show isis database verbose R2 | include SRv6 Locator
```

```
SRv6 Locator: MT (IPv6 Unicast)
```

```
fc00:bb00:2::/48
```

```
D:0 Metric: 0 Algorithm: 0
```

```
RP/0/RSP0/CPU0:R1#
```

```
show isis database verbose R3 | include SRv6 Locator
```

```
SRv6 Locator: MT (IPv6 Unicast)
```

```
fc00:bb00:3::/48
```

```
D:0 Metric: 1 Algorithm: 0
```

Deze SRv6-implementatie ondersteunt de overlay van het GRT-verkeer (Global Routing Table). Wanneer de Global BGP IPv6 unicast overlay service is ingeschakeld op zowel R1 als R3, genereert elke router een nieuwe service SID. Deze service-SID is gekoppeld aan de standaard VRF en maakt gebruik van het Eindpuntgedrag uDT6 in dit scenario. Deze service-SID moet worden uitgewisseld tussen BGP IPv6 unicast-peers om SRv6-forwarding tussen de twee BGP-peers mogelijk te maken. Het volgende gedeelte schetst de stappen van de BGP-signaleringsstroom, beginnend vanaf de triggeruitvoering (inkapselingstype srv6) tot het punt waar SRv6-forwarding is geprogrammeerd op Router R3.

1. Staat voorafgaand aan het inschakelen van SRv6

Voordat SRv6-inkapseling op de IPv6 unicast SAFI voor de BGP-peer wordt ingeschakeld, moet Router R1 BGP IPv6-voorvoegsels met toegewezen service-SID's hebben. Dit gebeurt wanneer 'segment-routing srv6' is ingeschakeld onder de IPv6 unicast global SAFI op R1. De uitvoer toont de lokale SID fc00:bb00:1:e002:: is toegewezen aan alle voorvoegsels onder BGP ipv6 unicast.

<#root>

```
RP/0/RSP0/CPU0:R1#
```

```
show bgp ipv6 unicast local-sids
```

```
BGP router identifier 10.0.0.1, local AS number 1
BGP generic scan interval 60 secs
Non-stop routing is enabled
BGP table state: Active
Table ID: 0xe0800000 RD version: 7
BGP table nexthop route policy:
BGP main routing table version 7
BGP NSR Initial initsync version 7 (Reached)
BGP NSR/ISSU Sync-Group versions 0/0
BGP scan interval 60 secs
```

Status codes: s suppressed, d damped, h history, * valid, > best

```

        i - internal, r RIB-failure, S stale, N Nexthop-discard
Origin codes: i - IGP, e - EGP, ? - incomplete
   Network          Local Sid          Alloc mode   Locator
*> fc00:aa00:1::1/128 fc00:bb00:1:e002:: per-vrf      MAIN
*> ifc00:aa00:3::3/128 NO SRv6 Sid      -           -

Processed 2 prefixes, 2 paths

```

Deze service-SID wordt lokaal geprogrammeerd door het sid_mgr-proces op R1 dat Endpoint-gedrag heeft als uDT6 dat is gekoppeld aan standaard-vrf en eigendom is van bgp. Dit betekent gewoon dat wanneer het R1-ontvangstpakket met het bestemmingsadres overeenkomt met service SID fc00:bb00:1:e002: en het is het laatste segment, de R1 moet de header decapsuleren en het gedecapsuleerde pakket indienen bij FIB-opzoeken van IPv6 standaard vrf-tabel. Dit is volgens RFC8986, die alle SRv6-eindpuntgedrag opsomt. Merk de uitvoer op waar het sid_mgr laat zien en maak de service SID fc00:bb00:1:e002:: en geef deze informatie door aan RIB en uiteindelijk FIB.

<#root>

RP/0/RSP0/CPU0:R1#

show segment-routing srv6 sid all

*** Locator: 'MAIN' ***

SID	Behavior	Context	Owner	Sta
fc00:bb00:1::	uN (PSP/USD)	'default':1	sidmgr	InU
fc00:bb00:1:e001::	uA (PSP/USD)	[Te0/0/0/8, Link-Local]:0	isis-1	InU
fc00:bb00:1:e002::	uDT6	'default'	bgp-1	
InUse Y				

RP/0/RSP0/CPU0:R1#

show segment-routing srv6 sid fc00:bb00:1:e002:: internal

*** Locator: 'MAIN' ***

SID	Behavior	Context	Owner	Sta
fc00:bb00:1:e002::				
uDT6	'default'	bgp-1	InUse Y	
SID Function: 0xe002 SID context: { table-id=0xe0800000 ('default':IPv6/Unicast) } App data: [0000000000000000] Locator: 'MAIN' Allocation type: Dynamic Owner List: 1) Name: bgp-1, Client-ID: 32, Proto-ID: 8, Node-ID: 0, Locator-ID: 5 () Refcount: 1 Flags: 0x0 ()				

Chkpt Obj ID: 0x2f60
TI Object:
Type: Entry
Ptr: 0x140160285526000, Producer ID: 0
Flags:
Generic: 0x0 ()
Specific: 0x0 ()
Modified: Fri Jun 27 16:27:05 EST 2025 (2d01h ago)
Created: Jun 27 16:17:40.796 (2d01h ago)

Event history:
SIDMGR-OPCODE-EVENT-CLASS
Total entries : 4

Event	Time Stamp	S, M
object create	Jun 27 16:17:40.864	1, 0
object delete	Jun 27 16:27:04.320	1, 1
object modify	Jun 27 16:27:04.320	0, 1
object refcount decrement	Jun 27 16:27:04.320	0, 1

RP/0/RSP0/CPU0:R1#

show route ipv6 fc00:bb00:1:e002:: detail

Routing entry for

fc00:bb00:1:e002::/64

Known via

"local-srv6 bgp-1"

, distance 0, metric 0,

SRV6 Endpoint uDT6

, SRv6 Format f3216
Installed Jun 27 16:27:06.040 for 2d01h
Routing Descriptor Blocks
directly connected
Route metric is 0
Label: None
Tunnel ID: None
Binding Label: None
Extended communities count: 0
NHID: 0x0 (Ref: 0)
Route version is 0x15 (21)
No local label
IP Precedence: Not Set
QoS Group ID: Not Set
Flow-tag: Not Set
Fwd-class: Not Set
Route Priority: RIB_PRIORITY_LOCAL (3) SVD Type RIB_SVD_TYPE_LOCAL
Download Priority 0, Download Version 3140327
No advertising protos.

RP/0/RSP0/CPU0:R1#

show cef ipv6 fc00:bb00:1:e002::

fc00:bb00:1:e002::/64, version 3140327,

SRV6 Endpoint uDT6


```
, internal 0x1000001 0x0 (ptr 0x7bb98f54) [1], 0x400 (0x7ba7cfa0), 0x0 (0x7a90d290)
Updated Jun 27 16:27:06.043
Prefix Len 64, traffic index 0, precedence n/a, priority 0
gateway array (0x78e92608) reference count 3, flags 0x0, source rib (7), 0 backups
    [4 type 3 flags 0x8401 (0x78f35598) ext 0x0 (0x0)]
LW-LDI[type=3, refc=1, ptr=0x7ba7cfa0, sh-ldi=0x78f35598]
gateway array update type-time 1 Jun 26 15:54:48.345
LDI Update time Jun 26 15:54:48.349
LW-LDI-TS Jun 27 16:17:42.533
Accounting: Disabled
    via ::/128, 0 dependencies, weight 0, class 0 [flags 0x0]
    path-idx 0 NHID 0x0 [0x781b61e8 0x0]
    next hop ::/128

    Load distribution: 0 (refcount 4)

Hash   OK   Interface           Address
0      Y   recursive          Lookup in table
```

Omdat R1 de SRv6-inkapseling niet heeft ingeschakeld onder zijn BGP ipv6 unicast peer, adverteert R1 deze voorvoegsels in de richting van R3 zonder SRv6 TLV in BGP-update, hoewel R1 lokaal lokale SID's heeft toegewezen.

<#root>

RP/0/RSP0/CPU0:R1#

show bgp ipv6 unicast

```
BGP router identifier 10.0.0.1, local AS number 1
BGP generic scan interval 60 secs
Non-stop routing is enabled
BGP table state: Active
Table ID: 0xe0800000 RD version: 7
BGP table nexthop route policy:
BGP main routing table version 7
BGP NSR Initial initsync version 7 (Reached)
BGP NSR/ISSU Sync-Group versions 0/0
BGP scan interval 60 secs

Status codes: s suppressed, d damped, h history, * valid, > best
                i - internal, r RIB-failure, S stale, N Nexthop-discard
Origin codes: i - IGP, e - EGP, ? - incomplete
   Network          Next Hop           Metric LocPrf Weight Path
*> fc00:aa00:1::1/128 ::                0          32768 i
*> ifc00:aa00:3::3/128 fc00:bb00:3::1    0          100    0 i
```

Processed 2 prefixes, 2 paths

RP/0/RSP0/CPU0:R1#

show bgp ipv6 unicast advertised neighbor fc00:bb00:3::1

```
fc00:aa00:1::1/128 is advertised to fc00:bb00:3::1
Path info:
```

```
neighbor: Local          neighbor router id: 10.0.0.1
valid local best
Received Path ID 0, Local Path ID 1, version 4
Attributes after inbound policy was applied:
  next hop: ::
  MET ORG AS
  origin: IGP metric: 0
  aspath:
Attributes after outbound policy was applied:
  next hop: fc00:bb00:1::1
  MET ORG AS
  origin: IGP metric: 0
  aspath:
```

Router R3 ontvangt de update van router R1 zonder SID. R3 installeert de voorvoegsels die van R1 naar de RIB- en FIB-tabel worden ontvangen zonder een SRv6-header.

<#root>

RP/0/RSP0/CPU0:R3#

show bgp ipv6 unicast received-sids

```
BGP router identifier 10.0.0.3, local AS number 1
BGP generic scan interval 60 secs
Non-stop routing is enabled
BGP table state: Active
Table ID: 0xe0800000 RD version: 44
BGP table nexthop route policy:
BGP main routing table version 44
BGP NSR Initial initsync version 6 (Reached)
BGP NSR/ISSU Sync-Group versions 0/0
BGP scan interval 60 secs
```

```
Status codes: s suppressed, d damped, h history, * valid, > best
               i - internal, r RIB-failure, S stale, N Nexthop-discard
```

```
Origin codes: i - IGP, e - EGP, ? - incomplete
```

Network	Next Hop	Received Sid
*>fc00:aa00:1::1/128	fc00:bb00:1::1	NO SRv6 Sid
*> fc00:aa00:3::3/128	::	NO SRv6 Sid

```
Processed 2 prefixes, 2 paths
```

RP/0/RSP0/CPU0:R3#

show route ipv6 unicast fc00:aa00:1::1/128 detail

```
Routing entry for fc00:aa00:1::1/128
  Known via "bgp 1", distance 200, metric 0, type internal
  Installed Jun  8 17:34:24.126 for 00:12:38
  Routing Descriptor Blocks
    fc00:bb00:1::1, from fc00:bb00:1::1
      Route metric is 0
      Label: None
      Tunnel ID: None
```

```

Binding Label: None
Extended communities count: 0
NHID: 0x0 (Ref: 0)
Path Grouping ID: 1
Route version is 0x1d (29)
No local label
IP Precedence: Not Set
QoS Group ID: Not Set
Flow-tag: Not Set
Fwd-class: Not Set
Route Priority: RIB_PRIORITY_RECURSIVE (12) SVD Type RIB_SVD_TYPE_LOCAL
Download Priority 4, Download Version 162
No advertising protos.

```

RP/0/RSP0/CPU0:R3#

show cef ipv6 fc00:aa00:1::1/128

```

fc00:aa00:1::1/128, version 162, internal 0x5000001 0x40 (ptr 0x7941f0f4) [1], 0x0 (0x0), 0x0 (0x0)
Updated Jun  8 17:34:24.128
Prefix Len 128, traffic index 0, precedence n/a, priority 4
gateway array (0x78eac518) reference count 1, flags 0x2010, source rib (7), 0 backups
    [1 type 3 flags 0x48441 (0x78f4f538) ext 0x0 (0x0)]
LW-LDI[type=0, refc=0, ptr=0x0, sh-ldi=0x0]
gateway array update type-time 1 Jun  8 17:34:24.129
LDI Update time Jun  8 17:34:24.129

```

```

Level 1 - Load distribution: 0
[0] via fc00:bb00:1::1/128, recursive

```

```

Accounting: Disabled
via fc00:bb00:1::1/128, 5 dependencies, recursive [flags 0x6000]
path-idx 0 NHID 0x0 [0x7941edb4 0x0]
next hop fc00:bb00:1::1/128 via fc00:bb00:1::/48


```

Load distribution: 0 (refcount 1)

Hash	OK	Interface	Address
0	Y	TenGigE0/0/0/1	remote

2. Inkapseling SRv6 inschakelen

Het inschakelen van SRv6-inkapseling zorgt ervoor dat R1 een BGP Update-bericht naar zijn peer stuurt met attribuuttype 40, dat wordt gebruikt in Segment Routing om een BGP-voorvoegsel met een specifieke Segment Routing Identifier (SID) te adverteren. Router R1 verzendt de UPDATE naar R3 voor het IPv6-voorvoegsel fc00:bb00:3:1 (Stap 1) met de bijbehorende SID fc00:bb00:1:e002:. Na ontvangst van de UPDATE werkt Router R3 zijn BGP IPv6 unicasttabel bij (Stap 2) en werkt vervolgens zijn RIB- en FIB-tabellen bij (Stap 3). De figuur 2 illustreert de BGP-signaleringsstroom samen met de bijbehorende stappen.

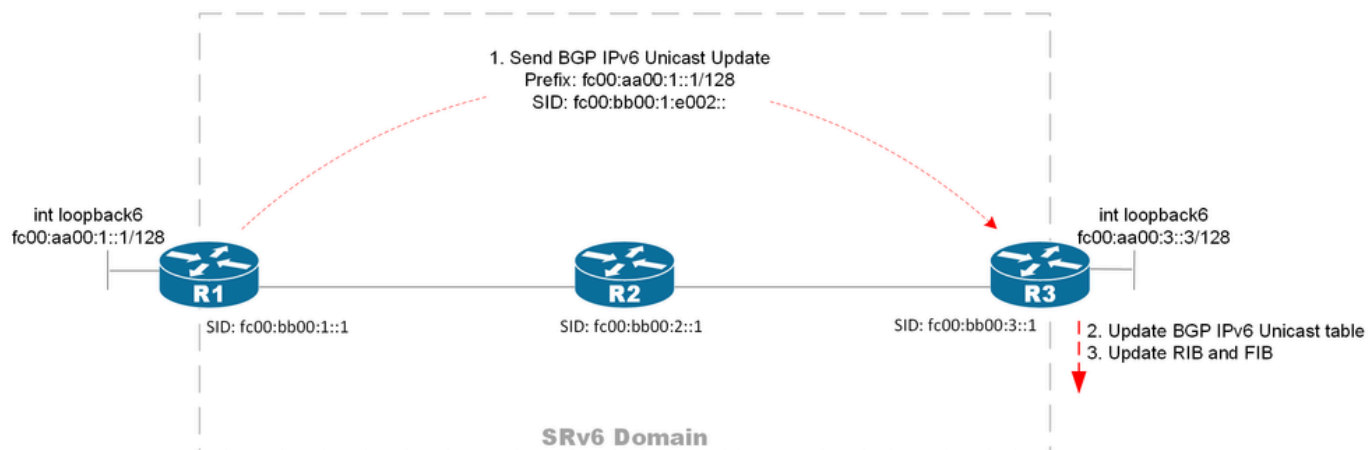

Afbeelding 2. BGP-signaleringsstroom na inkapseling srv6 inschakelen

De uitvoer geeft het BGP-debuglogboek onmiddellijk weer nadat SRv6-inkapseling op de R3-peer is ingeschakeld, waaruit blijkt dat R1 een BGP-updatebericht naar R3 stuurt:

```
router bgp 1
 neighbor fc00:bb00:3::1
  address-family ipv6 unicast
  encapsulation-type srv6
!
!
!
end
```

```
RP/0/RSP0/CPU0:R1(config)#commit
```

```
bgp[1100]: [default-upd] (ip6u): Added reference to table TBL:default (2/1) refcount 9
bgp[1100]: [default-upd] (ip6u): Created update group for table TBL:default (2/1), index 0.3 neighbor f
bgp[1100]: [default-upd] (ip6u): Removed neighbor fc00:bb00:3::1 from update group 0.2 for IPv6 Unicast
bgp[1100]: [default-upd] (ip6u): Removing neighbor fc00:bb00:3::1 from update filter-group 0.2 in IPv6 U
bgp[1100]: [default-upd]: Enqueue Wdw: Nbr:fc00:bb00:3::1(5) Wdw:0 Del:0 Pending:0 RefreshPending:0
bgp[1100]: [default-upd]: Deleting filter-group 0.2 in TBL:default (2/1) refcount 2
bgp[1100]: [default-upd] (ip6u): Deleted update group 0.2
bgp[1100]: [default-upd] (ip6u): Added reference to table TBL:default (2/1) refcount 10
bgp[1100]: [default-upd]: Compute RT set for vrf default neighbor fc00:bb00:3::1 from old filter-group
bgp[1100]: [default-upd]: Allocating filter-group 0.3 in TBL:default (2/1)
bgp[1100]: [default-upd] (ip6u): Added reference to table TBL:default (2/1) refcount 11
bgp[1100]: [default-upd] (ip6u): Adding vrf default neighbor fc00:bb00:3::1 to new filter-group 0.3 in
bgp[1100]: [default-upd] (ip6u): Added vrf default neighbor fc00:bb00:3::1 to update filter-group 0.3 i
bgp[1100]: [default-upd] (ip6u): Added neighbor fc00:bb00:3::1 to update sub-group 0.1 in IPv6 Unicast
bgp[1100]: [default-upd] (ip6u): Started updgrp timer for updgrp 0.3:: delay=0.010, delaytype=0
bgp[1100]: [default-upd] (ip6u): Removed reference to Table TBL:default (2/1) refcount 9
bgp[1100]: [default-upd] (ip6u): Starting updgen walk for updgrp 0.3:: targetver=27: tblver=27, labelv
bgp[1100]: [default-upd] (ip6u): Computing updates for update sub-group 0.1 (Regular)
bgp[1100]: [default-upd] (ip6u): bgp_srv6_execute_sid_alloc_mode_policy: Use default SRv6 alloc mode pe
bgp[1100]: [default-upd]: table-attr walk for table TBL:default (2/1), resume version 0, subgrp version
bgp[1100]: [default-upd] (ip6u): process UPDATE for: tbl=TBL:default (2/1), afi=5: ug=0.3, (Regular), p
bgp[1100]: [default-upd] (ip6u): Ran 'internal' policy '(null)', result 'TRUE', ptr 0x7f4584005f30, use
bgp[1100]: [default-upd] (ip6u):      : tbl=TBL:default (2/1), afi=5: ug=0.3, sg=0.1, ugf1=0x00104183: n
bgp[1100]: [default-upd] (ip6u):      <NH&LABEL-SEL>: tbl=TBL:default (2/1), afi=5: ug=0.3, sg=0.1, ugf1
bgp[1100]: [default-upd] (ip6u):      <nh&label-sel>:: labselectdone=1, labselectdone=0, updlab=1048577(0
bgp[1100]: [default-upd]: Comm-lib: Assigned ID (0x1d000008) for elem-type PREFIX_SID SRV6_L3SVC
bgp[1100]: [default-upd]: Comm-lib: Assigned ID (0x9000000c) for elem-type Attribute
bgp[1100]: [default-upd] (ip6u): Permit UPDATE to filter-group 0.3 (Regular, pelem Regular) for fc00:aa
```

```

bgp[1100]: [default-upd] (ip6u): Sending UPDATE message(0x0x7f4589fd4ba4) to sub-group 0.1 (Regular, pe
bgp[1100]: [default-upd] (ip6u): origin i, path , metric 0, localpref 100, Prefix-SID attribute 0x05002
bgp[1100]: [default-upd] (ip6u): Created msg elem 0x0x7f4589e3afc8 (pointing to message 0x0x7f4589fd4ba
bgp[1100]: [default-upd] (ip6u): process UPDATE for: tbl=TBL:default (2/1), afi=5: ug=0.3, (Regular), p
bgp[1100]: [default-upd] (ip6u): No unreachable (not advertising to sender: fc00:bb00:3::1) sent to sub
bgp[1100]: [default-upd] (ip6u): Generated 1 updates for update sub-group 0.1 (average size = 126 bytes
bgp[1100]: [default-upd] (ip6u): Updates replicated to neighbor fc00:bb00:3::1
bgp[1100]: [default-iowt]: fc00:bb00:3::1 send UPDATE length (incl. header) 126
bgp[1100]: [default-iowt]: Send message dump for fc00:bb00:3::1:
bgp[1100]: [default-iowt]: ffff ffff ffff ffff ffff ffff ffff ffff
bgp[1100]: [default-iowt]: 007e 0200 0000 6790 0e00 2600 0201 10fc
bgp[1100]: [default-iowt]: 00bb 0000 0100 0000 0000 0000 0000 0100
bgp[1100]: [default-iowt]: 80fc 00aa 0000 0100 0000 0000 0000 0000
bgp[1100]: [default-iowt]: 0140 0101 0040 0200 8004 0400 0000 0040
bgp[1100]: [default-iowt]: 0504 0000 0064 c028 2505 0022 0001 001e
bgp[1100]: [default-iowt]: 00fc 00bb 0000 01e0 0200 0000 0000 0000
bgp[1100]: [default-iowt]: 0000 003e 0001 0006 2010 1000 0000
bgp[1100]: [default-iowt]: bgp_io_nbr_add_version: New ver: nbr=fc00:bb00:3::1, io_wr_txsn=58992, acksn
bgp[1100]: [default-iowt]: bgp_io_nbr_derive_acked_version: nbr=fc00:bb00:3::1, io_wr_txsn=58992, acksn
bgp[1100]: [default-iowt]: fc00:bb00:3::1 (afi:4) advancedpeer_acked_version to 10refresh peer acked ve
bgp[1100]: [default-iowt]: fc00:bb00:3::1 (afi:5) received ack for version 27
bgp[1100]: [default-iowt]: bgp_write_list_tonet: IO_SENDMSG: nbr=fc00:bb00:3::1, fd=530: total=1, send-
bgp[1100]: [default-iowt] (ip6u): Deleting msg elem 0x0x7f4589e3afc8 (message 0x0x7f4589fd4ba4), for fi
bgp[1100]: [default-iowt] (ip6u): Deleting message 0x0x7f4589fd4ba4, from subgroup 0.1
bgp[1100]: [default-iowt]: Keepalive timer started for fc00:bb00:3::1(loc 10): last 529293 this 529308
bgp[1100]: [default-iowt]: bgp write for afi 4 for neighbor fc00:bb00:3::1 (fd 530)
bgp[1100]: [default-iowt]: bgp write for afi 5 for neighbor fc00:bb00:3::1 (fd 530)
bgp[1100]: [default-iowt]: bgp_io_nbr_derive_acked_version: nbr=fc00:bb00:3::1, io_wr_txsn=58992, acksn
bgp[1100]: [default-iowt]: fc00:bb00:3::1 (afi:4) advancedpeer_acked_version to 10refresh peer acked ve
bgp[1100]: [default-iowt]: fc00:bb00:3::1 (afi:5) advancedpeer_acked_version to 27refresh peer acked ve
bgp[1100]: [default-iowt]: bgp_io_write_nbr_ver_timer_process: nbr_ver_timer handler: Walk complete: nb

```

De uitvoer geeft de BGP-tracering op R1 weer:

```

default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:7799: trying to find update group for nbr fc00:bb00:3
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:6752: created update group for table TBL:default (2/1
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:2039: Filter-group op (Filter-group Rm Nbr) Tbl/Nbr(A
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:1501: Filter-group op (Delete) Tbl/Nbr(TBL:default (2
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:6798: Delete update group for table TBL:default (2/1)
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:2181: Filter-group op (Filter-group Compute Nbr RT) T
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:1411: Filter-group op (Alloc) Tbl/Nbr(TBL:default (2/
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:2725: Filter-group op (Filter-group Add Nbr new) Tbl/
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:2751: created filtergrp 3 for vrf default nbr fc00:bb
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:4473: Created subgrp:1(0x840070a0) refr:0 for nbr fc0
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:6935: added vrf default nbr fc00:bb00:3::1 to update
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:3088: TBL:default (2/1) free subgrp SG:2 subgrp:0x840
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:1316: Update gen Start bit operation Filtergrp delete
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:11342: Updgen - TBL:default (2/1) UG: 0.3 SG: 0.1 msg
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:11344: Updgen - pfx: [tot] adv/wdn/sup/skp/be[2] 1/0
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:11351: Updgen - fpx: wdn/skp[0/0] ver: 0 -> 27 res ve
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:4009: Updgen - UG: 3 FG: 3 afi:5 msg: 1 ver -> 27
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t32561 [UPD]:4011: pfx: adv/wdn/sup/skp 1/0/0/1
default-bgp/spkr-tr2-common 0/RSP0/CPU0 t32558 [COMMON]:638: vrf default nbr fc00:bb00:3::1, set peer a
default-bgp/spkr-tr2-gen 0/RSP0/CPU0 t32501 [GEN]:617: vrf default nbr 2000:0:0:1::1, old state 1, new

```

Het gedecodeerde BGP UPDATE-bericht toont het attribuuttype 40 en TLV Type 5, die de service SID fc00:bb00:1:e002: bevatten.

Attribute

```
ATTRIBUTE FLAG:      0xC0
ATTRIBUTE FLAG binary: 11000000
    Bit 0, the Optional bit, is 1 so this is an optional attribute
    Bit 1, the Transitive bit, is 1 so this is a transitive attribute
    Bit 2, the Partial bit, is not set
    Bit 3, the Extended Length Bit, is 0 so the length field is 1 byte
    The lower-order four bits of the Attribute Flag are unused and are set to 0000

ATTRIBUTE TYPE:      0x28      - 40
ATTRIBUTE LENGTH:    0x25      - 37 bytes
ATTRIBUTE CONTENT:    0x0500220001001E00FC00BB000001E00200000000000000000003E00010006201010000000

    BGP Prefix-SID:
    Type:            5 (0x05) - SRv6 L3 Service
    Length:          34 - 0x0022
    Value:           0x0001001E00FC00BB000001E00200000000000000000003E00010006201010000000
    Reserved:        0x00
    Sub Type:        1 (0x01)
    Sub Length:      30 (0x001E)
    SRv6 SID = FC00:BB00:0001:E002:0000:0000:0000:0000
    SID Flags:       0 (0x00)
    Endpoint Behavior: 62 (0x003E)
    Reserved2 :      0 (0x00)
    SRv6 SID Optional Type: 1 (0x01)
    SRv6 SID Optional Len: 6 (0x0006)
    SRv6 SID Optional Value: 35253360001024 (0x201010000000)
```

Het volledig gedecodeerde BGP UPDATE-bericht ziet er als volgt uit:

Message #1 - 126 bytes

```
FF FF FF FF  FF FF FF FF  FF FF FF FF  FF FF FF FF
00 7E 02 00  00 00 67 90  0E 00 26 00  02 01 10 FC
00 BB 00 00  01 00 00 00  00 00 00 00  00 00 01 00
80 FC 00 AA  00 00 01 00  00 00 00 00  00 00 00 00
01 40 01 01  00 40 02 00  80 04 04 00  00 00 00 40
05 04 00 00  00 64 C0 28  25 05 00 22  00 01 00 1E
00 FC 00 BB  00 00 01 E0  02 00 00 00  00 00 00 00
00 00 00 3E  00 01 00 06  20 10 10 00  00 00
```

```
BGP Marker:      0xFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF
BGP Length:      0x007E      - 126 bytes
BGP Type:        0x02      - UPDATE
```

```
UPDATE
UNFEASIBLE ROUTES LENGTH:    0x0000      - 0 bytes
TOTAL PATH ATTRIBUTES LENGTH: 0x0067      - 103 bytes
```

Attribute

```
ATTRIBUTE FLAG:      0x90
ATTRIBUTE FLAG binary: 10010000
```


Bit 1, the Transitive bit, is 0 so this is a non-transitive attribute
Bit 2, the Partial bit, is not set
Bit 3, the Extended Length Bit, is 0 so the length field is 1 byte
The lower-order four bits of the Attribute Flag are unused and are set to 0000

ATTRIBUTE TYPE: 0x04 - 4
ATTRIBUTE LENGTH: 0x04 - 4 bytes
ATTRIBUTE CONTENT: 0x00000000 - 0

Attribute

ATTRIBUTE FLAG: 0x40
ATTRIBUTE FLAG binary: 01000000
Bit 0, the Optional bit, is 0 so this is a well-known attribute
Bit 1, the Transitive bit, is 1 so this is a transitive attribute
Bit 2, the Partial bit, is not set
Bit 3, the Extended Length Bit, is 0 so the length field is 1 byte
The lower-order four bits of the Attribute Flag are unused and are set to 0000

ATTRIBUTE TYPE: 0x05 - 5
ATTRIBUTE LENGTH: 0x04 - 4 bytes
ATTRIBUTE CONTENT: 0x00000064 - 100

Attribute

ATTRIBUTE FLAG: 0xC0
ATTRIBUTE FLAG binary: 11000000
Bit 0, the Optional bit, is 1 so this is an optional attribute
Bit 1, the Transitive bit, is 1 so this is a transitive attribute
Bit 2, the Partial bit, is not set
Bit 3, the Extended Length Bit, is 0 so the length field is 1 byte
The lower-order four bits of the Attribute Flag are unused and are set to 0000

ATTRIBUTE TYPE: 0x28 - 40
ATTRIBUTE LENGTH: 0x25 - 37 bytes
ATTRIBUTE CONTENT: 0x0500220001001E00FC00BB000001E00200000000000000000003E00010006201010000000

BGP Prefix-SID:

Type: 5 (0x05) - SRv6 L3 Service
Length: 34 - 0x0022
Value: 0x0001001E00FC00BB000001E00200000000000000000003E00010006201010000000
Reserved: 0x00
Sub Type: 1 (0x01)
Sub Length: 30 (0x001E)
SRv6 SID = FC00:BB00:0001:E002:0000:0000:0000:0000
SID Flags: 0 (0x00)
Endpoint Behavior: 62 (0x003E)
Reserved2 : 0 (0x00)
SRv6 SID Optional Type: 1 (0x01)
SRv6 SID Optional Len: 6 (0x0006)
SRv6 SID Optional Value: 35253360001024 (0x201010000000)

NLRI

NLRI LENGTH: UPDATE Length - 23 - TOTAL PATH ATTRIBUTES LENGTH - UNFEASIBLE ROUTES LENGTH

NLRI LENGTH: 126 - 23 - 103 - 0
NLRI LENGTH: 0 bytes

3. R3 ontvangt de BGP-update en installeert deze in BGP IPv6 Unicast Table

Router R3 ontvangt een BGP-update van R1, die kan worden waargenomen door BGP-debuggen op R3 in te schakelen. Het ontvangen BGP-updatepakket moet overeenkomen met het pakket dat door R1 is verzonden, zoals wordt weergegeven in de foutopsporingsuitvoer.

```
bgp[1100]: [default-rtr]: UPDATE from fc00:bb00:1::1 contains nh fc00:bb00:1::1/128, gw_afi 5, flags 0x
bgp[1100]: [default-rtr]: NH-Validate-Create: addr=fc00:bb00:1::1/128, len=16, nlrifi=5, nbr=fc00:bb00:1::1/128
bgp[1100]: [default-rtr]: --bgp4_rcv_attributes--: END: nbr=fc00:bb00:1::1: msg=0x0x7fc420108bdc/126,
bgp[1100]: [default-rtr]: Comm-lib: Assigned ID (0x1d0000ac) for elem-type PREFIX_SID SRV6_L3SVC
bgp[1100]: [default-rtr]: Comm-lib: Assigned ID (0x900000de) for elem-type Attribute
bgp[1100]: [default-rtr] (ip6u): Received UPDATE from fc00:bb00:1::1 with attributes:
bgp[1100]: [default-rtr] (ip6u): nexthop fc00:bb00:1::1/128, origin i, localpref 100, metric 0
bgp[1100]: [default-rtr] (ip6u): Received prefix fc00:aa00:1::1/128 (path ID: none) from fc00:bb00:1::1
bgp[1100]: [default-rtr] (ip6u): Handling OCRIB attrs while relacing path 0x7fc3e1be61d8. Old oc attr (
bgp[1100]: [default-rtr]: bgp_bmp_table_path_update_cb: Operation: 0x1, Inbound Post-Policy Route Mon i
bgp[1100]: [default-rtr] (ip6u): Done modify path (old tlv size=0 new tlv size=0) for net=fc00:aa00:1::1/128
bgp[1100]: [default-rtr]: bgp_set_path_metric:8712 afi 5 net fc00:aa00:1::1/128 path 0x7fc3e1be61d8 nh
bgp[1100]: [default-rtr] (ip6u): bestpath: (full bp 1) start for net=fc00:aa00:1::1/128, nver=2000371,
bgp[1100]: [default-rtr] (ip6u): bestpath: (full 1) calculated for net=fc00:aa00:1::1/128, nver=2000371
bgp[1100]: [default-rtr] (ip6u): bestpath: change for net=fc00:aa00:1::1/128, nver=2000371, nfl=0x000003
bgp[1100]: [default-rtr] (ip6u): bestpath: update flags for net=fc00:aa00:1::1/128, nver=2000371, nfl=0
bgp[1100]: [default-rtr] (ip6u): bestpath: modified path: net=fc00:aa00:1::1/128, nver=2000371, nfl=0x0
bgp[1100]: [default-rtr] (ip6u): bgp_srv6_get_alloc_mode_locator_from_policy: Use default SRv6 alloc mo
bgp[1100]: [default-rtr] (ip6u): bestpath: complete for net=fc00:aa00:1::1/128, nver=2000371, nfl=0x0000
bgp[1100]: [default-rtr]: Received UPDATE from fc00:bb00:1::1 (length incl. header = 126)
bgp[1100]: [default-rtr]: Receive message dump for fc00:bb00:1::1:
bgp[1100]: [default-rtr]: ffff ffff ffff ffff ffff ffff ffff ffff
bgp[1100]: [default-rtr]: 007e 0200 0000 6790 0e00 2600 0201 10fc
bgp[1100]: [default-rtr]: 00bb 0000 0100 0000 0000 0000 0000 0100
bgp[1100]: [default-rtr]: 80fc 00aa 0000 0100 0000 0000 0000 0000
bgp[1100]: [default-rtr]: 0140 0101 0040 0200 8004 0400 0000 0040
bgp[1100]: [default-rtr]: 0504 0000 0064 c028 2505 0022 0001 001e
bgp[1100]: [default-rtr]: 00fc 00bb 0000 01e0 0200 0000 0000 0000
bgp[1100]: [default-rtr]: 0000 003e 0001 0006 2010 1000 0000
bgp[1100]: [default-rtr]: Enabling read from: fc00:bb00:1::1 readset: 1 msgcount: 0
bgp[1100]: [default-iowt]: bgp write for afi 4 for neighbor fc00:bb00:1::1 (fd 516)
bgp[1100]: [default-iowt]: bgp write for afi 5 for neighbor fc00:bb00:1::1 (fd 516)
bgp[1100]: [default-imp] (ip6u): START import walk from 2000371 to 2000372 skip_walk 1
bgp[1100]: [default-rib2] (ip6u): RIB thread triggered for versioned walk: current version 2000371, ack
bgp[1100]: [default-rib2] (ip6u): RNH rib opaque update for (IPv6 Unicast)
bgp[1100]: [default-rib2] (ip6u): RIB thread triggered for RNH walk for nh table(IPv6 Unicast): current
bgp[1100]: [default-lbl] (ip6u): Label update triggered: current version 2000371, target version 200037
bgp[1100]: [default-lbl]: Table: TBL:default (2/1) bgp_label_srv6_sid_config_release: label_sid_need_ev
bgp[1100]: [default-lbl]: uSID WLIB allocation is (LIB Default)
bgp[1100]: [default-lbl]: Table: TBL:default (2/1) bgp_label_thread_walk_type: rd:0x7fc3e1efbf30(ALLzer
bgp[1100]: [default-lbl] (ip6u): rd:0x7fc3e1efbf30 sid_walk:1 label_walk:0
bgp[1100]: [default-lbl]: uSID WLIB allocation is (LIB Default)
bgp[1100]: [default-upd] (vpn4u): Started updgrp timer for updgrp 0.1:: delay=0.010, delaytype=0
bgp[1100]: [default-lbl] (ip6u): SRv6 SID process for net: TBL:default (2/1)fc00:aa00:1::1/128(SID N) e
bgp[1100]: [default-lbl] (ip6u): SRv6 SID process for net: TBL:default (2/1)fc00:aa00:1::1/128 point 1
bgp[1100]: [default-lbl]: uSID WLIB allocation is (LIB Default)
bgp[1100]: [default-lbl] (ip6u): Label update run from 2000371 target label version 2000372, rib version
```

```

bgp[1100]: [default-lbl] (ip6u): Wake up rib thread, label version 2000372, rib version 2000371, bgp ta
bgp[1100]: [default-rib2] (ip6u): RIB thread triggered for versioned walk: current version 2000371, ack
bgp[1100]: [default-rib2] (ip6u): RNH rib opaque update for (IPv6 Unicast)
bgp[1100]: [default-rib2] (ip6u): RIB thread triggered for RNH walk for nh table(IPv6 Unicast): current
bgp[1100]: [default-rib2] (ip6u): Rib Batch-buf Route ADD: table=TBL:default (2/1), tableid=0xe0800000,
bgp[1100]: [default-rib2] (ip6u): Revise route batch: installing fc00:aa00:1::1/128 with next hop fc00:
bgp[1100]: [default-rib2] (ip6u): [0]: Rib Batch-buf Path ADD: table=TBL:default (2/1), net=fc00:aa00:1
bgp[1100]: [default-rib2] (ip6u): Sending convergence info for IPv6 Unicast - not converged, version: 0
bgp[1100]: [default-upd] (ip6u): Started updgrp timer for updgrp 0.1:: delay=0.010, delaytype=0
bgp[1100]: [default-rib2] (ip6u): vrf default: RIB update run to 2000372: installed 0, modified 1, skip
bgp[1100]: [default-rib2] (ip6u): RIB thread finished versioned walk: table version 2000372, acked tabl
bgp[1100]: [default-upd] (vpn4u): Starting updgen walk for updgrp 0.1:: targetver=463: tblver=463, lab
bgp[1100]: [default-upd] (ip6u): Starting updgen walk for updgrp 0.1:: targetver=2000372: tblver=20003
bgp[1100]: [default-upd] (ip6u): Computing updates for update sub-group 0.1 (Regular)
bgp[1100]: [default-upd] (ip6u): bgp_srv6_execute_sid_alloc_mode_policy: Use default SRv6 alloc mode pe
bgp[1100]: [default-upd]: table-attr walk for table TBL:default (2/1), resume version 0, subgrp version
bgp[1100]: [default-upd] (ip6u): process UPDATE for: tbl=TBL:default (2/1), afi=5: ug=0.1, (Regular), p
bgp[1100]: [default-upd] (ip6u): No unreachable (not advertising to sender: fc00:bb00:1::1) sent to sub

```

Router R3 genereert een BGP-trace die overeenkomt met de updateverwerking van R1, wat uiteindelijk resulteert in R3 die de BGP IPv6-unicasttabel bijwerkt. Deze update, die BGP-attribuuttype 40 bevat, omvat het installeren van de ontvangen SID's samen met de bijbehorende BGP IPv6 unicast-voorvoegsels van R1.

```

RP/0/RSP0/CPU0:R3#show bgp trace
default-bgp/spkr-tr2-imp 0/RSP0/CPU0 t16100 [IMPORT]:6661: Skipping Import walk: import ver 2000371 ->
default-bgp/spkr-tr2-rib 0/RSP0/CPU0 t30391 [RIB]:17177: RIB walk for afi IPv6 Unicast: target version
default-bgp/spkr-tr2-label 0/RSP0/CPU0 t16061 [LABEL]:8505: label walk afi:IPv6 Unicast, lbl ver 200037
default-bgp/spkr-tr2-label 0/RSP0/CPU0 t16061 [LABEL]:8510: label walk afi:IPv6 Unicast, lbl ver 200037
default-bgp/spkr-tr2-rib 0/RSP0/CPU0 t30391 [RIB]:17177: RIB walk for afi IPv6 Unicast: target version
default-bgp/spkr-tr2-rib 0/RSP0/CPU0 t30391 [RIB]:14681: send converge to RIB, afi IPv6 Unicast, tablei
default-bgp/spkr-tr2-rib 0/RSP0/CPU0 t30391 [RIB]:15892: RIB(default:v6u): ver 2000371 -> 2000372 :pfx
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t16101 [UPD]:11342: Updgen - TBL:default (2/1) UG: 0.1 SG: 0.1 msg
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t16101 [UPD]:11344: Updgen - pfx: [tot] adv/wdn/sup/skp/be[1] 0/0
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t16101 [UPD]:11351: Updgen - fpx: wdn/skp[0/0] ver: 2000371 -> 200
default-bgp/spkr-tr2-common 0/RSP0/CPU0 t16101 [COMMON]:3628: vrf default nbr fc00:bb00:1::1, set peer
default-bgp/spkr-tr2-upd 0/RSP0/CPU0 t16101 [UPD]:11663: Updgen - Skip EoR for Tbl:(TBL:default (2/1))

```

<#root>

RP/0/RSP0/CPU0:R3#

show bgp ipv6 unicast received-sids

```

BGP router identifier 10.0.0.3, local AS number 1
BGP generic scan interval 60 secs
Non-stop routing is enabled
BGP table state: Active
Table ID: 0xe0800000 RD version: 46
BGP table nexthop route policy:
BGP main routing table version 46
BGP NSR Initial initsync version 6 (Reached)
BGP NSR/ISSU Sync-Group versions 0/0

```

BGP scan interval 60 secs

Status codes: s suppressed, d damped, h history, * valid, > best

i - internal, r RIB-failure, S stale, N Nexthop-discard

Origin codes: i - IGP, e - EGP, ? - incomplete

Network	Next Hop	Received Sid
*>ifc00:aa00:1::1/128	fc00:bb00:1::1	

fc00:bb00:1:e002::

*> fc00:aa00:3::3/128 ::	NO SRv6 Sid
--------------------------	-------------

Processed 2 prefixes, 2 paths

4. R3 installeer de RIB en FIB

Uiteindelijk installeert R3 de RIB en FIB om het signaleringsproces te voltooien. R3 fungeert dan als SRv6 Headend met SID-lijst fc00:bb00:1:e002:. Deze ingangen R1 fungeert als SRv6 Headend met inkapseling in een SR-beleid, afgekort als H.Encaps (RFC 8986, sectie 5.1). Dit gedrag omvat het pakket in een IPv6-header, waarbij een segmentlijst wordt opgelegd en SRH wordt toegevoegd indien nodig. In dit geval is het niet nodig om SRH toe te voegen, omdat er slechts één segment is. Het pakket wordt verzonden met het bestemmingsadres fc00:bb00:1:e002::, dat is de service-SID op R1 met gedrag SRv6 Endpoint UDT6.

<#root>

RP/0/RSP0/CPU0:R3#

show route ipv6 fc00:aa00:1::1/128 detail

Routing entry for fc00:aa00:1::1/128

Known via "bgp 1", distance 200, metric 0, type internal

Installed Jun 8 17:52:31.546 for 00:53:55

Routing Descriptor Blocks

fc00:bb00:1::1, from fc00:bb00:1::1

Route metric is 0

Label: None

Tunnel ID: None

Binding Label: None

Extended communities count: 0

NHID: 0x0 (Ref: 0)

Path Grouping ID: 1

SRv6 Headend: H.Encaps.Red [f3216], SID-list {fc00:bb00:1:e002::}

Route version is 0x1f (31)

No local label

IP Precedence: Not Set

QoS Group ID: Not Set

Flow-tag: Not Set

Fwd-class: Not Set

Route Priority: RIB_PRIORITY_RECURSIVE (12) SVD Type RIB_SVD_TYPE_LOCAL

Download Priority 4, Download Version 166

No advertising protos.

RP/0/RSP0/CPU0:R3#

show cef ipv6 fc00:aa00:1::1/128

fc00:aa00:1::1/128, version 166,

SRv6 Headend

, internal 0x5000001 0x40 (ptr 0x7941f0f4) [1], 0x0 (0x0), 0x0 (0x7ad58368)
Updated Jun 8 17:52:31.551
Prefix Len 128, traffic index 0, precedence n/a, priority 4
gateway array (0x78eac428) reference count 1, flags 0x2010, source rib (7), 0 backups
[1 type 3 flags 0x48441 (0x78f4f4d8) ext 0x0 (0x0)]
LW-LDI[type=0, refc=0, ptr=0x0, sh-ldi=0x0]
gateway array update type-time 1 Jun 8 17:52:31.551
LDI Update time Jun 8 17:52:31.551

Level 1 - Load distribution: 0
[0] via fc00:bb00:1::/128, recursive


Accounting: Disabled
via fc00:bb00:1::/128, 5 dependencies, recursive [flags 0x6000]
path-idx 0 NHID 0x0 [0x7941edb4 0x0]
next hop fc00:bb00:1::/128 via fc00:bb00:1::/48

SRv6 H.Encaps.Red SID-list {fc00:bb00:1:e002::}

Load distribution: 0 (refcount 1)

Hash	OK	Interface	Address
0	Y	TenGigE0/0/0/1	remote

In afbeelding 4 wordt het pakketformaat weergegeven wanneer router R3 (fc00:aa00:3:3) ping R1 (fc00:aa00:1:1).

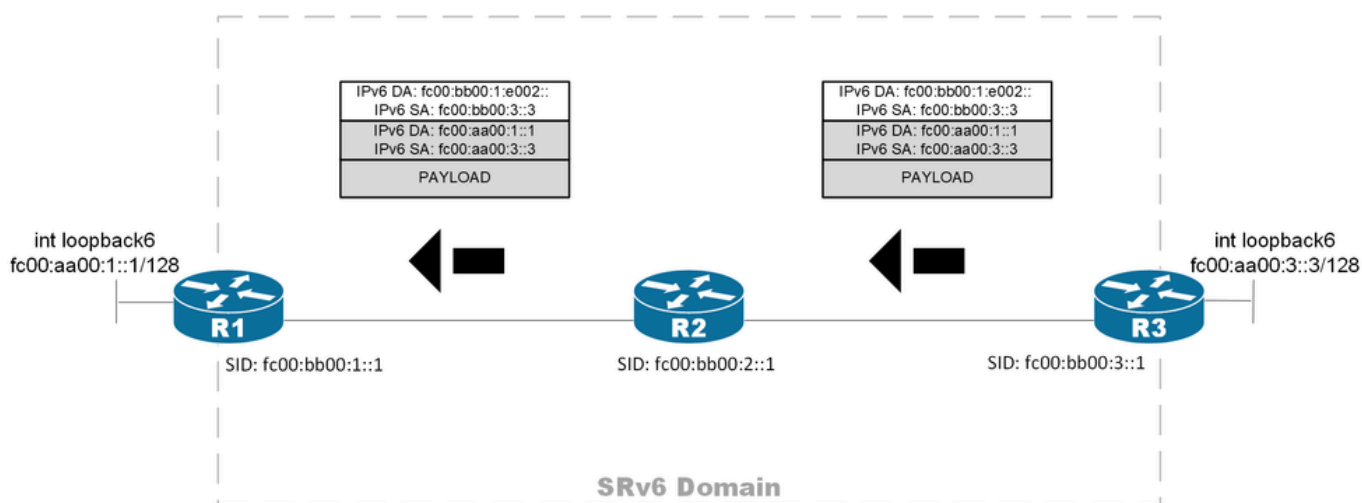

Afbeelding 4. Pakketverwerking langs het pad van BGP IPv6 Unicast over SRv6

Over deze vertaling

Cisco heeft dit document vertaald via een combinatie van machine- en menselijke technologie om onze gebruikers wereldwijd ondersteuningscontent te bieden in hun eigen taal. Houd er rekening mee dat zelfs de beste machinevertaling niet net zo nauwkeurig is als die van een professionele vertaler. Cisco Systems, Inc. is niet aansprakelijk voor de nauwkeurigheid van deze vertalingen en raadt aan altijd het oorspronkelijke Engelstalige document (link) te raadplegen.