

Cisco Unified Communications Domain Manager (CUCDM)-platform voor wachtwoordherstel

Inhoud

[Inleiding](#)

[Wachtwoordherstel](#)

Inleiding


In dit document wordt beschreven hoe u het Cisco UCDM-platform wachtwoord opnieuw kunt instellen indien u het wachtwoord vergeet en u geen toegang hebt tot de CLI via de platformgebruiker.

Wachtwoordherstel


In dit gedeelte wordt de Cisco UCDM-wachtwoordherstelprocedure beschreven.

Opmerking: Deze procedure is alleen van toepassing op CUCDM 10.1.x en 10.6 GRUB versie 1.99-21ubuntu3.17 en 3.18.

1. Schakel verbindingen uit, indien mogelijk, door het netwerk uit te schakelen. Dit waarborgt dat transacties niet verloren gaan.
2. Meld u aan bij VMWare en kies de Cisco UCDM Virtual Machine (VM).
3. Klik met de rechtermuisknop op VM en kies **Instellingen bewerken**.
4. Klik op het tabblad **Opties**, kies **Opstartopties** en controleer het aankruisvakje in het vak Force **opboboven**. De volgende keer dat de virtuele machine start, moet u de toegang tot het geprogrammeerde systeem forceren.

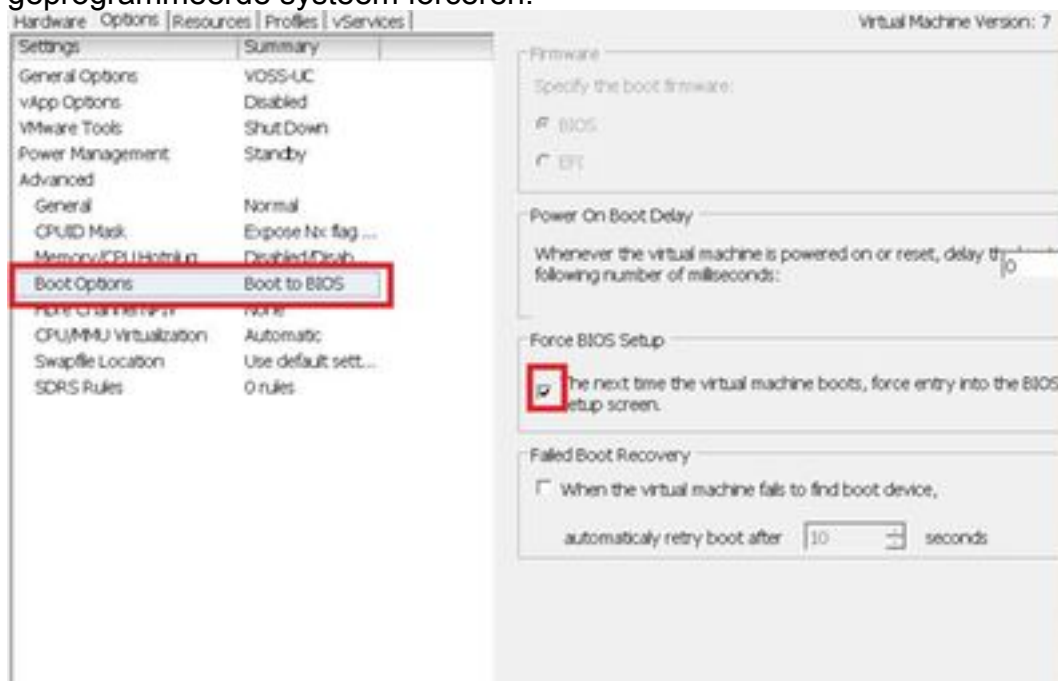

5. Open de Cisco UCDM-weergave (Start Virtual Machine Console).
6. Klik op de knop opnieuw opstarten (Start herstarten).
7. De VM wordt in het geprogrammeerd en komt zonder wijzigingen uit het geprogrammeerde systeem. (De volgende stap moet snel worden uitgevoerd voordat het systeem wordt opgestart).
8. Druk op de Grub-laarsconsole.

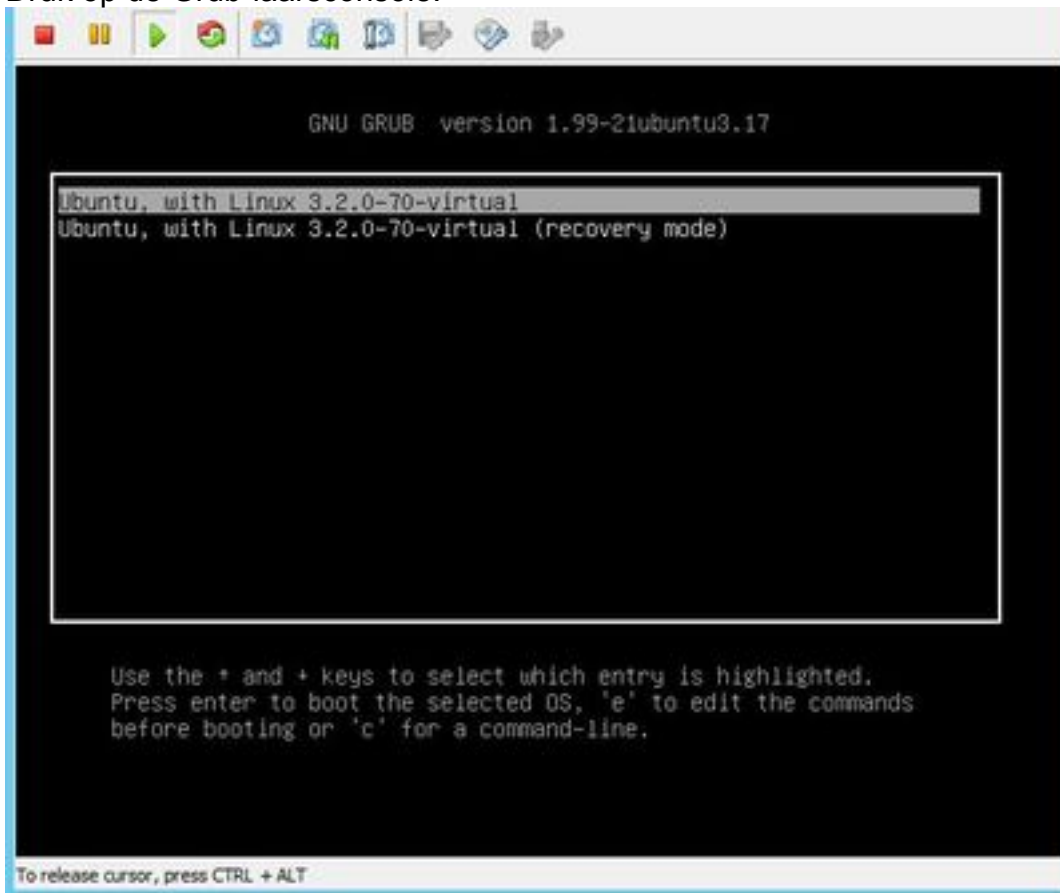

9. Navigeer naar de tweede naar de laatste regel, die begint met linux.

GNU GRUB version 1.99-21ubuntu3.18

```
setparams 'Ubuntu, with Linux 3.2.0-88-virtual'

recordfail
gfxmode $linux_gfx_mode
insmod gzio
insmod part_msdos
insmod ext2
set root='(hd0,msdos1)'
search --no-floppy --fs-uuid --set=root b15d3989-c37a-4de8-88de-89e0\
a14a0dc5
linux /boot/vmlinuz-3.2.0-88-virtual root=UUID=b15d3989-c37a-4de8-88\
de-89e0a14a0dc5 ro
initrd /boot/initrd.img-3.2.0-88-virtual
```

Minimum Emacs-like screen editing is supported. TAB lists completions. Press Ctrl-x or F10 to boot, Ctrl-c or F2 for a command-line or ESC to discard edits and return to the GRUB menu.

10. Navigeer naar het einde van de regel naar 'in=/bin/bash' zoals in deze afbeelding.


GNU GRUB version 1.99-21ubuntu3.18

```
setparams 'Ubuntu, with Linux 3.2.0-88-virtual'

recordfail
gfxmode $linux_gfx_mode
insmod gzio
insmod part_msdos
insmod ext2
set root='(hd0,msdos1)'
search --no-floppy --fs-uuid --set=root b15d3989-c37a-4de8-88de-89e0\
a14a0dc5
linux /boot/vmlinuz-3.2.0-88-virtual root=UUID=b15d3989-c37a-4de8-88\
de-89e0a14a0dc5 ro init=/bin/bash_
initrd /boot/initrd.img-3.2.0-88-virtual
```

Minimum Emacs-like screen editing is supported. TAB lists completions. Press Ctrl-x or F10 to boot, Ctrl-c or F2 for a command-line or ESC to discard edits and return to the GRUB menu.

11. Druk op **Ctrl-X** om het systeem te starten.
12. Voer de hoeveelheid **-o** in om te herstellen, **rw /** nadat het systeem is opgestart.

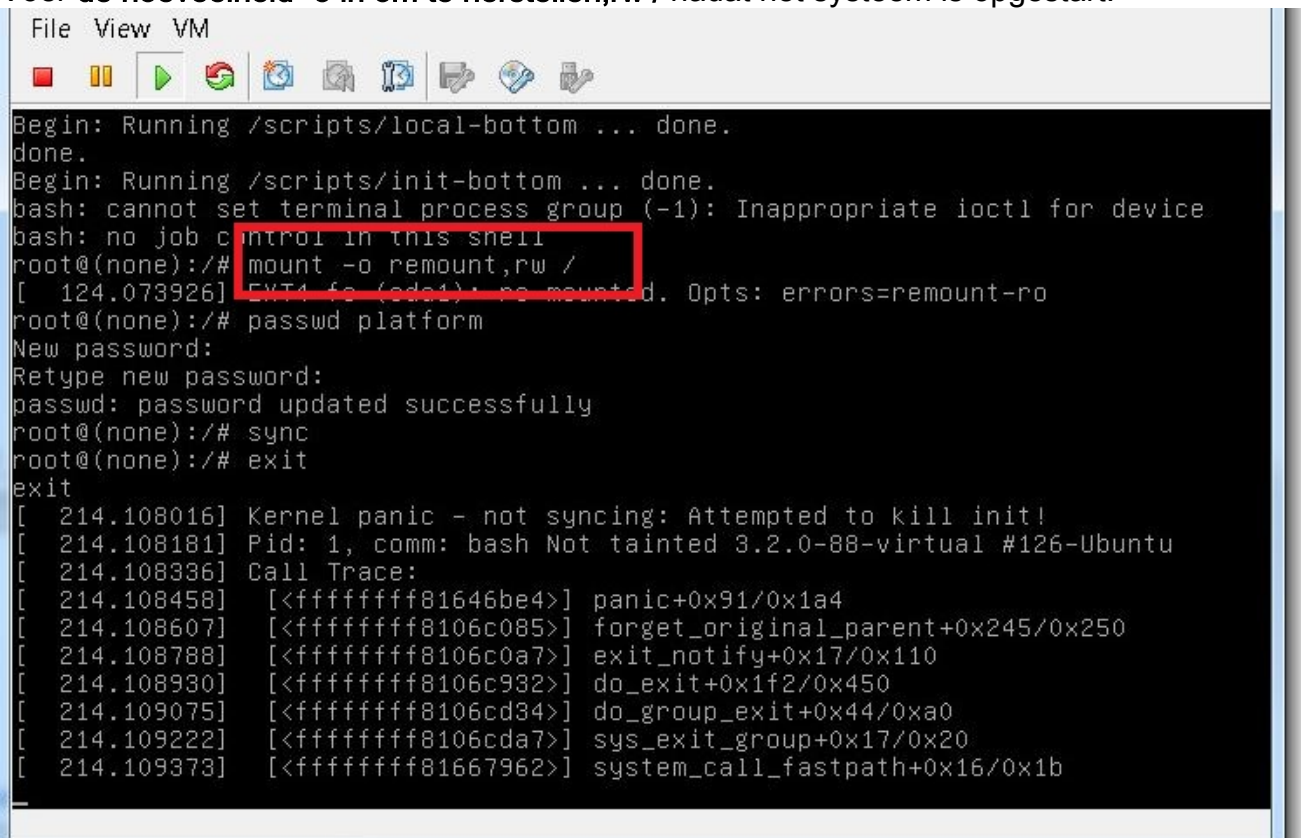

```
File View VM
Begin: Running /scripts/local-bottom ... done.
done.
Begin: Running /scripts/init-bottom ... done.
bash: cannot set terminal process group (-1): Inappropriate ioctl for device
bash: no job control in this shell
root@(none):/# mount -o remount,rw /
[ 124.073926] EXT4 fs (sda1): no mounted. Opts: errors=remount-ro
root@(none):/# passwd platform
New password:
Retype new password:
passwd: password updated successfully
root@(none):/# sync
root@(none):/# exit
exit
[ 214.108016] Kernel panic - not syncing: Attempted to kill init!
[ 214.108181] Pid: 1, comm: bash Not tainted 3.2.0-88-virtual #126-Ubuntu
[ 214.108336] Call Trace:
[ 214.108458] [] panic+0x91/0x1a4
[ 214.108607] [] forget_original_parent+0x245/0x250
[ 214.108788] [] exit_notify+0x17/0x110
[ 214.108930] [] do_exit+0x1f2/0x450
[ 214.109075] [] do_group_exit+0x44/0xa0
[ 214.109222] [] sys_exit_group+0x17/0x20
[ 214.109373] [] system_call_fastpath+0x16/0x1b
```

13. Voer een **wachtwoord** in en voer een nieuw wachtwoord in voor het systeem.

```
File View VM
Begin: Running /scripts/local-bottom ... done.
done.
Begin: Running /scripts/init-bottom ... done.
bash: cannot set terminal process group (-1): Inappropriate ioctl for device
bash: no job control in this shell
root@(none):/# mount -o remount,rw /
[ 124.073926] EXT4-fs (sda1): re-mounted. Opts: errors=remount-ro
root@(none):/# passwd platform
New password:
Retype new password:
passwd: password updated successfully
root@(none):/# sync
root@(none):/# exit
exit
[ 214.108016] Kernel panic - not syncing: Attempted to kill init!
[ 214.108181] Pid: 1, comm: bash Not tainted 3.2.0-88-virtual #126-Ubuntu
[ 214.108336] Call Trace:
[ 214.108458] [] panic+0x91/0x1a4
[ 214.108607] [] forget_original_parent+0x245/0x250
[ 214.108788] [] exit_notify+0x17/0x110
[ 214.108930] [] do_exit+0x1f2/0x450
[ 214.109075] [] do_group_exit+0x44/0xa0
[ 214.109222] [] sys_exit_group+0x17/0x20
[ 214.109373] [] system_call_fastpath+0x16/0x1b
```

14. Typ **sync** om een systeem sync voor het bestand te forceren.

```
File View VM
Begin: Running /scripts/local-bottom ... done.
done.
Begin: Running /scripts/init-bottom ... done.
bash: cannot set terminal process group (-1): Inappropriate ioctl for device
bash: no job control in this shell
root@(none):/# mount -o remount,rw /
[ 124.073926] EXT4-fs (sda1): re-mounted. Opts: errors=remount-ro
root@(none):/# passwd platform
New password:
Retype new password:
passwd: password updated successfully
root@(none):/# sync
root@(none):/# exit
exit
[ 214.108016] Kernel panic - not syncing: Attempted to kill init!
[ 214.108181] Pid: 1, comm: bash Not tainted 3.2.0-88-virtual #126-Ubuntu
[ 214.108336] Call Trace:
[ 214.108458] [] panic+0x91/0x1a4
[ 214.108607] [] forget_original_parent+0x245/0x250
[ 214.108788] [] exit_notify+0x17/0x110
[ 214.108930] [] do_exit+0x1f2/0x450
[ 214.109075] [] do_group_exit+0x44/0xa0
[ 214.109222] [] sys_exit_group+0x17/0x20
[ 214.109373] [] system_call_fastpath+0x16/0x1b
```

15. Type **exit** en schakel vervolgens de stroom uit en op de VM.

16. Kies **Ubuntu, met Linux 3.2.0-70-virtueel** wanneer het systeem start.



U kunt nu inloggen als platformgebruiker met het wachtwoord dat in stap 13 is ingesteld.