

Configurando um túnel GRE sobre o IPsec com OSPF

Índice

[Introdução](#)

[Pré-requisitos](#)

[Requisitos](#)

[Componentes Utilizados](#)

[Convenções](#)

[Configurar](#)

[Diagrama de Rede](#)

[Configurações](#)

[Verificar](#)

[Troubleshooting](#)

[Comandos para Troubleshooting](#)

[Informações Relacionadas](#)

[Introdução](#)

As configurações de segurança IP (IPsec) normais não podem transferir protocolos de roteamento, como o Enhanced Interior Gateway Routing Protocol (EIGRP) e o Open Shortest Path First (OSPF) ou tráfego não IP, como Internetwork Packet Exchange (IPX) e Appletalk. Este documento ilustra como distribuir entre as redes diferentes que usam um protocolo de roteamento e um tráfego não-IP com IPsec. Este exemplo usa o Generic Routing Encapsulation (GRE) a fim realizar o roteamento entre as redes diferentes.

Refira [PIX/ASA 7.x e mais tarde: VPN/IPsec com exemplo da configuração de OSPF](#) para obter mais informações sobre de como configurar para um VPN/IPsec com Open Shortest Path First (OSPF) sem um túnel GRE na versão de software 7.x da ferramenta de segurança de Cisco PIX ou na ferramenta de segurança adaptável de Cisco (ASA).

Refira [configurar o hub and spoke do roteador para roteador do IPsec com uma comunicação entre o spokes](#) para obter informações sobre de como configurar um projeto do IPsec do hub and spoke entre três Roteadores.

Refira [configurar o IPSec de roteador a roteador \(chaves pré-compartilhada\) no túnel GRE com firewall de IOS e o NAT](#) para obter informações sobre de como configurar a configuração de firewall básica do [®] do Cisco IOS em um túnel GRE com Network Address Translation (NAT).

[Pré-requisitos](#)

[Requisitos](#)

Certifique-se de atender a estes requisitos antes de tentar esta configuração:

- Certifique-se de que o túnel funciona antes que você aplique os crypto map.
- Refira o [ajuste de IP MTU, de TCP MSS, e de PMTUD em sistemas de Windows e de Sun](#) para obter informações sobre das edições possíveis da unidade de transmissão máxima (MTU).

Componentes Utilizados

As informações neste documento são baseadas nestas versões de software e hardware:

- Cisco 3600 que executa o Cisco IOS Software Release 12.4(8)
- Cisco 2600 que executa o Cisco IOS Software Release 12.4(8)
- Software Release 6.3(5) do PIX Firewall (leão)
- Software Release 6.3(5) do PIX Firewall (tigre)

As informações neste documento foram criadas a partir de dispositivos em um ambiente de laboratório específico. Todos os dispositivos utilizados neste documento foram iniciados com uma configuração (padrão) inicial. Se a sua rede estiver ativa, certifique-se de que entende o impacto potencial de qualquer comando.

Convenções

Consulte as [Convenções de Dicas Técnicas da Cisco](#) para obter mais informações sobre convenções de documentos.


Configurar

Nesta seção, você é apresentado com a informação usada para configurar as características descritas neste documento.

Nota: Use a ferramenta [Command Lookup Tool](#) ([apenas para clientes registrados](#)) para obter mais informações sobre os comandos usados neste documento.

Diagrama de Rede

Este documento utiliza a seguinte configuração de rede:

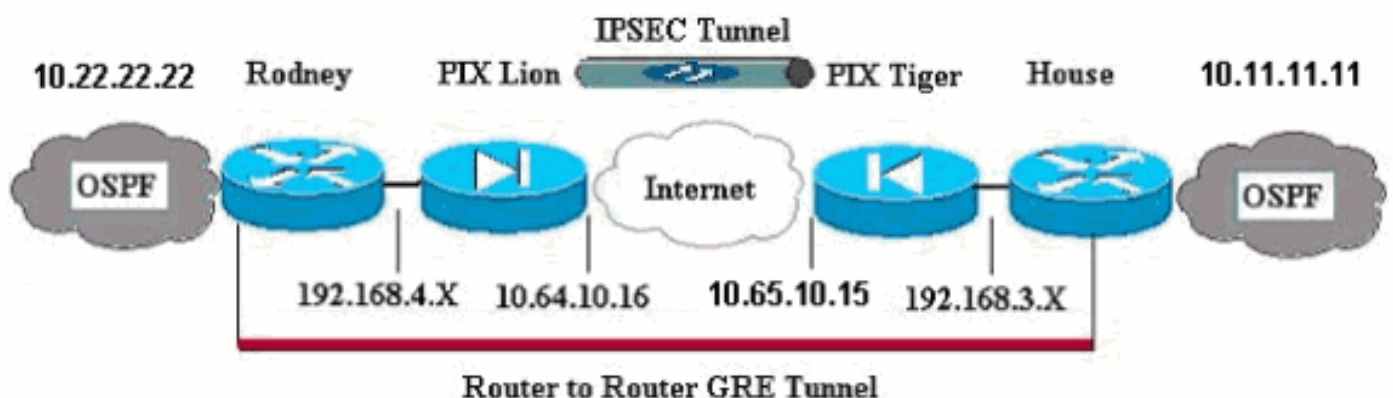

Nota: Os esquemas de endereçamento IP usados nesta configuração não são legalmente

roteáveis na Internet. Estes são os endereços do [RFC 1918](#) que foram usados em um ambiente de laboratório.

Nota: Cripto não apoia o Cisco 7600 Series Router. Você pode ter que instalar o módulo de VPN para que este trabalhe.

Configurações

Este documento utiliza as seguintes configurações:

- [PIX Lion](#)
- [PIX Tiger](#)
- [Roteador Rodney](#)
- [Companhia do Roteador](#)

PIX Lion

```
PIX Version 6.3(5)
interface ethernet0 auto
interface ethernet1 auto
interface ethernet2 auto shutdown
interface ethernet3 auto shutdown
interface ethernet4 auto shutdown
interface ethernet5 auto shutdown
nameif ethernet0 outside security0
nameif ethernet1 inside security100
nameif ethernet2 intf2 security4
nameif ethernet3 intf3 security6
nameif ethernet4 intf4 security8
nameif ethernet5 intf5 security10
enable password 8Ry2YjIyt7RRXU24 encrypted
passwd 2KFQnbNIdI.2KYOU encrypted
hostname Lion fixup protocol dns maximum-length 512
fixup protocol ftp 21 fixup protocol h323 h225 1720
fixup protocol h323 ras 1718-1719 fixup protocol http 80
fixup protocol rsh 514 fixup protocol rtsp 554 fixup
protocol sip 5060 fixup protocol sip udp 5060 fixup
protocol skinny 2000 fixup protocol smtp 25 fixup
protocol sqlnet 1521 fixup protocol tftp 69 names !---
Defines interesting traffic that is protected by the
IPsec tunnel. access-list 101 permit gre 192.168.4.0
255.255.255.0 192.168.3.0 255.255.255.0 !--- Do not
perform NAT for traffic to other PIX Firewall. access-
list nonat permit ip 192.168.4.0 255.255.255.0
192.168.3.0 255.255.255.0 pager lines 24 mtu outside
1500 mtu inside 1500 mtu intf2 1500 mtu intf3 1500 mtu
intf4 1500 mtu intf5 1500 ip address outside 10.64.10.16
255.255.255.224 ip address inside 192.168.4.1
255.255.255.0 !--- Output suppressed. global (outside) 1
interface !--- Do not Network Address Translate (NAT)
traffic. nat (inside) 0 access-list nonat nat (inside) 1
0.0.0.0 0.0.0.0 0 0 route outside 0.0.0.0 0.0.0.0
10.64.10.1 1 timeout xlate 3:00:00 timeout conn 1:00:00
half-closed 0:10:00 udp 0:02:00 rpc 0:10:00 h323 0:05:00
s0 timeout h323 0:05:00 mgcp 0:05:00 sip 0:30:00
sip_media 0:02:00 timeout sip-disconnect 0:02:00 sip-
invite 0:03:00 timeout uauth 0:05:00 absolute aaa-server
TACACS+ protocol tacacs+ aaa-server TACACS+ max-failed-
attempts 3 aaa-server TACACS+ deadtime 10 aaa-server
RADIUS protocol radius aaa-server RADIUS max-failed-
```

```
attempts 3 aaa-server RADIUS deadline 10 aaa-server
LOCAL protocol local no snmp-server location no snmp-
server contact snmp-server community public no snmp-
server enable traps floodguard enable !--- Trust IPsec
traffic and avoid going through !--- access control
lists (ACLs)/NAT. sysopt connection permit-ipsec !---
IPsec configuration. crypto ipsec transform-set pixset
esp-des esp-md5-hmac crypto map pixmap 20 ipsec-isakmp
crypto map pixmap 20 match address 101 crypto map pixmap
20 set peer 10.65.10.15 crypto map pixmap 20 set
transform-set pixset crypto map pixmap interface outside
isakmp enable outside !--- IKE parameters. isakmp key
***** address 10.65.10.15 netmask 255.255.255.255
isakmp identity address isakmp policy 20 authentication
pre-share isakmp policy 20 encryption des isakmp policy
20 hash md5 isakmp policy 20 group 1 isakmp policy 20
lifetime 3600 telnet timeout 5 ssh 10.104.205.124
255.255.255.255 outside ssh timeout 5 terminal width 80
Cryptochecksum:d39b3d449563c7cd434b43f82f0f0a21 : end
```

PIX Tiger

```
PIX Version 6.3(5)
interface ethernet0 auto
interface ethernet1 auto
interface ethernet2 auto shutdown
interface ethernet3 auto shutdown
interface ethernet4 auto shutdown
interface ethernet5 auto shutdown
nameif ethernet0 outside security0
nameif ethernet1 inside security100
nameif ethernet2 intf2 security4
nameif ethernet3 intf3 security6
nameif ethernet4 intf4 security8
nameif ethernet5 intf5 security10
enable password 8Ry2YjIyt7RRXU24 encrypted
passwd 2KFQnbNIdI.2KYOU encrypted
hostname Tiger fixup protocol dns maximum-length 512
fixup protocol ftp 21 fixup protocol h323 h225 1720
fixup protocol h323 ras 1718-1719 fixup protocol http 80
fixup protocol rsh 514 fixup protocol rtsp 554 fixup
protocol sip 5060 fixup protocol sip udp 5060 fixup
protocol skinny 2000 fixup protocol smtp 25 fixup
protocol sqlnet 1521 fixup protocol tftp 69 names
access-list 101 permit gre 192.168.3.0 255.255.255.0
192.168.4.0 255.255.255.0 access-list nonat permit ip
192.168.3.0 255.255.255.0 192.168.4.0 255.255.255.0 mtu
outside 1500 mtu inside 1500 mtu intf2 1500 mtu intf3
1500 mtu intf4 1500 mtu intf5 1500 ip address outside
10.65.10.15 255.255.255.224 ip address inside
192.168.3.1 255.255.255.0 !--- Output suppressed. global
(outside) 1 interface !--- Do not NAT traffic. nat
(inside) 0 access-list nonat nat (inside) 1 0.0.0.0
0.0.0.0 0 0 route outside 0.0.0.0 0.0.0.0 10.64.10.1 1
timeout xlate 3:00:00 timeout conn 1:00:00 half-closed
0:10:00 udp 0:02:00 rpc 0:10:00 h323 0:05:00 s0 timeout
h323 0:05:00 mgcp 0:05:00 sip 0:30:00 sip_media 0:02:00
timeout sip-disconnect 0:02:00 sip-invite 0:03:00
timeout uauth 0:05:00 absolute aaa-server TACACS+
protocol tacacs+ aaa-server TACACS+ max-failed-attempts
3 aaa-server TACACS+ deadline 10 aaa-server RADIUS
protocol radius aaa-server RADIUS max-failed-attempts 3
aaa-server RADIUS deadline 10 aaa-server LOCAL protocol
local no snmp-server location no snmp-server contact
snmp-server community public no snmp-server enable traps
```

```
floodguard enable sysopt connection permit-ipsec !---
IPsec parameters. crypto ipsec transform-set pixset esp-
des esp-md5-hmac crypto map pixmap 20 ipsec-isakmp
crypto map pixmap 20 match address 101 crypto map pixmap
20 set peer 10.64.10.16 crypto map pixmap 20 set
transform-set pixset crypto map pixmap interface outside
!--- IKE parameters. isakmp enable outside isakmp key
***** address 10.64.10.16 netmask 255.255.255.255
isakmp identity address isakmp policy 20 authentication
pre-share isakmp policy 20 encryption des isakmp policy
20 hash md5 isakmp policy 20 group 1 isakmp policy 20
lifetime 3600 telnet timeout 5 ssh timeout 5 terminal
width 80 Cryptochecksum:a0a7ac847b05d9d080d1c442ef053a0b
: end
```

Roteador Rodney

```
version 12.4
service timestamps debug uptime
service timestamps log uptime
no service password-encryption
!
hostname rodney ! memory-size iomem 15 ip subnet-zero !
ip audit notify log ip audit po max-events 100 ! !
interface Loopback1 ip address 10.22.22.22 255.255.255.0
! interface Tunnel0 ip address 10.1.1.2 255.255.255.0 !-
-- Tunnel source. tunnel source Ethernet0/1 !--- Tunnel
destination. tunnel destination 192.168.3.2 ! interface
Ethernet0/0 no ip address ! interface Serial0/0 no ip
address shutdown ! interface Ethernet0/1 ip address
192.168.4.2 255.255.255.0 ! interface Serial0/1 no ip
address shutdown ! router ospf 22 log-adjacency-changes
network 10.1.1.0 0.0.0.255 area 0 network 10.22.22.0
0.0.0.255 area 0 ! ip classless ip route 0.0.0.0 0.0.0.0
192.168.4.1 !--- The 10.11.11.0 traffic is passed
through !--- the GRE tunnel. ip route 10.11.11.0
255.255.255.0 Tunnel0 no ip http server ! line con 0
line aux 0 line vty 0 4 login ! end! End
```

Companhia do Roteador

```
version 12.4
service timestamps debug uptime
service timestamps log uptime
no service password-encryption
!
hostname house ! ip subnet-zero no ip domain-lookup ! !
interface Loopback1 ip address 10.11.11.11 255.255.255.0
! interface Tunnel0 ip address 10.1.1.1 255.255.255.0 !-
-- Tunnel source. tunnel source FastEthernet0/1 !---
Tunnel destination. tunnel destination 192.168.4.2 !
interface FastEthernet0/0 no ip address shutdown duplex
auto speed auto ! interface FastEthernet0/1 ip address
192.168.3.2 255.255.255.0 duplex auto speed auto !
interface FastEthernet4/0 no ip address shutdown duplex
auto speed auto ! router ospf 11 log-adjacency-changes
network 10.1.1.0 0.0.0.255 area 0 network 10.11.11.0
0.0.0.255 area 0 ! ip classless ip route 0.0.0.0 0.0.0.0
192.168.3.1 !--- The 10.22.22.0 traffic is passed
through !--- the GRE tunnel. ip route 10.22.22.0
255.255.255.0 Tunnel0 ip http server ! line con 0 line
aux 0 line vty 0 4
```

No momento, não há procedimento de verificação disponível para esta configuração.

Troubleshooting

Esta seção fornece informações que podem ser usadas para o troubleshooting da sua configuração.

Refira a [pesquisa de defeitos do PIX para passar o tráfego de dados em um túnel IPsec estabelecido](#) para obter informações adicionais sobre de pesquisar defeitos um PIX e um túnel de IPsec.

Comandos para Troubleshooting

A [Output Interpreter Tool \(apenas para clientes registrados\)](#) (OIT) suporta determinados comandos show. Use a OIT para exibir uma análise da saída do comando show.

Nota: Consulte [Informações Importantes sobre Comandos de Depuração](#) antes de usar comandos debug.

Debug correto do PIX IPsec

- **show crypto isakmp sa** – Mostra a estrutura Internet Security Association Management Protocol (ISAKMP) Security Association (SA) construída entre correspondentes.
`Lion#show crypto isakmp sa` Total : 1 Embryonic : 0 dst src state pending created 10.65.10.15 10.64.10.16 QM_IDLE 0 1
`Tiger#show crypto isakmp sa` Total SAs : 1 Embryonic : 0 dst src state pending created 10.65.10.15 10.64.10.16 QM_IDLE 0 1
- **show crypto engine connection active** — Mostra cada fase 2 SA construída e a quantidade de tráfego enviada.
`Lion#show crypto engine connection active` Crypto Engine Connection Map: size = 8, free = 6, used = 2, active = 2
`Tiger#show crypto engine connection active` Crypto Engine Connection Map: size = 8, free = 6, used = 2, active = 2
- **a mostra debuga** — Indica o resultado do debug.
`Lion#show debug debug crypto ipsec debug crypto isakmp debug crypto engine`
crypto_isakmp_process_block: src 10.65.10.15, dest 10.64.10.16 OAK_MM exchange ISAKMP (0): processing SA payload. message ID = 0 ISAKMP (0): Checking ISAKMP transform 1 against priority 20 policy ISAKMP: encryption DES-CBC ISAKMP: hash MD5 ISAKMP: default group 1 ISAKMP: auth pre-share ISAKMP: life type in seconds ISAKMP: life duration (basic) of 3600 ISAKMP (0): atts are acceptable. Next payload is 0 ISAKMP (0): SA is doing pre-shared key authentication using id type ID_IPV4_ADDR return status is IKMP_NO_ERROR#
crypto_isakmp_process_block: src 10.65.10.15, dest 10.64.10.16 OAK_MM exchange ISAKMP (0): processing KE payload. message ID = 0 ISAKMP (0): processing NONCE payload. message ID = 0 ISAKMP (0): processing vendor id payload ISAKMP (0): speaking to another IOS box!
ISAKMP (0): ID payload next-payload : 8 type : 1 protocol : 17 port : 500 length : 8 ISAKMP (0): Total payload length: 12 return status is IKMP_NO_ERROR
crypto_isakmp_process_block: src 10.65.10.15, dest 10.64.10.16 OAK_MM exchange ISAKMP (0): processing ID payload. message ID = 0 ISAKMP (0): processing HASH payload. message ID = 0 ISAKMP (0): SA has been authenticated ISAKMP (0): beginning Quick Mode exchange, M-ID of 1220019031:48b80357IPSEC(key. IPSEC(spi_response): getting spi 0xa67177c5(2792454085) for SA from 10.65.10.15 to 10.64.10.16 for prot 3 return status is IKMP_NO_ERROR
crypto_isakmp_process_block: src 10.65.10.15, dest 10.64.10.16 OAK_QM exchange oakley_process_quick_mode: OAK_QM_IDLE ISAKMP (0): processing SA payload. message ID = 1220019031 ISAKMP : Checking IPsec proposal 1 ISAKMP: transform 1, ESP_DES ISAKMP: attributes in transform: ISAKMP: encaps is 1 ISAKMP: SA life type in seconds ISAKMP: SA life duration (basic) of 28800 ISAKMP: SA life type in kilobytes ISAKMP: SA life duration (VPI) of 0x0 0x46 0x50 0x0 ISAKMP: authenticator is HMAC-MD5 ISAKMP (0): atts are acceptable.IPSEC(validate_proposal_request): proposal part, (key eng. msg.) dest= 10.65.10.15, src= 10.64.10.16, dest_proxy= 192.168.3.0/255.255.255.0/0/0 (type=4), src_proxy= 192.168.4.0/255.255.255.0/0/0 (type=4), protocol= ESP, transform= esp-des esp-

```
md5-hmac , lifedur= 0s and 0kb, spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x4 ISAKMP (0):
processing NONCE payload. message ID = 1220019031 ISAKMP (0): processing ID payload. message
ID = 1220019031 ISAKMP (0): processing ID payload. message ID = 1220019031map_alloc_entry:
allo2 map_alloc_entry: allocating entry 1 ISAKMP (0): Creating IPsec SAs inbound SA from
10.65.10.15 to 10.64.10.16 (proxy 192.168.3) has spi 2792454085 and conn_id 2 and flags 4
lifetime of 28800 seconds lifetime of 4608000 kilobytes outbound SA from 10.64.10.16 to
10.65.10.15 (proxy 192.168.) has spi 285493108 and conn_id 1 and flags 4 lifetime of 28800
seconds lifetime of 4608000 kilobytesIPSEC(key_engine): got a queue event...
IPSEC(initialize_sas): , (key eng. msg.) dest= 10.64.10.16, src= 10.65.10.15, dest_proxy=
192.168.4.0/255.255.255.0/0/0 (type=4), src_proxy= 192.168.3.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac , lifedur= 28800s and 4608000kb, spi=
0xa67177c5(2792454085), conn_id= 2, keysize= 0, flags= 0x4 IPSEC(initialize_sas): , (key
eng. msg.) src= 10.64.10.16, dest= 10.65.10.15, src_proxy= 192.168.4.0/255.255.255.0/0/0
(type=4), dest_proxy= 192.168.3.0/255.255.255.0/0/0 (type=4), protocol= ESP, transform= esp-
des esp-md5-hmac , lifedur= 28800s and 4608000kb, spi= 0x11044774(285493108), conn_id= 1,
keysize= 0, flags= 0x4 return status is IKMP_NO_ERROR
```

Roteador GRE que passa o roteamento e o sibilo

- **show ip route - Exibe entradas de tabela de IP Routing.**

```
rodney#show ip route Codes: C -
connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP D - EIGRP, EX - EIGRP
external, O - OSPF, IA - OSPF inter area N1 - OSPF NSSA external type 1, N2 - OSPF NSSA
external type 2 E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP i - IS-IS, L1
- IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area * - candidate default, U - per-
user static route, o - ODR P - periodic downloaded static route Gateway of last resort is
192.168.4.1 to network 0.0.0.0 10.0.0.0/24 is subnetted, 1 subnets C 10.1.1.0 is directly
connected, Tunnel0 10.0.0.0/24 is subnetted, 1 subnets C 10.20.20.0 is directly connected,
Loopback0 10.0.0.0/24 is subnetted, 1 subnets C 10.22.22.0 is directly connected, Loopback1
C 192.168.4.0/24 is directly connected, Ethernet0/1 10.0.0.0/24 is subnetted, 1 subnets S
10.10.10.0 is directly connected, Tunnel0 10.0.0.0/32 is subnetted, 1 subnets O 10.11.11.11
[110/11112] via 10.1.1.1, 03:34:01, Tunnel0 S* 0.0.0.0/0 [1/0] via 192.168.4.1 rodney#
rodney#ping 10.11.11.11 Type escape sequence to abort. Sending 5, 100-byte ICMP Echos to
10.11.11.11, timeout is 2 seconds: !!!!! Success rate is 100 percent (5/5), round-trip
min/avg/max = 1/2/4 ms house#show ip route Codes: C - connected, S - static, I - IGRP, R -
RIP, M - mobile, B - BGP D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area N1 -
OSPF NSSA external type 1, N2 - OSPF NSSA external type 2 E1 - OSPF external type 1, E2 -
OSPF external type 2, E - EGP i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS
inter area * - candidate default, U - per-user static route, o - ODR P - periodic downloaded
static route Gateway of last resort is 192.168.3.1 to network 0.0.0.0 10.0.0.0/24 is
subnetted, 1 subnets C 1.1.1.0 is directly connected, Tunnel0 10.0.0.0/24 is subnetted, 1
subnets S 10.20.20.0 is directly connected, Tunnel0 10.0.0.0/32 is subnetted, 1 subnets O
10.22.22.22 [110/11112] via 10.1.1.2, 03:33:39, Tunnel0 10.0.0.0/24 is subnetted, 1 subnets
C 10.10.10.0 is directly connected, Loopback0 10.0.0.0/24 is subnetted, 1 subnets C
10.11.11.0 is directly connected, Loopback1 C 192.168.3.0/24 is directly connected,
FastEthernet0/1 S* 0.0.0.0/0 [1/0] via 192.168.3.1 house#ping 10.22.22.22 Type escape
sequence to abort. Sending 5, 100-byte ICMP Echos to 10.22.22.22, timeout is 2 seconds:
!!!!!! Success rate is 100 percent (5/5), round-trip min/avg/max = 1/3/4 ms
```

[Informações Relacionadas](#)

- [Negociação IPsec/Protocolos IKE](#)
- [Referências do comando Cisco Secure PIX Firewall](#)
- [Sustentação do produto PIX](#)
- [Suporte Técnico e Documentação - Cisco Systems](#)