

用CSS5-SSL模块处理HTTPS通信

目录

[简介](#)

[先决条件](#)

[要求](#)

[使用的组件](#)

[规则](#)

[配置](#)

[网络图](#)

[配置](#)

[验证](#)

[故障排除](#)

[相关信息](#)

[简介](#)

本文档提供了适用于 CSS5-SSL 模块的配置示例。CSS5-SSL模块引入了WebNs version 5.20 build 1。

[先决条件](#)

[要求](#)

本文档没有任何特定的要求。

[使用的组件](#)

本文档不限于特定的软件和硬件版本。

[规则](#)

有关文档规则的详细信息，请参阅 [Cisco 技术提示规则](#)。


[配置](#)

本部分提供有关如何配置本文档所述功能的信息。

注意： 使用 [命令查找工具](#) ([仅限注册用户](#)) 可获取有关本部分所使用命令的详细信息。

网络图

本文档使用此网络设置。

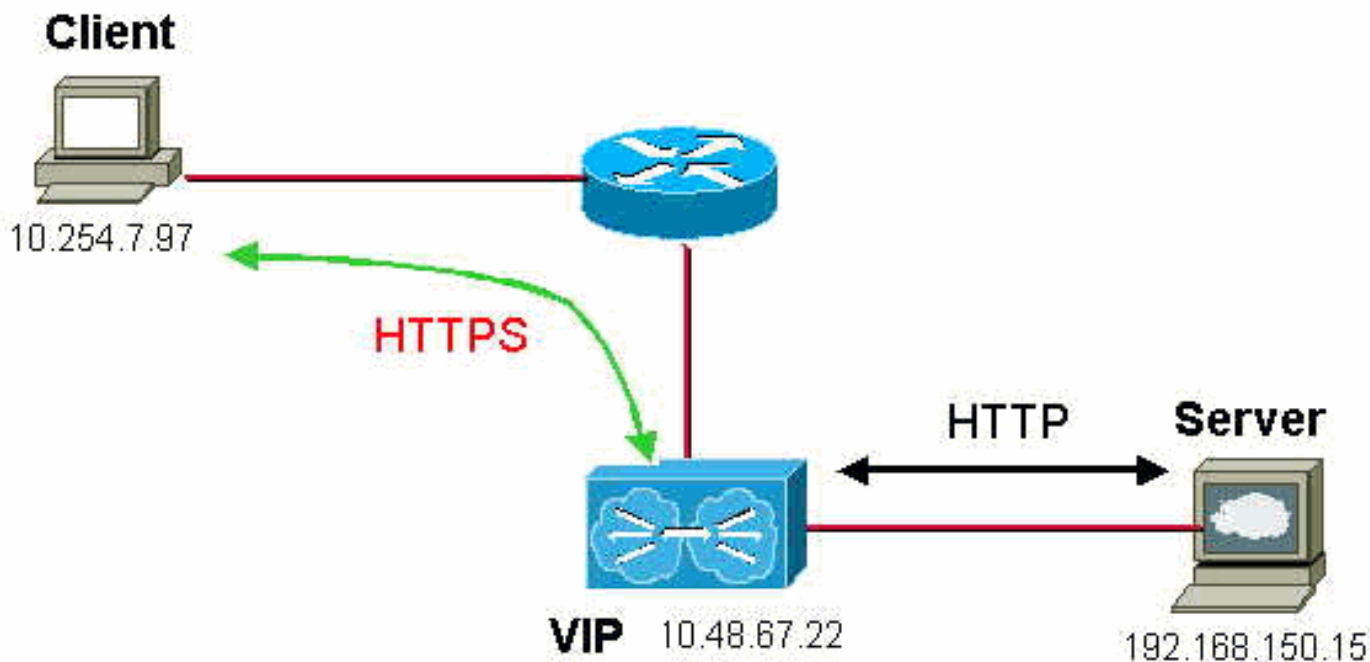

配置

本文档使用以下配置。

- [POMPON \(CSS 11506\)](#)

POMPON (CSS 11506)

```
POMPON#show running-config !Generated on 10/09/2002
12:46:25 !Active version: sg0520002s configure
!***** GLOBAL
***** logging buffer 64000 ssl
associate rsakey keyrsa CompanyX-rsa-key ssl associate
cert rsacert CompanyX-cert ssl associate dhparam
CompanyX-dh CompanyX-dh ssl associate dsakey CompanyXdsa
CompanyX-dsa-key ip route 0.0.0.0 0.0.0.0 10.48.66.1 1
!***** INTERFACE
***** interface Ethernet-Mgmt phy
10Mbits-HD interface 3/1 bridge vlan 10 interface 3/3
bridge vlan 149 !***** CIRCUIT
***** circuit VLAN10 ip address
10.48.67.8 255.255.254.0 circuit VLAN149 ip address
192.168.150.199 255.255.255.0 !--- Server VLAN.
!***** SSL PROXY LIST
***** ssl-proxy-list ssl-list ssl-
server 90 ssl-server 90 vip address 10.48.67.22 !--- The
VIP address must be the same as in the content rule
defined here. !--- The default port is 443. !--- You can
change the default port when you issue the !--- ssl-
server 90 port <0-65535> command. ssl-server 90 cipher
rsa-with-des-cbc-sha 192.168.150.15 80 ssl-server 90
cipher rsa-with-3des-ede-cbc-sha 192.168.150.15 80 ssl-
server 90 cipher rsa-with-rc4-128-sha 192.168.150.15 80
```

```

ssl-server 90 cipher rsa-with-rc4-128-md5 192.168.150.15
80 !--- Note: The IP address in the cipher suite can be
the VIP address or !--- the address of a real server
that is available to the CSS. !--- Select which cipher
mode you want the CSS to accept and define to which
server !--- deciphered (clear) traffic should be sent.
!--- You can select different servers/ports for each
cipher mode. ssl-server 90 rsacert rsacert ssl-server 90
rsakey keyrsa !--- Define which certificate and key to
use. active !***** SERVICE
***** service WWW type ssl-accel !-
-- Define that the SSL module is used. add ssl-proxy-
list ssl-list keepalive type none !--- Disable keepalive
- internal heartbeat is used. slot 5 !--- Define which
SSL module to use (issue the show chassis !--- command
to see in which slot the SSL module is. active
|***** OWNER
***** owner CompanyX !--- The
content rule definition is the same as for any other
service. content ssl port 443 vip address 10.48.67.22 !-
-- The ssl-proxy-list VIP address and port must match
with those defined here. protocol tcp application ssl
add service WWW active POMPON#

```

验证

使用本部分可确认配置能否正常运行。

[命令输出解释程序 \(仅限注册用户 \)](#) (OIT) 支持某些 **show** 命令。使用 OIT 可查看对 **show** 命令输出的分析。

- **show chassis** `POMPON#show chassis` Configuration for CSS11506-2AC A0: Product Name: CSS11506-2AC A0 SW Version: 5.20 Build 2 Serial Number: PL505500237 Base Mac Address: 00-07-85-43-8d-96 Slot Number Module Name Status 1 CSS5-SCM-2GE primary 2 CSS5-SAM primary 3 CSS5-IOM-8FE primary 4 CSS5-IOM-2GE primary 5 **CSS5-SSL primary** 6 empty slot 7 CSS506-SM powered-on 8 CSS506-SM powered-on
- **show version** `POMPON#show version` Version: sg0520002s (5.20 Build 2) Flash (Locked): 5.10 Build 1 Flash (Operational): 5.20 Build 2 Type: PRIMARY Licensed Cmd Set(s): Standard Feature Set Secure Management POMPON#
- **show ssl file** `POMPON#show ssl file` File Name File Type File Size -----
----- CompanyX-rsa-key PEM 688 CompanyX-cert PEM 871 CompanyX-dh PEM 201 CompanyX-dsa-key PEM 404 POMPON#
- **show ssl flows** `POMPON#show ssl flows` SSL Acceleration Flows for slot 5 Virtual Port TCP Proxy Flows Active SSL Flows SSL Flows in Handshake -----
----- 10.48.67.22 443 0 0 0 POMPON#
- **show ssl associate** `POMPON#show ssl associate` Certificate Name File Name Used by List -----
----- rsacert CompanyX-cert yes RSA Key Name File Name Used by List -----
----- CompanyXrsa CompanyX-rsa-key yes DH Param Name File Name Used by List -----
----- CompanyX-dh CompanyX-dh no DSA Key Name File Name Used by List -----
----- CompanyXdsa CompanyX-dsa-key no POMPON#
- **show ssl statistics** `POMPON#show ssl statistics` SSL Acceleration Statistics 0 DSA Sign Failed 0 DSA Verify Failed 0 SSL MAC Failed 0 TLS HMAC Failed 0 3DES Failed 0 ARC4 Failed 0 HASH Failed 0 Hardware Device Not Found 0 Hardware Device Timed Out 0 Invalid Crypto Parameter 0 Hardware Device Failed 313 SSL received non-application data bytes 992 SSL transmitted non-application data bytes 0 RSA Private Decrypt failures 0 MAC failures for packets received 0 Re-handshake TimerAlloc failed 0 Blocks SSL could not allocate 0 Dup Blocks SSL could not allocate 0 Too many blocks for Block2AccelFragmentArray 0 Too many blocks in a SSL message POMPON#

- **show summary** POMPON#**show summary** Global Bypass Counters: No Rule Bypass Count: 0 Acl Bypass Count: 0 Owner Content Rules State Services Service Hits CompanyX ssl Master WWW 2 POMPON#
- **show flows** POMPON#**show flows** -----
----- Src Address SPort Dst Address DPort NAT Dst Address Prt InPort OutPort -----
----- 192.168.150.15 80
10.254.8.98 38460 0.0.0.0 TCP 3/3 3/1 POMPON#
- **show rule owner content all** POMPON#**show rule CompanyX ssl all** Name: ssl Owner: CompanyX State: Active Type: SSL Balance: Round Robin Failover: N/A Persistence: Enabled Param-Bypass: Disabled Session Redundancy: Disabled PrimarySorryServer: None SecondSorryServer: None Name: Hits: Wgt: State: Ld: KAlive: Conn: DNS: -----
- ---- WWW 16 S-1 Alive 2 None 0 0 Rule DNS Information DNS Balance: roundrobin DNS Names: DNS TTL: Rule Hotlist Information Hotlist: Disabled Size: 10, Type: HitCount, Threshold 0, Interval 1 Associated ACLs: NONE
- **show ssl statistics ssl-proxy-server** POMPON#**show ssl statistics ssl-proxy-server** SSL Acceleration Statistics Component: SSL Proxy Server Slot: 5 Count Description -----
- ----- 20 Handshake started for incoming SSL connections 19 Handshake completed for incoming SSL connections 0 Handshake started for outgoing SSL connections 0 Handshake completed for outgoing SSL connections 1 Active SSL flows high water mark 0 Current number of TCP Proxy flows 2 Maximum number of TCP Proxy flows POMPON#
- **show ssl statistics ssl** POMPON#**show ssl statistics ssl** SSL Acceleration Statistics Component: SSL Slot: 5 Count Description -----
----- 5 RSA Private Decrypt calls 0 RSA Public Decrypt calls 0 DH Compute key calls 0 DH Generate key calls 0 DSA Verify calls 0 DSA Sign calls 335 MD5 raw hash calls
- **show ssl statistics crypto** POMPON#**show ssl statistics crypto** SSL Acceleration Statistics Component: Crypto Slot: 5 Count Description -----
----- 5 RSA Private 0 RSA Public 0 DH Shared 0 DH Public 0 DSA Sign 0 DSA Verify 192 SSL MAC 257 TLS HMAC 451 3DES 0 ARC4 3,303 HASH 0 RSA Private Failed 0 RSA Public Failed 0 DH Shared Failed 0 DH Public Failed 0 DSA Sign Failed 0 DSA Verify Failed 0 SSL MAC Failed 0 TLS HMAC Failed 0 3DES Failed 0 ARC4 Failed 0 HASH Failed 0 Hardware Device Not Found 0 Hardware Device Timed Out 0 Invalid Crypto Parameter 0 Hardware Device Failed 0 Hardware Device Busy 0 Out Of Resources 0 Cancelled -- Device Reset POMPON#

故障排除

目前没有针对此配置的故障排除信息。

相关信息

- [内容网络软件中心\(注册用户\)](#)
- [内容网络设备硬件支持](#)
- [技术支持和文档 - Cisco Systems](#)