

删除/删除从Supervisor刀片准许

目录

[简介](#)

[问题](#)

[解决方案](#)


简介

本文描述如何从Supervisor刀片(MSE 8050)删除许可证。

问题

万一要删除他们，没有直接方式删除从Supervisor刀片的许可证。选项没有给删除前端。

[Home](#) > [Exit licenses](#) > License summary

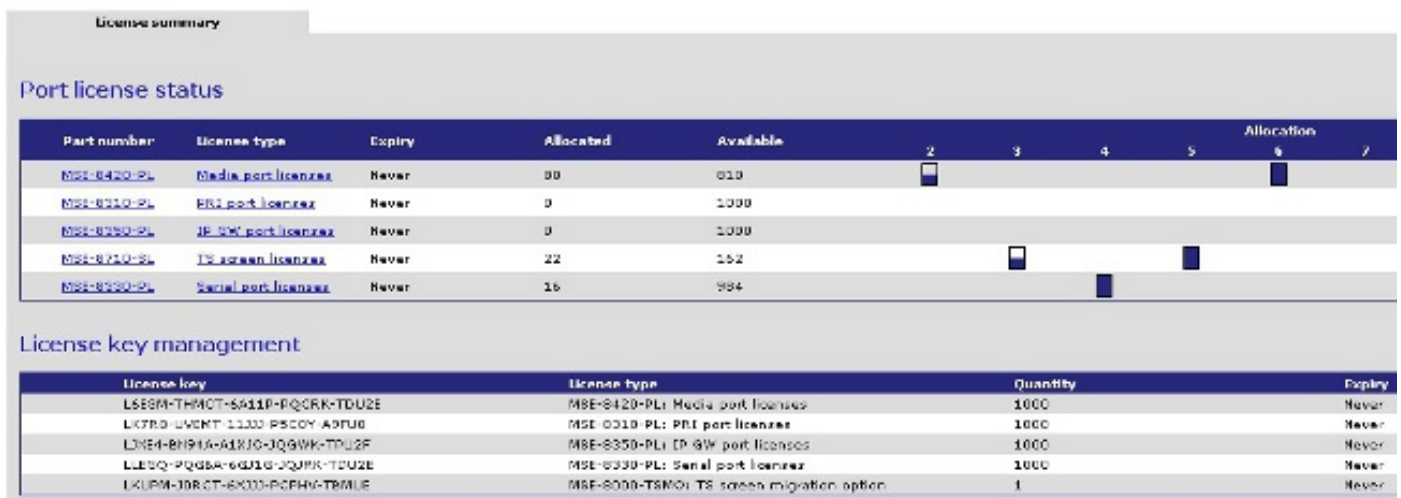

解决方案


打开浏览器并且输入此URL为了删除介质端口许可证(为例)：

```
Supervisor>/delete_key.html?key_type=1&permanent=L6E3M-THMCT-6A11P-PQCRK-TDU2E  
http:// <IPaddress
```

key_type=1 is for MSE-8420-PL: Media port licenses
key_type=2 is for MSE-8220-PL: Recording port licenses
key_type=3 is for MSE-8310-PL: PRI port licenses
key_type=4 is for MSE-8350-PL: IP GW port licenses
key_type=5 is for MSE-8710-SL: TS screen licenses

key_type=6 is for MSE-8330-PL: Serial port licenses

key_type=7 is for 5300-PL: 5300 Media port licenses

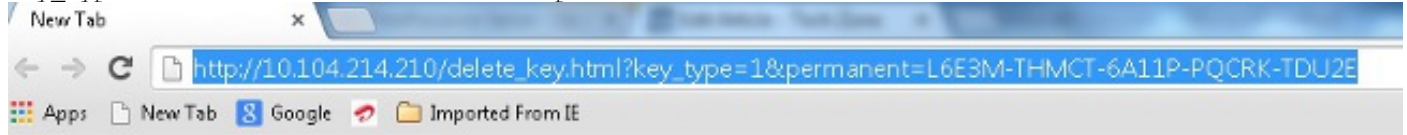

License summary

Port license status

Part number	License type	Expiry	Allocated	Available	2	3	4	5	6	7
MSE-8420-PL	Media port licenses	Never	80	0	█					
MSE-8510-PL	PRT port licenses	Never	0	1000						
MSE-8550-PL	IP GW port licenses	Never	0	1000						
MSE-8710-PL	TS screen licenses	Never	22	0		█			█	
MSE-8830-PL	Serial port licenses	Never	16	984			█			

License key management

License key	License type	Quantity	Expiry
LK2K3-U4EMT-11111-P500Y-R3FU8	MSE-8510-PL: PRT port licenses	1000	Never
LK2F4-A194A-A1X1C-1Q2WK-TP11F	MSE-8550-PL: IP GW port licenses	1000	Never
LLE9Q-PQ98A-66118-JQCRK-TDU2E	MSE-8830-PL: Serial port licenses	1000	Never
LK1PM-10RCT-6A111-PCPHV-TBM1F	MSE-8000-TSMO: TS screen migration option	1	Never