

OSPF非末节区域类型7到类型5的连接状态通告转换

Contents

[Introduction](#)

[Prerequisites](#)

[Requirements](#)

[Components Used](#)

[Conventions](#)

[Configure](#)

[Network Diagram](#)

[配置](#)

[Verify](#)

[检查OSPF数据库](#)

[Troubleshoot](#)

[Related Information](#)

[Introduction](#)

本文显示开放式最短路径优先(OSPF)如何转换非末节区域类型7链路状态广播(LSA)到类型5 LSA。

[Prerequisites](#)

[Requirements](#)

There are no specific requirements for this document.

[Components Used](#)

This document is not restricted to specific software and hardware versions.

[Conventions](#)

Refer to [Cisco Technical Tips Conventions](#) for more information on document conventions.


[Configure](#)

本部分提供有关如何配置本文档所述功能的信息。

Note: 要查找本文档所用命令的其他信息，请使用[命令查找工具](#)（[仅限注册用户](#)）。

Network Diagram

本文档使用此图所示的网络设置。

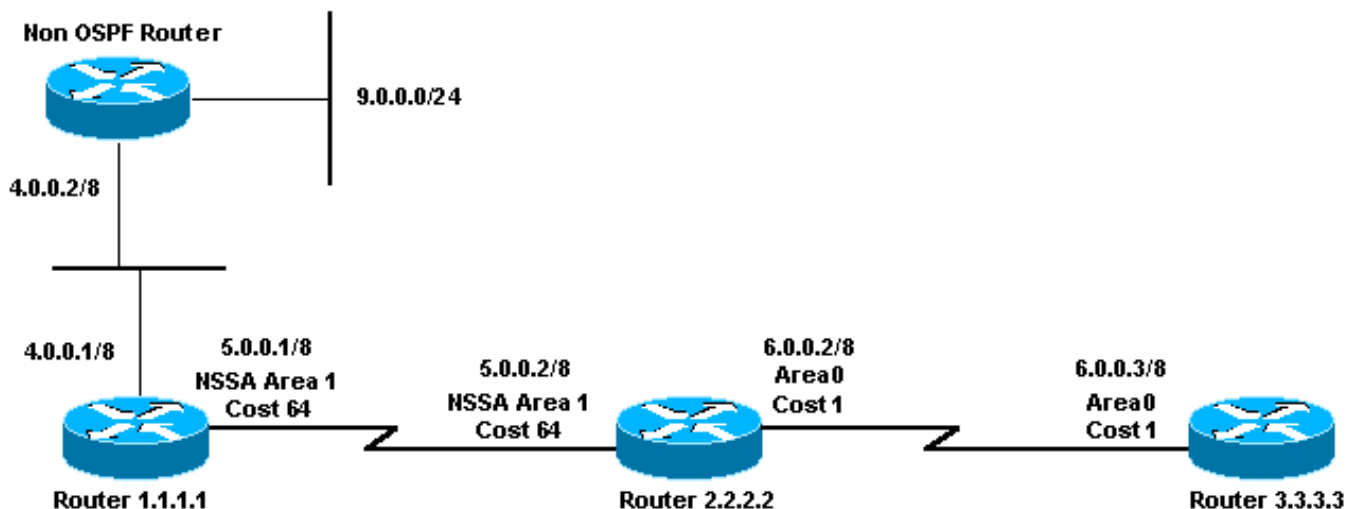

配置

本文档使用此处所示的配置。

- [路由器1.1.1.1](#)
- [路由器2.2.2.2](#)
- [路由器3.3.3.3](#)

Router1.1.1.1

Current configuration:

```
hostname r1.1.1.1

interface Loopback0
 ip address 1.1.1.1 255.0.0.0

interface Serial2/1/0
 ip address 5.0.0.1 255.0.0.0

interface Ethernet2/0/0
 ip address 4.0.0.1 255.0.0.0

router ospf 4
 redistribute static metric 5 metric-type 1
 network 5.0.0.0 0.255.255.255 area 1
 network 4.0.0.0 0.255.255.255 area 1
 area 1 nssa

ip route 9.0.0.0 255.0.0.0 4.0.0.2

end
```

路由器2.2.2.2

Current configuration:

```
hostname r2.2.2.2

interface Loopback0
 ip address 2.2.2.2 255.0.0.0

interface Serial0/1/0
 ip address 5.0.0.2 255.0.0.0

interface ATM1/0.20
 ip address 6.0.0.2 255.0.0.0

router ospf 2
 network 5.0.0.0 0.255.255.255 area 1
 network 6.0.0.0 0.255.255.255 area 0
 area 1 nssa

end
```

路由器3.3.3.3

```
Current configuration:

hostname r3.3.3.3

interface Loopback0
 ip address 3.3.3.3 255.0.0.0

interface ATM2/0.20 point-to-point
 ip address 6.0.0.3 255.0.0.0

router ospf 2
 network 6.0.0.0 0.255.255.255 area 0

end
```

Verify

本部分所提供的信息可用于确认您的配置是否正常工作。

[命令输出解释程序工具](#) ([仅限注册用户](#)) 支持某些 **show** 命令，使用此工具可以查看对 **show** 命令输出的分析。

- [show ip ospf database](#) —显示LSA列表并且键入他们到链路状态数据库。此列表在LSA报头显示仅信息。
- [show ip ospf database nssa-external](#) —显示仅信息关于NSSA外部LSA。
- [show ip ospf database external](#) - 仅显示有关外部 LSA 的信息。
- [show ip ospf database \[router\] \[link-state-id\]](#) —显示所有列表在数据库的路由器LSA。LSA是由每个路由器生产的，并且这些根本LSA与状态和链路流出开销一起列出所有路由器链路或者接口。他们在他们产生的区域内仅被充斥。
- [show ip ospf database summary <link状态id>](#) —显示区域边界路由器(ABR)汇总链路。
- [show ip route](#) - [显示路由表的当前状态。](#)

检查OSPF数据库

看到产生的OSPF数据库看起来此网络环境，如何使用**show ip ospf database**命令。

```
r2.2.2.2#show ip ospf database
```

```
OSPF Router with ID (2.2.2.2) (Process ID 2)
```

```
Router Link States (Area 0)
```

Link ID	ADV Router	Age	Seq#	Checksum	Link count
2.2.2.2	2.2.2.2	1235	0x8000001D	0xD9FF	2
3.3.3.3	3.3.3.3	1100	0x8000000B	0x9455	2

```
Summary Net Link States (Area 0)
```

Link ID	ADV Router	Age	Seq#	Checksum
4.0.0.0	2.2.2.2	1979	0x80000002	0xFDE7
5.0.0.0	2.2.2.2	1483	0x80000004	0x8864

```
Router Link States (Area 1)
```

Link ID	ADV Router	Age	Seq#	Checksum	Link count
1.1.1.1	1.1.1.1	319	0x8000000C	0xAFA8	3
2.2.2.2	2.2.2.2	220	0x8000002F	0xD478	2

```
Summary Net Link States (Area 1)
```

Link ID	ADV Router	Age	Seq#	Checksum
6.0.0.0	2.2.2.2	1483	0x8000001C	0x7894

```
Type-7 AS External Link States (Area 1)
```

Link ID	ADV Router	Age	Seq#	Checksum	Tag
9.0.0.0	1.1.1.1	334	0x80000005	0xD738	0

```
Type-5 AS External Link States
```

Link ID	ADV Router	Age	Seq#	Checksum	Tag
9.0.0.0	2.2.2.2	1725	0x80000004	0x50C6	0

要通告外部路由到NSSA，自治系统边界路由器(ASBR)创建nssa-external LSA (类型7)。

```
r2.2.2.2#show ip ospf database nssa-external 9.0.0.0
```

```
OSPF Router with ID (2.2.2.2) (Process ID 2)
```

```
Type-7 AS External Link States (Area 1)
```

```
Routing Bit Set on this LSA
```

```
LS age: 381
```

```
Options: (No TOS-capability, Type 7/5 translation, DC)
```

```
!--- This can be translated into a type 5 LSA by !--- an ABR. LS Type: AS External Link Link  
State ID: 9.0.0.0 (External Network Number ) !--- The ASBR (Router 1.1.1.1) advertises !---  
9.0.0.0/8. Advertising Router: 1.1.1.1 !--- Router ID of the ASBR. LS Seq Number: 80000005  
Checksum: 0xD738 Length: 36 Network Mask: /8 Metric Type: 1 (Comparable directly to link state  
metric) TOS: 0 Metric: 5 Forward Address: 4.0.0.1 !--- Forwarding address is incorrectly  
specified !--- as an interface on the ASBR.
```

ABR转换类型7 LSA成类型5 LSA，并且传播类型5 LSA到正常区域。

```
r2.2.2.2#show ip ospf database external 9.0.0.0
```

```
OSPF Router with ID (2.2.2.2) (Process ID 2)
```

Type-5 AS External Link States

```
LS age: 1782
Options: (No TOS-capability, DC)
LS Type: AS External Link
Link State ID: 9.0.0.0 (External Network Number )
!--- Router 2.2.2.2 advertises 9.0.0.0/8. Advertising Router: 2.2.2.2 !--- When the conversion
is complete, the advertising !--- router ID becomes the ABR router ID !--- because the ABR
originates this type 5 LSA. LS Seq Number: 80000004 Checksum: 0x50C6 Length: 36 Network Mask: /8
Metric Type: 1 (Comparable directly to link state metric) TOS: 0 Metric: 5 Forward Address:
4.0.0.1 External Route Tag: 0 r2.2.2.2#show ip ospf database router 1.1.1.1
```

OSPF Router with ID (2.2.2.2) (Process ID 2)

Router Link States (Area 1)

```
Routing Bit Set on this LSA
LS age: 426
Options: (No TOS-capability, DC)
LS Type: Router Links
Link State ID: 1.1.1.1
!--- For router links, Link State ID is always the same !--- as the advertising router (next
line). Advertising Router: 1.1.1.1 LS Seq Number: 8000000C Checksum: 0xAFA8 Length: 60 AS
Boundary Router !--- Bit E in the router LSA indicates that this router !--- originates from
external LSAs. Number of Links: 3 !--- There are three links in area 1. Link connected to: a
Stub Network !--- This represents the Ethernet segment 4.0.0.0/8. (Link ID) Network/subnet
number: 4.0.0.0 (Link Data) Network Mask: 255.0.0.0 Number of TOS metrics: 0 TOS 0 Metrics: 10
!--- The OSPF cost of the Ethernet segment. Link connected to: another Router (point-to-point)
!--- Shows that Router 1.1.1.1 is a neighbor with !--- Router 2.2.2.2. (Link ID) Neighboring
Router ID: 2.2.2.2 (Link Data) Router Interface address: 5.0.0.1 !--- The interface address that
connects to Router !--- 2.2.2.2 is 5.0.0.1. Number of TOS metrics: 0 TOS 0 Metrics: 64 !--- The
OSPF cost of the link that connects !--- the two routers. Link connected to: a Stub Network !---
This represents the serial link 5.0.0.0/8. (Link ID) Network/subnet number: 5.0.0.0 (Link Data)
Network Mask: 255.0.0.0 Number of TOS metrics: 0 TOS 0 Metrics: 64 !--- The OSPF cost of the
serial link.
```

您能从**粗体**输出看到这里，虽然路由器2.2.2.2不安排其中任一**重新分配**在其配置的语句，它仍然是ASBR，因为转换类型7 LSA成类型5 LSA。

```
r2.2.2.2#show ip ospf database router 2.2.2.2
```

OSPF Router with ID (2.2.2.2) (Process ID 2)

Router Link States (Area 0)

```
LS age: 1361
Options: (No TOS-capability, DC)
LS Type: Router Links
Link State ID: 2.2.2.2
Advertising Router: 2.2.2.2
LS Seq Number: 8000001D
Checksum: 0xD9FF
Length: 48
Area Border Router
!--- Bit B is set in the router LSA to indicate !--- that this router is an ABR. AS Boundary
Router
!--- Bit E in the router LSA indicates that this router !--- originates from external LSAs.
Number of Links: 2 !--- There are two links in area 0. Link connected to: another Router (point-
to-point) (Link ID) Neighboring Router ID: 3.3.3.3 (Link Data) Router Interface address: 6.0.0.2
Number of TOS metrics: 0 TOS 0 Metrics: 1 Link connected to: a Stub Network (Link ID)
Network/subnet number: 6.0.0.0 (Link Data) Network Mask: 255.0.0.0 Number of TOS metrics: 0 TOS
0 Metrics: 1 Router Link States (Area 1) LS age: 346 Options: (No TOS-capability, DC) LS Type:
Router Links Link State ID: 2.2.2.2 Advertising Router: 2.2.2.2 LS Seq Number: 8000002F
```

Checksum: 0xD478 Length: 48 Area Border Router AS Boundary Router Number of Links: 2 Link connected to: another Router (point-to-point) (Link ID) Neighboring Router ID: 1.1.1.1 (Link Data) Router Interface address: 5.0.0.2 Number of TOS metrics: 0 TOS 0 Metrics: 64 Link connected to: a Stub Network (Link ID) Network/subnet number: 5.0.0.0 (Link Data) Network Mask: 255.0.0.0 Number of TOS metrics: 0 TOS 0 Metrics: 64 r2.2.2.2#**show ip ospf database router 3.3.3.3**

OSPF Router with ID (2.2.2.2) (Process ID 2)

Router Link States (Area 0)

LS age: 1245
Options: (No TOS-capability, DC)
LS Type: Router Links
Link State ID: 3.3.3.3
Advertising Router: 3.3.3.3
LS Seq Number: 8000000B
Checksum: 0x9455
Length: 48
Number of Links: 2

Link connected to: another Router (point-to-point)
(Link ID) Neighboring Router ID: 2.2.2.2
(Link Data) Router Interface address: 6.0.0.3
Number of TOS metrics: 0
TOS 0 Metrics: 1

Link connected to: a Stub Network
(Link ID) Network/subnet number: 6.0.0.0
(Link Data) Network Mask: 255.0.0.0
Number of TOS metrics: 0
TOS 0 Metrics: 1

要通告从一个区域的路由到别的， ABR创建汇总LSA (类型3)。

r2.2.2.2#**show ip ospf database summary 4.0.0.0**

OSPF Router with ID (2.2.2.2) (Process ID 2)

Summary Net Link States (Area 0)

LS age: 172
Options: (No TOS-capability, DC)
LS Type: Summary Links(Network)
Link State ID: 4.0.0.0 (summary Network Number)
!--- The ABR (Router 2.2.2.2) advertises !--- 4.0.0.0/8 into area 0. Advertising Router:
2.2.2.2 LS Seq Number: 80000003 Checksum: 0xFBE8 Length: 28 Network Mask: /8 TOS: 0 Metric: 74
r2.2.2.2#**show ip ospf database summary 5.0.0.0**

OSPF Router with ID (2.2.2.2) (Process ID 2)

Summary Net Link States (Area 0)

LS age: 1687
Options: (No TOS-capability, DC)
LS Type: Summary Links(Network)
Link State ID: 5.0.0.0 (summary Network Number)
!--- The ABR (Router 2.2.2.2) advertises !--- 5.0.0.0/8 into area 0. Advertising Router:
2.2.2.2 LS Seq Number: 80000004 Checksum: 0x8864 Length: 28 Network Mask: /8 TOS: 0 Metric: 64
r2.2.2.2#**show ip ospf database summary 6.0.0.0**

OSPF Router with ID (2.2.2.2) (Process ID 2)

Summary Net Link States (Area 1)

LS age: 1697

Options: (No TOS-capability, DC)

LS Type: Summary Links(Network)

Link State ID: 6.0.0.0 (summary Network Number)

!--- The ABR (Router 2.2.2.2) advertises !--- 6.0.0.0/8 into area 1. Advertising Router:

2.2.2.2 LS Seq Number: 8000001C Checksum: 0x7894 Length: 28 Network Mask: /8 TOS: 0 Metric: 1

ASBR汇总LSA在这种情况下没有必要，因为ABR产生外部LSA，并且ABR在area 0内是可及的。此示例与NSSA是一个正常区域的方案比较通过查看数据库示例[OSPF如何传播外部路由到多个区域](#)。

此路由表输出显示不同种类的OSPF路由9.0.0.0叫作由每个路由器。

```
r1.1.1.1#show ip route 9.0.0.0
```

```
Routing entry for 9.0.0.0/8
```

```
Known via "static", distance 1, metric 0
```

```
Redistributing via ospf 4
```

```
Advertised by ospf 4 metric 5 metric-type 1
```

```
Routing Descriptor Blocks:
```

```
* 4.0.0.2
```

```
Route metric is 0, traffic share count is 1
```

```
r2.2.2.2#show ip route ospf
```

```
O 4.0.0.0/8 [110/74] via 5.0.0.1, 01:10:13, Serial0/1/0
```

```
O N1 9.0.0.0/8 [110/79] via 5.0.0.1, 01:07:20, Serial0/1/0
```

```
R3.3.3.3#show ip route ospf
```

```
O IA 4.0.0.0/8 [110/75] via 6.0.0.2, 02:11:14, ATM2/0.20
```

```
O IA 5.0.0.0/8 [110/65] via 6.0.0.2, 03:10:41, ATM2/0.20
```

```
O E1 9.0.0.0/8 [110/80] via 6.0.0.2, 02:08:11, ATM2/0.20
```

Troubleshoot

目前没有针对此配置的故障排除信息。

Related Information

- [OSPF如何传播外部路由到多个区域](#)
- [OSPF数据库说明指南](#)
- [OSPF支持](#)
- [IP 路由支持页](#)
- [Technical Support & Documentation - Cisco Systems](#)