

在专用网络之间配置 IPSec 路由器到路由器、预共享和 NAT 过载

目录

[简介](#)

[先决条件](#)

[要求](#)

[使用的组件](#)

[规则](#)

[配置](#)

[网络图](#)

[配置](#)

[验证](#)

[故障排除](#)

[故障排除命令](#)

[相关信息](#)

简介

本示例配置显示如何使用 IPSec 在二个专用网络 (10.50.50.x 和 10.103.1.x) 之间加密数据流。网络根据它们的专用地址来相互辨认。

先决条件

要求

本文档没有任何特定的要求。

使用的组件

本文档中的信息基于以下软件和硬件版本：

- Cisco IOS® 软件版本12.3.1a
- Cisco 2691 路由器

本文档中的信息都是基于特定实验室环境中的设备编写的。本文档中使用的所有设备最初均采用原始 (默认) 配置。如果您使用的是真实网络，请确保您已经了解所有命令的潜在影响。

规则

有关文档规则的详细信息，请参阅 [Cisco 技术提示规则](#)。


配置

本部分提供有关如何配置本文档所述功能的信息。

注意： 要查找本文档所用命令的其他信息，请使用[命令查找工具](#)（[仅限注册用户](#)）。

网络图

本文档使用此图所示的网络设置。

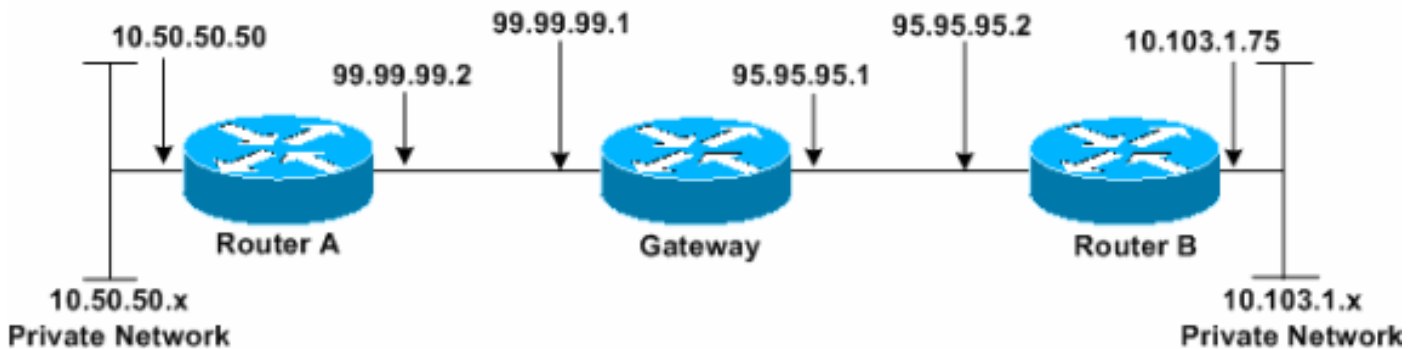

配置

本文档使用以下配置。

- [路由器 A](#)
- [路由器 B](#)

路由器 A

```
Router_A#write terminal
Building configuration...
Current configuration : 1638 bytes
!
version 12.3
service timestamps debug datetime msec
service timestamps log datetime msec
no service password-encryption
!
hostname Router_A
!
boot system flash:c2691-ik9o3s-mz.123-1a.bin
!
ip subnet-zero
!
ip audit notify log
ip audit po max-events 100
no ftp-server write-enable
!
crypto isakmp policy 1
hash md5
authentication pre-share
crypto isakmp key cisco123 address 95.95.95.2
!
crypto ipsec transform-set rtpset esp-des esp-md5-hmac
!
crypto map rtp 1 ipsec-isakmp
```

```

set peer 95.95.95.2
set transform-set rtpset
!--- Include the private network to private network
traffic !--- in the encryption process. match address
115
!
no voice hpi capture buffer
no voice hpi capture destination
!
interface FastEthernet0/0
ip address 99.99.99.2 255.255.255.0
ip nat outside
duplex auto
speed auto
crypto map rtp
!
interface FastEthernet0/1
ip address 10.50.50.50 255.255.255.0
ip nat inside
duplex auto
speed auto
!
!--- Except the private network traffic from the !---
Network Address Translation (NAT) process. ip nat inside
source route-map nonat interface FastEthernet0/0
overload
ip http server
no ip http secure-server
ip classless
ip route 0.0.0.0 0.0.0.0 99.99.99.1
!
!--- Except the private network traffic from the NAT
process. access-list 110 deny ip 10.50.50.0 0.0.0.255
10.103.1.0 0.0.0.255
access-list 110 permit ip 10.50.50.0 0.0.0.255 any
!--- Include the private network to private network
traffic !--- in the encryption process. access-list 115
permit ip 10.50.50.0 0.0.0.255 10.103.1.0 0.0.0.255
!
!--- Except the private network traffic from the NAT
process. route-map nonat permit 10
match ip address 110
!
dial-peer cor custom
!
line con 0
exec-timeout 0 0
line aux 0
line vty 0 4
login
!
end

Router_A#

```

路由器 B

```

Router_B#write terminal
Building configuration...
Current configuration : 1394 bytes
!
version 12.3
service timestamps debug datetime msec
service timestamps log datetime msec
no service password-encryption

```

```
!  
hostname Router_B  
!  
boot system flash:c2691-ik9o3s-mz.123-1a.bin  
!  
ip subnet-zero  
!  
ip audit notify log  
ip audit po max-events 100  
no ftp-server write-enable  
!  
crypto isakmp policy 1  
hash md5  
authentication pre-share  
crypto isakmp key cisco123 address 99.99.99.2  
!  
crypto ipsec transform-set rtpset esp-des esp-md5-hmac  
!  
crypto map rtp 1 ipsec-isakmp  
set peer 99.99.99.2  
set transform-set rtpset  
!--- Include the private network to private network  
traffic !--- in the encryption process. match address  
115  
!  
no voice hpi capture buffer  
no voice hpi capture destination  
!  
interface FastEthernet0/0  
ip address 95.95.95.2 255.255.255.0  
ip nat outside  
duplex auto  
speed auto  
crypto map rtp  
!  
interface FastEthernet0/1  
ip address 10.103.1.75 255.255.255.0  
ip nat inside  
duplex auto  
speed auto  
!  
!--- Except the private network traffic from the NAT  
process. ip nat inside source route-map nonat interface  
FastEthernet0/0 overload  
ip http server  
no ip http secure-server  
ip classless  
ip route 0.0.0.0 0.0.0.0 95.95.95.1  
!  
!--- Except the private network traffic from the NAT  
process. access-list 110 deny ip 10.103.1.0 0.0.0.255  
10.50.50.0 0.0.0.255  
access-list 110 permit ip 10.103.1.0 0.0.0.255 any  
!--- Include the private network to private network  
traffic !--- in the encryption process. access-list 115  
permit ip 10.103.1.0 0.0.0.255 10.50.50.0 0.0.0.255  
!  
!--- Except the private network traffic from the NAT  
process. route-map nonat permit 10  
match ip address 110  
!  
dial-peer cor custom  
!  
line con 0
```

```
exec-timeout 0 0
line aux 0
line vty 0 4
login
!
end
Router_B#
```

验证

当前没有可用于此配置的验证过程。

故障排除

故障排除命令

[命令输出解释程序工具](#) ([仅限注册用户](#)) 支持某些 **show** 命令，使用此工具可以查看对 show 命令输出的分析。

注意： 在发出 **debug** 命令之前，请参阅[有关 Debug 命令的重要信息](#)。

- **debug crypto ipsec sa** - 显示第 2 阶段的 IPsec 协商。
- **debug crypto isakmp sa** - 显示第 1 阶段的 Internet 安全连接和密钥管理协议 (ISAKMP) 协商。
- **debug crypto engine** — 显示加密会话。

相关信息

- [IP安全故障排除-了解和使用debug命令](#)
- [IPSec 支持页面](#)
- [技术支持 - Cisco Systems](#)