

# FlexVPN : 对LAN配置的IPv6基本LAN

## 目录

[简介](#)

[先决条件](#)

[要求](#)

[使用的组件](#)

[规则](#)

[网络图](#)

[设置寻址基本的IPv6和相关静态路由](#)

[对LAN配置的弹性VPN基本LAN](#)

[IKEv2建议、策略和授权策略](#)

[IKEv2钥匙圈、IKEv2配置文件、证书地图和IPSec简档](#)

[创建隧道接口使用sVTi](#)

[相关信息](#)

## [简介](#)

本文提供关于FlexVPN LAN的信息给在IPv6终端之间的LAN隧道配置使用本地认证(预共享密钥和certs)。

## [先决条件](#)

### [要求](#)

本文档没有任何特定的要求。


### [使用的组件](#)

本文档不限于特定的软件和硬件版本。

### [规则](#)

有关文档规则的详细信息，请参阅 [Cisco 技术提示规则](#)。

## [网络图](#)

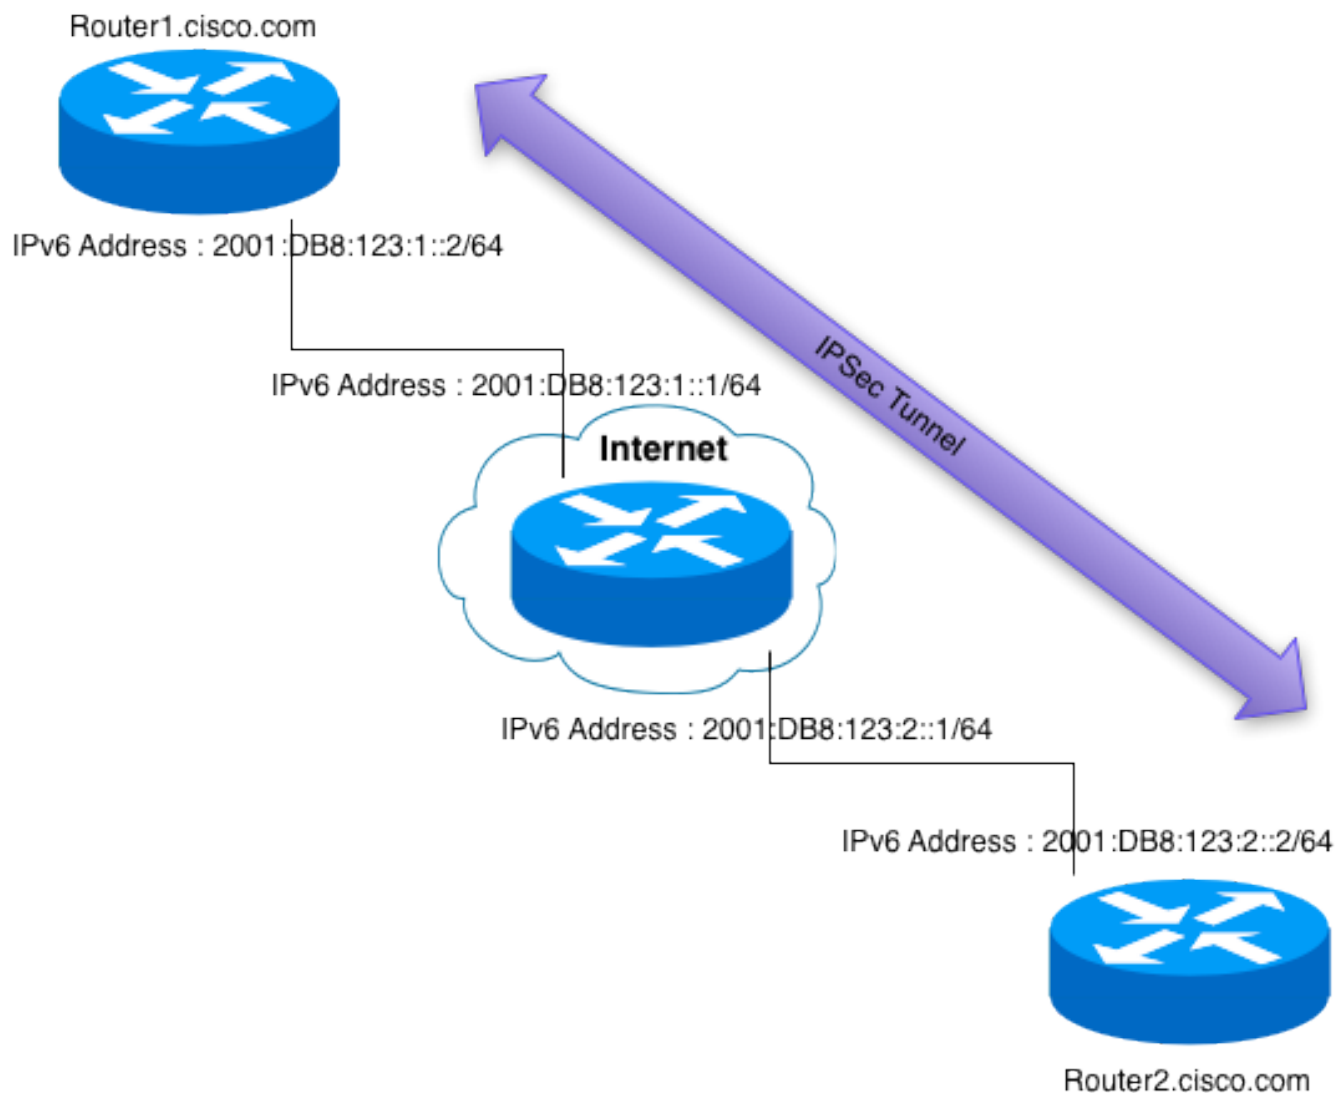

## 设置寻址基本的IPv6和相关静态路由

IPv6寻址是出于范围本文。参考[实现IPv6寻址和基本连通性](#)欲知更多信息。

路由器 R1 :

```

ipv6 unicast-routing
!
interface Ethernet0/0
  no ip address
  ipv6 address 2001:DB8:123:1::2/64
  ipv6 enable
!
ipv6 route ::/0 2001:DB8:123:1::1
!

```

路由器ISP:

```

ipv6 unicast-routing
!
interface Ethernet0/0
  no ip address
  ipv6 address 2001:DB8:123:1::1/64
  ipv6 enable
!

```

```
interface Ethernet0/1
  no ip address
  ipv6 address 2001:DB8:123:2::1/64
  ipv6 enable
!
```

路由器R2 :

```
ipv6 unicast-routing
!
interface Ethernet0/0
  no ip address
  ipv6 address 2001:DB8:123:2::2/64
  ipv6 enable
!
ipv6 route ::/0 2001:DB8:123:2::1
!
```

## 对LAN配置的弹性VPN基本LAN

基本LAN的设置对LAN的在两个IPv6终端之间跟IPv4没有不同。

### IKEv2建议、策略和授权策略

聪明的默认(IKEv2建议、策略和授权策略)用于此示例。

**注意：**聪明的默认不必须配置。

```
crypto ikev2 authorization policy default
  route set interface
  route accept any
!
crypto ikev2 proposal default
  encryption aes-cbc-256 aes-cbc-192 aes-cbc-128
  integrity sha512 sha384 sha256 sha1 md5
  group 5 2
!
crypto ikev2 policy default
  match fvrfl any
  proposal default
!
```

### IKEv2钥匙圈、IKEv2配置文件、证书地图和IPSec简档

#### 使用PSK

路由器 R1 :

```
crypto ikev2 keyring key
  peer R2.cisco.com
    description Pre-Shared-Key for Router2
    address 2001:DB8:123:2::2/128
    hostname Router2
    identity address 2001:DB8:123:2::2
    pre-shared-key local cisco123
    pre-shared-key remote cisco456
!
crypto ikev2 profile default
  match identity remote address 2001:DB8:123:2::2/128
  authentication remote pre-share
```

```
authentication local pre-share
keyring local key
!
crypto ipsec profile default*
set ikev2-profile default
!
```

*\*as of 15.3(3)T the following line need not be explicitly configured anymore and is part of the smart default.*

**路由器R2 :**

```
crypto ikev2 keyring key
peer R1.cisco.com
description Pre-Shared-Key for Router1
address 2001:DB8:123:1::2/128
hostname Router1
identity address 2001:DB8:123:1::2
pre-shared-key local cisco456
pre-shared-key remote cisco123
!
crypto ikev2 profile default
match identity remote address 2001:DB8:123:1::2/128
authentication remote pre-share
authentication local pre-share
keyring local key
!
crypto ipsec profile default
set ikev2-profile default
!
```

## 使用Certs

**路由器 R1 :**

```
crypto pki trustpoint ikev2
enrollment url http://[2001:DB8:123:1::1]:80
revocation-check none
crypto pki certificate map cmap 1
subject-name eq hostname = router2.cisco.com
!
crypto ikev2 profile default
match identity remote address 2001:DB8:123:2::2/128
match certificate cmap
authentication remote rsa-sig
authentication local rsa-sig
pki trustpoint ikev2
!
crypto ipsec profile default
set ikev2-profile default
!
```

**路由器R2 :**

```
crypto pki trustpoint ikev2
enrollment url http://[2001:DB8:123:1::1]:80
revocation-check none
crypto pki certificate map cmap 1
subject-name eq hostname = router1.cisco.com
!
crypto ikev2 profile default
match identity remote address 2001:DB8:123:1::2/128
match certificate cmap
```

```
authentication remote rsa-sig
authentication local rsa-sig
pki trustpoint ikev2
!
crypto ipsec profile default
 set ikev2-profile default
!
```

## [创建隧道接口使用sVTi](#)

由于可以使用两不同类型的流量，IPv4和IPv6在现有IPv6建立隧道，您有不同的设计例如：

- 在IPv6通道的IPv6使用隧道模式ipsec IPv6
- 在IPv6通道的IPv4使用隧道模式gre IPv6
- 混合模式使用隧道模式gre IPv6的地方，您通过通道执行IPv4和IPv6

**注意：**推荐管理员使用在SVTIs (IPSec模式)的GRE隧道。这是因为在多数部署IPv6支持实际上暗示双重堆栈和GRE/IPSEC支持双重堆栈无缝地。

## [在IPv6通道的IPv6](#)

路由器 R1：

```
interface Loopback0
 description This is a test endpoint
 no ip address
 ipv6 address 2001:DB8:100:1::1/64
 ipv6 enable
!
interface Tunnel0
 no ip address
 ipv6 address 2001:DB8:99::1/64
 ipv6 enable
 tunnel source Ethernet0/0
 tunnel mode ipsec ipv6
 tunnel destination 2001:DB8:123:2::2
 tunnel protection ipsec profile default
!
ipv6 route 2001:DB8:200:1::/64 Tunnel0
!
```

路由器R2：

```
interface Loopback0
 description This is a test endpoint
 no ip address
 ipv6 address 2001:DB8:200:1::1/64
 ipv6 enable
!
interface Tunnel0
 no ip address
 ipv6 address 2001:DB8:99::2/64
 ipv6 enable
 tunnel source Ethernet0/0
 tunnel mode ipsec ipv6
 tunnel destination 2001:DB8:123:1::2
 tunnel protection ipsec profile default
!
ipv6 route 2001:DB8:100:1::/64 Tunnel0
!
```

**显示命令：**

=====

IKEv2 SA:

=====

Using PSK:

-----

Router1#show crypto ikev2 sa detailed

IPv4 Crypto IKEv2 SA

IPv6 Crypto IKEv2 SA

```
Tunnel-id   fvrf/ivrf           Status
2           none/none           READY
Local      2001:DB8:123:1::2/500
Remote    2001:DB8:123:2::2/500
Encr: AES-CBC, keysize: 256, Hash: SHA512, DH Grp:5, Auth sign: PSK,
Auth verify: PSK
Life/Active Time: 86400/14180 sec
CE id: 0, Session-id: 1
Status Description: Negotiation done
Local spi: C73B18AE83F68C11      Remote spi: EF52B3A4454D1AAA
Local id: 2001:DB8:123:1::2
Remote id: 2001:DB8:123:2::2
Local req msg id: 4                Remote req msg id: 4
Local next msg id: 4              Remote next msg id: 4
Local req queued: 4               Remote req queued: 4
Local window: 5                   Remote window: 5
DPD configured for 0 seconds, retry 0
NAT-T is not detected
Cisco Trust Security SGT is disabled
Initiator of SA : Yes
```

-----

Router2#show crypto ikev2 sa detailed

IPv4 Crypto IKEv2 SA

IPv6 Crypto IKEv2 SA

```
Tunnel-id   fvrf/ivrf           Status
3           none/none           READY
Local      2001:DB8:123:2::2/500
Remote    2001:DB8:123:1::2/500
Encr: AES-CBC, keysize: 256, Hash: SHA512, DH Grp:5, Auth sign: PSK,
Auth verify: PSK
Life/Active Time: 86400/14298 sec
CE id: 0, Session-id: 1
Status Description: Negotiation done
Local spi: EF52B3A4454D1AAA      Remote spi: C73B18AE83F68C11
Local id: 2001:DB8:123:2::2
Remote id: 2001:DB8:123:1::2
Local req msg id: 4                Remote req msg id: 4
Local next msg id: 4              Remote next msg id: 4
Local req queued: 4               Remote req queued: 4
Local window: 5                   Remote window: 5
DPD configured for 0 seconds, retry 0
NAT-T is not detected
Cisco Trust Security SGT is disabled
Initiator of SA : No
```

Using Cert Auth:

-----

Router1#show crypto ikev2 sa detail

IPv4 Crypto IKEv2 SA

IPv6 Crypto IKEv2 SA

```
Tunnel-id    fvrf/ivrf          Status
1            none/none          READY
Local 2001:DB8:123:1::2/500
Remote 2001:DB8:123:2::2/500
Encr: AES-CBC, keysize: 256, Hash: SHA512, DH Grp:5, Auth sign: RSA,
Auth verify: RSA
Life/Active Time: 86400/18153 sec
CE id: 1024, Session-id: 3
Status Description: Negotiation done
Local spi: 282FE0B3B5CC7FAB      Remote spi: 0D26F64871399A2B
Local id: 2001:DB8:123:1::2
Remote id: 2001:DB8:123:2::2
Local req msg id: 6              Remote req msg id: 6
Local next msg id: 6            Remote next msg id: 6
Local req queued: 6             Remote req queued: 6
Local window: 5                 Remote window: 5
DPD configured for 0 seconds, retry 0
NAT-T is not detected
Cisco Trust Security SGT is disabled
Initiator of SA : Yes
```

-----

```
Router2#show crypto ikev2 sa detail
IPv4 Crypto IKEv2 SA

IPv6 Crypto IKEv2 SA
```

```
Tunnel-id    fvrf/ivrf          Status
1            none/none          READY
Local 2001:DB8:123:2::2/500
Remote 2001:DB8:123:1::2/500
Encr: AES-CBC, keysize: 256, Hash: SHA512, DH Grp:5, Auth sign: RSA,
Auth verify: RSA
Life/Active Time: 86400/17811 sec
CE id: 1024, Session-id: 4
Status Description: Negotiation done
Local spi: 0D26F64871399A2B      Remote spi: 282FE0B3B5CC7FAB
Local id: 2001:DB8:123:2::2
Remote id: 2001:DB8:123:1::2
Local req msg id: 6              Remote req msg id: 6
Local next msg id: 6            Remote next msg id: 6
Local req queued: 6             Remote req queued: 6
Local window: 5                 Remote window: 5
DPD configured for 0 seconds, retry 0
NAT-T is not detected
Cisco Trust Security SGT is disabled
Initiator of SA : No
```

```
=====
IPSec SA:
=====
```

```
Router1#show crypto ipsec sa detail

interface: Tunnel0
Crypto map tag: Tunnel0-head-0, local addr 2001:DB8:123:1::2

protected vrf: (none)
local ident (addr/mask/prot/port): (::/0/0/0)
remote ident (addr/mask/prot/port): (::/0/0/0)
current_peer 2001:DB8:123:2::2 port 500
PERMIT, flags={origin_is_acl,}
```

#pkts encaps: 15, #pkts encrypt: 15, #pkts digest: 15  
#pkts decaps: 15, #pkts decrypt: 15, #pkts verify: 15  
#pkts compressed: 0, #pkts decompressed: 0  
#pkts not compressed: 0, #pkts compr. failed: 0  
#pkts not decompressed: 0, #pkts decompress failed: 0  
#pkts no sa (send) 0, #pkts invalid sa (rcv) 0  
#pkts encaps failed (send) 0, #pkts decaps failed (rcv) 0  
#pkts invalid prot (rcv) 0, #pkts verify failed: 0  
#pkts invalid identity (rcv) 0, #pkts invalid len (rcv) 0  
#pkts replay rollover (send): 0, #pkts replay rollover (rcv) 0  
##pkts replay failed (rcv): 0  
#pkts tagged (send): 0, #pkts untagged (rcv): 0  
#pkts not tagged (send): 0, #pkts not untagged (rcv): 0  
#pkts internal err (send): 0, #pkts internal err (rcv) 0

local crypto endpt.: 2001:DB8:123:1::2,  
remote crypto endpt.: 2001:DB8:123:2::2  
path mtu 1500, ipv6 mtu 1500, ipv6 mtu idb Ethernet0/0  
current outbound spi: 0xA50C0785(2769028997)  
PFS (Y/N): N, DH group: none

inbound esp sas:

spi: 0xA065288D(2690984077)  
transform: esp-aes esp-sha-hmac ,  
in use settings = {Tunnel, }  
conn id: 62, flow\_id: SW:62, sibling\_flags 80000041, crypto map:  
Tunnel0-head-0  
sa timing: remaining key lifetime (k/sec): (4226008/2911)  
IV size: 16 bytes  
replay detection support: Y  
Status: ACTIVE(ACTIVE)

inbound ah sas:

inbound pcp sas:

outbound esp sas:

spi: 0xA50C0785(2769028997)  
transform: esp-aes esp-sha-hmac ,  
in use settings = {Tunnel, }  
conn id: 61, flow\_id: SW:61, sibling\_flags 80000041, crypto map:  
Tunnel0-head-0  
sa timing: remaining key lifetime (k/sec): (4226008/2911)  
IV size: 16 bytes  
replay detection support: Y  
Status: ACTIVE(ACTIVE)

outbound ah sas:

outbound pcp sas:

-----

Router2#show crypto ipsec sa detail

interface: Tunnel0

Crypto map tag: Tunnel0-head-0, local addr 2001:DB8:123:2::2

protected vrf: (none)

local ident (addr/mask/prot/port): (::/0/0/0)

remote ident (addr/mask/prot/port): (::/0/0/0)

current\_peer 2001:DB8:123:1::2 port 500

PERMIT, flags={origin\_is\_acl,}

#pkts encaps: 15, #pkts encrypt: 15, #pkts digest: 15



```
#pkts decaps: 15, #pkts decrypt: 15, #pkts verify: 15
#pkts compressed: 0, #pkts decompressed: 0
#pkts not compressed: 0, #pkts compr. failed: 0
#pkts not decompressed: 0, #pkts decompress failed: 0
#pkts no sa (send) 0, #pkts invalid sa (rcv) 0
#pkts encaps failed (send) 0, #pkts decaps failed (rcv) 0
#pkts invalid prot (rcv) 0, #pkts verify failed: 0
#pkts invalid identity (rcv) 0, #pkts invalid len (rcv) 0
#pkts replay rollover (send): 0, #pkts replay rollover (rcv) 0
##pkts replay failed (rcv): 0
#pkts tagged (send): 0, #pkts untagged (rcv): 0
#pkts not tagged (send): 0, #pkts not untagged (rcv): 0
#pkts internal err (send): 0, #pkts internal err (rcv) 0
```

```
local crypto endpt.: 2001:DB8:123:2::2,
remote crypto endpt.: 2001:DB8:123:1::2
path mtu 1500, ipv6 mtu 1500, ipv6 mtu idb Ethernet0/0
current outbound spi: 0xA065288D(2690984077)
PFS (Y/N): N, DH group: none
```

inbound esp sas:

```
spi: 0xA50C0785(2769028997)
transform: esp-aes esp-sha-hmac ,
in use settings ={Tunnel, }
conn id: 61, flow_id: SW:61, sibling_flags 80000041, crypto map:
Tunnel0-head-0
sa timing: remaining key lifetime (k/sec): (4231562/2833)
IV size: 16 bytes
replay detection support: Y
Status: ACTIVE(ACTIVE)
```

inbound ah sas:

inbound pcp sas:

outbound esp sas:

```
spi: 0xA065288D(2690984077)
transform: esp-aes esp-sha-hmac ,
in use settings ={Tunnel, }
conn id: 62, flow_id: SW:62, sibling_flags 80000041, crypto map:
Tunnel0-head-0
sa timing: remaining key lifetime (k/sec): (4231562/2833)
IV size: 16 bytes
replay detection support: Y
Status: ACTIVE(ACTIVE)
```

outbound ah sas:

outbound pcp sas:

```
=====
Routing :
=====
```

```
Router1#show ipv6 route
IPv6 Routing Table - default - 9 entries
S   ::/0 [1/0]
    via 2001:DB8:123:1::1
C   2001:DB8:99::/64 [0/0]
    via Tunnel0, directly connected
L   2001:DB8:99::1/128 [0/0]
    via Tunnel0, receive
C   2001:DB8:100:1::/64 [0/0]
    via Loopback0, directly connected
```

```
L 2001:DB8:100:1::1/128 [0/0]
  via Loopback0, receive
C 2001:DB8:123:1::/64 [0/0]
  via Ethernet0/0, directly connected
L 2001:DB8:123:1::2/128 [0/0]
  via Ethernet0/0, receive
S 2001:DB8:200:1::/64 [1/0]
  via Tunnel0, directly connected
L FF00::/8 [0/0]
  via Null0, receive
```

```
-----
Router2#show ipv6 route
```

```
IPv6 Routing Table - default - 9 entries
```

```
Codes: C - Connected, L - Local, S - Static, U - Per-user Static route
       B - BGP, HA - Home Agent, MR - Mobile Router, R - RIP
       H - NHRP, I1 - ISIS L1, I2 - ISIS L2, IA - ISIS interarea
       IS - ISIS summary, D - EIGRP, EX - EIGRP external, NM - NEMO
       ND - ND Default, NDP - ND Prefix, DCE - Destination, NDR - Redirect
       O - OSPF Intra, OI - OSPF Inter, OE1 - OSPF ext 1, OE2 - OSPF ext 2
       ON1 - OSPF NSSA ext 1, ON2 - OSPF NSSA ext 2, l - LISP
```

```
S ::/0 [1/0]
  via 2001:DB8:123:2::1
C 2001:DB8:99::/64 [0/0]
  via Tunnel0, directly connected
L 2001:DB8:99::2/128 [0/0]
  via Tunnel0, receive
S 2001:DB8:100:1::/64 [1/0]
  via Tunnel0, directly connected
C 2001:DB8:123:2::/64 [0/0]
  via Ethernet0/0, directly connected
L 2001:DB8:123:2::2/128 [0/0]
  via Ethernet0/0, receive
C 2001:DB8:200:1::/64 [0/0]
  via Loopback0, directly connected
L 2001:DB8:200:1::1/128 [0/0]
  via Loopback0, receive
L FF00::/8 [0/0]
  via Null0, receive
```

```
=====
CEF :
=====
```

```
Router1#show ipv6 cef tu0
```

```
2001:DB8:99::/64
  attached to Tunnel0
2001:DB8:200:1::/64
  attached to Tunnel0
```

```
Router1#show ipv6 cef 2001:DB8:200:1::1 int
```

```
2001:DB8:200:1::/64, epoch 0, flags attached, RIB[S], refcount 4, per-destination
sharing
sources: RIB
feature space:
  IPRM: 0x00048000
ifnums:
  Tunnel0(14)
path EFE135F8, path list F1BA1F2C, share 1/1, type attached prefix, for IPv6
attached to Tunnel0, adjacency IPV6 midchain out of Tunnel0 F1BBAB80
output chain: IPV6 midchain out of Tunnel0 F1BBAB80 IPV6 adj out of Ethernet0/0,
addr 2001:DB8:123:1::1 F0F7D978
```

```

Router1#show adj int | i IP|erfa|comp
Protocol Interface Address
IPV6 Ethernet0/0 2001:DB8:123:1::1(16)
IPv6 ND
IP redirect enabled
Switching vector: IPv6 adjacency oce
IPV6 Ethernet0/0 FE80::A8BB:CCFF:FE00:6500(2)
IPv6 ND
IP redirect enabled
Switching vector: IPv6 adjacency oce
IPV6 Tunnel0 point2point(10)
IPv6 adj out of Ethernet0/0, addr 2001:DB8:123:1::1
IP redirect enabled
Switching vector: IPv6 midchain adjacency oce
Post encap features: IPSEC Post-encap output
classification
IP Tunnel stack to 2001:DB8:123:2::2 in Default (0x0)
IPv6 adj out of Ethernet0/0, addr 2001:DB8:123:1::1

```

```

-----
Router2#show ipv6 cef tu0
2001:DB8:99::/64
  attached to Tunnel0
2001:DB8:100:1::/64
  attached to Tunnel0

```

```

Router2# show ipv6 cef 2001:DB8:100:1::1 int
2001:DB8:100:1::/64, epoch 0, flags attached, RIB[S], refcount 4, per-destination
sharing
sources: RIB
feature space:
  IPRM: 0x00048000
ifnums:
  Tunnel0(14)
path F1515E90, path list F2F75774, share 1/1, type attached prefix, for IPv6
attached to Tunnel0, adjacency IPV6 midchain out of Tunnel0 F0FB8E48
output chain: IPV6 midchain out of Tunnel0 F0FB8E48 IPV6 adj out of Ethernet0/0,
addr 2001:DB8:123:2::1 F0FB8F78

```

```

Router2# show adj int | i IP|erfa|comp
Protocol Interface Address
IPV6 Ethernet0/0 2001:DB8:123:2::1(16)
IPv6 ND
IP redirect enabled
Switching vector: IPv6 adjacency oce
IPV6 Ethernet0/0 FE80::A8BB:CCFF:FE00:6510(2)
IPv6 ND
IP redirect enabled
Switching vector: IPv6 adjacency oce
IPV6 Tunnel0 point2point(10)
IPv6 adj out of Ethernet0/0, addr 2001:DB8:123:2::1
IP redirect enabled
Switching vector: IPv6 midchain adjacency oce
Post encap features: IPSEC Post-encap output
classification
IP Tunnel stack to 2001:DB8:123:1::2 in Default (0x0)
IPv6 adj out of Ethernet0/0, addr 2001:DB8:123:2::1

```

## 调试

调试采取，当曾经PSK验证时：

```
debug crypto ikev2
debug crypto ipsec
```

调试采取，当曾经Cert验证时：

```
debug crypto ikev2
debug crypto ipsec
debug crypto pki messages
debug crypto pki transaction
```

## 在IPv6/Hybrid通道的IPv4

使用GRE报头，被混合的这/混合模式建立隧道可以仅达到。使用隧道模式gre IPv6命令。如果错误地使用隧道模式ipsec IPv6命令，则这出现：

```
%IPSECV6-4-PKT_PROTOCOL_MISMATCH: IP protocol in packet mismatched with tunnel mode,
packet from <src> to <dst> dropped by Tunnel0.
```

路由器 R1：

```
interface Loopback1
  description This is a test endpoint
  ip address 10.0.0.1 255.255.255.0
!
interface Tunnel0
  ip address 100.0.0.1 255.255.255.0
  tunnel source Ethernet0/0
  tunnel mode gre ipv6
  tunnel destination 2001:DB8:123:2::2
  tunnel protection ipsec profile default
!
ip route 20.0.0.0 255.255.255.0 Tunnel0
!
```

路由器R2：

```
interface Loopback1
  description This is a test endpoint
  ip address 20.0.0.1 255.255.255.0
!
interface Tunnel0
  ip address 100.0.0.2 255.255.255.0
  tunnel source Ethernet0/0
  tunnel mode gre ipv6
  tunnel destination 2001:DB8:123:1::2
  tunnel protection ipsec profile l2l
!
ip route 10.0.0.0 255.255.255.0 Tunnel0
!
```

显示命令：

```
=====
IPSec SA:
=====
```

```
Router1#show crypto ipsec sa detail
```

```
interface: Tunnel0
  Crypto map tag: Tunnel0-head-0, local addr 2001:DB8:123:1::2

  protected vrf: (none)
  local ident (addr/mask/prot/port): (2001:DB8:123:1::2/128/47/0)
  remote ident (addr/mask/prot/port): (2001:DB8:123:2::2/128/47/0)
  current_peer 2001:DB8:123:2::2 port 500
```

```
PERMIT, flags={origin_is_acl,}
#pkts encaps: 5, #pkts encrypt: 5, #pkts digest: 5
#pkts decaps: 5, #pkts decrypt: 5, #pkts verify: 5
#pkts compressed: 0, #pkts decompressed: 0
#pkts not compressed: 0, #pkts compr. failed: 0
#pkts not decompressed: 0, #pkts decompress failed: 0
#pkts no sa (send) 0, #pkts invalid sa (rcv) 0
#pkts encaps failed (send) 0, #pkts decaps failed (rcv) 0
#pkts invalid prot (rcv) 0, #pkts verify failed: 0
#pkts invalid identity (rcv) 0, #pkts invalid len (rcv) 0
#pkts replay rollover (send): 0, #pkts replay rollover (rcv) 0
##pkts replay failed (rcv): 0
#pkts tagged (send): 0, #pkts untagged (rcv): 0
#pkts not tagged (send): 0, #pkts not untagged (rcv): 0
#pkts internal err (send): 0, #pkts internal err (rcv) 0
```

```
local crypto endpt.: 2001:DB8:123:1::2,
remote crypto endpt.: 2001:DB8:123:2::2
path mtu 1500, ipv6 mtu 1500, ipv6 mtu idb Ethernet0/0
current outbound spi: 0x99D16BE2(2580638690)
PFS (Y/N): N, DH group: none
```

inbound esp sas:

```
spi: 0xDFF1E2D(234823213)
transform: esp-aes esp-sha-hmac ,
in use settings ={Transport, }
conn id: 90, flow_id: SW:90, sibling_flags 80000001, crypto map:
Tunnel0-head-0
sa timing: remaining key lifetime (k/sec): (4222891/2971)
IV size: 16 bytes
replay detection support: Y
Status: ACTIVE(ACTIVE)
```

inbound ah sas:

inbound pcp sas:

outbound esp sas:

```
spi: 0x99D16BE2(2580638690)
transform: esp-aes esp-sha-hmac ,
in use settings ={Transport, }
conn id: 89, flow_id: SW:89, sibling_flags 80000001, crypto map:
Tunnel0-head-0
sa timing: remaining key lifetime (k/sec): (4222891/2971)
IV size: 16 bytes
replay detection support: Y
Status: ACTIVE(ACTIVE)
```

outbound ah sas:

outbound pcp sas:

-----  
Router2#show crypto ipsec sa detail

interface: Tunnel0

Crypto map tag: Tunnel0-head-0, local addr 2001:DB8:123:2::2

protected vrf: (none)

local ident (addr/mask/prot/port): (2001:DB8:123:2::2/128/47/0)

remote ident (addr/mask/prot/port): (2001:DB8:123:1::2/128/47/0)

current\_peer 2001:DB8:123:1::2 port 500

PERMIT, flags={origin\_is\_acl,}

```
#pkts encaps: 5, #pkts encrypt: 5, #pkts digest: 5
#pkts decaps: 5, #pkts decrypt: 5, #pkts verify: 5
#pkts compressed: 0, #pkts decompressed: 0
#pkts not compressed: 0, #pkts compr. failed: 0
#pkts not decompressed: 0, #pkts decompress failed: 0
#pkts no sa (send) 0, #pkts invalid sa (rcv) 0
#pkts encaps failed (send) 0, #pkts decaps failed (rcv) 0
#pkts invalid prot (rcv) 0, #pkts verify failed: 0
#pkts invalid identity (rcv) 0, #pkts invalid len (rcv) 0
#pkts replay rollover (send): 0, #pkts replay rollover (rcv) 0
##pkts replay failed (rcv): 0
#pkts tagged (send): 0, #pkts untagged (rcv): 0
#pkts not tagged (send): 0, #pkts not untagged (rcv): 0
#pkts internal err (send): 0, #pkts internal err (rcv) 0
```

```
local crypto endpt.: 2001:DB8:123:2::2,
remote crypto endpt.: 2001:DB8:123:1::2
path mtu 1500, ipv6 mtu 1500, ipv6 mtu idb Ethernet0/0
current outbound spi: 0xDFF1E2D(234823213)
PFS (Y/N): N, DH group: none
```

```
inbound esp sas:
spi: 0x99D16BE2(2580638690)
transform: esp-aes esp-sha-hmac ,
in use settings ={Transport, }
conn id: 89, flow_id: SW:89, sibling_flags 80000001, crypto map:
Tunnel0-head-0
sa timing: remaining key lifetime (k/sec): (4210423/2955)
IV size: 16 bytes
replay detection support: Y
Status: ACTIVE(ACTIVE)
```

```
inbound ah sas:
```

```
inbound pcp sas:
```

```
outbound esp sas:
spi: 0xDFF1E2D(234823213)
transform: esp-aes esp-sha-hmac ,
in use settings ={Transport, }
conn id: 90, flow_id: SW:90, sibling_flags 80000001, crypto map:
Tunnel0-head-0
sa timing: remaining key lifetime (k/sec): (4210423/2955)
IV size: 16 bytes
replay detection support: Y
Status: ACTIVE(ACTIVE)
```

```
outbound ah sas:
```

```
outbound pcp sas:
```

```
=====
Routing :
=====
```

```
Router1#show ip route
```

```
Gateway of last resort is not set
```

```
10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    10.0.0.0/24 is directly connected, Loopback1
L    10.0.0.1/32 is directly connected, Loopback1
20.0.0.0/24 is subnetted, 1 subnets
S    20.0.0.0 is directly connected, Tunnel0
```

```
100.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    100.0.0.0/24 is directly connected, Tunnel0
L    100.0.0.1/32 is directly connected, Tunnel0
```

```
Router1#show ipv6 route
IPv6 Routing Table - default - 6 entries
S    ::/0 [1/0]
     via 2001:DB8:123:1::1
C    2001:DB8:100:1::/64 [0/0]
     via Loopback0, directly connected
L    2001:DB8:100:1::1/128 [0/0]
     via Loopback0, receive
C    2001:DB8:123:1::/64 [0/0]
     via Ethernet0/0, directly connected
L    2001:DB8:123:1::2/128 [0/0]
     via Ethernet0/0, receive
L    FF00::/8 [0/0]
     via Null0, receive
```

```
-----
Router2#sh ip route
Gateway of last resort is not set
```

```
10.0.0.0/24 is subnetted, 1 subnets
S    10.0.0.0 is directly connected, Tunnel0
20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/24 is directly connected, Loopback1
L    20.0.0.1/32 is directly connected, Loopback1
100.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    100.0.0.0/24 is directly connected, Tunnel0
L    100.0.0.2/32 is directly connected, Tunnel0
```

```
Router2#show ipv6 route
IPv6 Routing Table - default - 6 entries
S    ::/0 [1/0]
     via 2001:DB8:123:2::1
C    2001:DB8:123:2::/64 [0/0]
     via Ethernet0/0, directly connected
L    2001:DB8:123:2::2/128 [0/0]
     via Ethernet0/0, receive
C    2001:DB8:200:1::/64 [0/0]
     via Loopback0, directly connected
L    2001:DB8:200:1::1/128 [0/0]
     via Loopback0, receive
L    FF00::/8 [0/0]
     via Null0, receive
```

```
=====
CEF :
=====
```

```
Router1# sh ip cef tu0
20.0.0.0/24
  attached to Tunnel0
100.0.0.0/24
  attached to Tunnel0
```

```
Router1#show ip cef 20.0.0.1 internal
20.0.0.0/24, epoch 0, flags attached, RIB[S], refcount 5, per-destination
sharing
sources: RIB
feature space:
  IPRM: 0x00048004
```

```
ifnums:
  Tunnel0(14)
path EFE136D8, path list F1BA1EDC, share 1/1, type attached prefix,
for IPv4
attached to Tunnel0, adjacency IP midchain out of Tunnel0 F1BBBFA0
output chain: IP midchain out of Tunnel0 F1BBBFA0 IPV6 adj out of Ethernet0/0,
addr 2001:DB8:123:1::1 F0F7D978
```

```
Router1# show adj int | i IP|erfa|comp
Protocol Interface      Address
IPV6      Ethernet0/0          2001:DB8:123:1::1(16)
           IPv6 ND
           IP redirect enabled
           Switching vector: IPv6 adjacency oce
IPV6      Ethernet0/0          FE80::A8BB:CCFF:FE00:6500(2)
           IPv6 ND
           IP redirect enabled
           Switching vector: IPv6 adjacency oce
IP        Tunnel0
           point2point(10)
           IPV6 adj out of Ethernet0/0, addr
             2001:DB8:123:1::1
             GRE IPv6 tunnel
           IP redirect disabled
           Switching vector: IPv4 midchain adj oce
           Post encap features: IPSEC Post-encap output
             classification
           IP Tunnel stack to 2001:DB8:123:2::2 in Default (0x0)
           IPV6 adj out of Ethernet0/0, addr 2001:DB8:123:1::1
```

```
-----
Router2#sh ip cef tu0
10.0.0.0/24
  attached to Tunnel0
100.0.0.0/24
  attached to Tunnel0
```

```
Router2#show ip cef 10.0.0.1 internal
10.0.0.0/24, epoch 0, flags attached, RIB[S], refcount 5, per-destination sharing
sources: RIB
feature space:
  IPRM: 0x00048004
ifnums:
  Tunnel0(14)
path F1515DB0, path list F2F77EBC, share 1/1, type attached prefix, for IPv4
attached to Tunnel0, adjacency IP midchain out of Tunnel0 F0FB8E48
output chain: IP midchain out of Tunnel0 F0FB8E48 IPV6 adj out of Ethernet0/0, addr
2001:DB8:123:2::1 F0FB8F78
```

```
Router2# show adj int | i IP|erfa|comp
Protocol Interface      Address
IPV6      Ethernet0/0          2001:DB8:123:2::1(16)
           IPv6 ND
           IP redirect enabled
           Switching vector: IPv6 adjacency oce
IPV6      Ethernet0/0          FE80::A8BB:CCFF:FE00:6510(2)
           IPv6 ND
           IP redirect enabled
           Switching vector: IPv6 adjacency oce
IP        Tunnel0
           point2point(10)
           IPV6 adj out of Ethernet0/0, addr 2001:DB8:123:2::1
             GRE IPv6 tunnel
           IP redirect disabled
           Switching vector: IPv4 midchain adj oce
```



```
Post encap features: IPSEC Post-encap output
classification
IP Tunnel stack to 2001:DB8:123:1::2 in Default (0x0)
IPV6 adj out of Ethernet0/0, addr 2001:DB8:123:2::1
```

**调试：**

```
debug crypto ikev2
debug crypto ipsec
```

## [相关信息](#)

- [技术支持和文档 - Cisco Systems](#)